


IMPACT ACOUSTIC®

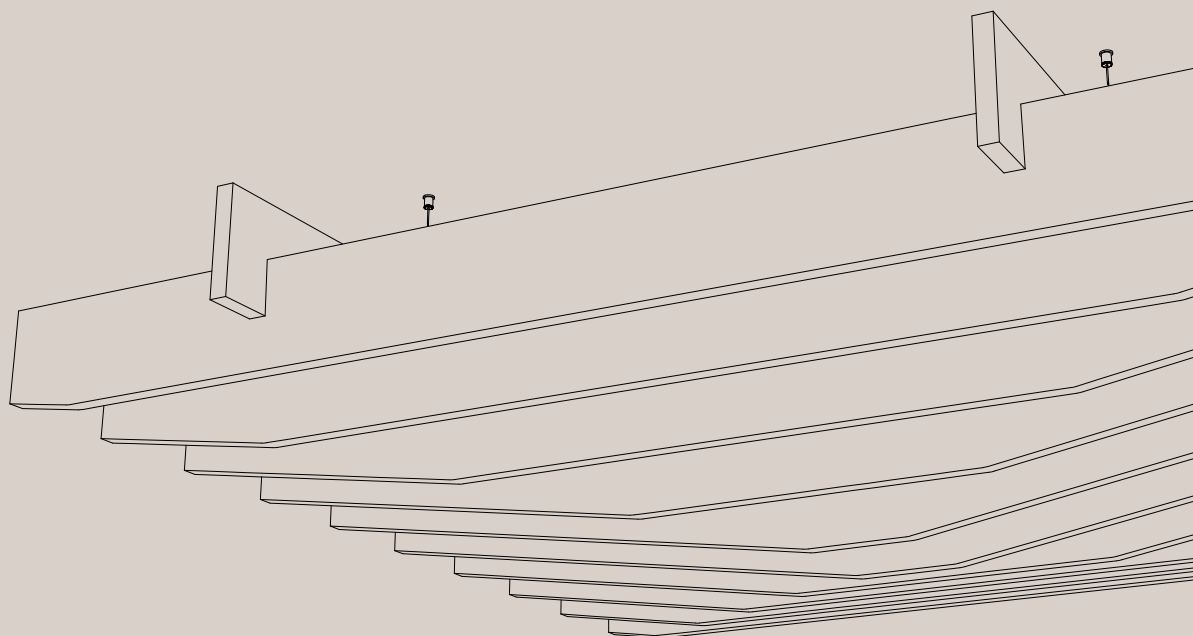


Modular Baffles

712.24.10.000.00
712.24.11.000.00
712.24.12.000.00
712.24.13.000.00

TECHNICAL DATA SHEET

Modular Baffles

General Information

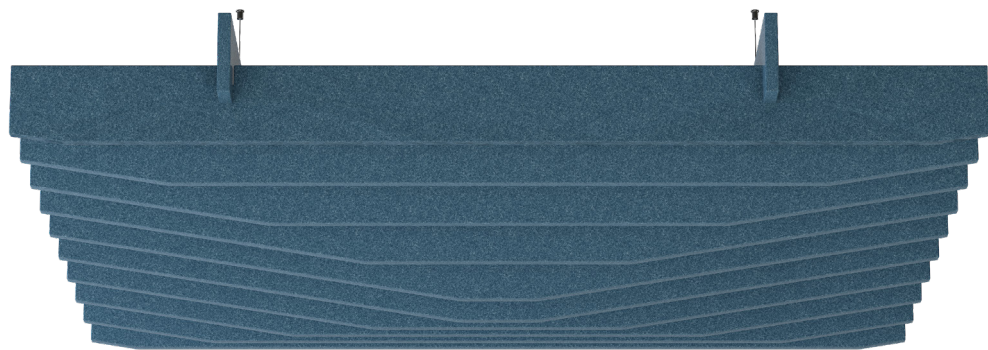

Data

Applicable article numbers

712.24.10.000.00	712.24.11.000.00	712.24.12.000.00	712.24.13.000.00
------------------	------------------	------------------	------------------

Dimensions¹

Width	1800mm	70.87"
Length	1800mm	70.87"
Material thickness	24mm	0.94"
Total Height	280-340mm	11.02-13.39"



Custom solutions available

Material

Baffles	100% PET (60% post-consumer) in 36 colours.
Gripper system	Steel




Extended document available

Weight²

712.24.10.000.00	16.76 kg (±10%)	36.95 lbs (±10%)	(without suspension)
712.24.11.000.00	14.4 kg (±10%)	31.75 lbs (±10%)	(without suspension)
712.24.12.000.00	12.4 kg (±10%)	27.34 lbs (±10%)	(without suspension)
712.24.13.000.00	14.32 kg (±10%)	31.57 lbs (±10%)	(without suspension)

Included

Baffle Module



Cable-Gripper
Suspension



Installation
guide



Warranty
10 years²




1 - all dimintions are nominal 2 - all weight values are nominal 3 - Impact Acoustic warranty terms apply

Modular Baffles

Specification Guide

Ensure you make the perfect choice by choosing our solutions for your next project. To get started, simply define some basic information and constraints about your space. Then explore our range of standard solutions or contact us directly for a more in-depth discussion of personalised customized options.

1 Prepare this information:




Ceiling Plans (RCP)



Other Considerations


page 1-2

2 Specify your Baffles:




Size

page 5-8



Number of Modules


page 4



Colour

page 9

3 Verify installation method:




Gripper + Slotted
Baffle

Modular Baffles

Product Family Overview


1 Standard Straight Baffle

712.24.10.000.00 - Ceiling Baffle Straight Modular (W1800 L1800, H280)
(W70.87", L70.87", H11.02")

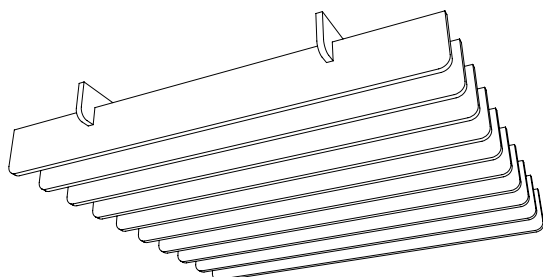


2 Standard Polygonal Baffle

712.24.11.000.00 - Ceiling Baffle Edge Modular (W1800 L1800, H300)
(W70.87", L70.87", H11.81")

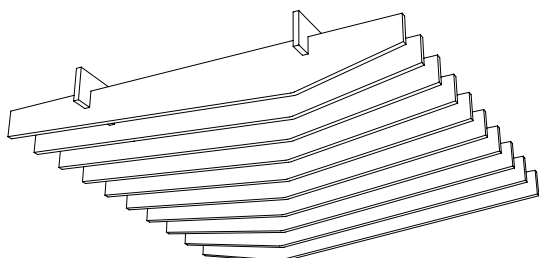


712.24.13.000.00 - Ceiling Baffle Peak Modular (W1800 L1800, H340)
(W70.87", L70.87", H 13.39")

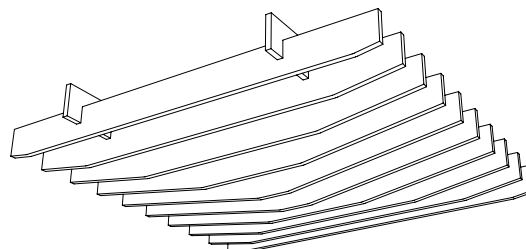


3 Standard Wave Baffle

712.24.12.000.00 - Ceiling Baffle Wave Modular (W1800 L1800, H320)
(W70.87", L70.87", H 12.60")




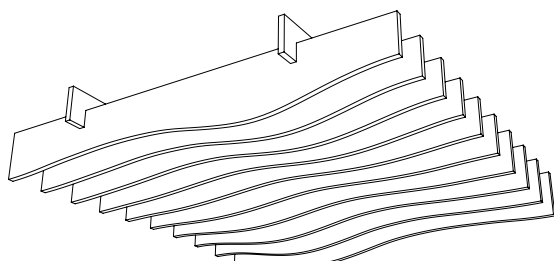


Modular Baffles

Geometry Information



Ceiling Baffle Straight Modular 712.24.10.0000.00

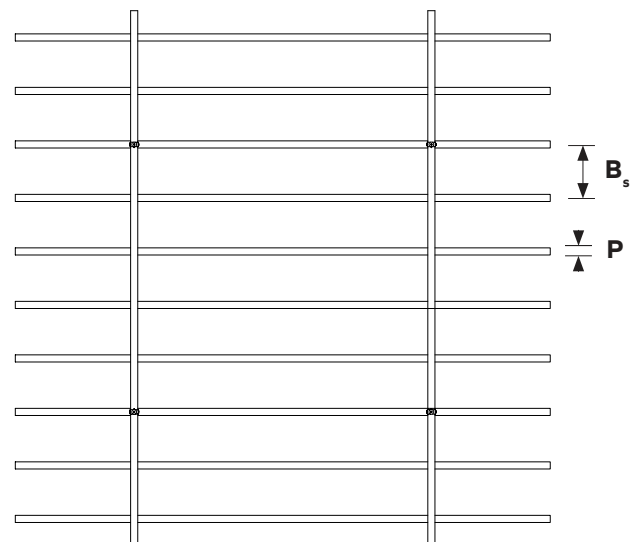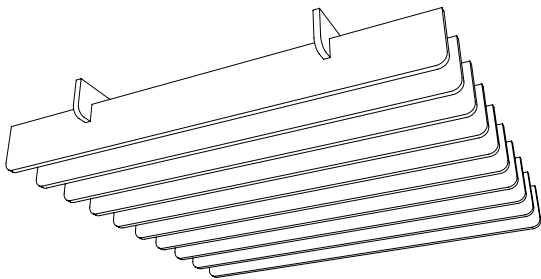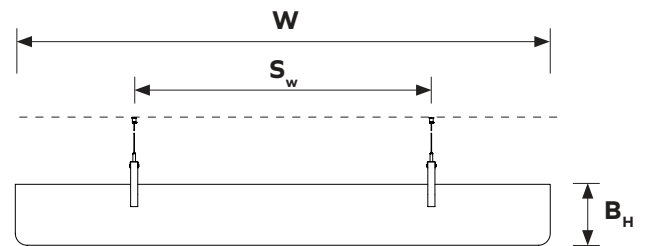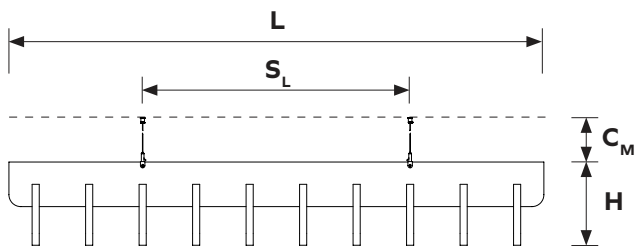


Dimensions table


W	Total width	1800mm	70.87"
L	Total length	1800mm	70.87"
H	Total height	280mm	11.02"
B_H	Bottom baffle height	205mm	8.07"
B_s	Baffle spacing	180mm	7.09"
D	Distance from ceiling	min. 100mm	min. 4"
S_w	Support spacing W	1000mm	39.37"
S_L	Support spacing L	900mm	35.43"
P	PET material thickness	24mm	0.94"

Modular Baffles

Geometry Information



Ceiling Baffle Edge Modular 712.24.11.000.00

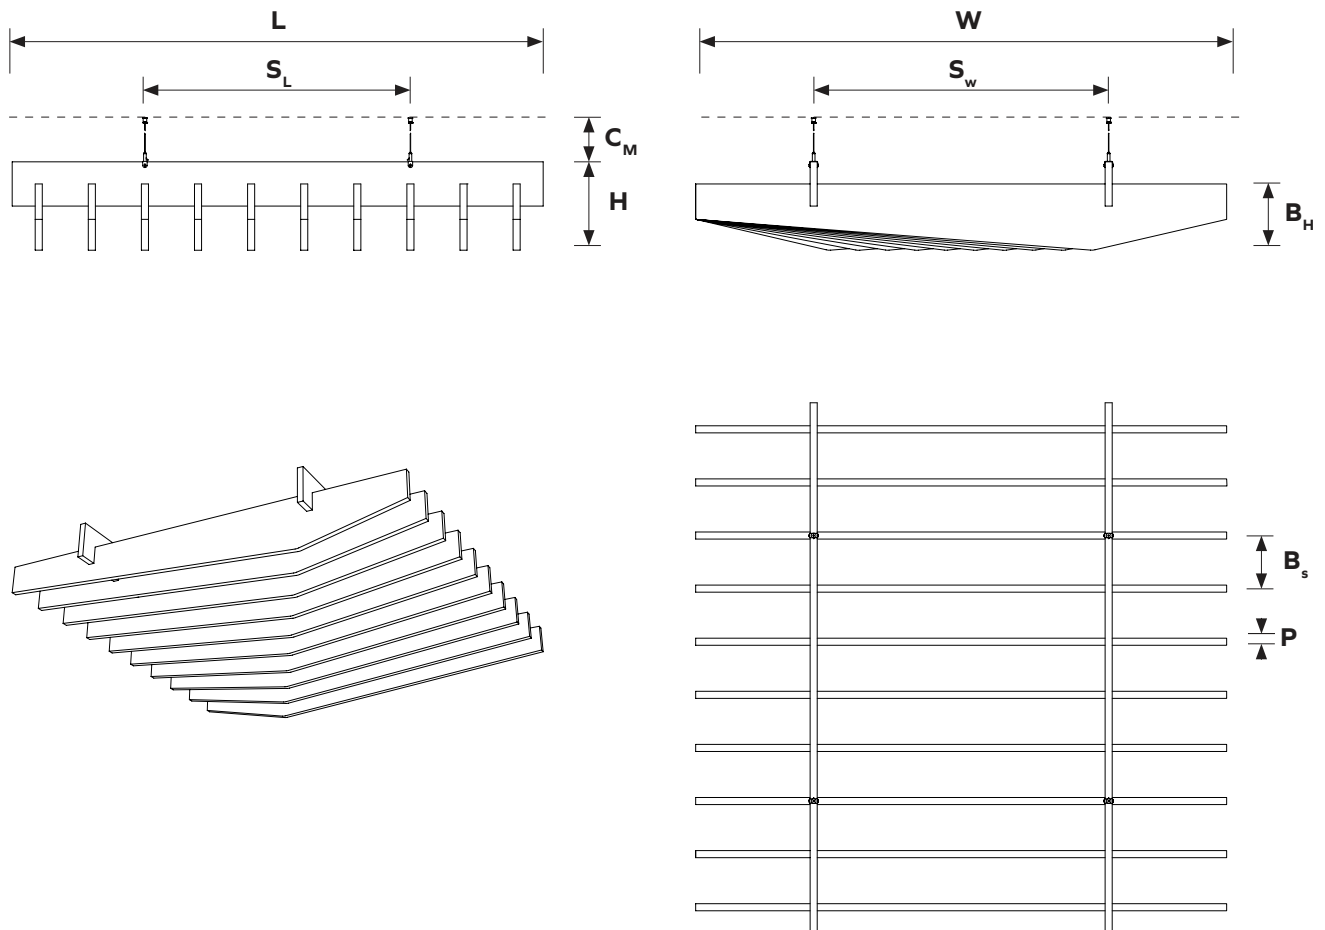


Dimensions table


W	Total width	1800mm	70.87"
L	Total length	1800mm	70.87"
H	Total height	300mm	11.81"
B_H	Bottom baffle height	225mm	8.86"
B_s	Baffle spacing	180mm	7.09"
D	Distance from ceiling	min. 100mm	min. 4"
S_w	Support spacing W	1000mm	39.37"
S_L	Support spacing L	900mm	35.43"
P	PET material thickness	24mm	0.94"

Modular Baffles

Geometry Information



Ceiling Baffle Wave Modular 712.24.12.0000.00

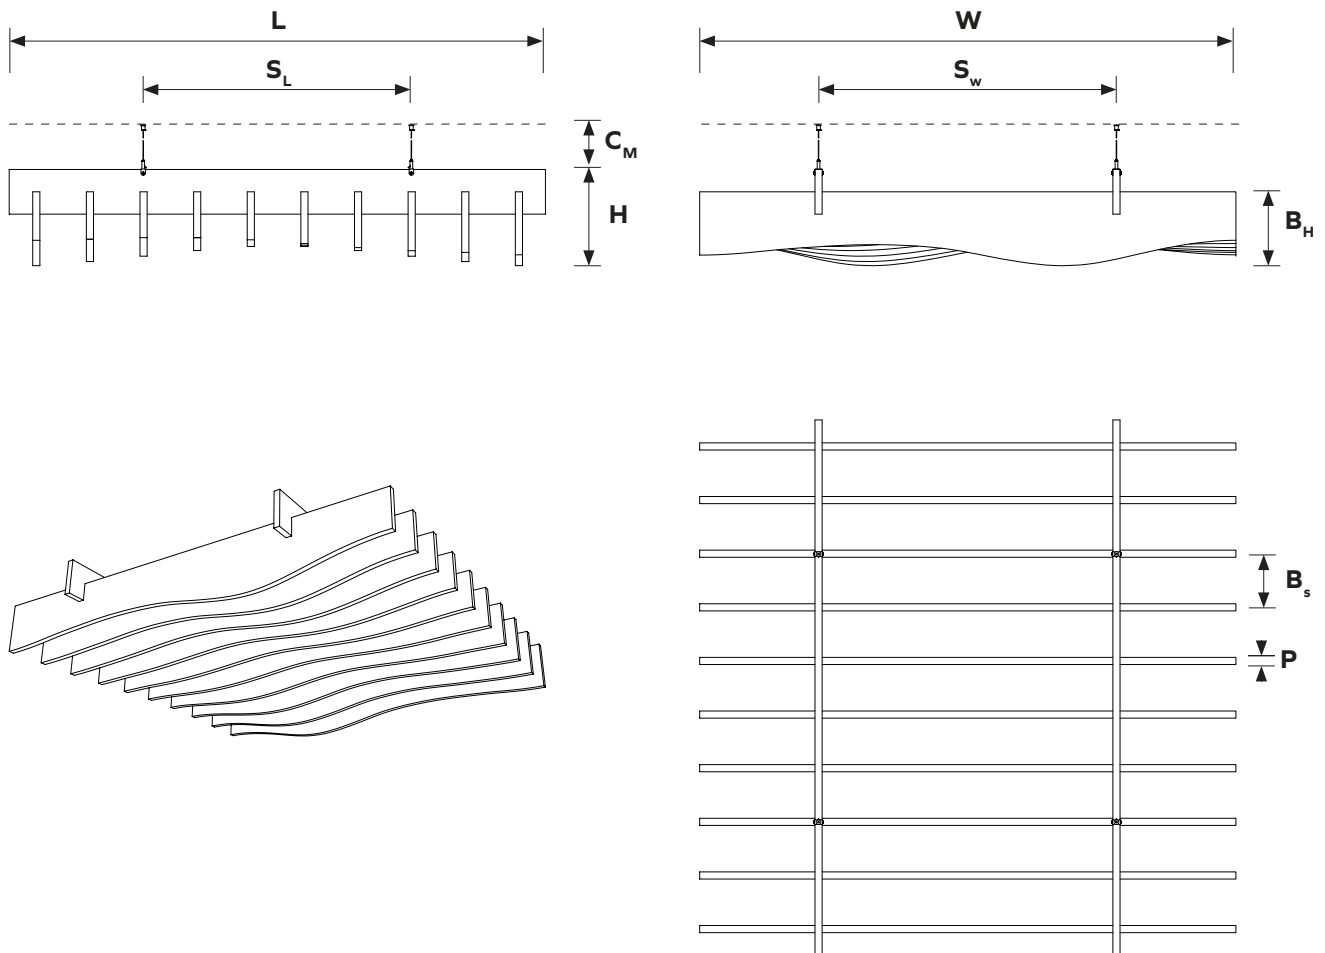

Dimensions table


W	Total width	1800mm	70.87"
L	Total length	1800mm	70.87"
H	Total height	323mm	12.72"
B_H	Bottom baffle height	248mm	9.76"
B_s	Baffle spacing	180mm	7.09"
D	Distance from ceiling	min. 100mm	min. 4"
S_w	Support spacing W	1000mm	39.37"
S_L	Support spacing L	900mm	35.43"
P	PET material thickness	24mm	0.94"

Modular Baffles

Geometry Information



Ceiling Baffle Peak Modular 712.24.13.000.00

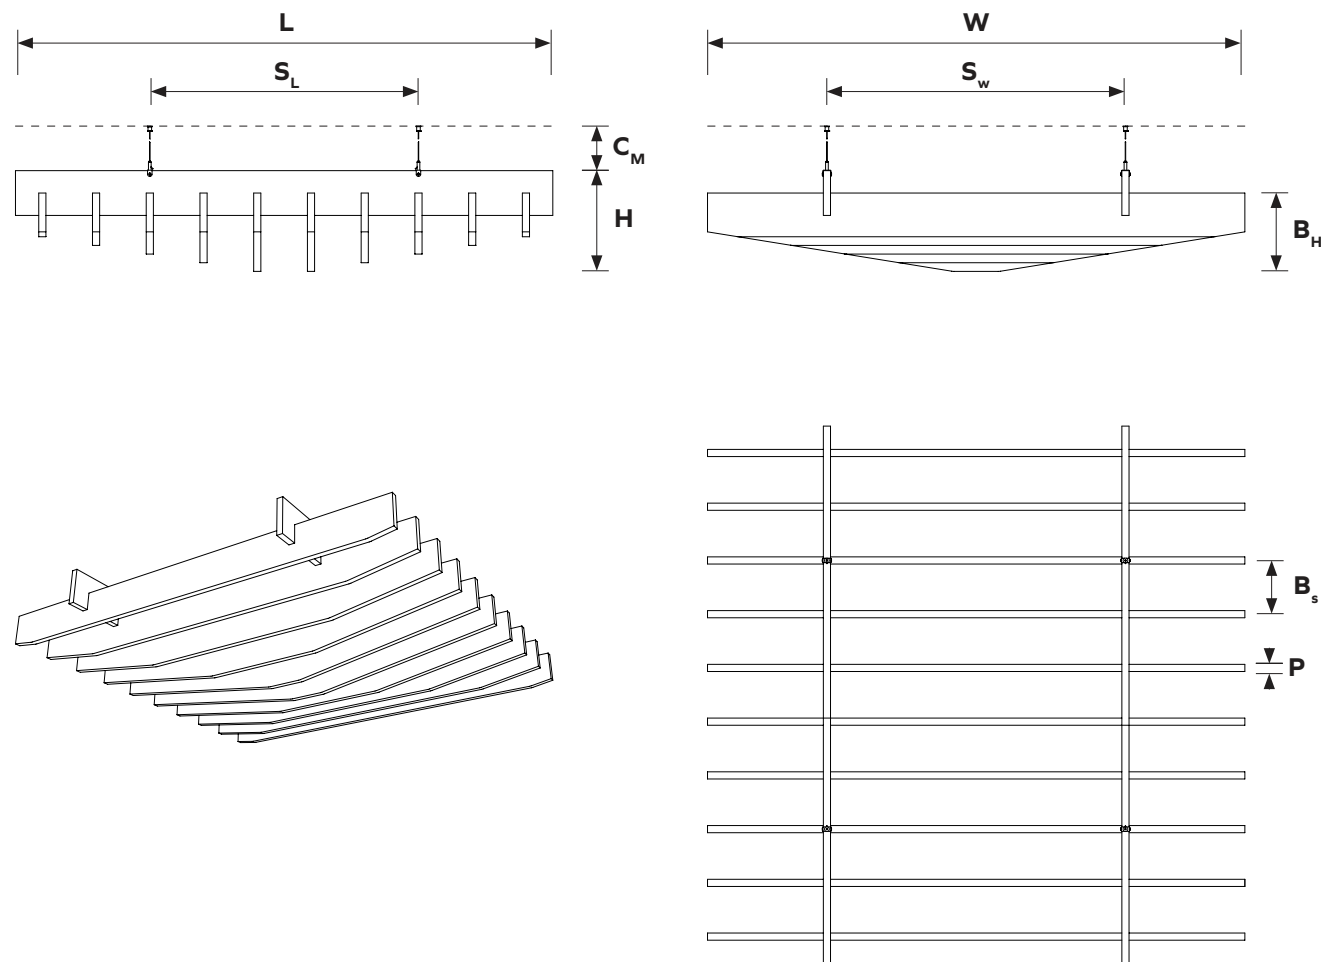

Dimensions table

W	Total width	1800mm	70.87"
L	Total length	1800mm	70.87"
H	Total height	337mm	13.27"
B_H	Bottom baffle height	262mm	10.32"
B_s	Baffle spacing	180mm	7.09"
D	Distance from ceiling	min. 100mm	min. 4"
S_w	Support spacing W	1000mm	39.37"
S_L	Support spacing L	900mm	35.43"
P	PET material thickness	24mm	0.94"

Modular Baffles


Installation Overview




Extended document available

1 Attach mounting hardware


Attach 4 pieces of mounting cables (1) to the ceiling.

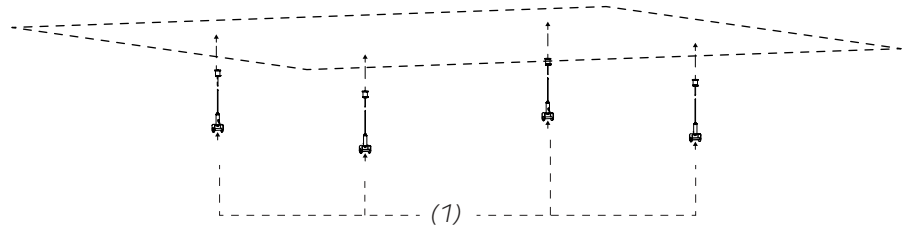

2 Install upper Baffles




Attach slotted upper baffles (2) to the gripper connectors. Secure the baffles with provided screws. Adjust the lift of the baffles using the cable gripper.

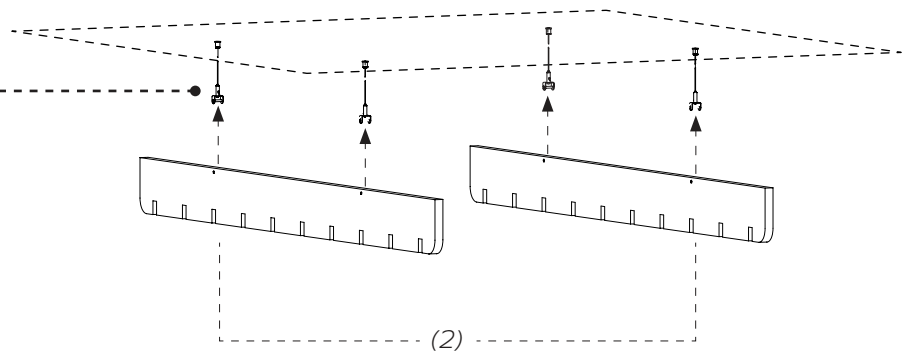


3 Install lower Baffles

Push in lower Baffles (3) into slots provided in a upper baffles.

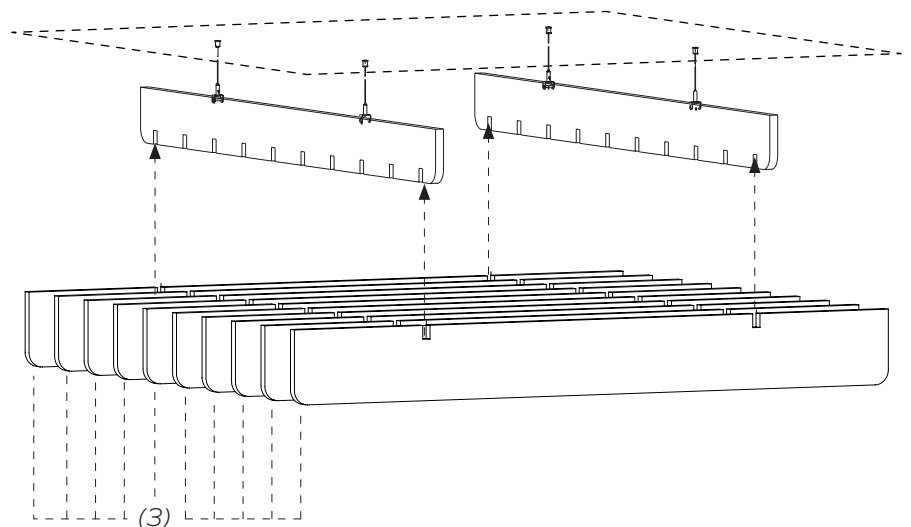

ARCHISONIC® Felt Colours



Name	Snow White	Milk	Cloud	Gull	Smoke	Ground	Charcoal	Slate	Raven
Code	500	404	103	144	442	108	542	444	550
NCS	S 0300-N	S 0502-Y	S 1002-B	S 2502-Y	S 3005-R80B	S 5005-Y20R	S 7502-B	S 4500-N	S 8500-N

Name	Nordic Pine	Grove	Fern	Moss	Spearment	Ice Blue	Succulent	Deep Sea	True Navy
Code	311	317	180	439	706	304	712	918	194
NCS	S 5030-G10Y	S 7020-G30Y	S 6010-G90Y	S 2040-G40Y	S 1010-B90G	S 0510-B	S 3020-B30G	S 5020-R90B	S 8005-B

Name	Lichen	Linen	Shell Pink	Jute	Warm Stone	Terracotta	Soft Coral	Honeycomb	Sunshine
Code	160	107	102	920	105	239	516	139	846
NCS	S 4005-Y	S 1505-Y30R	S 0510-R30B	S 3010-Y30R	S 3010-Y50R	S 4040-Y70R	S 2020-Y90R	S 2050-Y20R	S 1040-Y10R

Name	Garnet	Hot Pink	Poster Red	Electric Orange	Winter Sky	Pacific Ocean	Midnight	Grape	Marine Blue
Code	724	140	662	464	410	432	810	540	864
NCS	S 5040-R10B	S 2060-R20B	S 1080-R	S 0580-Y70R	S 2020-R90 B	S 3040-B	S 7020-R70B	S 5040-R40B	S 4050-R70B

These NCS codes are the closest visual match available and may not be exact to blended fibres.

ARCHISONIC®

Colours

Experience our ARCHISONIC® Felt material with a stunning selection of 36 colours across 8 distinct families, thoughtfully curated by *Colour Hive* in London. Effortlessly combine colours harmoniously to suit your preferences. Discover more in our Materials brochure and order your free sample box today.

Colour fastness

Class 6

ISO 105-B02:A1

Order a free sample box



ARCHISONIC® Felt

Material Specification

Product Name	ARCHISONIC® Felt	
Content	100% PET (60% certified post-consumer content)	
Thickness¹	12mm (0.47")	24mm (0.94")
Max. Size	1200x2800mm (47"x110")	1800x2400mm (70"x94")
Acoustic²	ASTM: NRC=0.6 ISO: α_w =0.65	ASTM: NRC=0.9 ISO: α_w =0.95
Density¹	2400 g/m ² (0.49 lbs/ sqft)	4000 g/m ² (0.82 lbs/sqft)
Colour Fastness	Class 6 ISO 105-B02:A1	
Colour	36 colours (see ARCHISONIC® Felt Colour page for more information)	
Maintenance	For daily cleaning we recommend alcohol solution (75%), e.g. Pantasept. In case of contamination by dust or fluff, use feather duster or a regular vacuum cleaner. For heavy dirt, treat the material with hydrogen peroxide.	
Production Lead time³	21 days	
Fire Rating	DIN EN 13501-1: B-s1, d0	ASTM E84 Class A
VOC Emission	28 Days French Regulation A+ ASTM E84 Pass Breeam® (International, UK, NL, SE, NOR) Exemplary CDPH (CDPH/EHLB/Standard Method V1.2) Pass	
Certifications	Declare label, Cradle to Cradle, UL Environmental Product Declaration, Member of US Green Building Council, Ecobau 1st Priority, Climmate-KIC, VOC emissions in LEED EQ credit (low-emitting products), SCS Recycled Content	
Durability	Contract	

1 - all values are nominal 2 - measured with 300mm air cavity 3 - depending on the location and type of product




Climate-KIC is supported by the
EIT, a body of the European Union



Modular Baffles

Acoustic Performance




Testing Standards

ISO 354:2003	Acoustics — Measurement of sound absorption in a reverberation room
ISO 11654:1997	Acoustics — Sound absorbers for use in buildings — Rating of sound absorption
ISO 20189:2018	Acoustics — Screens, furniture and single objects intended for interior use — Rating of sound absorption and sound reduction of elements based on laboratory measurements
ASTM C423-17	Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
ASTM E795-16	Standard Practices for Mounting Test Specimens During Sound Absorption Tests

Acoustic Test Results

	α_w	SAA	NRC
Ceiling Baffle, 100mm height, spaced 200mm on center	0.35 (H)	0.43	0.45
Ceiling Baffle, 200mm height, spaced 200mm on center	0.7 (MH)	0.96	0.95
Ceiling Baffle, 100mm height, spaced 300mm on center	0.3 (H)	0.32	0.30
Ceiling Baffle, 200mm height, spaced 300mm on center	0.6 (MH)	0.72	0.70

The NRC rating is calculated as the average of the absorption coefficients measured at frequencies of 250Hz, 500Hz, 1000Hz and 2000Hz and round to the nearest 0.05. SAA rating is calculated as the average of the sound absorption coefficients of a material for the twelve one-third octave bands from 200Hz through 2500Hz and rounded off to the nearest 0.01. These single number values are calculated using the sound absorption coefficient of the ceiling baffles per area covered.

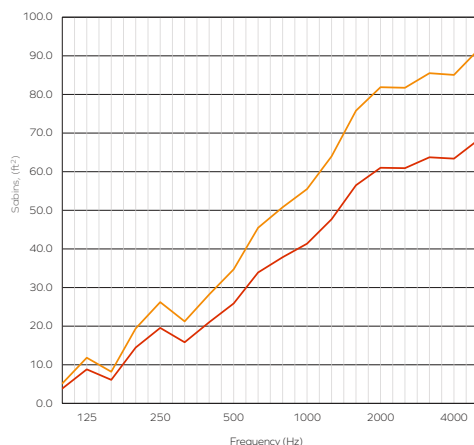


Acoustic Performance - ASTM Sabins, ft²

Frequency (Hz)	125	250	500	1000	2000	4000
Nebula Modular Baffle Small	6.46	16.15	26.91	41.98	59.20	65.66
Nebula Modular Baffle Big	8.61	22.60	36.60	57.05	79.65	87.19

The graph represents the Sabins (ft²) in the third octave band center frequencies in accordance with ASTM C423.

- Nebula Modular Baffle Small
- Nebula Modular Baffle Big

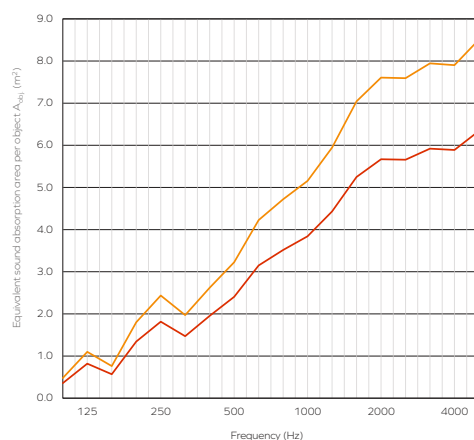

Acoustic Performance - ISO A_{obj}, m²

Frequency (Hz)	125	250	500	1000	2000	4000
Nebula Modular Baffle Small	0.6	1.5	2.5	3.9	5.5	6.1
Nebula Modular Baffle Big	0.8	2.1	3.4	5.3	7.4	8.1

The graph represents the equivalent sound absorption area per object (A_{obj}) in the third octave band center frequencies in accordance with ISO 20189. Measurement used Pink Noise as excitation signal in a reverberant room.

- Nebula Modular Baffle Small
- Nebula Modular Baffle Big

Modular Baffles

Reference Projects



Modular Baffles

Additional Information

Online Resources

A variety of resources are available online for all of our products. Please visit the product's page for more information.



CAD files



Spec sheets and
Installation Guide



Colour families



Instruction
videos



Associated
products specs.

Ordering Process

Our experienced team of Project Consultants will guide and support you throughout the order process. We fulfill the majority of our orders in as little as 21 days¹ from your first point of contact, allowing you to focus on what truly matters to you.



Contact our
consultant

Quote¹

48h



Order Confirmation

Production¹

14-21 days



Dispatch

Transit

location based



Delivery

Contact Us

Ready to make an impact? We are just an email or call away to discuss your project and answer any question.




+41 41 244 14 00



connect@impactacoustic.com



Online form

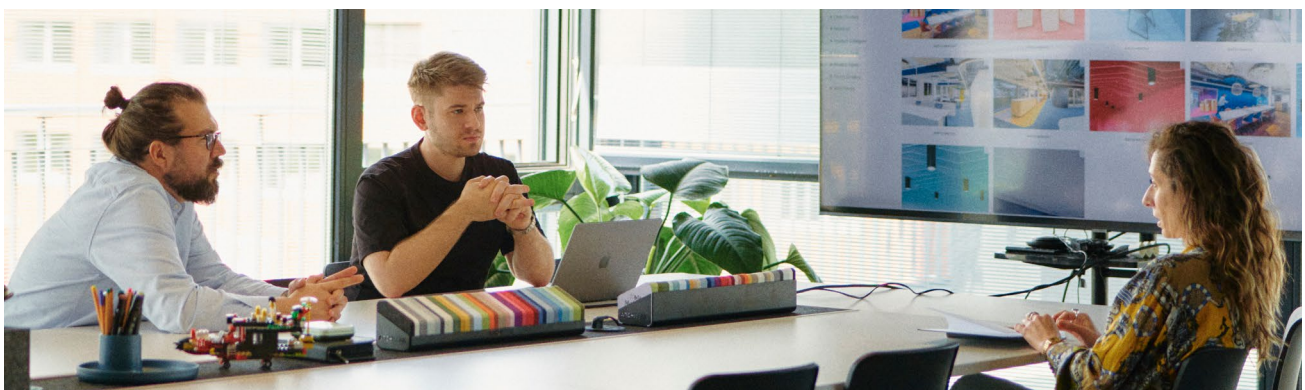

¹ - Quote and Production times may vary.

IMPACT ACOUSTIC®
Modular Baffles rev.01 - 12.08.25

(Switzerland)
(USA)
(Philippines)

connect@impactacoustic.com
usa@impactacoustic.com
philippines@impactacoustic.com

(+41) 41 244 14 00
(+1) 619 378 2100
(+63) 285 80 02 50

#WeMakeAnImpact

**#We
Make An
Impact**

connect@impactacoustic.com | www.impactacoustic.com