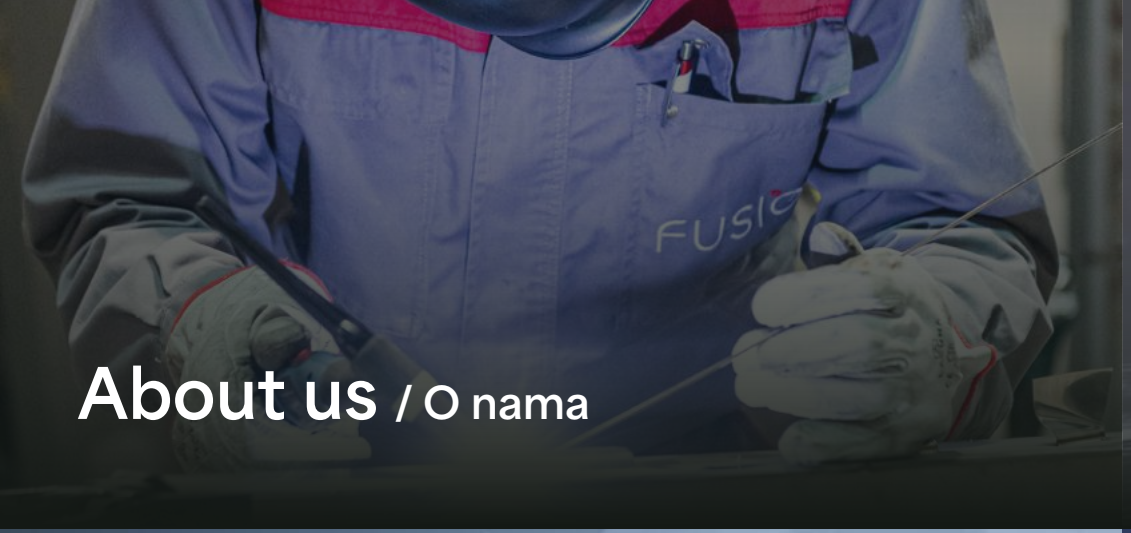


FUSIO

Cooling units Rashladni uređaji


PRODUCT CATALOG


FUSIO


About us / O nama


Basic


Smart

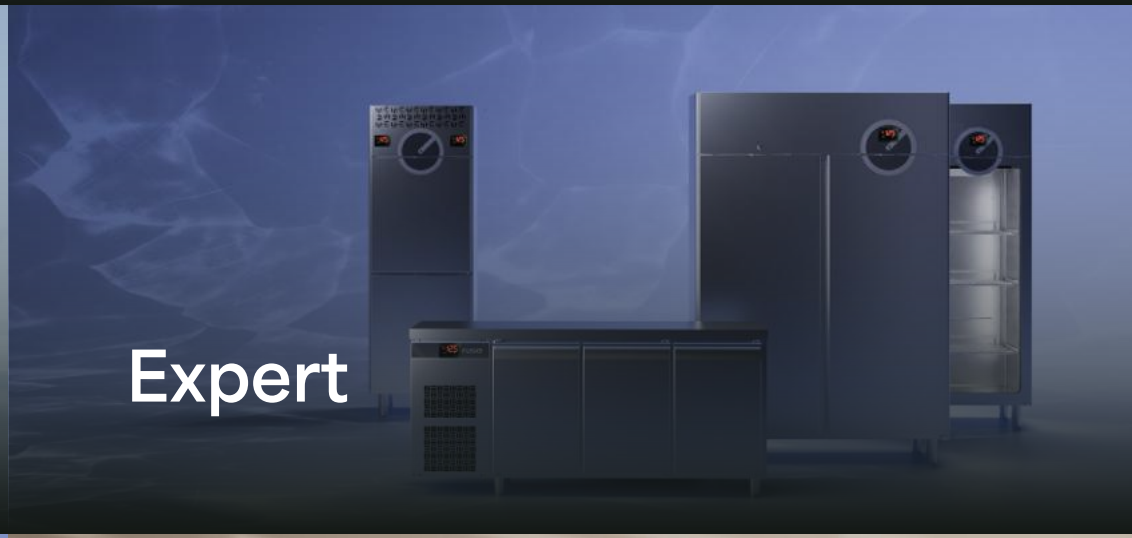
Expert


Expert Pro


Bar & beverage



About us

Fusio d.o.o. is a leading Croatian company specializing in the design, production, supply, and servicing of catering equipment.

The company has partnered with prominent domestic tourism brands such as Maistra, Valamar and Plava Laguna, as well as international clients including Radisson Blu and Falkensteiner Resorts.

O nama

Fusio d.o.o. je vodeća hrvatska tvrtka specijalizirana za projektiranje, opremanje, proizvodnju i servisiranje ugostiteljske opreme.

Tvrtka surađuje s velikim domaćim turističkim brendovima poput Maistre, Valamara i Plave Lagune, kao i s međunarodnim klijentima poput Radisson Blu i Falkensteiner Resorts.

FUSIO

Our products are exported daily to Slovenia, Italy, Austria, the Czech Republic, and across Southeast Europe. We are especially proud of having delivered Fusio equipment to the demanding U.S. market.

Fusio is committed to excellence in the catering equipment industry, combining years of experience, expert craftsmanship, and high-quality materials.

Fusio proizvodi svakodnevno pronalaze put do klijenata u Sloveniji, Italiji te zemljama jugoistočne Europe, a s ponosom ističemo i plasman na zahtjevno tržište SAD-a.

Fusio se posvećuje izvrsnosti u industriji ugostiteljske opreme, spajajući godine iskustva, stručno zanatsko umijeće i visokokvalitetne materijale.



With a mission to provide innovative solutions that meet customer needs, we strive to lead the market with cutting-edge products and services.

The company's vision is to be the top manufacturer of kitchen equipment, continuously exceeding expectations through quality and innovation.

Fusio values its dedicated team and invests in ongoing development, ensuring reliable service and fostering trust within its community.


Every project aims to transform kitchens into spaces of inspiration and efficiency.

FUSIO

S misijom pružanja inovativnih rješenja koja zadovoljavaju potrebe kupaca, nastojimo biti lider na tržištu s vrhunskim proizvodima i uslugama. Vizija tvrtke je biti vodeći proizvođač kuhinjske opreme, kontinuirano premašujući očekivanja kroz kvalitetu i inovacije.

Fusio cijeni svoj predani tim i ulaže u stalni razvoj, osiguravajući pouzdanu uslugu i potičući povjerenje unutar svoje zajednice. Svaki projekt ima za cilj transformirati kuhinje u prostore inspiracije i učinkovitosti.

Inspirirani užitkom

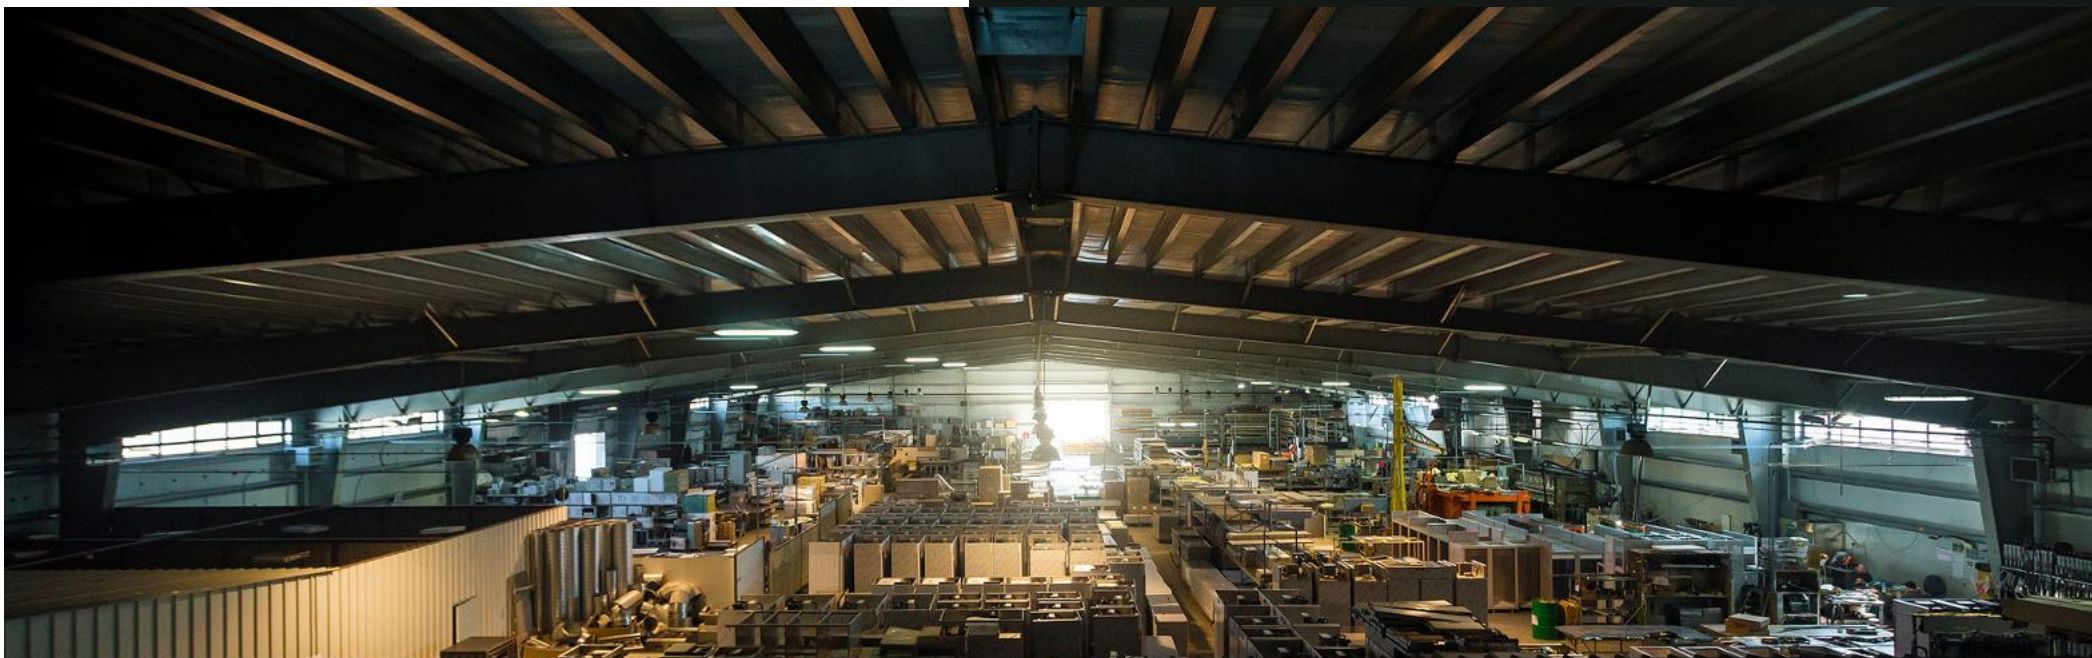


Fusio manufacture

Fusio d.o.o. began its journey in 1995 in Poreč with just two machines and a handful of skilled workers.

Drawing on years of experience at a leading Italian stainless steel factory, the company has grown into Croatia's largest manufacturer of professional refrigeration and freezing equipment, specializing in high-performance solutions for the hospitality and foodservice industries.

Today, the company operates from a 8000 m² production facility and ensures top-quality production through strict control over materials, processes, and final products, maintaining high standards and compliance with regulations.



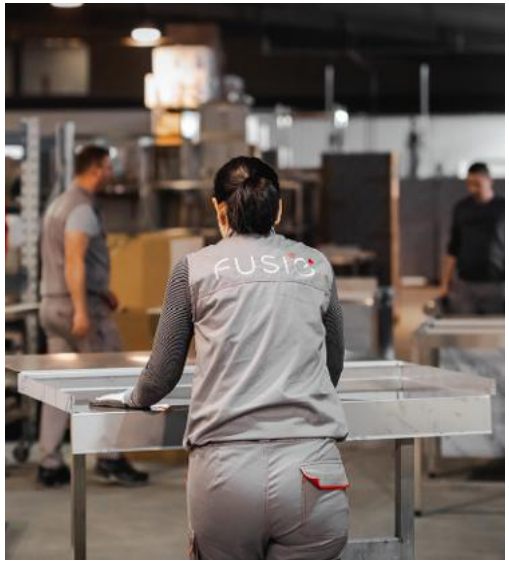






With a focus on durability, efficiency, and innovation, Fusio provides custom-designed refrigeration systems that meet the demanding needs of commercial kitchens, hotels, and restaurants.

Combining cutting-edge technology with meticulous quality control, we ensure that every product delivers optimal performance, energy efficiency, and reliability.

Whether for small businesses or large-scale operations, Fusio is dedicated to creating refrigeration solutions that help businesses maintain the highest standards.

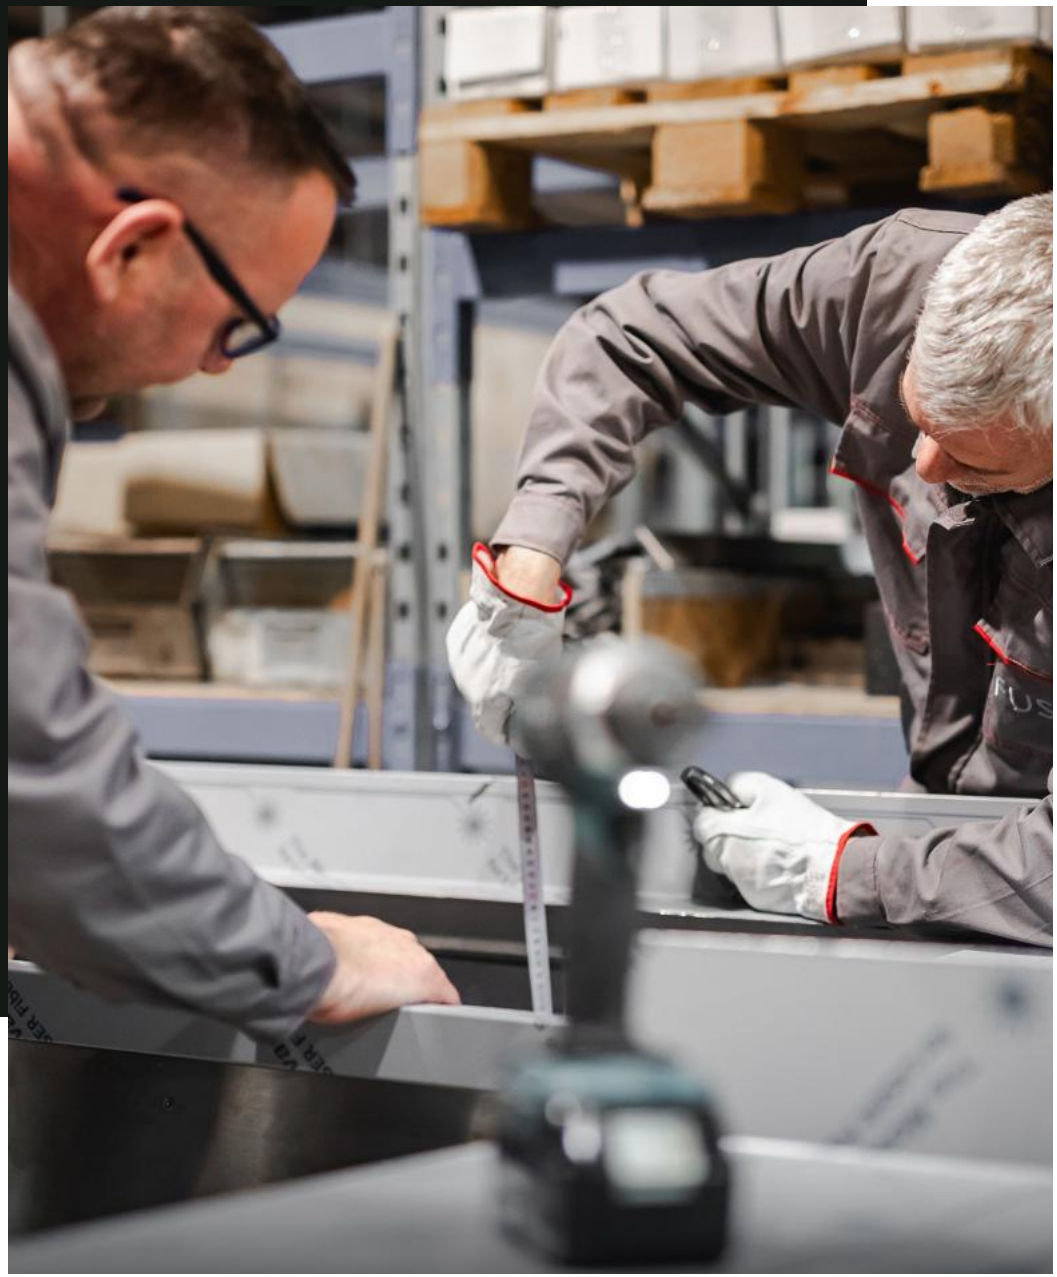

Fusio proizvodnja

Fusio d.o.o. je započeo svoje putovanje 1995. godine u Poreču s tek dvije mašine i nekoliko vještih radnika.

Oslanjajući se na godine iskustva u vodećoj talijanskoj tvornici nehrđajućeg čelika, tvrtka je prerasla u najvećeg proizvođača profesionalne rashladne opreme u Hrvatskoj, specijalizirajući se za visokoučinkovita rješenja za ugostiteljsku i prehrambenu industriju.

Danas tvrtka posluje iz proizvodnog pogona od 8000 m² i osigurava vrhunsku kvalitetu proizvodnje kroz strogu kontrolu materijala, procesa i gotovih proizvoda, održavajući visoke standarde i usklađenost s propisima.

Fusio se fokusira na trajnost, učinkovitost i inovacije te pruža rashladne sustave po mjeri koji zadovoljavaju zahtjevne potrebe komercijalnih kuhinja, hotela i restorana.

Kombinirajući najsuvremeniju tehnologiju s preciznom kontrolom kvalitete, osiguravamo da svaki proizvod pruža optimalne performanse, energetsku učinkovitost i pouzdanost.

Bilo da se radi o malim poduzećima ili velikim sustavima, Fusio je posvećen stvaranju rashladnih rješenja koja pomažu poslovima u održavanju najviših standarda.

Fusio cooling cabinets and tables

Fusio offers a range of professional cooling and freezing solutions designed for the hospitality and food service industries, including refrigerators of various capacities (600, 700, 1200, 1400 L), refrigerated tables with two to five doors, drawers, ronde doors, and customizable glass doors.

These units are built to meet the specific needs of the hospitality and foodservice industries, ensuring both practicality and efficiency in storage solutions.

Their product lines include Basic, Smart, Expert, and Expert Pro—each tailored to meet varying demands for efficiency, performance, and advanced features.

Whether you need cost-effective options for smaller operations or high-performance systems for larger establishments, Fusio provides reliable refrigeration solutions that optimize storage and energy use, ensuring superior quality and durability across all product lines.





Fusio rashladni ormari i stolovi

Fusio nudi niz profesionalnih rashladnih riješenja dizajniranih za ugostiteljsku i prehrambenu industriju, uključujući hladnjake različitih kapaciteta (600, 700, 1200, 1400 L) kao i rashladne stolove s dvije do pet vrata, ladicama, ronda vratima i prilagodljivim staklenim vratima.

Ove jedinice su izrađene kako bi zadovoljile specifične potrebe ugostiteljske i prehrambene industrije, osiguravajući praktičnost i učinkovitost u rješenjima za pohranu. Njihove linije proizvoda uključuju Basic, Smart, Expert i Expert Pro–svaka prilagođena različitim zahtjevima za učinkovitošću, performansama i naprednim značajkama.

Bilo da tražite isplativa rješenja za manje kuhinje ili visokoučinkovite sustave za veće ustanove, Fusio pruža pouzdana rashladna rješenja koja optimiziraju pohranu i potrošnju energije, osiguravajući vrhunsku kvalitetu i dugovječnost svih linija proizvoda.

Airflow



Airflow in refrigeration is crucial for maintaining consistent temperatures and preventing hotspots. Proper airflow ensures even distribution of cool air within the unit, enhancing energy efficiency and preserving stored items.

It helps to circulate air around the evaporator coil and removes warm air, improving the system's cooling capacity. Effective airflow also prevents ice build-up, reduces compressor strain, and promotes faster cooling.

Key aspects of airflow:

Even distribution of cold air: Air must circulate evenly inside the refrigerator to ensure all parts, including shelves and drawers, are properly cooled. This prevents the formation of hot spots within the unit, which can lead to temperature increases and food spoilage.

Cooling efficiency: A good airflow system helps optimize cooling, reducing the need for additional energy. For example, efficient airflow helps remove warm air more quickly, preventing the compressor from working too hard, which in turn reduces energy consumption.

Ice prevention: Proper airflow also helps prevent ice build-up in the refrigerator, especially in freezers. If air does not circulate properly, moisture can condense and form ice, which can reduce the efficiency of the unit and increase energy consumption.

Condensation and ventilation: A quality ventilation system ensures that warm air is removed from the refrigerator while cold air reaches the components that need cooling. This is important for reducing the load on the compressor and maintaining stable temperatures.

Internal design shape: The design of the refrigerator, including the position of the fan and the arrangement of shelves, also plays a key role in the effectiveness of airflow. Better-positioned fans can facilitate better air circulation and prevent the creation of cold or hot spots.

Airflow plays a vital role in efficiency, energy consumption, and food preservation.



Protočnost zraka

Protok zraka u hladnjacima ključan je za održavanje konstantnih temperatura i sprječavanje stvaranja vrućih točaka. Pravilna protočnost zraka osigurava ravnomjernu distribuciju hladnog zraka unutar uređaja, čime se poboljšava energetska učinkovitost i čuvanje pohranjenih namirnica.

Pomaže u cirkulaciji zraka oko isparivača i uklanjanju toplog zraka, čime se poboljšava kapacitet hlađenja sustava. Učinkovit protok zraka također sprječava nakupljanje leda, smanjuje opterećenje kompresora i omogućava brže hlađenje.



Ključni aspekti protoka zraka:

Ravnomjerna distribucija hladnog zraka: Zrak mora ravnomjerno cirkulirati unutar hladnjaka kako bi svi dijelovi, uključujući police i ladice, bili pravilno ohlađeni. To sprječava stvaranje vrućih točaka unutar uređaja, što može dovesti do povećanja temperature i kvarenja hrane.

Učinkovitost hlađenja: Dobar sustav protoka zraka pomaže u optimizaciji hlađenja, smanjujući potrebu za dodatnom energijom. Na primjer, učinkovit protok zraka pomaže bržem uklanjanju toplog zraka, čime se kompresor ne mora previše opterećivati, što smanjuje potrošnju energije.

Prevencija leda: Pravilna protočnost zraka također pomaže u prevenciji stvaranja leda u hladnjaku, osobito u zamrzivačima. Ako zrak ne cirkulira pravilno, vlaga se može kondenzirati i stvarati led, što može smanjiti učinkovitost uređaja i povećati potrošnju energije.

Kondenzacija i ventilacija: Kvalitetan ventilacijski sustav osigurava da se topli zrak ukloni iz hladnjaka, dok hladan zrak dopire do komponenata koje treba rashladiti. Ovo je važno za smanjenje opterećenja na kompresoru i održavanje stabilnih temperatura.

Oblik unutarnjeg dizajna: Dizajn hladnjaka, uključujući poziciju ventilatora i raspored polica, također igra ključnu ulogu u učinkovitosti protoka zraka. Bolje pozicionirani ventilatori mogu omogućiti bolju cirkulaciju zraka i spriječiti stvaranje hladnih ili vrućih točaka.

Protok zraka igra ključnu ulogu u učinkovitosti, energetskoj potrošnji i očuvanju hrane.



Basic

The Basic line of cooling cabinets and cooling tables from Fusio combines practicality and flexibility, designed to meet the needs of professional kitchens. These units are available with options for left or right door openings, providing convenient access in various kitchen layouts.

Wheels are available as optional accessories, enabling easy mobility and flexible placement when needed. This makes the Basic line a versatile choice for dynamic work environments.

Whether you need efficient storage or adaptability in your kitchen setup, the Basic line offers reliable, user-friendly refrigeration solutions.

BASIC CHARACTERISTICS


- Stainless steel
- Insulation tickness of 60mm
- Digital, easy to use control unit
- Easy door seal replacement
- Main components easily accessible for maintenance
- Automatic defrost

Basic

cooling cabinets

- Stainless steel
- Insulation thickness of 60 mm
- Digital control unit that is easy to use
- Easy door seal replacement
- Main components easily accessible for maintenance
- Automatic defrost



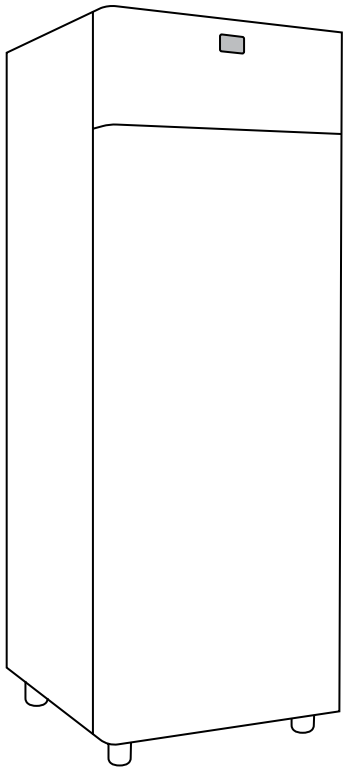

OR07TN-B

Temperature range: **+2/+10°C**

Total power: **483 W**
Voltage: **230V/50Hz**

Capacity (L): **572,5L**
Weight: **135 kg**

Internal dimension: **600x690x1521 mm**
External dimension: **720x845x2006 mm**

OR06TZ-B

Temperature range: **-20/-10°C**

Total power: **766 W**
Voltage: **230V/50Hz**

Capacity (L): **460,5L**
Weight: **115 kg**

Internal dimension: **600x555x1521 mm**
External dimension: **720x710x2006 mm**

OR06TN-B

Temperature range: **+2/+10°C**

Total power: **483 W**
Voltage: **230V/50Hz**

Capacity (L): **460,5L**
Weight: **115 kg**

Internal dimension: **600x555x1521 mm**
External dimension: **720x710x2006 mm**


OR07TZ-B

Temperature range: **-20/-10°C**

Total power: **766 W**
Voltage: **230V/50Hz**

Capacity (L): **572,5L**
Weight: **135 kg**

Internal dimension: **600x690x1521 mm**
External dimension: **720x845x2006 mm**

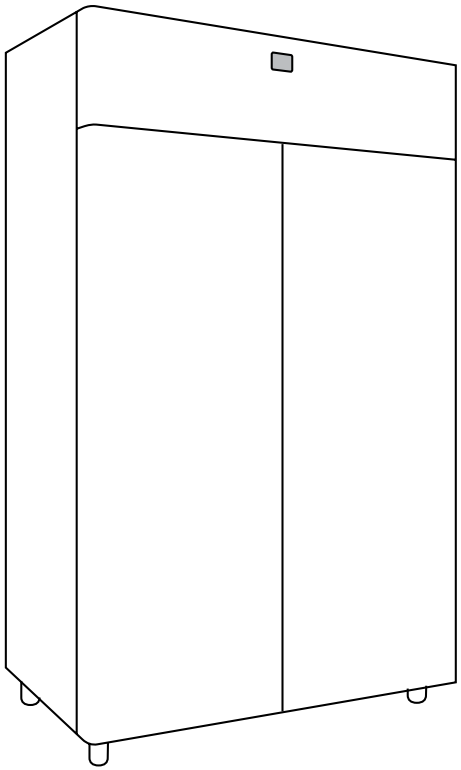

OR14TN-B

Temperature range: **+2/+10°C**

Total power: **578 W**
Voltage: **230V/50Hz**

Capacity (L): **1260L**
Weight: **190 kg**

Internal dimension: **1320x690x1521 mm**
External dimension: **1440x845x2006 mm**

OR12TZ-B

Temperature range: **-20/-10°C**

Total power: **907 W**
Voltage: **230V/50Hz**

Capacity (L): **1013L**
Weight: **180 kg**

Internal dimension: **1320x555x1521 mm**
External dimension: **1440x710x2006 mm**

OR12TN-B

Temperature range: **+2/+10°C**

Total power: **578 W**
Voltage: **230V/50Hz**

Capacity (L): **1013L**
Weight: **180 kg**

Internal dimension: **1320x555x1521 mm**
External dimension: **1440x710x2006 mm**

OR14TZ-B

Temperature range: **-20/-10°C**

Total power: **907 W**
Voltage: **230V/50Hz**

Capacity (L): **1260L**
Weight: **190 kg**

Internal dimension: **1320x690x1521 mm**
External dimension: **1440x845x2006 mm**




Basic

cooling table

- Insulation thickness of 60mm
- Stainless steel
- Digital control unit that is easy to use
- Easy door seal replacement
- Main components easily accessible for maintenance
- Automatic defrost



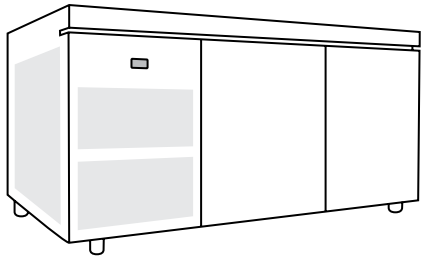

SR2TND-B


2 BOX DOORS

Temperature range: **+2/+10°C**

Total power: **483 W**
Voltage: **230V/50Hz**

Capacity (L): **397L**
Weight: **103 kg**

Internal dimension: **1011x585x671 mm**
External dimension: **1490x700x860 mm**

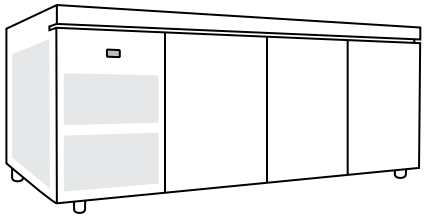

SR3TND-B


3 BOX DOORS

Temperature range: **+2/+10°C**

Total power: **483 W**
Voltage: **230V/50Hz**

Capacity (L): **597L**
Weight: **126 kg**

Internal dimension: **1521x585x671 mm**
External dimension: **2000x700x860 mm**

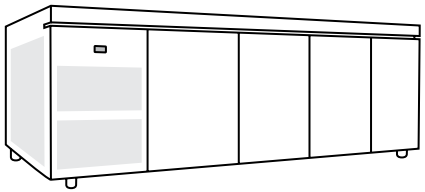

SR4TND-B


4 BOX DOORS

Temperature range: **+2/+10°C**

Total power: **578 W**
Voltage: **230V/50Hz**

Capacity (L): **797L**
Weight: **166 kg**

Internal dimension: **2031x585x671 mm**
External dimension: **2600x700x860 mm**

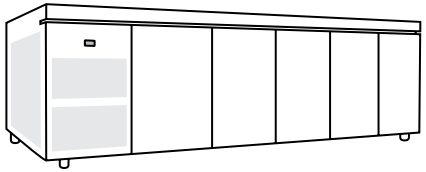

SR5TND-B

5 BOX DOORS

Temperature range: **+2/+10°C**

Total power: **578 W**
Voltage: **230V/50Hz**

Capacity (L): **997L**
Weight: **210 kg**

Internal dimension: **2541x585x671 mm**
External dimension: **3110x700x860 mm**



Basic


Basic linija rashladnih ormara i rashladnih stolova marke Fusio spaja praktičnost i fleksibilnost, osmišljena kako bi zadovoljila potrebe profesionalnih kuhinja.
Ovi uređaji dostupni su s mogućnošću otvaranja vrata s lijeve ili desne strane, što omogućuje jednostavan pristup u različitim rasporedima kuhinje.

Kotači su dostupni kao dodatna oprema, omogućujući jednostavno premještanje i fleksibilno postavljanje uređaja prema potrebi. To čini Basic liniju svestranim izborom za dinamična radna okruženja.

Bilo da vam je potrebna učinkovita pohrana ili prilagodljivost u organizaciji kuhinje, Basic linija nudi pouzdana i jednostavna rashladna rješenja

KARAKTERISTIKE

- Nehrđajući čelik
- Debljina izolacije od 60 mm
- Digitalna, jednostavna za korištenje kontrolna jedinica
- Jednostavna zamjena brtve na vratima
- Glavni komponente lako dostupne za održavanje
- Automatsko odmrzavanje

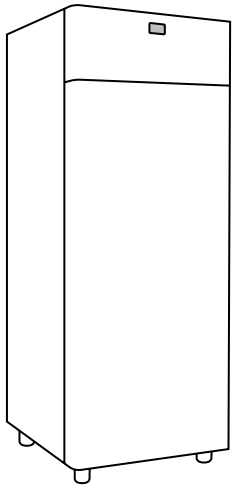

OR06TN-B

Temperaturni režim: **+2/+10°C**

Snaga: **483 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **460,5L**
Težina: **115 kg**

Unutarnje dimenzije: **600x555x1521 mm**
Vanjske dimenzije: **720x710x2006 mm**

OR06TZ-B

Temperaturni režim: **-20/-10°C**

Snaga: **766 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **460,5L**
Težina: **115 kg**

Unutarnje dimenzije: **600x555x1521 mm**
Vanjske dimenzije: **720x710x2006 mm**

OR07TN-B

Temperaturni režim: **+2/+10°C**

Snaga: **483 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **572,5L**
Težina: **135 kg**

Unutarnje dimenzije: **600x690x1521 mm**
Vanjske dimenzije: **720x845x2006 mm**


OR07TZ-B

Temperaturni režim: **-20/-10°C**

Snaga: **766 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **572,5L**
Težina: **135 kg**

Unutarnje dimenzije: **600x690x1521 mm**
Vanjske dimenzije: **720x845x2006 mm**

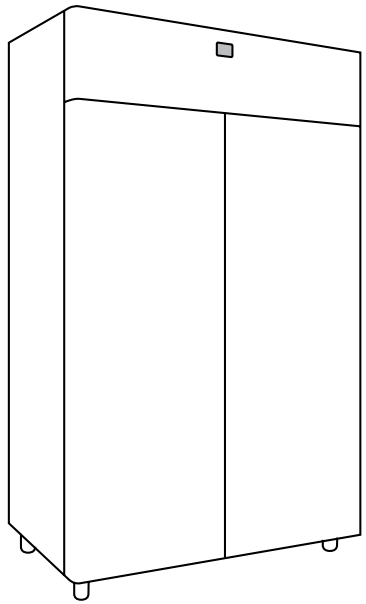

OR12TN-B

Temperaturni režim: **+2/+10°C**

Snaga: **578 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1013L**
Težina: **180 kg**

Unutarnje dimenzije: **1320x555x1521 mm**
Vanjske dimenzije: **1440x710x2006 mm**

OR14TN-B

Temperaturni režim: **+2/+10°C**

Snaga: **578 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1260L**
Težina: **190 kg**

Unutarnje dimenzije: **1320x690x1521 mm**
Vanjske dimenzije: **1440x845x2006 mm**

OR12TZ-B

Temperaturni režim: **-20/-10°C**

Snaga: **907 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1013L**
Težina: **180 kg**

Unutarnje dimenzije: **1320x555x1521 mm**
Vanjske dimenzije: **1440x710x2006 mm**


OR14TZ-B

Temperaturni režim: **-20/-10°C**

Snaga: **907 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1260L**
Težina: **190 kg**

Unutarnje dimenzije: **1320x690x1521 mm**
Vanjske dimenzije: **1440x845x2006 mm**

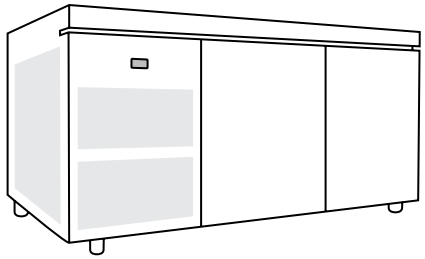

SR2TND-B


DVOJE VRATA

Temperaturni režim: **+2/+10°C**

Snaga: **483 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **397L**
Težina: **103 kg**

Unutarnje dimenzije: **1011x585x671 mm**
Vanjske dimenzije: **1490x700x860 mm**

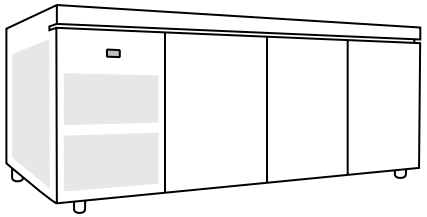

SR3TND-B


TROJE VRATA

Temperaturni režim: **+2/+10°C**

Snaga: **483 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **597L**
Težina: **126 kg**

Unutarnje dimenzije: **1521x585x671 mm**
Vanjske dimenzije: **2000x700x860 mm**

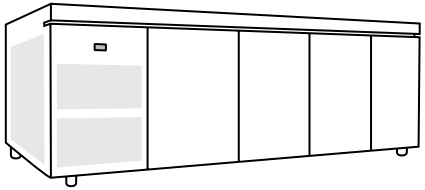

SR4TND-B


ČETIRI VRATA

Temperaturni režim: **+2/+10°C**

Snaga: **578 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **797L**
Težina: **166 kg**

Unutarnje dimenzije: **2031x585x671 mm**
Vanjske dimenzije: **2600x700x860 mm**

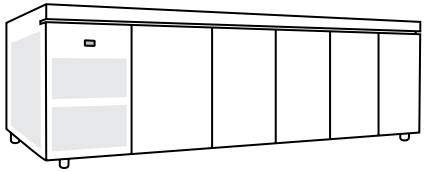

SR5TND-B

PET VRATA

Temperaturni režim: **+2/+10°C**

Snaga: **578 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **997L**
Težina: **210 kg**

Unutarnje dimenzije: **2541x585x671 mm**
Vanjske dimenzije: **3110x700x860 mm**

FUSIO

Basic

list of device variants

INDEX:
SR - COOLING TABLE (applies to all models) | TN - positive temperature (+2/+10°C)
D - compressor compartment right | L - compressor compartment left
B - BASIC | RP - worktop | ZZ - wall protection | K - sink

SR2TND-B	Cooling table 02 BASIC +2/+10°C compressor side right, without WS 1490x700x810
SR2TND-B-RP	Cooling t"able 02 BASIC +2/+10°C compressor side right 1490x700x860
SR2TND-B-RPZZ	Cooling table 02 BASIC +2/+10°C compressor side right, with WP 1490x700x860
SR2TND-B-RPK	Cooling table 02 BASIC +2/+10°C compressor side right, with sink 1490x700x860
SR2TND-B-RPKZZ	Cooling table 02 BASIC +2/+10°C compressor side right, with sink and WP 1490x700x860
SR2TNL-B	Cooling table 02 BASIC +2/+10°C compressor side left, without WS 1490x700x810
SR2TNL-B-RP	Cooling table 02 BASIC +2/+10°C compressor side left 1490x700x860
SR2TNL-B-RPZZ	Cooling table 02 BASIC +2/+10°C compressor side left, with WP 1490x700x860
SR2TNL-B-RPK	Cooling table 02 BASIC +2/+10°C compressor side left, with sink 1490x700x860
SR2TNL-B-RPKZZ	Cooling table 02 BASIC +2/+10°C compressor side left, with sink and WP 1490x700x860
SR3TND-B	Cooling table 03 BASIC +2/+10°C compressor side right, without WS 2000x700x810
SR3TND-B-RP	Cooling table 03 BASIC +2/+10°C compressor side right 2000x700x860
SR3TND-B-RPZZ	Cooling table 03 BASIC +2/+10°C compressor side right, with WP 2000x700x860
SR3TND-B-RPK	Cooling table 03 BASIC +2/+10°C compressor side right, with sink 2000x700x860
SR3TND-B-RPKZZ	Cooling table 03 BASIC +2/+10°C compressor side right, with sink and WP ZZ 2000x700x860
SR3TNL-B	Cooling table 03 BASIC +2/+10°C compressor side left, without WS 2000x700x810
SR3TNL-B-RP	Cooling table 03 BASIC +2/+10°C compressor side left 2000x700x860
SR3TNL-B-RPZZ	Cooling table 03 BASIC +2/+10°C compressor side left, with WP 2000x700x860
SR3TNL-B-RPK	Cooling table 03 BASIC +2/+10°C compressor side left, with sink 2000x700x860
SR3TNL-B-RPKZZ	Cooling table 03 BASIC +2/+10°C compressor side left, with sink and WP 2000x700x860

Basic

list of device variants

SR4TND-B	Cooling table 04 BASIC +2/+10°C compressor side right, without WS 2600x700x810
SR4TND-B-RP	Cooling table 04 BASIC +2/+10°C compressor side right 2600x700x860
SR4TND-B-RPZZ	Cooling table 04 BASIC +2/+10°C compressor side right, with WP 2600x700x860
SR4TND-B-RPK	Cooling table 04 BASIC +2/+10°C compressor side right, with sink 2600x700x860
SR4TND-B-RPKZZ	Cooling table 04 BASIC +2/+10°C compressor side right, with sink and WP 2600x700x860
SR4TNL-B	Cooling table 04 BASIC +2/+10°C compressor side left, without WP 2600x700x810
SR4TNL-B-RP	Cooling table 04 BASIC +2/+10°C compressor side left 2600x700x860
SR4TNL-B-RPZZ	Cooling table 04 BASIC +2/+10°C compressor side left, with WP 2600x700x860
SR4TNL-B-RPK	Cooling table 04 BASIC +2/+10°C compressor side left, with sink 2600x700x860
SR4TNL-B-RPKZZ	Cooling table 04 BASIC +2/+10°C compressor side left, with sink and WP 2600x700x860
SR5TND-B	Cooling table 05 BASIC +2/+10°C compressor side right, without WS 3110x700x810
SR5TND-B-RP	Cooling table 05 BASIC +2/+10°C compressor side right 3110x700x860
SR5TND-B-RPZZ	Cooling table 05 BASIC +2/+10°C compressor side right, with WP 3110x700x860
SR5TND-B-RPK	Cooling table 05 BASIC +2/+10°C compressor side right, with sink 3110x700x860
SR5TND-B-RPKZZ	Cooling table 05 BASIC +2/+10°C compressor side right, with sink and WP 3110x700x860
SR5TNL-B	Cooling table 05 BASIC +2/+10°C compressor side left, without WS 3110x700x810
SR5TNL-B-RP	Cooling table 05 BASIC +2/+10°C compressor side left 3110x700x860
SR5TNL-B-RPZZ	Cooling table 05 BASIC +2/+10°C compressor side left, with WP 3110x700x860
SR5TNL-B-RPK	Cooling table 05 BASIC +2/+10°C compressor side left, with sink 3110x700x860
SR5TNL-B-RPKZZ	Cooling table 05 BASIC +2/+10°C compressor side left, with sink and WP 3110x700x860

FUSIO

Basic

lista varijanti uređaja

KAZALO:
SR - STOL RASHLADNI (vrijedi za sve modele) | **TN** - pozitivna temperatura (+2/+10°C)
D - karter desno | **L** - karter lijevo
B - BASIC | **RP** - radna površina | **ZZ** - zaštita zida | **K** - korito

SR2TND-B	Stol rashladni 02 BASIC +2/+10°C karter desno, bez RP 1490x700x810
SR2TND-B-RP	Stol rashladni 02 BASIC +2/+10°C karter desno 1490x700x860
SR2TND-B-RPZZ	Stol rashladni 02 BASIC +2/+10°C karter desno, sa ZZ 1490x700x860
SR2TND-B-RPK	Stol rashladni 02 BASIC +2/+10°C karter desno, sa koritom 1490x700x860
SR2TND-B-RPKZZ	Stol rashladni 02 BASIC +2/+10°C karter desno, sa koritom i ZZ 1490x700x860
SR2TNL-B	Stol rashladni 02 BASIC +2/+10°C karter lijevo, bez RP 1490x700x810
SR2TNL-B-RP	Stol rashladni 02 BASIC +2/+10°C karter lijevo 1490x700x860
SR2TNL-B-RPZZ	Stol rashladni 02 BASIC +2/+10°C karter lijevo, sa ZZ 1490x700x860
SR2TNL-B-RPK	Stol rashladni 02 BASIC +2/+10°C karter lijevo, sa koritom 1490x700x860
SR2TNL-B-RPKZZ	Stol rashladni 02 BASIC +2/+10°C karter lijevo, sa koritom i ZZ 1490x700x860
SR3TND-B	Stol rashladni 03 BASIC +2/+10°C karter desno, bez RP 2000x700x810
SR3TND-B-RP	Stol rashladni 03 BASIC +2/+10°C karter desno 2000x700x860
SR3TND-B-RPZZ	Stol rashladni 03 BASIC +2/+10°C karter desno, sa ZZ 2000x700x860
SR3TND-B-RPK	Stol rashladni 03 BASIC +2/+10°C karter desno, sa koritom 2000x700x860
SR3TND-B-RPKZZ	Stol rashladni 03 BASIC +2/+10°C karter desno, sa koritom i ZZ 2000x700x860
SR3TNL-B	Stol rashladni 03 BASIC +2/+10°C karter lijevo, bez RP 2000x700x810
SR3TNL-B-RP	Stol rashladni 03 BASIC +2/+10°C karter lijevo 2000x700x860
SR3TNL-B-RPZZ	Stol rashladni 03 BASIC +2/+10°C karter lijevo, sa ZZ 2000x700x860
SR3TNL-B-RPK	Stol rashladni 03 BASIC +2/+10°C karter lijevo, sa koritom 2000x700x860
SR3TNL-B-RPKZZ	Stol rashladni 03 BASIC +2/+10°C karter lijevo, sa koritom i ZZ 2000x700x860

Basic

lista varijanti uređaja

SR4TND-B	Stol rashladni 04 BASIC +2/+10°C karter desno, bez RP 2600x700x810
SR4TND-B-RP	Stol rashladni 04 BASIC +2/+10°C karter desno 2600x700x860
SR4TND-B-RPZZ	Stol rashladni 04 BASIC +2/+10°C karter desno, sa ZZ 2600x700x860
SR4TND-B-RPK	Stol rashladni 04 BASIC +2/+10°C karter desno, sa koritom 2600x700x860
SR4TND-B-RPKZZ	Stol rashladni 04 BASIC +2/+10°C karter desno, sa koritom i ZZ 2600x700x860
SR4TNL-B	Stol rashladni 04 BASIC +2/+10°C karter lijevo, bez RP 2600x700x810
SR4TNL-B-RP	Stol rashladni 04 BASIC +2/+10°C karter lijevo 2600x700x860
SR4TNL-B-RPZZ	Stol rashladni 04 BASIC +2/+10°C karter lijevo, sa ZZ 2600x700x860
SR4TNL-B-RPK	Stol rashladni 04 BASIC +2/+10°C karter lijevo, sa koritom 2600x700x860
SR4TNL-B-RPKZZ	Stol rashladni 04 BASIC +2/+10°C karter lijevo, sa koritom i ZZ 2600x700x860
SR5TND-B	Stol rashladni 05 BASIC +2/+10°C karter desno, bez RP 3110x700x810
SR5TND-B-RP	Stol rashladni 05 BASIC +2/+10°C karter desno 3110x700x860
SR5TND-B-RPZZ	Stol rashladni 05 BASIC +2/+10°C karter desno, sa ZZ 3110x700x860
SR5TND-B-RPK	Stol rashladni 05 BASIC +2/+10°C karter desno, sa koritom 3110x700x860
SR5TND-B-RPKZZ	Stol rashladni 05 BASIC +2/+10°C karter desno, sa koritom i ZZ 3110x700x860
SR5TNL-B	Stol rashladni 05 BASIC +2/+10°C karter lijevo, bez RP 3110x700x810
SR5TNL-B-RP	Stol rashladni 05 BASIC +2/+10°C karter lijevo 3110x700x860
SR5TNL-B-RPZZ	Stol rashladni 05 BASIC +2/+10°C karter lijevo, sa ZZ 3110x700x860
SR5TNL-B-RPK	Stol rashladni 05 BASIC +2/+10°C karter lijevo, sa koritom 3110x700x860
SR5TNL-B-RPKZZ	Stol rashladni 05 BASIC +2/+10°C karter lijevo, sa koritom i ZZ 3110x700x860

Smart



The Smart line of cooling units from Fusio offers advanced features for optimal performance and ease of use. Available with left or right door opening options, these units also provide added mobility with optional wheels.

They are designed with enhanced air circulation for efficient cooling and thicker insulation for improved energy efficiency.

The Smart line comes standard with a built-in lock for security, while LED lighting is available as an optional feature. With its modern design and practical features, it is an ideal choice for professional kitchens and foodservice environments seeking a reliable cooling solution for both functionality and modern features.

SMART CHARACTERISTICS


- Stainless steel
- Environmentally friendly refrigerant R290 monoblock
- Icreased insulation thickness of 75mm
- Reduced energy consumption
- Digital, easy to use control unit
- Self-diagnostic system
- Automatic defrost
- Easy door seal replacement

Smart

cooling cabinets

- Stainless steel
- Environmentally friendly refrigerant R290 monoblock
- Increased insulation thickness of 75mm
- Reduced energy consumption
- Digital control unit that is easy to use
- Self-diagnostic system
- Automatic defrost
- Easy door seal replacement



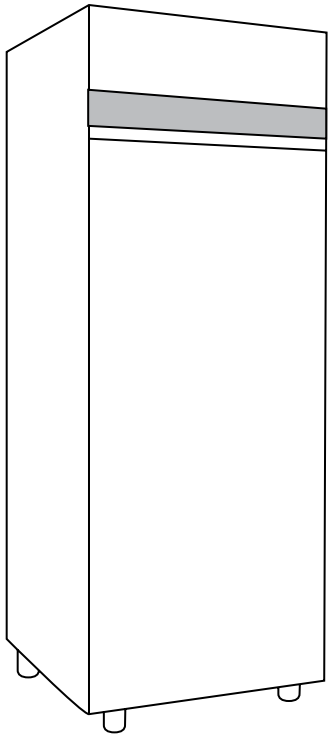

OR07TN-S

Temperature range: **+2/+10°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **583,5L**
Weight: **145 kg**

Internal dimension: **560x704x1480 mm**
External dimension: **708x840x2064 mm**

OR06TZ-S

Temperature range: **-20/-15°C**

Total power: **560 W**
Voltage: **230V/50Hz**

Capacity (L): **475,5L**
Weight: **132 kg**

Internal dimension: **560x574x1480 mm**
External dimension: **708x710x2064 mm**

OR06TN-S

Temperature range: **+2/+10°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **475,5L**
Weight: **132 kg**

Internal dimension: **560x574x1480 mm**
External dimension: **708x710x2064 mm**


OR07TZ-S

Temperature range: **-20/-15°C**

Total power: **560 W**
Voltage: **230V/50Hz**

Capacity (L): **583,5L**
Weight: **145 kg**

Internal dimension: **560x704x1480 mm**
External dimension: **708x840x2064 mm**

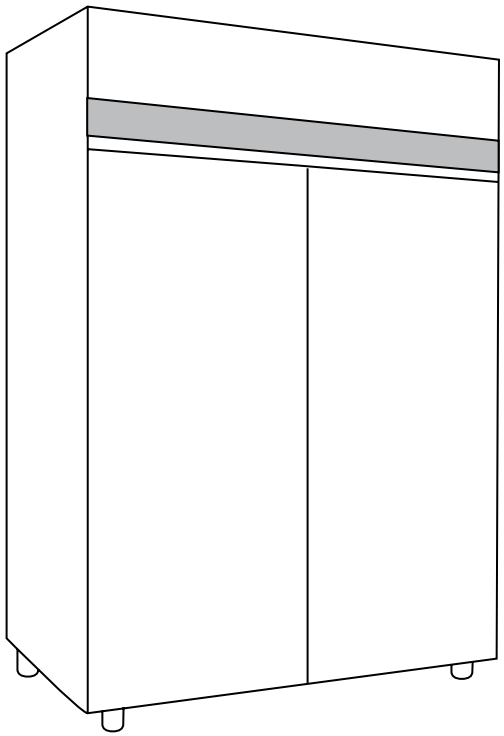

OR14TN-S

Temperature range: **-2/+10°C**

Total power: **535 W**
Voltage: **230V/50Hz**

Capacity (L): **1337,9L**
Weight: **210 kg**

Internal dimension: **1284x704x1480 mm**
External dimension: **1432x840x2064 mm**

OR12TZ-S

Temperature range: **-20/-15°C**

Total power: **820 W**
Voltage: **230V/50Hz**

Capacity (L): **1090L**
Weight: **197 kg**

Internal dimension: **1284x574x1480 mm**
External dimension: **1432x710x2064 mm**

OR12TN-S

Temperature range: **-2/+10°C**

Total power: **535 W**
Voltage: **230V/50Hz**

Capacity (L): **1090L**
Weight: **197 kg**

Internal dimension: **1284x574x1480 mm**
External dimension: **1432x710x2064 mm**

OR14TZ-S

Temperature range: **-20/-15°C**

Total power: **820 W**
Voltage: **230V/50Hz**

Capacity (L): **1337,9L**
Weight: **210 kg**


Internal dimension: **1284x704x1480 mm**
External dimension: **1432x840x2064 mm**



Smart

cooling cabinets

GLASS DOOR




OR07TN-S-SV

Temperature range: **+2/+10°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **583,5L**
Weight: **145 kg**

Internal dimension: **560x704x1480 mm**
External dimension: **708x840x2064 mm**



OR14TN-S-SV

Temperature range: **-2/+10°C**

Total power: **535 W**
Voltage: **230V/50Hz**

Capacity (L): **1337,9L**
Weight: **210 kg**

Internal dimension: **1284x704x1480 mm**
External dimension: **1432x840x2064 mm**

OR07TZ-S-SV

Temperature range: **-20/-15°C**

Total power: **560 W**
Voltage: **230V/50Hz**

Capacity (L): **583,5L**
Weight: **145 kg**

Internal dimension: **560x704x1480 mm**
External dimension: **708x840x2064 mm**

OR14TZ-S-SV


Temperature range: **-20/-15°C**

Total power: **820 W**
Voltage: **230V/50Hz**

Capacity (L): **1337,9L**
Weight: **210 kg**

Internal dimension: **1284x704x1480 mm**
External dimension: **1432x840x2064 mm**

DUAL TEMPERATURE



OR07TN/TN-S

Temperature range: **+2/+10°C / +2/+10°C**

Total power: **696 W**
Voltage: **230V/50Hz**

Capacity (L): **448,5L**
Weight: **145 kg**

Internal dimension: **2x 560x704x1480 mm**
External dimension: **708x840x2064 mm**

OR07TN/TZ-S

Temperature range: **+2/+10°C / -20/-10°C**

Total power: **814 W**
Voltage: **230V/50Hz**

Capacity (L): **448,5L**
Weight: **145 kg**

Internal dimension: **2x 560x704x698 mm**
External dimension: **708x840x2064 mm**

OR07TZ/TZ-S

Temperature range: **-20/-10°C / -20/-10°C**

Total power: **927W**
Voltage: **230V/50Hz**

Capacity (L): **448,5L**
Weight: **145 kg**

Internal dimension: **2x 560x704x698 mm**
External dimension: **708x840x2064 mm**


FUSIO

Smart

cooling table

- Stainless steel
- Environmentally friendly refrigerant R290 monoblock
- Increased insulation thickness of 75mm
- GN standard
- Reduced energy consumption
- Digital control unit that is easy to use
- Self-diagnostic system
- Automatic defrost
- Easy door seal replacement





SR2TNL-S

2 BOX DOORS

Temperature range: **-2/+10°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **266,2L**
Weight: **140 kg**

Internal dimension: **810x557x590 mm**
External dimension: **1350x700x875 mm**

SR2TZL-S


2 BOX DOORS

Temperature range: **-20/-15°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **266,2L**
Weight: **140 kg**

Internal dimension: **810x557x590 mm**
External dimension: **1350x700x875 mm**

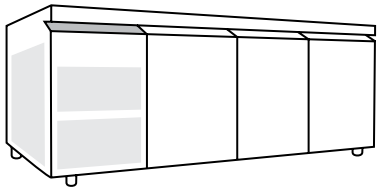

SR3TNL-S

3 BOX DOORS

Temperature range: **-2/+10°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **417,1L**
Weight: **168 kg**

Internal dimension: **1269x557x590 mm**
External dimension: **1809x700x875 mm**

SR3TZL-S


3 BOX DOORS

Temperature range: **-20/-15°C**

Total power: **540 W**
Voltage: **230V/50Hz**

Capacity (L): **417,1L**
Weight: **168 kg**

Internal dimension: **1269x557x590 mm**
External dimension: **1809x700x875 mm**

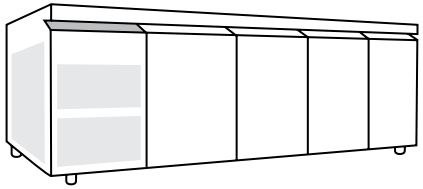

SR4TNL-S

4 BOX DOORS

Temperature range: **-2/+10°C**

Total power: **421 W**
Voltage: **230V/50Hz**

Capacity (L): **568L**
Weight: **188 kg**

Internal dimension: **1728x557x590 mm**
External dimension: **2268x700x875 mm**

SR4TZL-S

4 BOX DOORS

Temperature range: **-20/-15°C**

Total power: **421 W**
Voltage: **230V/50Hz**

Capacity (L): **568 L**
Weight: **188 kg**


Internal dimension: **1728x557x590 mm**
External dimension: **2268x700x875 mm**

Smart

cooling table

- Stainless steel
- Environmentally friendly refrigerant R290 monoblock
- Increased insulation thickness of 75mm
- GN standard
- Reduced energy consumption
- Digital control unit that is easy to use
- Self-diagnostic system
- Automatic defrost
- Easy door seal replacement



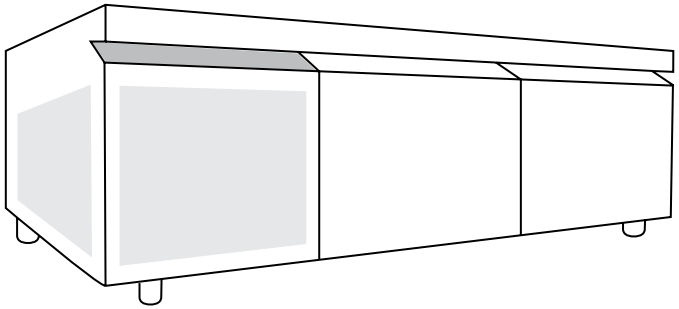

SRP2TNL-S
2 BOX DOORS

Temperature range: **-2/+10°C**

Total power: **483 W**
Voltage: **230V/50Hz**

Capacity (L): **95,3L**

Internal dimension: **629x457x340 mm**
External dimension: **1200x650x600 mm**


SR2TZL-S
2 BOX DOORS

Temperature range: **-20/-15°C**

Total power: **483 W**
Voltage: **230V/50Hz**

Capacity (L): **107,5L**

Internal dimension: **692x457x340 mm**
External dimension: **1200x650x600 mm**

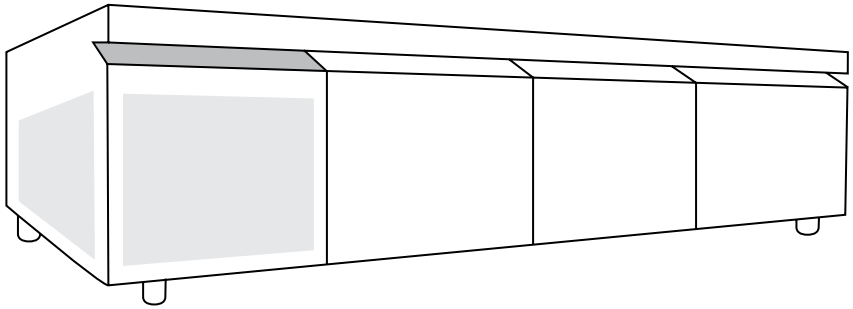

SRP3TNL-S
3 BOX DOORS

Temperature range: **-2/+10°C**

Total power: **483 W**
Voltage: **230V/50Hz**

Capacity (L): **170L**

Internal dimension: **1092x457x340 mm**
External dimension: **1600x650x600 mm**

SRP3TZL-S
3 BOX DOORS

Temperature range: **-2/-10 °C**

Total power: **421 W**
Voltage: **230V/50Hz**

Capacity (L): **417,1L**

Internal dimension: **1728x557x590mm**
External dimension: **2268x700x875mm**

Smart



Fusio Smart linija rashladnih uređaja nudi napredne značajke za optimalne performanse i jednostavno korištenje. Dostupna je s mogućnošću otvaranja vrata s lijeve ili desne strane, a dodatnu mobilnost omogućuju kotači.


Uređaji su dizajnirani s poboljšanom cirkulacijom zraka za učinkovito hlađenje te debljom izolacijom za bolju energetsku učinkovitost.

Smart linija standardno uključuje ugrađenu bravu za sigurnost, dok je LED rasvjeta dostupna kao dodatna oprema. Svojim modernim dizajnom i funkcionalnostima, idealan je izbor za profesionalne kuhinje i ugostiteljske objekte koji traže pouzdano rješenje za hlađenje.

SMART KARAKTERISTIKE

- Nehrđajući čelik
- Ekološki prihvatljiv rashladni plin R290 monoblok
- Povećana debljina izolacije od 75 mm
- Smanjena potrošnja energije
- Digitalna, jednostavna za korištenje kontrolna jedinica
- Sistemska samodijagnostika
- Automatsko odmrzavanje
- Jednostavna zamjena brtve na vratima

Rashladni ormari

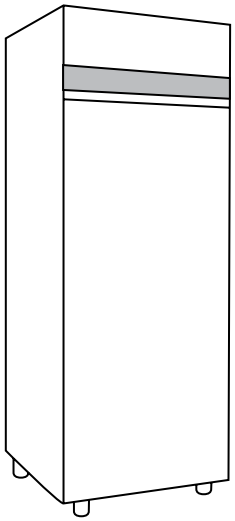

OR06TN-S

Temperaturni režim: **+2/+10°C**

Snaga: **348W**
Napajanje: **230V/50Hz**

Kapacitet (L): **475,5L**
Težina: **132kg**

Unutarnje dimenzije: **560x574x1480 mm**
Vanjske dimenzije: **708x710x2064 mm**

OR06TZ-S

Temperaturni režim: **-20/-15°C**

Snaga: **560W**
Napajanje:**230V/50Hz**

Kapacitet (L): **475,5L**
Težina: **132kg**

Unutarnje dimenzije: **560x574x1480 mm**
Vanjske dimenzije: **708x710x2064 mm**

OR07TN-S

Temperaturni režim: **+2/+10°C**

Snaga: **348W**
Napajanje: **230V/50Hz**

Kapacitet (L): **583,5L**
Težina: **145kg**

Unutarnje dimenzije: **560x704x1480 mm**
Vanjske dimenzije: **708x840x2064 mm**


OR07TZ-S

Temperaturni režim: **-20/-15°C**

Snaga: **560W**
Napajanje: **230V/50Hz**

Kapacitet (L): **583,5L**
Težina: **145kg**

Unutarnje dimenzije: **560x574x1480 mm**
Vanjske dimenzije: **708x840x2064 mm**

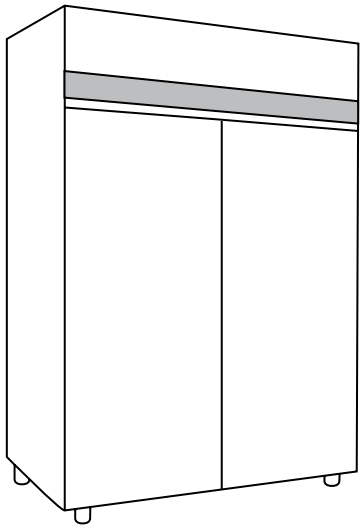

OR12TN-S

Temperaturni režim: **-2/+10°C**

Snaga: **535W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1090L**
Težina: **197kg**

Unutarnje dimenzije: **1284x574x1480mm**
Vanjske dimenzije: **1432x710x2064 mm**

OR14TN-S

Temperaturni režim: **-2/+10°C**

Snaga: **535W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1337,9L**
Težina: **210kg**

Unutarnje dimenzije: **1284x704x1480mm**
Vanjske dimenzije: **1432x840x2064mm**

OR12TZ-S

Temperaturni režim: **-20/-15°C**

Snaga: **820W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1090L**
Težina: **197kg**

Unutarnje dimenzije: **1284x574x1480mm**
Vanjske dimenzije: **1432x710x2064mm**

OR14TZ-S


Temperaturni režim: **-20/-15°C**

Snaga: **820W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1337,9L**
Težina: **210kg**

Unutarnje dimenzije: **1284x704x1480mm**
Vanjske dimenzije: **1432x840x2064mm**

STAKLENA VRATA



OR07TN-S-SV

Temperaturni režim: **+2/+10°C**

Snaga: **348 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **583,5L**
Težina: **145 kg**

Unutarnje dimenzije: **560x704x1480 mm**
Vanjske dimenzije: **708x840x2064 mm**


OR07TZ-S-SV

Temperaturni režim: **-20/-15°C**

Snaga: **560 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **583,5L**
Težina: **145 kg**

Unutarnje dimenzije: **560x704x1480 mm**
Vanjske dimenzije: **708x840x2064 mm**



OR14TN-S-SV

Temperaturni režim: **-2/+10°C**

Snaga: **535 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1337,9L**
Težina: **210 kg**

Unutarnje dimenzije: **1284x704x1480 mm**
Vanjske dimenzije: **1432x840x2064 mm**

OR14TZ-S-SV


Temperaturni režim: **-20/-15°C**

Snaga: **820 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1337,9L**
Težina: **210 kg**

Unutarnje dimenzije: **1284x704x1480 mm**
Vanjske dimenzije: **1432x840x2064 mm**

DVOJNA TEMPERATURA



OR07TN/TN-S

Temperaturni režim: **+2/+10°C / +2/+10°C**

Snaga: **696 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **448,5L**
Težina: **145 kg**

Unutarnje dimenzije: **2x 560x704x1480 mm**
Vanjske dimenzije: **708x840x2064 mm**

OR07TZ/TZ-S

Temperaturni režim: **-20/-10°C / -20/-10°C**

Snaga: **927W**
Napajanje: **230V/50Hz**

Kapacitet (L): **448,5L**
Težina: **145 kg**

Unutarnje dimenzije: **2x 560x704x698 mm**
Vanjske dimenzije: **708x840x2064 mm**

OR07TN/TZ-S


Temperature range: **+2/+10°C / -20/-10°C**

Total power: **814 W**
Voltage: **230V/50Hz**

Capacity (L): **448,5L**
Weight: **145 kg**

Internal dimension: **2x 560x704x698 mm**
External dimension: **708x840x2064 mm**

Rashladni stolovi



SR2TNL-S
DVOJE VRATA

Temperaturni režim: **-2/+10°C**

Snaga: **348 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **266,2L**
Težina: **140 kg**

Unutarnje dimenzije: **810x557x590 mm**
Vanjske dimenzije: **1350x700x875 mm**


SR2TZL-S
DVOJE VRATA

Temperaturni režim: **-20/-15°C**

Snaga: **348 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **266,2L**
Težina: **140 kg**

Unutarnje dimenzije: **810x557x590 mm**
Vanjske dimenzije: **1350x700x875 mm**

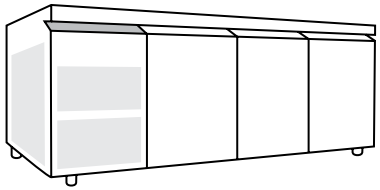

SR3TNL-S
TROJE VRATA

Temperaturni režim: **-2/+10°C**

Snaga: **348 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **417,1L**
Težina: **168 kg**

Unutarnje dimenzije: **1269x557x590 mm**
Vanjske dimenzije: **1809x700x875 mm**


SR3TZL-S
TROJE VRATA

Temperaturni režim: **-20/-15°C**

Snaga: **540 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **417,1L**
Težina: **168 kg**

Unutarnje dimenzije: **1269x557x590 mm**
Vanjske dimenzije: **1809x700x875 mm**

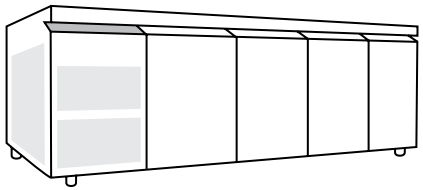

SR4TNL-S
ČETIRI VRATA

Temperaturni režim: **-2/+10°C**

Snaga: **421 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **568L**
Težina: **188 kg**

Unutarnje dimenzije: **1728x557x590 mm**
Vanjske dimenzije: **2268x700x875 mm**


SR4TZL-S
ČETIRI VRATA

Temperaturni režim: **-20/-15°C**

Snaga: **421 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **568 L**
Težina: **188 kg**

Unutarnje dimenzije: **1728x557x590 mm**
Vanjske dimenzije: **2268x700x875 mm**

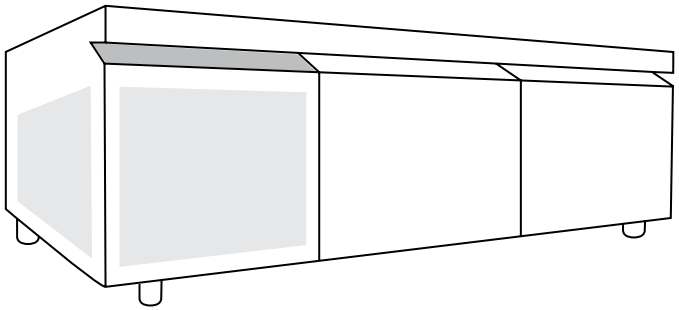

SRP2TNL-S
DVOJE VRATA

Temperaturni režim: **-2/+10°C**

Snaga: **483 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **95,3L**

Unutarnje dimenzije: **629x457x340 mm**
Vanjske dimenzije: **1200x650x600 mm**


SR2TZL-S
DVOJE VRATA

Temperaturni režim: **-20/-15°C**

Snaga: **483 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **107,5L**

Unutarnje dimenzije: **692x457x340 mm**
Vanjske dimenzije: **1200x650x600 mm**

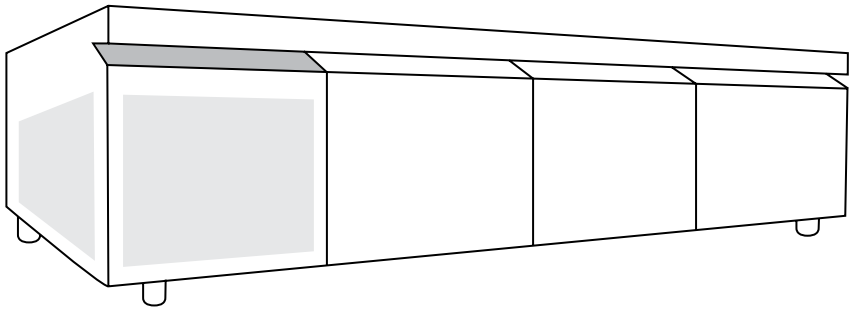

SRP3TNL-S
TROJE VRATA

Temperaturni režim: **-2/+10°C**

Snaga: **483 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **170L**

Unutarnje dimenzije: **1092x457x340 mm**
Vanjske dimenzije: **1600x650x600 mm**

SRP3TZL-S
TROJE VRATA

Temperaturni režim: **-2/-10 °C**

Snaga: **421 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **417,1L**

Unutarnje dimenzije: **1728x557x590mm**
Vanjske dimenzije: **2268x700x875mm**

Smart

list of device variants

INDEX:
SR - COOLING TABLE (applies to all models) | TN - positive temperature (+2/+10°C)
TZ - Negative Temperature (-20/-15°C) | L - compressor compartment left
S - SMART | RP - worktop | ZZ - wall protection

OR06TN-S	Cooling table 06 SMART -2/+10°C 708x710x2064
OR07TN-S	Cooling table 07 SMART -2/+10°C 708x840x2064
OR12TN-S	Cooling table 12 SMART -2/+10°C 1432x710x2064
OR14TN-S	Cooling table 14 SMART -2/+10°C 1432x840x2064
OR06TZ-S	Cooling table 06 SMART -20/-10°C 708x710x2064
OR07TZ-S	Cooling table 07 SMART -20/-10°C 708x840x2064
OR12TZ-S	Cooling table 12 SMART -20/-10°C 1432x710x2064
OR14TZ-S	Cooling table14 SMART -20/-10°C 1432x840x2064
OR07TN/TN-S	Cooling table07 SMART DUAL TEMPERATURE-2/+10°C -2/+10°C 708x840x2064
OR07TN/TZ-S	Cooling table 07 SMART DUAL TEMPERATURE--2/+10°C -20/-10°C 708x840x2064
OR07TZ/TZ-S	Cooling table 07 SMART DUAL TEMPERATURE--20/-10°C -20/-10°C 708x840x2064
OR07TN-S-SV	Cooling table 07 SMART GLASS DOORS -2/+10°C 708x840x2064
OR14TN-S-SV	Cooling table 14 SMART GLASS DOORS -2/+10°C 1432x840x2064
OR07TZ-S-SV	Cooling table 07 SMART GLASS DOORS-20/-10°C 708x840x2064
OR14TZ-S-SV	Cooling table 14 SMART GLASS DOORS -20/-10°C 1432x840x2064

SRP2TNL-S	Cooling table 02 SMART UNDER-COUNTER -2/+10°C left crankase, 1200x600x600 mm
SRP3TNL-S	Cooling table 03 SMART UNDER-COUNTER -2/+10°C left crankase, 1200x600x600 mm
SRP2TZL-S	Cooling table 02 SMART UNDER-COUNTER -20/-10°C left crankase, 1200x600x600 mm
SRP3TZL-S	Cooling table 03 SMART UNDER-COUNTER -20/-10°C left crankase, 1200x600x600 mm

FUSIO

Smart

list of device variants

SR2TNL-S	Cooling table 02 SMART -2/+10°C left crankcase, without WS 1350x700x835
SR2TNL-S-RP	Cooling table 02 SMART -2/+10°C left crankcase 1350x700x875
SR2TNL-S-RPZZ	Cooling table 02 SMART -2/+10°C left crankcase with WP 1350x700x875
SR3TNL-S	Cooling table 03 SMART -2/+10°C left crankcase, without WS 1809x700x835
SR3TNL-S-RP	Cooling table 03 SMART -2/+10°C left crankcase 1809x700x875
SR3TNL-S-RPZZ	Cooling table 03 SMART -2/+10°C left crankcase with WP 1809x700x875
SR4TNL-S	Cooling table 04 SMART -2/+10°C left crankcase, without WS 2268x700x835
SR4TNL-S-RP	Cooling table 04 SMART -2/+10°C left crankcase 2268x700x875
SR4TNL-S-RPZZ	Cooling table 04 SMART -2/+10°C left crankcase with WP 2268x700x875
SR2TZL-S	Cooling table 02 SMART -15/-20°C left crankcase, without WS 1350x700x835
SR2TZL-S-RP	Cooling table 02 SMART -15/-20°C left crankcase 1350x700x875
SR2TZL-S-RPZZ	Cooling table 02 SMART -15/-20°C left crankcase with WP 1350x700x875
SR3TZL-S	Cooling table 03 SMART -15/-20°C left crankcase, without WS 1809x700x835
SR3TZL-S-RP	Cooling table 03 SMART -15/-20°C left crankcase 1809x700x875
SR3TZL-S-RPZZ	Cooling table 03 SMART -15/-20°C left crankcase with WP 1809x700x875
SR4TZL-S	Cooling table 04 SMART -15/-20°C left crankcase, without WS 2268x700x835
SR4TZL-S-RP	Cooling table 04 SMART -15/-20°C left crankcase 2268x700x875
SR4TZL-S-RPZZ	Cooling table 04 SMART -15/-20°C left crankcase with WP2268x700x875

Smart

lista varijanti uređaja

KAZALO:
SR - STOL RASHLADNI (vrijedi za sve modele) | **TN** - pozitivna temperatura (+2/+10°C)
TZ - negativna temperatura (-20/-15°C) | **L** - karter lijevo
S - SMART | **RP** - radna površina | **ZZ** - zaštita zida

OR06TN-S	Ormar rashladni 06 SMART -2/+10°C 708x710x2064
OR07TN-S	Ormar rashladni 07 SMART -2/+10°C 708x840x2064
OR12TN-S	Ormar rashladni 12 SMART -2/+10°C 1432x710x2064
OR14TN-S	Ormar rashladni 14 SMART -2/+10°C 1432x840x2064
OR06TZ-S	Ormar rashladni 06 SMART -20/-15°C 708x710x2064
OR07TZ-S	Ormar rashladni 07 SMART -20/-15°C 708x840x2064
OR12TZ-S	Ormar rashladni 12 SMART -20/-15°C 1432x710x2064
OR14TZ-S	Ormar rashladni 14 SMART -20/-15°C 1432x840x2064
OR07TN/TN-S	Ormar rashladni 07 SMART DVOTEMPERATURNI +2/+10°C +2/+10°C 708x840x2064
OR07TN/TZ-S	Ormar rashladni 07 SMART DVOTEMPERATURNI +2/+10°C -20/-10°C 708x840x2064
OR07TZ/TZ-S	Ormar rashladni 07 SMART DVOTEMPERATURNI -20/-10°C -20/-10°C 708x840x2064
OR07TN-S-SV	Ormar rashladni 07 SMART STAKLENA VRATA -2/+10°C 708x840x2064
OR14TN-S-SV	Ormar rashladni 14 SMART STAKLENA VRATA -2/+10°C 1432x840x2064
OR07TZ-S-SV	Ormar rashladni 07 SMART STAKLENA VRATA -20/-15°C 708x840x2064
OR14TZ-S-SV	Ormar rashladni 14 SMART STAKLENA VRATA -20/-15°C 1432x840x2064

SRP2TNL-S	Stol rashladni 02 SMART PODPULTNI -2/+10°C karter lijevo, 1200x650x600 mm
SRP3TNL-S	Stol rashladni 03 SMART PODPULTNI -2/+10°C karter lijevo, 1600x650x600 mm
SRP2TZL-S	Stol rashladni 02 SMART PODPULTNI -20/-15°C karter lijevo, 1200x650x600 mm
SRP3TZL-S	Stol rashladni 03 SMART PODPULTNI -20/-15°C karter lijevo, 1600x650x600 mm

FUSIO

Smart

lista varijanti uređaja

SR2TNL-S	Stol rashladni 02 SMART -2/+10°C karter lijevo, bez RP 1350x700x835
SR2TNL-S-RP	Stol rashladni 02 SMART -2/+10°C karter lijevo 1350x700x875
SR2TNL-S-RPZZ	Stol rashladni 02 SMART -2/+10°C karter lijevo, sa ZZ 1350x700x875
SR3TNL-S	Stol rashladni 03 SMART -2/+10°C karter lijevo, bez RP 1809x700x835
SR3TNL-S-RP	Stol rashladni 03 SMART -2/+10°C karter lijevo 1809x700x875
SR3TNL-S-RPZZ	Stol rashladni 03 SMART -2/+10°C karter lijevo, sa ZZ 1809x700x875
SR4TNL-S	Stol rashladni 04 SMART -2/+10°C karter lijevo, bez RP 2268x700x835
SR4TNL-S-RP	Stol rashladni 04 SMART -2/+10°C karter lijevo 2268x700x875
SR4TNL-S-RPZZ	Stol rashladni 04 SMART -2/+10°C karter lijevo, sa ZZ 2268x700x875
SR2TZL-S	Stol rashladni 02 SMART -20/-15°C karter lijevo, bez RP 1350x700x835
SR2TZL-S-RP	Stol rashladni 02 SMART -20/-15°C karter lijevo 1350x700x875
SR2TZL-S-RPZZ	Stol rashladni 02 SMART -20/-15°C karter lijevo, sa ZZ 1350x700x875
SR3TZL-S	Stol rashladni 03 SMART -20/-15°C karter lijevo, bez RP 1809x700x835
SR3TZL-S-RP	Stol rashladni 03 SMART -20/-15°C karter lijevo 1809x700x875
SR3TZL-S-RPZZ	Stol rashladni 03 SMART -20/-15°C karter lijevo, sa ZZ 1809x700x875
SR4TZL-S	Stol rashladni 04 SMART -20/-15°C karter lijevo, bez RP 2268x700x835
SR4TZL-S-RP	Stol rashladni 04 SMART -20/-15°C karter lijevo 2268x700x875
SR4TZL-S-RPZZ	Stol rashladni 04 SMART -20/-15°C karter lijevo, sa ZZ 2268x700x875

The Expert line from Fusio represents the pinnacle of cooling technology, combining state-of-the-art features to deliver exceptional performance in professional kitchens. These units are available with left or right door opening options and offer enhanced mobility with wheels. They feature optimized air circulation for highly efficient cooling, along with thicker insulation for improved energy efficiency.

The Expert line includes LED lighting as standard and a secure locking system to ensure safety and control. Additionally, these units come equipped with a full HACCP compliance system, touchscreen controls for intuitive operation, and Wi-Fi connectivity for remote access and monitoring. With a sleek design and robust functionality, the Expert line is engineered to meet the highest standards of performance, safety, and convenience in demanding foodservice environments.

EXPERT CHARACTERISTICS

- Stainless steel AISI 304
- Environmentally friendly refrigerant R290 monoblock
- Icreased insulation thickness of 75mm
- Reduced energy consumption
- Touch screen thermostat contro with the ability to connect to HACCP system
- Completely flat IP65 front for easy cleaning
- Manual of programmed air exchange cycles, pause function
- Wi fi connection via Evconnect apllication EpoCA cloud platform
- Language selection
- Self-diagnostic system
- Automatic defrost
- Rounded external edges
- GN standard



Expert


FUSIO

Expert

cooling cabinets

- Stainless steel AISI 304
- Environmentally friendly refrigerant R290 monoblock
- Icreased insulation thickness of 75mm
- Reduced energy consumption
- Touch screen thermostat contro with the ability to connect to HACCP system
- Completely flat IP65 front for easy cleaning
- Manual of programmed air exchange cycles, pause function
- Wi fi connection via Evconnect apllication EpoCA cloud platform
- Language selection
- Self-diagnostic system
- Automatic defrost
- Rounded external edges
- GN standard



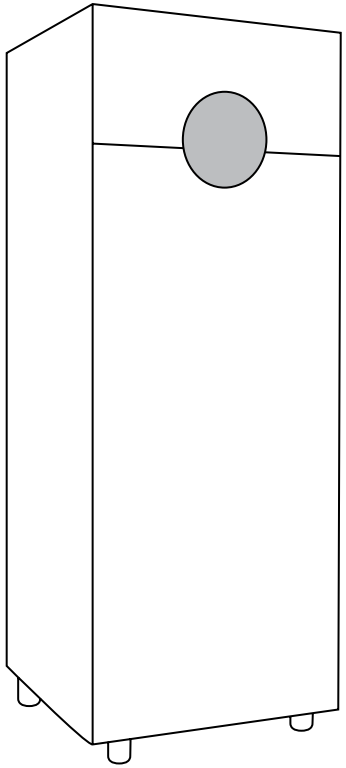

OR07TN-E

Temperature range: **-2/+10°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **583,5L**
Weight: **145 kg**

Internal dimension: **560x704x1480 mm**
External dimension: **708x840x2064 mm**

OR06TZ-E

Temperature range: **-20/-15°C**

Total power: **560 W**
Voltage: **230V/50Hz**

Capacity (L): **475,5L**
Weight: **132 kg**

Internal dimension: **560x704x1480mm**
External dimension: **708x840x2064mm**

OR06TN-E

Temperature range: **-2/+10°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **475,5L**
Weight: **132 kg**

Internal dimension: **560x574x1480 mm**
External dimension: **708x710x2064 mm**


OR07TZ-E

Temperature range: **-20/-15°C**

Total power: **560 W**
Voltage: **230V/50Hz**

Capacity (L): **583,5L**
Weight: **145 kg**

Internal dimension: **560x704x1480 mm**
External dimension: **708x840x2064 mm**

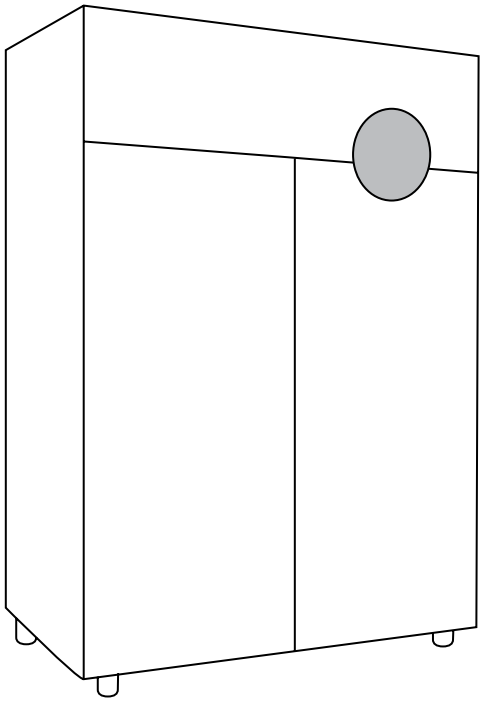

OR14TN-E

Temperature range: **-2/+10°C**

Total power: **535 W**
Voltage: **230V/50Hz**

Capacity (L): **1337,9L**
Weight: **210 kg**

Internal dimension: **1284x704x1480 mm**
External dimension: **1432x840x2064 mm**

OR12TZ-E

Temperature range: **-20/-10°C**

Total power: **907 W**
Voltage: **230V/50Hz**

Capacity (L): **1090L**
Weight: **210 kg**

Internal dimension: **1284x704x1480 mm**
External dimension: **1432x840x2064 mm**

OR12TN-E

Temperature range: **-2/+10°C**

Total power: **535 W**
Voltage: **230V/50Hz**

Capacity (L): **1090L**
Weight: **197 kg**

Internal dimension: **1284x574x1480 mm**
External dimension: **1432x710x2064 mm**

OR14TZ-E

Temperature range: **-20/-15°C**


Total power: **820 W**
Voltage: **230V/50Hz**

Capacity (L): **1337,9L**
Weight: **210 kg**

Internal dimension: **1284x704x1480 mm**
External dimension: **1432x840x2064 mm**



GLASS DOOR



OR07TN-E-SV

Temperature range: **-2/+10°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **583,5L**
Weight: **145 kg**

Internal dimension: **560x704x1480 mm**
External dimension: **708x840x2064 mm**


OR07TZ-E-SV

Temperature range: **-20/-15°C**

Total power: **560 W**
Voltage: **230V/50Hz**

Capacity (L): **583,5L**
Weight: **145 kg**

Internal dimension: **560x704x1480 mm**
External dimension: **708x840x2064 mm**



OR14TN-E-SV

Temperature range: **-2/+10°C**

Total power: **535 W**
Voltage: **230V/50Hz**

Capacity (L): **1337,9L**
Weight: **210 kg**

Internal dimension: **1284x704x1480 mm**
External dimension: **1432x840x2064 mm**

OR14TZ-E-SV


Temperature range: **-20/-15°C**

Total power: **820 W**
Voltage: **230V/50Hz**

Capacity (L): **1337,9L**
Weight: **210 kg**

Internal dimension: **1284x704x1480 mm**
External dimension: **1432x840x2064 mm**

DUAL TEMPERATURE



OR07TN/TN-E

Temperature range: **+2/+10°C / +2/+10°C**

Total power: **696 W**
Voltage: **230V/50Hz**

Capacity (L): **448,5L**
Weight: **145 kg**

Internal dimension: **2x 560x704x1480 mm**
External dimension: **708x840x2064 mm**

OR07TZ/TZ-E

Temperature range: **-20/-10°C / -20/-10°C**

Total power: **927W**
Voltage: **230V/50Hz**

Capacity (L): **448,5L**
Weight: **145 kg**

Internal dimension: **2x 560x704x1480 mm**
External dimension: **708x840x2064 mm**

OR07TN/TZ-E

Temperature range: **+2/+10°C / -20/-10°C**

Total power: **814 W**
Voltage: **230V/50Hz**

Capacity (L): **448,5L**
Weight: **145 kg**


Internal dimension: **2x 560x704x1480 mm**
External dimension: **708x840x2064 mm**

Expert

cooling table

- Made of stainless steel AISI 304
- Environmentally friendly refrigerant R290 monoblock
- Increased insulation thickness of 75mm
- Reduced energy consumption
- Touch-screen thermostat control with the ability to connect to HACCP system
- Completely flat IP65 front for easy cleaning
- Manual of programmed air exchange cycles, pause function
- Wi-Fi connection (EVlink Wi-Fi interface) trough EVconnect application EPoCA cloud platform
- Language selection
- Self-diagnostic system
- Automatic defrost
- Rounded external edges
- GN standard





SR2TNL-E

2 BOX DOORS

Temperature range: **-2/+10°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **266,2L**
Weight: **140 kg**

Internal dimension: **810x557x590 mm**
External dimension: **1350x700x875 mm**

SR2TZL-E


2 BOX DOORS

Temperature range: **-20/-15°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **266,2L**
Weight: **140 kg**

Internal dimension: **810x557x590 mm**
External dimension: **1350x700x875 mm**

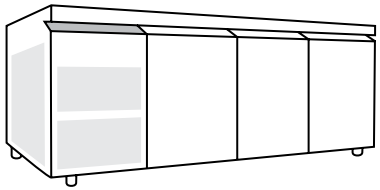

SR3TNL-E

3 BOX DOORS

Temperature range: **-2/+10°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **417,1L**
Weight: **168 kg**

Internal dimension: **1269x557x590 mm**
External dimension: **1809x700x875 mm**

SR3TZL-E


3 BOX DOORS

Temperature range: **-20/-15°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **417,1L**
Weight: **168 kg**

Internal dimension: **1269x557x590 mm**
External dimension: **1809x700x875 mm**

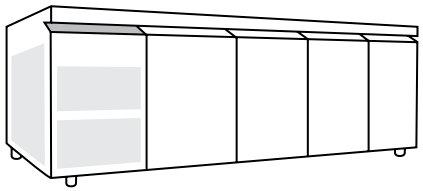

SR4TNL-E

4 BOX DOORS

Temperature range: **-2/+10°C**

Total power: **421 W**
Voltage: **230V/50Hz**

Capacity (L): **568L**
Weight: **188 kg**

Internal dimension: **1728x557x590 mm**
External dimension: **2268x700x875 mm**

SR4TZL-E

4 BOX DOORS

Temperature range: **-20/-15°C**

Total power: **421 W**
Voltage: **230V/50Hz**

Capacity (L): **568 L**
Weight: **188 kg**

Internal dimension: **1728x557x590 mm**
External dimension: **2268x700x875 mm**

Expert linija tvrtke Fusio predstavlja vrhunac tehnologije hlađenja, kombinirajući najsuvremenije značajke koje pružaju izvanredne performanse u profesionalnim kuhinjama.
Ovi uređaji dostupni su s mogućnošću otvaranja vrata s lijeve ili desne strane i nude poboljšanu mobilnost zahvaljujući kotačima. Odlikuju se optimiziranom cirkulacijom zraka za vrlo učinkovito hlađenje, kao i debljom izolacijom koja poboljšava energetsku učinkovitost.


Expert linija standardno uključuje LED rasvjetu i sigurnosni sustav zaključavanja za osiguranje zaštite i kontrole. Osim toga, ovi uređaji opremljeni su kompletnim HACCP sustavom usklađenosti, upravljanjem putem dodirnog zaslona za intuitivno rukovanje te Wi-Fi povezivošću za daljinski pristup i nadzor. S modernim dizajnom i snažnom funkcionalnošću, Expert linija je dizajnirana da zadovolji najviše standarde performansi, sigurnosti i praktičnosti u zahtjevnim ugostiteljskim okruženjima.

EXPERT KARAKTERISTIKE

- Nehrđajući čelik AISI 304
- Ekološki prihvatljiv rashladni plin R290 monoblok
- Povećana debljina izolacije od 75 mm
- Smanjena potrošnja energije
- Termostat s dodirnim zaslonom i mogućnošću povezivanja s HACCP sustavom
- Potpuno ravna prednja strana IP65 za lako čišćenje
- Ručno ili programirano izmjenjivanje zraka, funkcija pauze
- Wi-Fi povezivanje putem Evconnect aplikacije na EpoCA cloud platformi
- Odabir jezika
- Sistemska samodijagnostika
- Automatsko odmrzavanje
- Zaobljeni vanjski rubovi
- GN standard



Expert

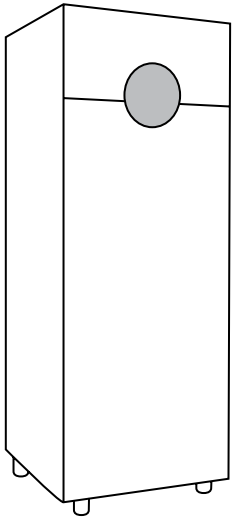

OR06TN-E

Temperaturni režim: **-2/+10°C**

Snaga: **348W**
Napajanje: **230V/50Hz**

Kapacitet (L): **475,5L**
Težina: **132kg**

Unutarnje dimenzije: **560x574x1480 mm**
Vanjske dimenzije: **708x710x2064 mm**

OR06TZ-E

Temperaturni režim: **-20/-15°C**

Snaga: **560W**
Napajanje:**230V/50Hz**

Kapacitet (L): **475,5L**
Težina: **132kg**

Unutarnje dimenzije: **560x574x1480 mm**
Vanjske dimenzije: **708x710x2064 mm**

OR07TN-E

Temperaturni režim: **-2/+10°C**

Snaga: **348W**
Napajanje: **230V/50Hz**

Kapacitet (L): **583,5L**
Težina: **145kg**

Unutarnje dimenzije: **560x704x1480 mm**
Vanjske dimenzije: **708x840x2064 mm**


OR07TZ-E

Temperaturni režim: **-20/-15°C**

Snaga: **560W**
Napajanje: **230V/50Hz**

Kapacitet (L): **583,5L**
Težina: **145kg**

Unutarnje dimenzije: **560x704x1480 mm**
Vanjske dimenzije: **708x840x2064 mm**

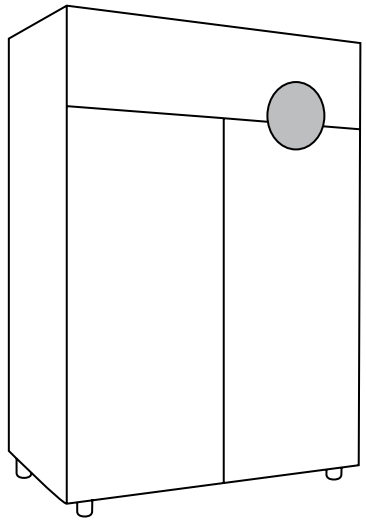

OR12TN-E

Temperaturni režim: **-2/+10°C**

Snaga: **535W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1090L**
Težina: **197kg**

Unutarnje dimenzije: **1284x574x1480mm**
Vanjske dimenzije: **1432x710x2064 mm**

OR14TN-E

Temperaturni režim: **-2/+10°C**

Snaga: **535W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1337,9L**
Težina: **210kg**

Unutarnje dimenzije: **1284x704x1480mm**
Vanjske dimenzije: **1432x840x2064mm**

OR12TZ-E

Temperaturni režim: **-20/-15°C**

Snaga: **907W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1090L**
Težina: **210kg**

Unutarnje dimenzije: **1284x704x1480mm**
Vanjske dimenzije: **1432x840x2064mm**

OR14TZ-E


Temperaturni režim: **-20/-15°C**

Snaga: **820W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1337,9L**
Težina: **210kg**

Unutarnje dimenzije: **1284x704x1480mm**
Vanjske dimenzije: **1432x840x2064mm**

STAKLENA VRATA




OR07TN-E-SV

Temperaturni režim: **-2/+10°C**

Snaga: **348 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **583,5L**
Težina: **145 kg**

Unutarnje dimenzije: **560x704x1480 mm**
Vanjske dimenzije: **708x840x2064 mm**



OR14TN-E-SV

Temperaturni režim: **-2/+10°C**

Snaga: **535 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1337,9L**
Težina: **210 kg**

Unutarnje dimenzije: **1284x704x1480 mm**
Vanjske dimenzije: **1432x840x2064 mm**

OR07TZ-E-SV

Temperaturni režim: **-20/-15°C**

Snaga: **560 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **583,5L**
Težina: **145 kg**

Unutarnje dimenzije: **560x704x1480 mm**
Vanjske dimenzije: **708x840x2064 mm**

OR14TZ-E-SV


Temperaturni režim: **-20/-15°C**

Snaga: **820 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1337,9L**
Težina: **210 kg**

Unutarnje dimenzije: **1284x704x1480 mm**
Vanjske dimenzije: **1432x840x2064 mm**

DVOJNA TEMPERATURA



OR07TN/TN-E

Temperaturni režim: **+2/+10°C / +2/+10°C**

Snaga: **696 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **448,5L**
Težina: **145 kg**

Unutarnje dimenzije: **2x 560x704x1480 mm**
Vanjske dimenzije: **708x840x2064 mm**

OR07TN/TZ-E

Temperature range: **+2/+10°C / -20/-10°C**

Total power: **814 W**
Voltage: **230V/50Hz**

Capacity (L): **448,5L**
Weight: **145 kg**

Internal dimension: **2x 560x704x698 mm**
External dimension: **708x840x2064 mm**

OR07TZ/TZ-E


Temperaturni režim: **-20/-10°C / -20/-10°C**

Snaga: **927W**
Napajanje: **230V/50Hz**

Kapacitet (L): **448,5L**
Težina: **145 kg**

Unutarnje dimenzije: **2x 560x704x1480 mm**
Vanjske dimenzije: **708x840x2064 mm**

Rashladni stolovi



SR2TNL-E
DVOJE VRATA

Temperaturni režim: **-2/+10°C**

Snaga: **348 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **266,2L**
Težina: **140 kg**

Unutarnje dimenzije: **810x557x590 mm**
Vanjske dimenzije: **1350x700x875 mm**


SR2TZL-E
DVOJE VRATA

Temperaturni režim: **-20/-15°C**

Snaga: **348 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **266,2L**
Težina: **140 kg**

Unutarnje dimenzije: **810x557x590 mm**
Vanjske dimenzije: **1350x700x875 mm**

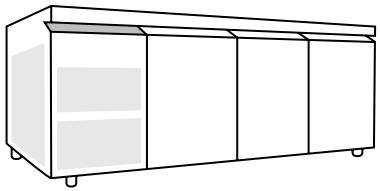

SR3TNL-E
TROJE VRATA

Temperaturni režim: **-2/+10°C**

Snaga: **348 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **417,1L**
Težina: **168 kg**

Unutarnje dimenzije: **1269x557x590 mm**
Vanjske dimenzije: **1809x700x875 mm**


SR3TZL-E
TROJE VRATA

Temperaturni režim: **-20/-15°C**

Snaga: **348 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **417,1L**
Težina: **168 kg**

Unutarnje dimenzije: **1269x557x590 mm**
Vanjske dimenzije: **1809x700x875 mm**

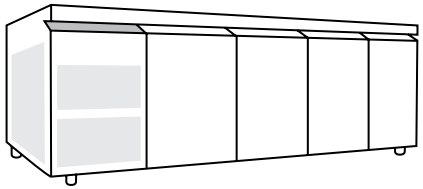

SR4TNL-E
ČETIRI VRATA

Temperaturni režim: **-2/+10°C**

Snaga: **421 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **568L**
Težina: **188 kg**

Unutarnje dimenzije: **1728x557x590 mm**
Vanjske dimenzije: **2268x700x875 mm**

SR4TZL-E
ČETIRI VRATA

Temperaturni režim: **-20/-15°C**

Snaga: **421 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **568 L**
Težina: **188 kg**

Unutarnje dimenzije: **1728x557x590 mm**
Vanjske dimenzije: **2268x700x875 mm**

Expert

list of device variants

INDEX:
SR - COOLING TABLE (applies to all models) | **TN** - positive temperature (-2/+10°C)
TZ - Negative Temperature (-20/-15°C) | **L** - left compressor
E - EXPERT | **RP** - work surface | **ZZ** - wall protection

OR06TN-E	Cooling cabinet 06 EXPERT -2/+10°C 708x710x2064
OR07TN-E	Cooling cabinet 07 EXPERT -2/+10°C 708x840x2064
OR12TN-E	Cooling cabinet 12 EXPERT -2/+10°C 1432x710x2064
OR14TN-E	Cooling cabinet 14 EXPERT -2/+10°C 1432x840x2064
OR06TZ-E	Cooling cabinet 06 EXPERT -20/-10°C 708x710x2064
OR07TZ-E	Cooling cabinet 07 EXPERT -20/-10°C 708x840x2064
OR12TZ-E	Cooling cabinet 12 EXPERT -20/-10°C 1432x710x2064
OR14TZ-E	Cooling cabinet 14 EXPERT -20/-10°C 1432x840x2064
OR07TN/TN-E	Cooling cabinet 07 EXPERT DUAL TEMPERATURE -2/+10°C -2/+10°C 708x840x2064
OR07TN/TZ-E	Cooling cabinet 07 EXPERT DUAL TEMPERATURE -2/+10°C -20/-10°C 708x840x2064
OR07TZ/TZ-E	Cooling cabinet 07 EXPERT DUAL TEMPERATURE -20/-10°C -20/-10°C 708x840x2064
OR07TN-E-SV	Cooling cabinet 07 EXPERT GLASS DOORS -2/+10°C 708x840x2064
OR14TN-E-SV	Cooling cabinet 14 EXPERT GLASS DOORS -2/+10°C 1432x840x2064
OR07TZ-E-SV	Cooling cabinet 07 EXPERT GLASS DOORS -20/-10°C 708x840x2064
OR14TZ-E-SV	Cooling cabinet 14 EXPERT GLASS DOORS -20/-10°C 1432x840x2064

FUSIO

Expert

list of device variants

SR2TNL-E	Cooling table 02 EXPERT -2/+10°C left crankcase, without WS 1350x700x835
SR2TNL-E-RP	Cooling table 02 EXPERT -2/+10°C left crankcase 1350x700x875
SR2TNL-E-RPZZ	Cooling table 02 EXPERT -2/+10°C left crankcase, with WP 1350x700x875
SR3TNL-E	Cooling table 03 EXPERT -2/+10°C left crankcase, without WS 1809x700x835
SR3TNL-E-RP	Cooling table 03 EXPERT -2/+10°C left crankcase 1809x700x875
SR3TNL-E-RPZZ	Cooling table 03 EXPERT -2/+10°C left crankcase, with WP 1809x700x875
SR4TNL-E	Cooling table 04 EXPERT -2/+10°C left crankcase, without WS 2268x700x835
SR4TNL-E-RP	Cooling table 04 EXPERT -2/+10°C left crankcase 2268x700x875
SR4TNL-E-RPZZ	Cooling table 04 EXPERT -2/+10°C left crankcase, with WP 2268x700x875
SR2TZL-E	Cooling table 02 EXPERT -15/-20°C left crankcase, without WS 1350x700x835
SR2TZL-E-RP	Cooling table 02 EXPERT -15/-20°C left crankcase 1350x700x875
SR2TZL-E-RPZZ	Cooling table 02 EXPERT -15/-20°C left crankcase, with WP 1350x700x875
SR3TZL-E	Cooling table 03 EXPERT-15/-20°C left crankcase, without WS 1809x700x835
SR3TZL-E-RP	Cooling table 03 EXPERT -15/-20°C left crankcase 1809x700x875
SR3TZL-E-RPZZ	Cooling table 03 EXPERT -15/-20°C left crankcase, with WP 1809x700x875
SR4TZL-E	Cooling table 04 EXPERT -15/-20°C left crankcase, without WS 2268x700x835
SR4TZL-E-RP	Cooling table 04 EXPERT-15/-20°C left crankcase 2268x700x875
SR4TZL-E-RPZZ	Cooling table 04 EXPERT-15/-20°C left crankcase, with WP 2168x700x875

Expert

lista varijanti uređaja

KAZALO:
SR - STOL RASHLADNI (vrijedi za sve modele) | **TN** - pozitivna temperatura (-2/+10°C)
TZ - negativna temperatura (-20/-15°C) | **L** - karter lijevo
E - EXPERT | **RP** - radna površina | **ZZ** - zaštita zida

OR06TN-E	Ormar rashladni 06 EXPERT -2/+10°C 708x710x2064
OR07TN-E	Ormar rashladni 07 EXPERT -2/+10°C 708x840x2064
OR12TN-E	Ormar rashladni 12 EXPERT -2/+10°C 1432x710x2064
OR14TN-E	Ormar rashladni 14 EXPERT -2/+10°C 1432x840x2064
OR06TZ-E	Ormar rashladni 06 EXPERT -20/-15°C 708x710x2064
OR07TZ-E	Ormar rashladni 07 EXPERT -20/-15°C 708x840x2064
OR12TZ-E	Ormar rashladni 12 EXPERT -20/-15°C 1432x710x2064
OR14TZ-E	Ormar rashladni 14 EXPERT -20/-15°C 1432x840x2064
OR07TN/TN-E	Ormar rashladni 07 EXPERT DVOTEMPERATURNI +2/+10°C +2/+10°C 708x840x2064
OR07TN/TZ-E	Ormar rashladni 07 EXPERT DVOTEMPERATURNI +2/+10°C -20/-10°C 708x840x2064
OR07TZ/TZ-E	Ormar rashladni 07 EXPERT DVOTEMPERATURNI -20/-10°C -20/-10°C 708x840x2064
OR07TN-E-SV	Ormar rashladni 07 EXPERT STAKLENA VRATA -2/+10°C 708x840x2064
OR14TN-E-SV	Ormar rashladni 14 EXPERT STAKLENA VRATA -2/+10°C 1432x840x2064
OR07TZ-E-SV	Ormar rashladni 07 EXPERT STAKLENA VRATA -20/-15°C 708x840x2064
OR14TZ-E-SV	Ormar rashladni 14 EXPERT STAKLENA VRATA -20/-15°C 1432x840x2064

FUSIO

Expert

lista varijanti uređaja

SR2TNL-E	Stol rashladni 02 EXPERT -2/+10°C karter lijevo, bez RP 1350x700x835
SR2TNL-E-RP	Stol rashladni 02 EXPERT -2/+10°C karter lijevo 1350x700x875
SR2TNL-E-RPZZ	Stol rashladni 02 EXPERT -2/+10°C karter lijevo, sa ZZ 1350x700x875
SR3TNL-E	Stol rashladni 03 EXPERT -2/+10°C karter lijevo, bez RP 1809x700x835
SR3TNL-E-RP	Stol rashladni 03 EXPERT -2/+10°C karter lijevo 1809x700x875
SR3TNL-E-RPZZ	Stol rashladni 03 EXPERT -2/+10°C karter lijevo, sa ZZ 1809x700x875
SR4TNL-E	Stol rashladni 04 EXPERT -2/+10°C karter lijevo, bez RP 2268x700x835
SR4TNL-E-RP	Stol rashladni 04 EXPERT -2/+10°C karter lijevo 2268x700x875
SR4TNL-E-RPZZ	Stol rashladni 04 EXPERT -2/+10°C karter lijevo, sa ZZ 2268x700x875
SR2TZL-E	Stol rashladni 02 EXPERT -20/-15°C karter lijevo, bez RP 1350x700x835
SR2TZL-E-RP	Stol rashladni 02 EXPERT -20/-15°C karter lijevo 1350x700x875
SR2TZL-E-RPZZ	Stol rashladni 02 EXPERT -20/-15°C karter lijevo, sa ZZ 1350x700x875
SR3TZL-E	Stol rashladni 03 EXPERT-20/-15°C karter lijevo, bez RP 1809x700x835
SR3TZL-E-RP	Stol rashladni 03 EXPERT -20/-15°C karter lijevo 1809x700x875
SR3TZL-E-RPZZ	Stol rashladni 03 EXPERT -20/-15°C karter lijevo, sa ZZ 1809x700x875
SR4TZL-E	Stol rashladni 04 EXPERT -20/-15°C karter lijevo, bez RP 2268x700x835
SR4TZL-E-RP	Stol rashladni 04 EXPERT -20/-15°C karter lijevo 2268x700x875
SR4TZL-E-RPZZ	Stol rashladni 04 EXPERT -20/-15°C karter lijevo, sa ZZ 2168x700x875



Expert Pro

The Fusio EXPERT PRO cooling cabinets and tables are designed for professionals who demand high-quality performance, reliability, and ease of use. Whether for a busy restaurant kitchen or a food storage facility, these units offer customizable features, superior insulation, and advanced technology to ensure your food is stored safely and efficiently.

A key design feature is the recessed internal sides, which facilitate easier cleaning and maintenance while promoting better hygiene. The combination of innovative design, ease of upkeep, and integration with modern systems makes the EXPERT PRO series the ideal choice for professionals looking to enhance their operations.

EXPERT PRO CHARACTERISTICS

- Made of stainless steel AISI 304
- Environmentally friendly refrigerant R290 monoblock
- Increased insulation thickness of 87mm
- Reduced energy consumption
- Touch-screen thermostat control with the ability to connect to HACCP system
- Completely flat IP65 front for easy cleaning
- Manual of programmed air exchange cycles, pause function
- Wi-Fi connection (EVlink Wi-Fi interface) trough EVconnect application
- EPoCA cloud platform
- Language selection
- Self-diagnostic system
- Automatic defrost
- Rounded outer edges
- Lockable door with keyInternal
- LED lighting


FUSIO

Expert Pro

cooling cabinets

- Made of stainless steel AISI 304
- Environmentally friendly refrigerant R290 monoblock
- Increased insulation thickness of 87mm
- Reduced energy consumption
- Touch-screen thermostat control with the ability to connect to HACCP system
- Completely flat IP65 front for easy cleaning
- Manual of programmed air exchange cycles, pause function
- Wi-Fi connection (EVlink Wi-Fi interface) trough
- EVconnect application
- EPoCA cloud platform
- Language selection
- Self-diagnostic system
- Automatic defrost
- Rounded outer edges
- Lockable door with keyInternal
- LED lighting



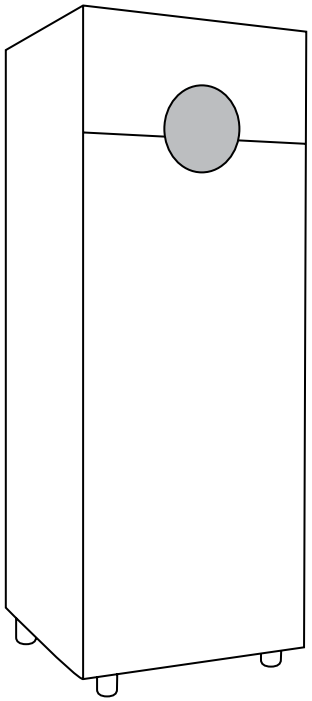

OR07TN-E PRO

Temperature range: **-2/+10°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **558,5L**
Weight: **160 kg**

Internal dimension: **560x704x1480 mm**
External dimension: **708x840x2064 mm**


OR07TZ-E PRO

Temperature range: **-20/-15°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **558,5L**
Weight: **160 kg**

Internal dimension: **536x704x1480 mm**
External dimension: **708x840x2064 mm**

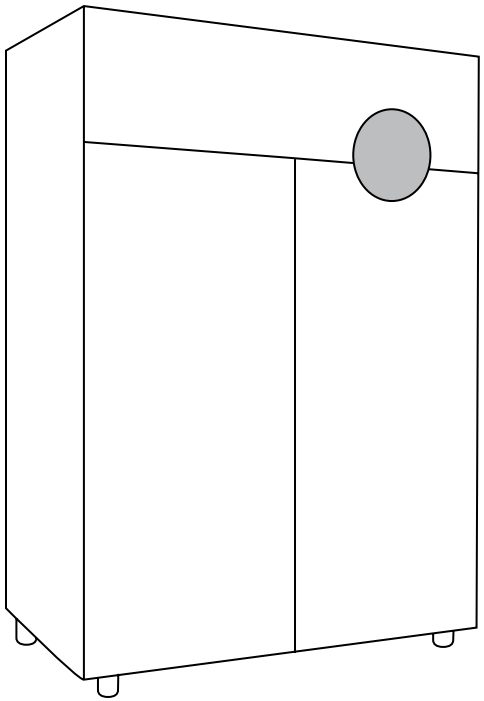

OR14TN-E PRO

Temperature range: **-2/+10°C**

Total power: **820 W**
Voltage: **230V/50Hz**

Capacity (L): **1312L**
Weight: **225 kg**

Internal dimension: **1260x704x1480 mm**
External dimension: **1432x840x2064 mm**

OR14TZ-E PRO

Temperature range: **-20/-15°C**

Total power: **820 W**
Voltage: **230V/50Hz**

Capacity (L): **1312L**
Weight: **225 kg**

Internal dimension: **1260x704x1480 mm**
External dimension: **1432x840x2064 mm**




Expert Pro

Fusio EXPERT PRO rashladni ormari i stolovi dizajnirani su za profesionalce koji zahtijevaju vrhunsku izvedbu, pouzdanost i jednostavnost korištenja. Bilo da se radi o užurbanim kuhinjama restorana ili objektima za skladištenje hrane, ovi uređaji nude prilagodljive značajke, vrhunsku izolaciju i naprednu tehnologiju koja osigurava sigurno i učinkovito čuvanje hrane.

Posebnu pažnju u dizajnu predstavlja upušteni unutarnji bokovi, koji olakšavaju čišćenje i održavanje te pridonose boljoj higijeni. Kombinacija inovativnog dizajna, jednostavnog održavanja i integracije s modernim sustavima čini EXPERT PRO seriju idealnim izborom za profesionalce koji žele unaprijediti svoje poslovanje.

EXPERT PRO KARAKTERISTIKE

- Izrađeno od nehrđajućeg čelika AISI 304
- Ekološki prihvatljiv rashladni plin R290 monoblok
- Povećana debljina izolacije od 87 mm
- Smanjena potrošnja energije
- Kontrola termostata s dodirnim zaslonom s mogućnošću povezivanja s HACCP sustavom
- Potpuno ravna prednja strana IP65 za lako čišćenje
- Ručno ili programirano izmjenjivanje zraka, funkcija pauze
- Wi-Fi povezivanje (EVlink Wi-Fi sučelje) putem EVconnect aplikacije
- EPoCA cloud platforma
- Odabir jezika
- Sistemska samodijagnostika
- Automatsko odmrzavanje
- Zaobljeni vanjski rubovi
- Zaključavajuća vrata s ključem
- Interno LED osvjetljenje

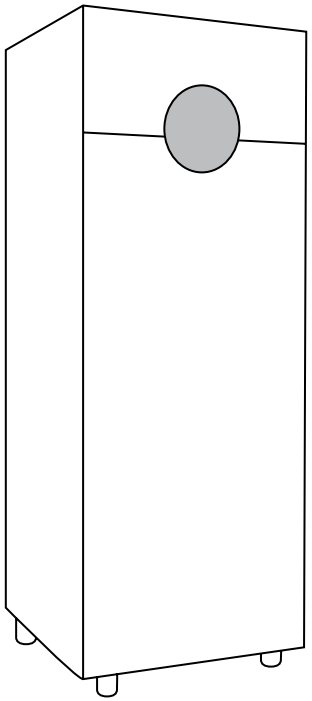

OR07TN-E PRO

Temperaturni režim: **-2/+10°C**

Snaga: **348 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **558,5L**
Težina: **160 kg**

Unutarnje dimenzije: **560x704x1480 mm**
Vanjske dimenzije: **708x840x2064 mm**


OR07TZ-E PRO

Temperaturni režim: **-20/-10°C**

Snaga: **348 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **558,5L**
Težina: **160 kg**

Unutarnje dimenzije: **536x704x1480 mm**
Vanjske dimenzije: **708x840x2064 mm**

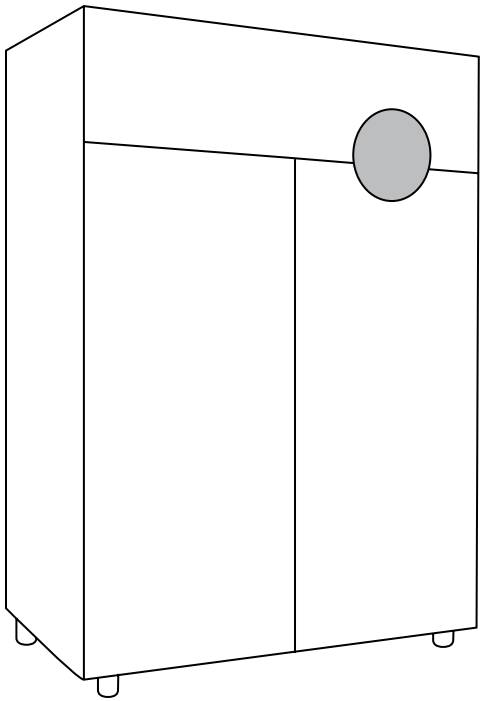

OR14TN-E PRO

Temperaturni režim: **-2/+10°C**

Snaga: **820 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1312L**
Težina: **225 kg**

Unutarnje dimenzije: **1260x704x1480 mm**
Vanjske dimenzije: **1432x840x2064 mm**

OR14TZ-E PRO

Temperaturni režim: **-20/-15°C**

Snaga: **820 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1312L**
Težina: **225 kg**

Unutarnje dimenzije: **1260x704x1480 mm**
Vanjske dimenzije: **1432x840x2064 mm**

FUSIO

Expert Pro

list of device variants

OR07TN-E PRO	Cooling cabinet 07 EXPERT PRO -2/+10°C 708x840x2064
OR14TN-E PRO	Cooling cabinet 14 EXPERT PRO -2/+10°C 1432x840x2064
OR07TZ-E PRO	Cooling cabinet 07 EXPERT PRO -20/-10°C 708x840x2064
OR14TZ-E PRO	Cooling cabinet 14 EXPERT PRO -20/-10°C 1432x840x2064

Expert Pro

lista varijanti uređaja

OR07TN-E PRO	Ormar rashladni 07 EXPERT PRO -2/+10°C 708x840x2064
OR14TN-E PRO	Ormar rashladni 14 EXPERT PRO -2/+10°C 1432x840x2064
OR07TZ-E PRO	Ormar rashladni 07 EXPERT PRO -20/-15°C 708x840x2064
OR14TZ-E PRO	Ormar rashladni 14 EXPERT PRO -20/-15°C 1432x840x2064



Bar & beverage

SMART/EXPERT


FUSIO

Smart BAR & BEVERAGE

cooling table

- Stainless steel
- Environmentally friendly refrigerant R290 monoblock
- insulation thickness of 50 mm
- Reduced energy consumption
- Digital control unit that is easy to use
- Self-diagnostic system
- Easy door seal replacement





SR2TNL-S-B


2 BOX DOORS SMART BAR & BEVERAGE

Temperature range: **+2/+10°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **432L**
Weight: **170 kg**

Internal dimension: **1066x563x719 mm**
External dimension: **1520x700x855 mm**

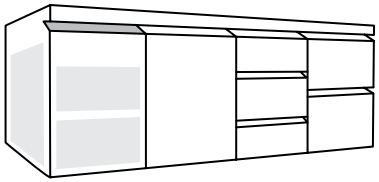

SR3TNL-S-B


3 BOX DOORS SMART BAR & BEVERAGE

Temperature range: **+2/+10°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **666L**
Weight: **198 kg**

Internal dimension: **1646x563x719 mm**
External dimension: **2100x700x855 mm**

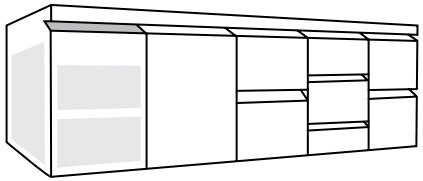

SR4TNL-S-B

4 BOX DOORS SMART BAR & BEVERAGE

Temperature range: **+2/+10°C**

Total power: **421 W**
Voltage: **230V/50Hz**

Capacity (L): **901L**
Weight: **218 kg**

Internal dimension: **2226x563x719 mm**
External dimension: **2680x700x855 mm**


FUSIO

Expert BAR & BEVERAGE

cooling table

- Stainless steel 304
- Environmentally friendly refrigerant R290 monoblock
- insulation thickness of 50 mm
- Reduced energy consumption
- Digital control unit that is easy to use
- Self-diagnostic system
- Easy door seal replacement
- High quality drawer opener handle





SR2TNL-E-B


2 BOX DOORS EXPERT BAR & BEVERAGE

Temperature range: **+2/+10°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **522L**
Weight: **190 kg**

Internal dimension: **1096x663x719 mm**
External dimension: **1578x800x855 mm**

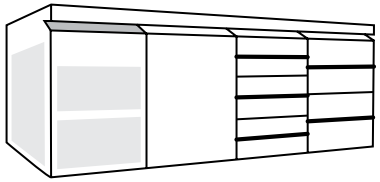

SR3TNL-E-B


3 BOX DOORS EXPERT BAR & BEVERAGE

Temperature range: **+2/+10°C**

Total power: **348 W**
Voltage: **230V/50Hz**

Capacity (L): **813L**
Weight: **210 kg**

Internal dimension: **1706x663x719 mm**
External dimension: **2188x800x855 mm**

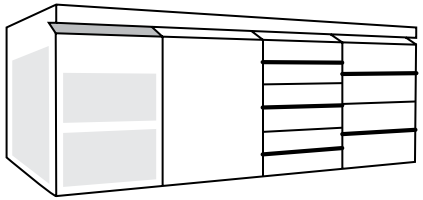

SR4TNL-S-B

4 BOX DOORS EXPERT BAR & BEVERAGE

Temperature range: **+2/+10°C**

Total power: **421 W**
Voltage: **230V/50Hz**


Capacity (L): **1104L**
Weight: **238 kg**

Internal dimension: **2316x663x719 mm**
External dimension: **2798x800x855 mm**



Bar

SMART/EXPERT

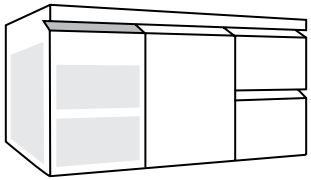

SR2TNL-S-B


DVOJA VRATA SMART BAR&BEVERAGE

Temperaturni režim: **+2/+10°C**

Snaga: **348 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **432L**
Težina: **170 kg**

Unutarnje dimenzije: **1066x563x719 mm**
Vanjske dimenzije: **1520x700x855 mm**

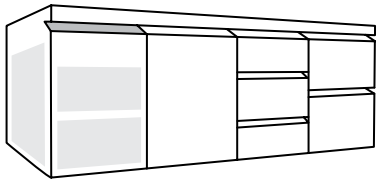

SR3TNL-S-B


TROJA VRATA SMART BAR&BEVERAGE

Temperaturni režim: **+2/+10°C**

Snaga: **348 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **666L**
Težina: **198 kg**

Unutarnje dimenzije: **1646x563x719 mm**
Vanjske dimenzije: **2100x700x855 mm**

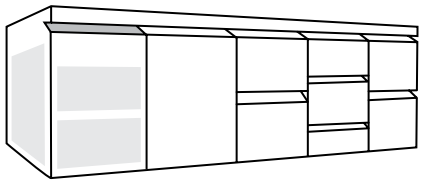

SR4TNL-S-B


ČETIRI VRATA SMART BAR&BEVERAGE

Temperaturni režim: **+2/+10°C**

Snaga: **421 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **901L**
Težina: **218 kg**

Unutarnje dimenzije: **2226x563x719 mm**
Vanjske dimenzije: **2680x700x855 mm**



SR2TNL-E-B


DVOJA VRATA EXPERT BAR&BEVERAGE

Temperaturni režim: **+2/+10°C**

Snaga: **348 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **522L**
Težina: **190 kg**

Unutarnje dimenzije: **1096x663x719 mm**
Vanjske dimenzije: **1578x800x855 mm**

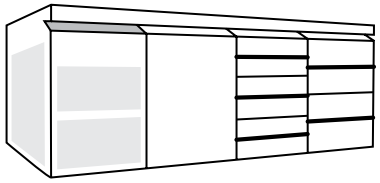

SR3TNL-E-B


TROJA VRATA EXPERT BAR&BEVERAGE

Temperaturni režim: **+2/+10°C**

Snaga: **348 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **813L**
Težina: **210 kg**

Unutarnje dimenzije: **1706x663x719 mm**
Vanjske dimenzije: **2188x800x855 mm**

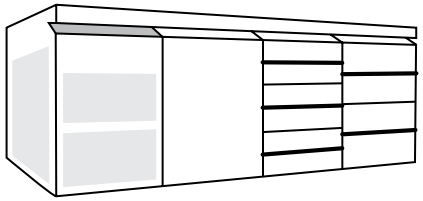

SR4TNL-S-B

ČETIRI VRATA EXPERT BAR&BEVERAGE

Temperaturni režim: **+2/+10°C**

Snaga: **421 W**
Napajanje: **230V/50Hz**

Kapacitet (L): **1104L**
Težina: **238 kg**

Unutarnje dimenzije: **2316x663x719 mm**
Vanjske dimenzije: **2798x800x855 mm**

FUSIO

Bar & beverage SMART/EXPERT

list of device variants

SR2TNL-S-B	Cooling table 02 SMART BAR -2/+10°C 1520x700x855 mm
SR3TNL-S-B	Cooling table 03 SMART BAR -2/+10°C 2100x700x855 mm
SR4TNL-S-B	Cooling table 04 SMART BAR -2/+10°C 2680x700x855 mm
SR2TNL-E-B	Cooling table 02 EXPERT BAR -2/+10°C 1578x800x855 mm
SR3TNL-E-B	Cooling table 03 EXPERT BAR -2/+10°C 2188x800x855mm
SR4TNL-E-B	Cooling table 04 EXPERT BAR -2/+10°C 2798x800x855 mm

Bar SMART/EXPERT

lista varijanti uređaja

SR2TNL-S-B	Stol rashladni 02 SMART BAR +2/+10°C 1520x700x855 mm
SR3TNL-S-B	Stol rashladni 03 SMART BAR +2/+10°C 2100x700x855 mm
SR4TNL-S-B	Stol rashladni 04 SMART BAR +2/+10°C 2680x700x855 mm
SR2TNL-E-B	Stol rashladni 02 EXPERT BAR +2/+10°C 1578x800x855 mm
SR3TNL-E-B	Stol rashladni 03 EXPERT BAR +2/+10°C 2188x800x855mm
SR4TNL-E-B	Stol rashladni 04 EXPERT BAR +2/+10°C 2798x800x855 mm

Leading Innovation and Quality in Professional Solutions

At Fusio, our mission is simple yet powerful: to offer quality, new ideas, and constant refreshment to our partners at all times. We are dedicated to staying ahead of global trends, continually expanding horizons, and developing cutting-edge products that meet the evolving needs of the market.

By focusing on innovation, reliability, and flexibility, we ensure that our products consistently exceed expectations, helping our partners thrive in a competitive, fast-paced industry.

To learn more about the latest Fusio products and how we can support your business, visit us at **www.fusio.hr.**

Vodeća Inovacija i Kvaliteta u Profesionalnim Rješenjima

Misija Fusia jednostavna, ali snažna: ponuditi kvalitetu, nove ideje i stalnu osvježenje našim partnerima u svakom trenutku. Posvećeni smo tome da budemo ispred globalnih trendova, stalno proširujući horizonte i razvijajući vrhunske proizvode koji zadovoljavaju razvojne potrebe tržišta.

Fokusirajući se na inovaciju, pouzdanost i fleksibilnost, osiguravamo da naši proizvodi dosljedno premašuju očekivanja, pomažući našim partnerima da napreduju u konkurentnoj i brzoj industriji.
Za više informacija o najnovijim Fusio proizvodima i kako možemo podržati vaše poslovanje, posjetite nas na
www.fusio.hr.

