

Conic

An iconic spot



Feel Good Hotel, Valencia, Spain / Interior design: AKSL arhitekti / Visualisation: Studio Spacer





Private residence, Slovenia / Interior design & Visualisation: Studio Spacer



Private office / Visualisation: Studio Spacer

No need to putty at all

When you want a spot on a higher level, choose Conic. It's distinguished by prestigious finishes, wide range of colours and clean looks.

Most of all, Conic stands out for its innovative, easy and clean installation in a finished plaster ceilings, with tools of standard sizes and no puttying.

DESIGN:

Serge Cornelissen



Family range

LUMINAIRE LUMINOUS FLUX:

up to 1100 lm

LED COLOUR

927, 930, 935, 940

BEAM ANGLE


20°, 30°, 55°

DRIVERS

Casambi, DALI, FO


TRIM-LESS

ADJUSTABLE

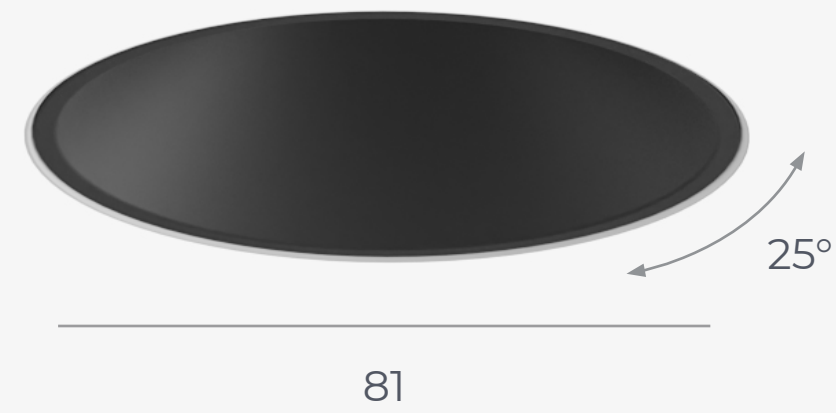

RI A


FIXED

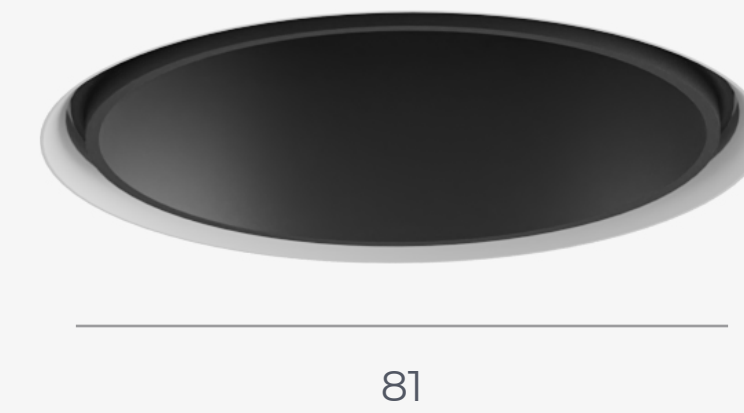

RI F


VISIBLE-TRIM

ADJUSTABLE

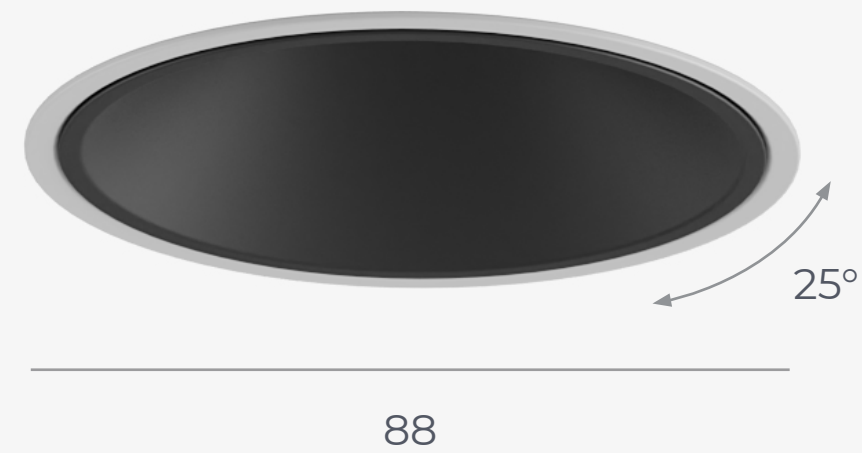

RV A


FIXED

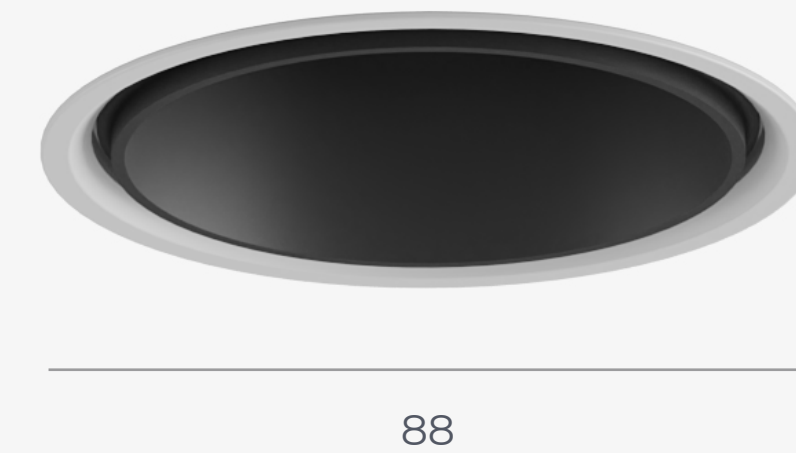

RV F

Revolutionary trim-less installation

[CONIC INSTALLATION VIDEO](#)




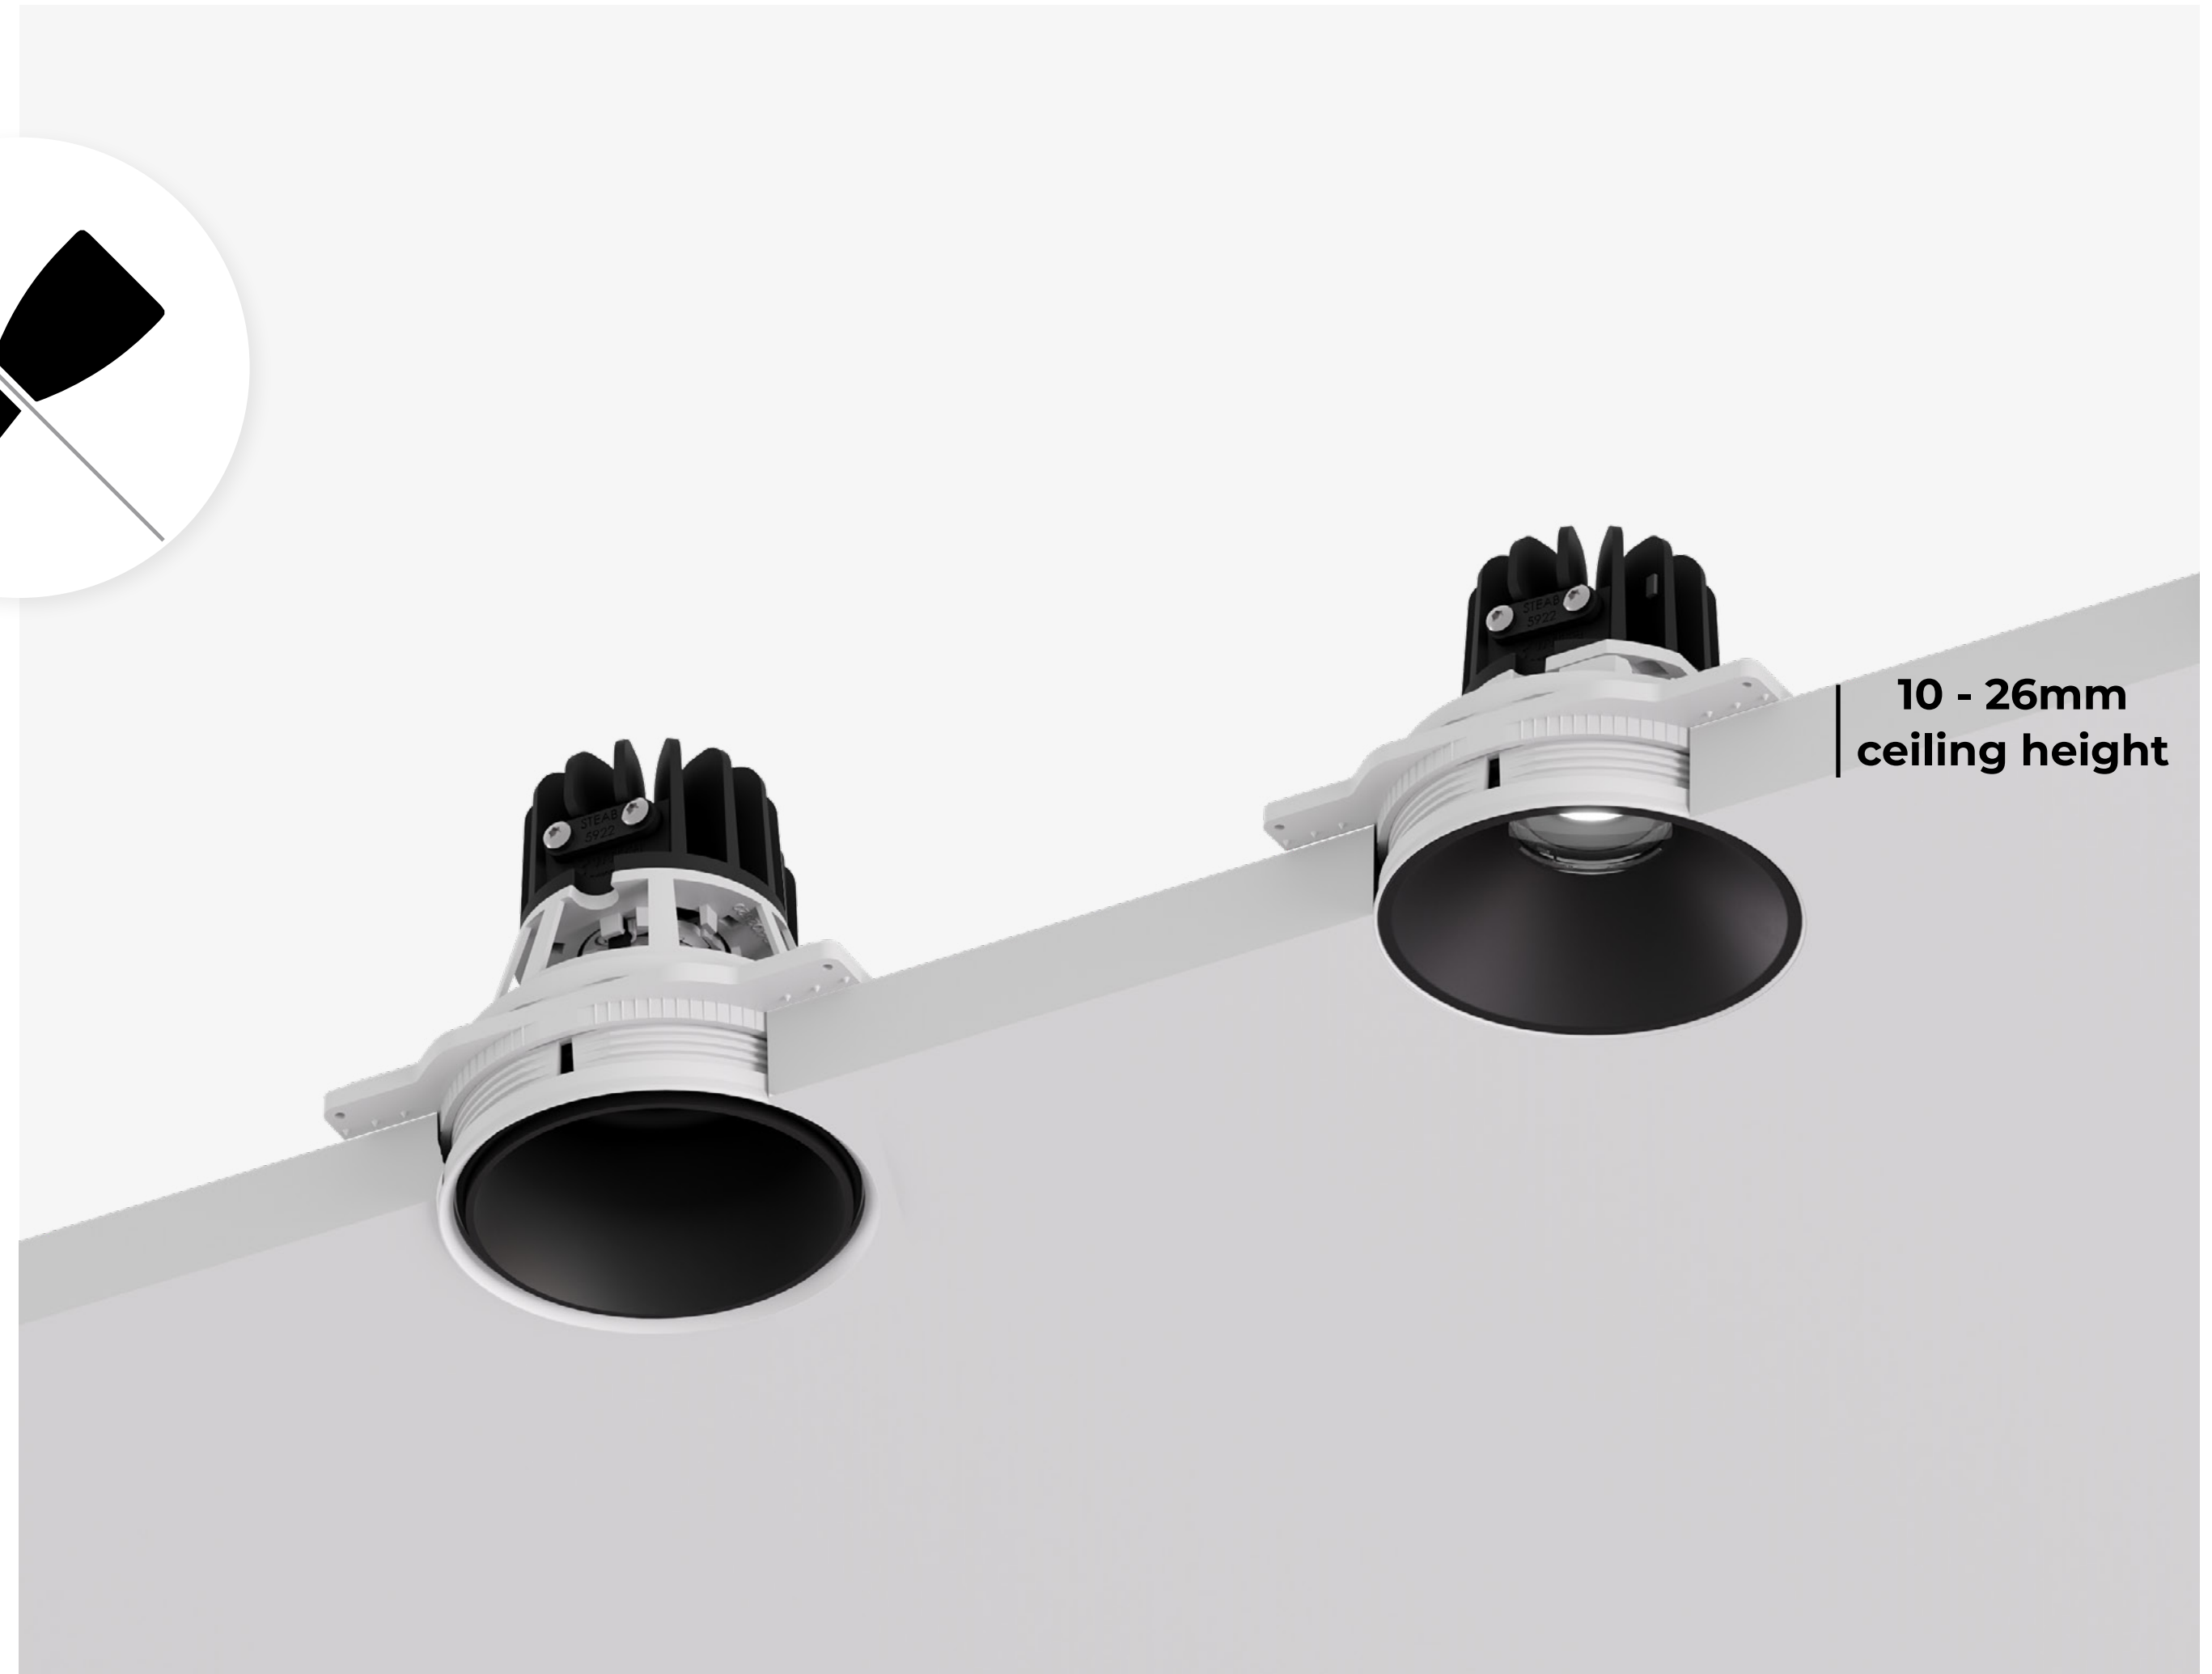


10 - 26mm
ceiling height

Trim-less installation without puttying

1. Make a hole with a standard 80 mm hole saw.
2. Paint the ceiling, no puttying needed.
3. Twist and level the RI kit with the ceiling.
4. Click in the spot and the funnel.

[CONIC INSTALLATION VIDEO](#)

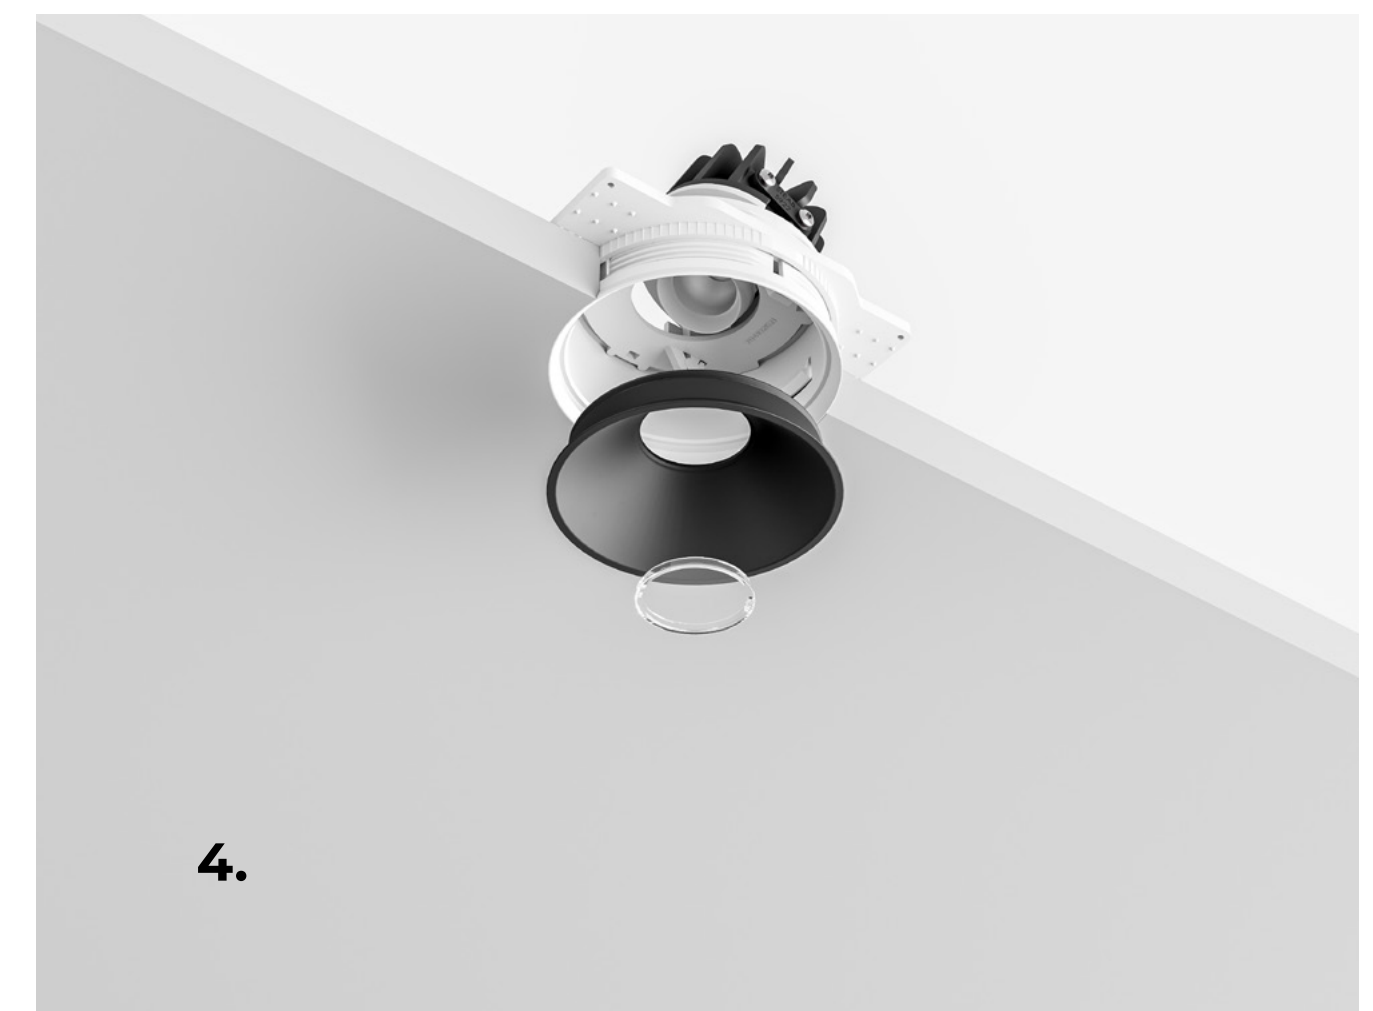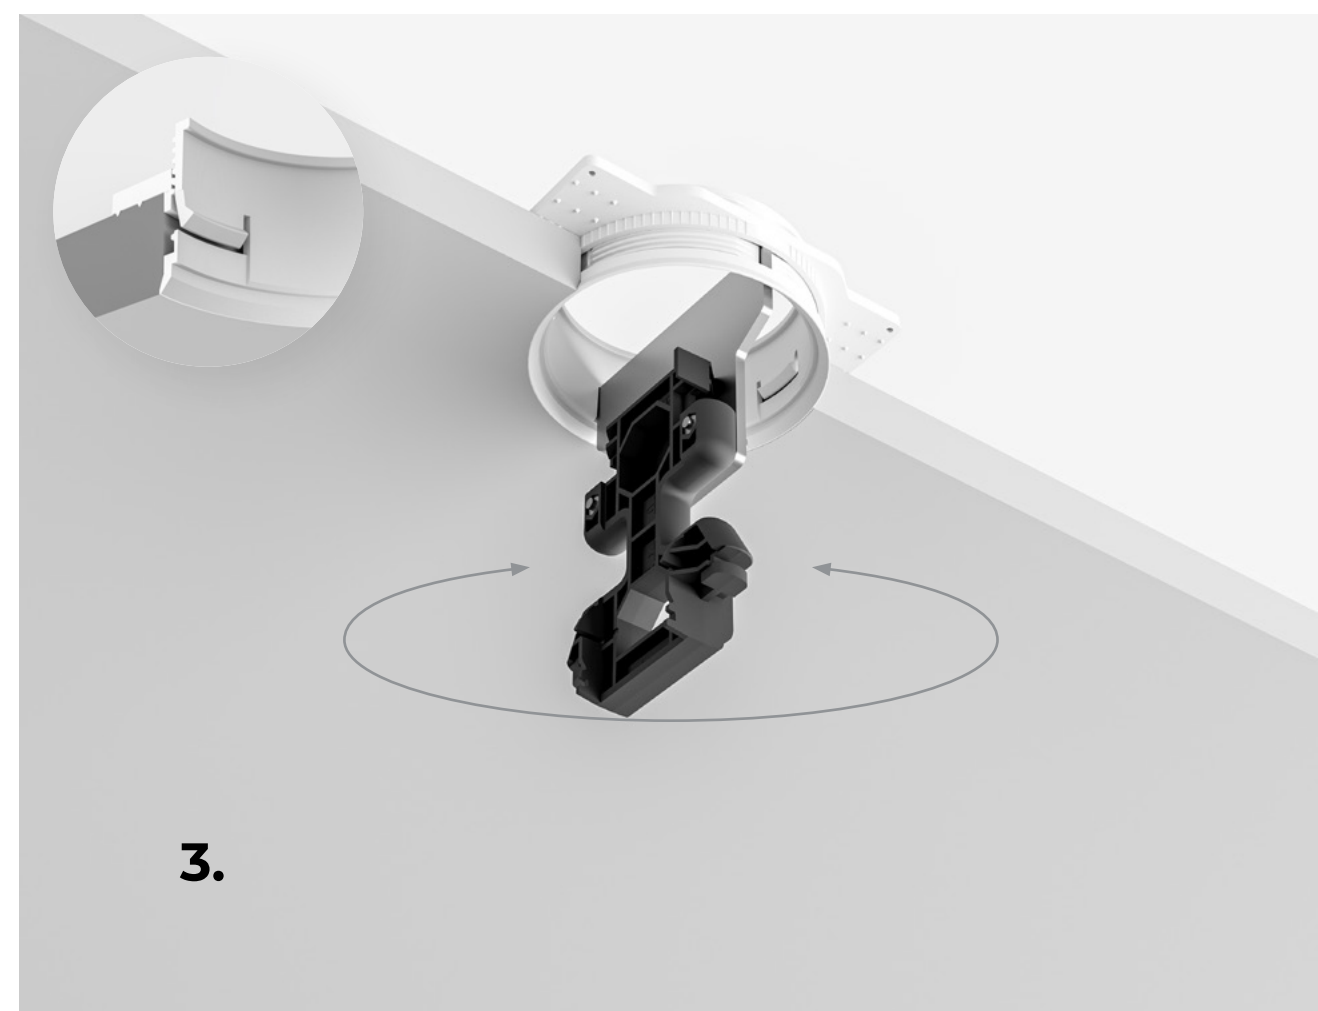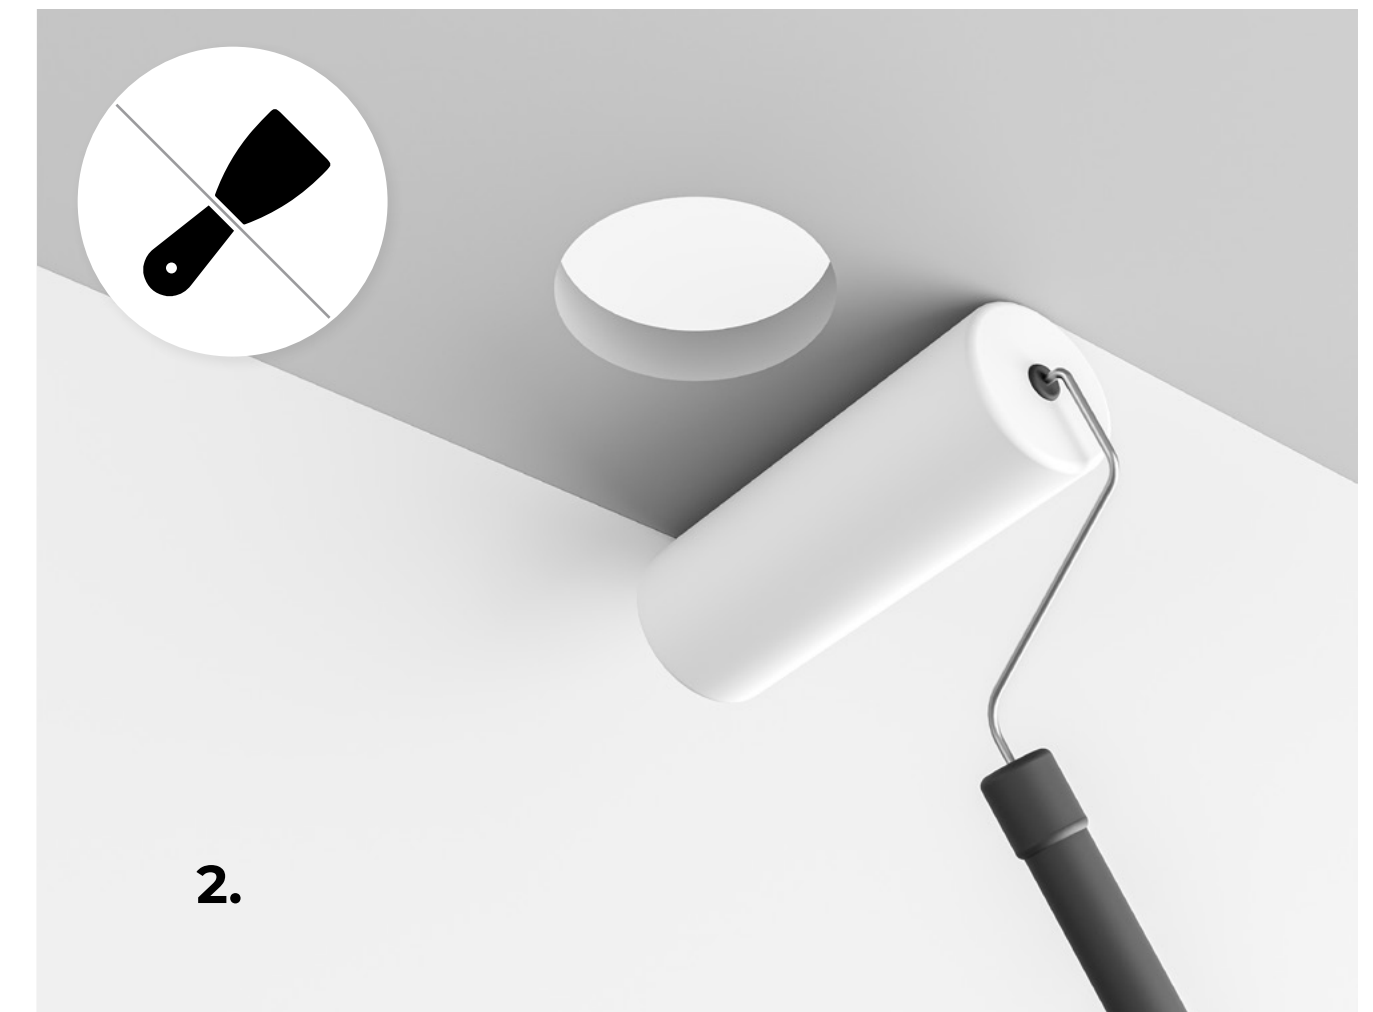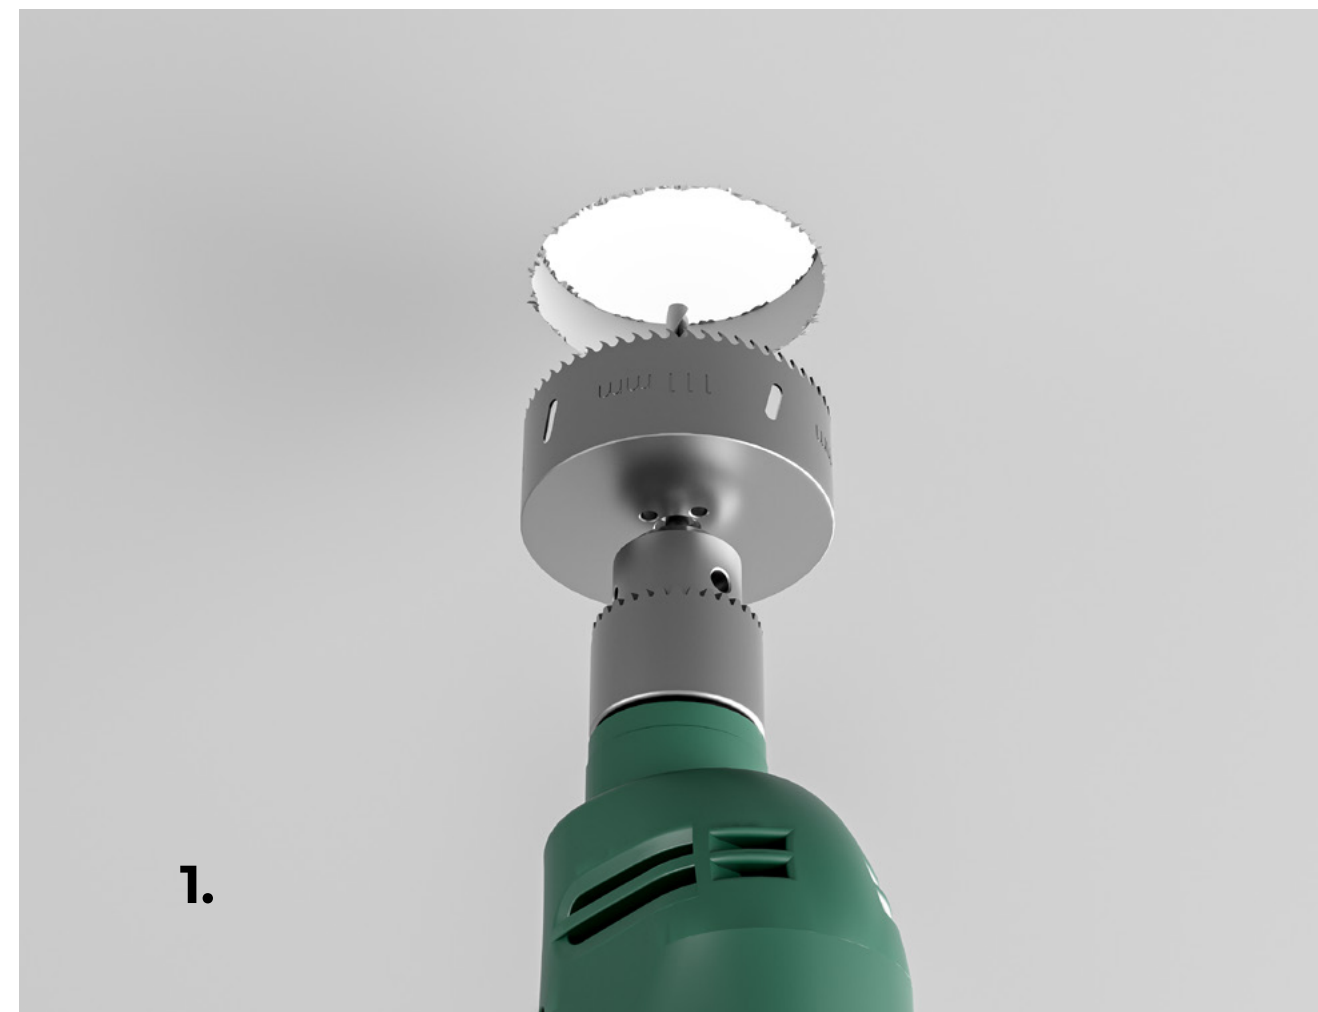

Main features



Prestigious look with trendy colours

The interior of the funnel can be gold, bronze or onyx coated which gives a luminaire prestigious look. Gold & bronze are on trend, but at the same time timeless chic finishes, perfect to match all kinds of interiors.




Gold coated

Onyx coated

Bronze coated



IP44

It's the perfect solution for high moisture environments like bathrooms. It offers pleasant and functional light as well as IP44 protection.

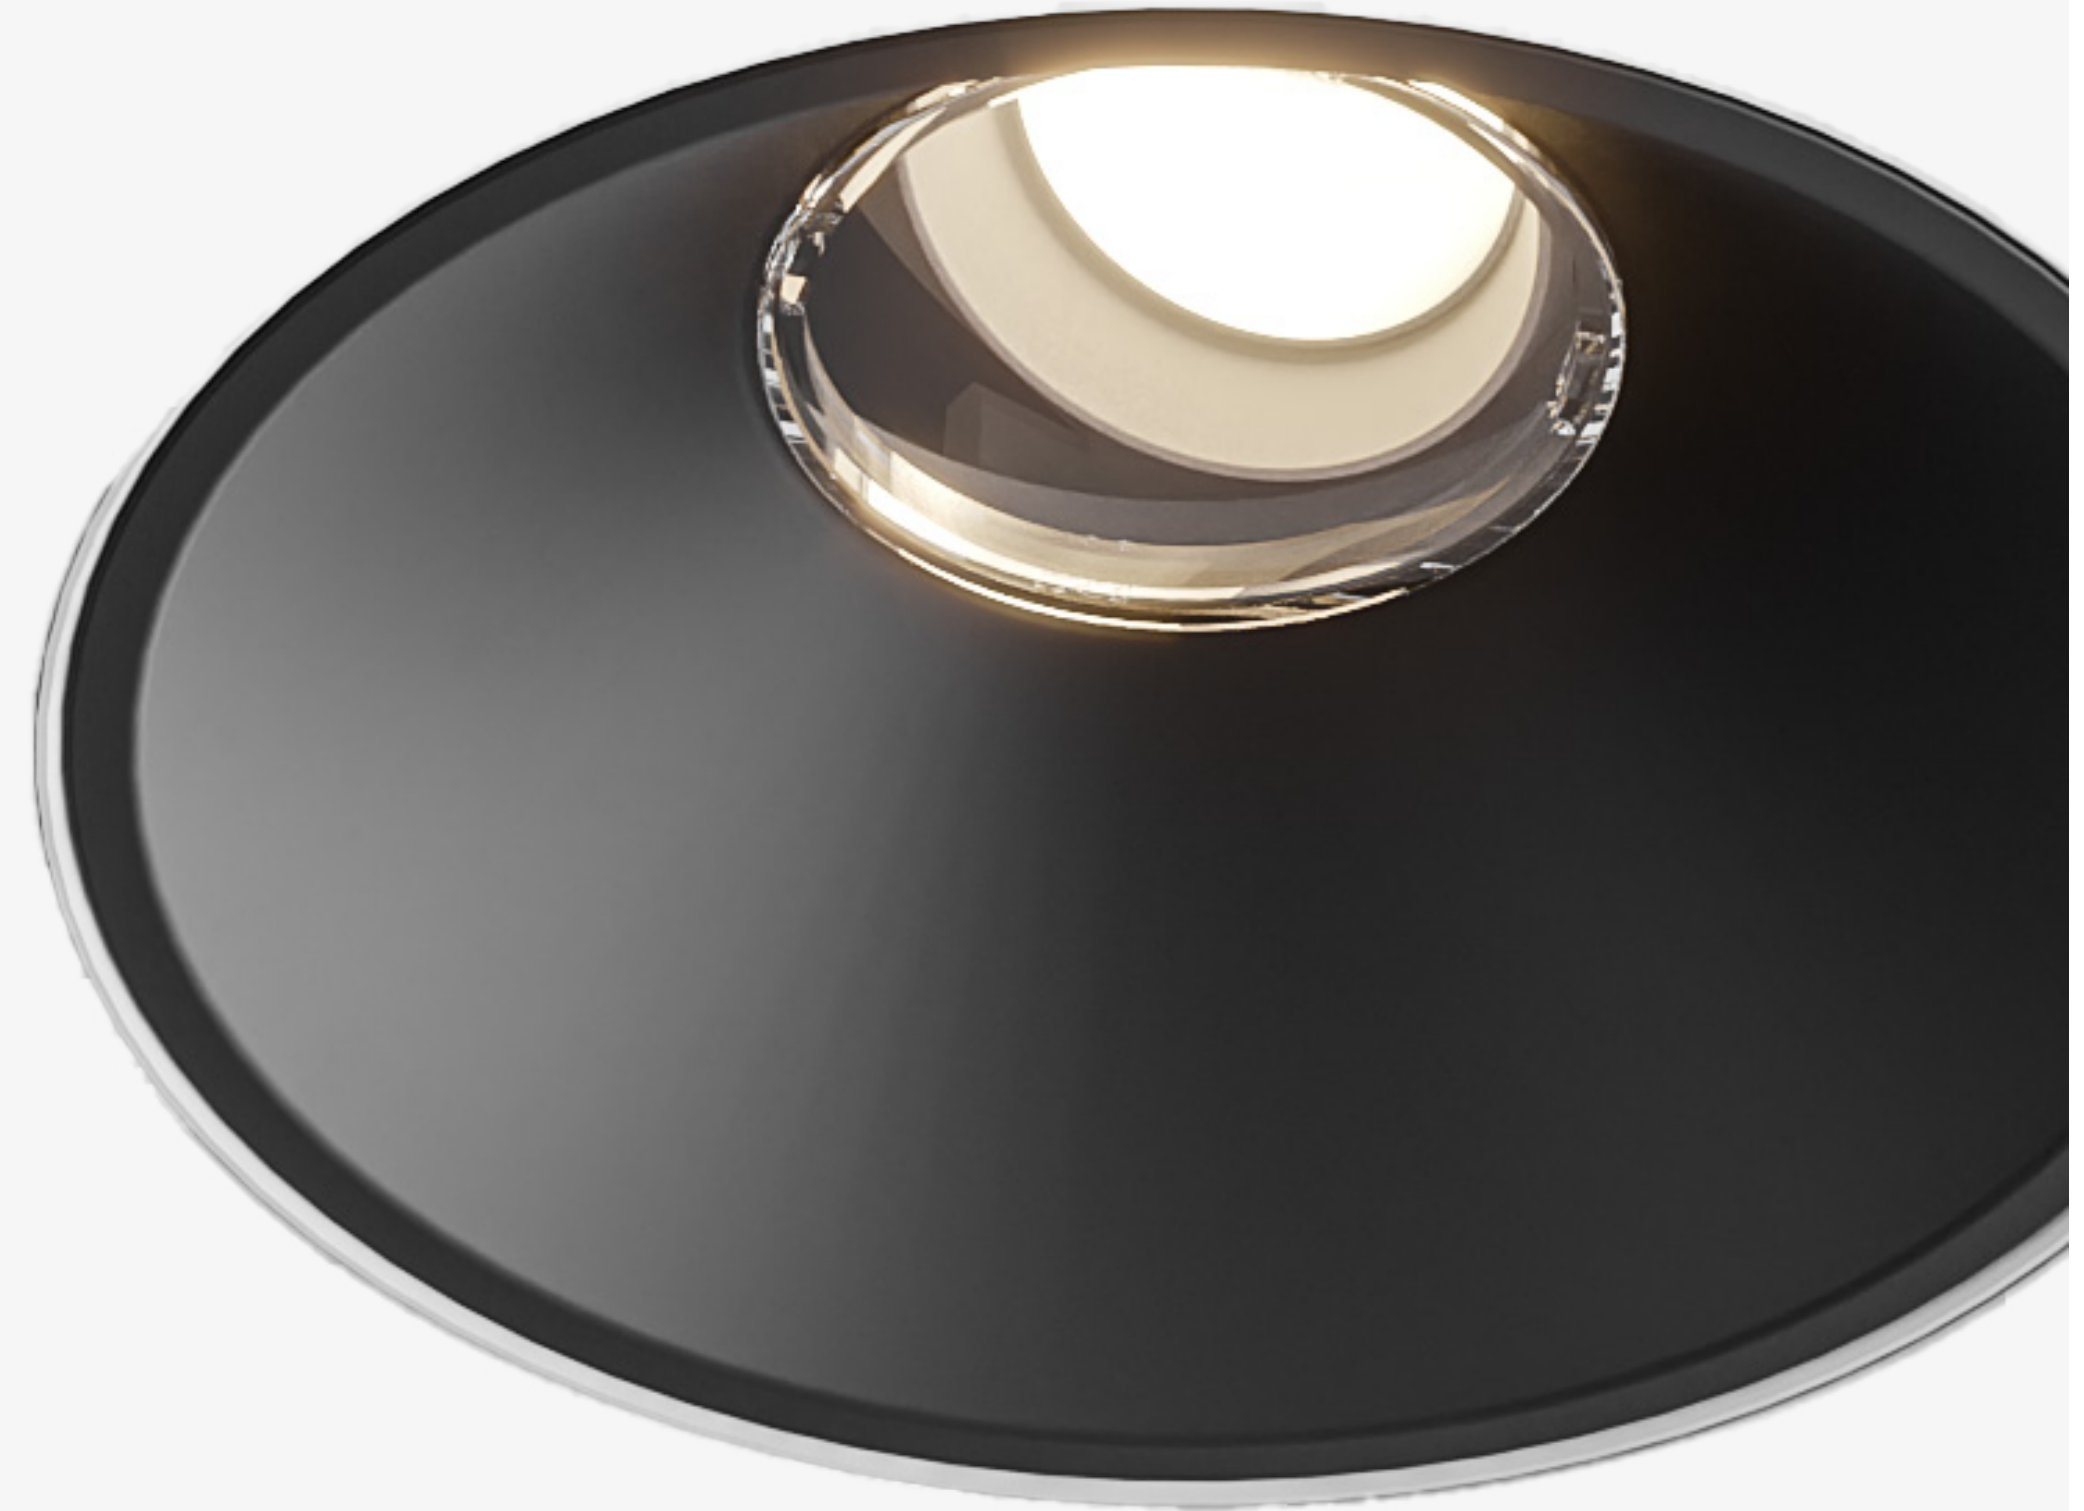



Innovative
installation
without
puttying

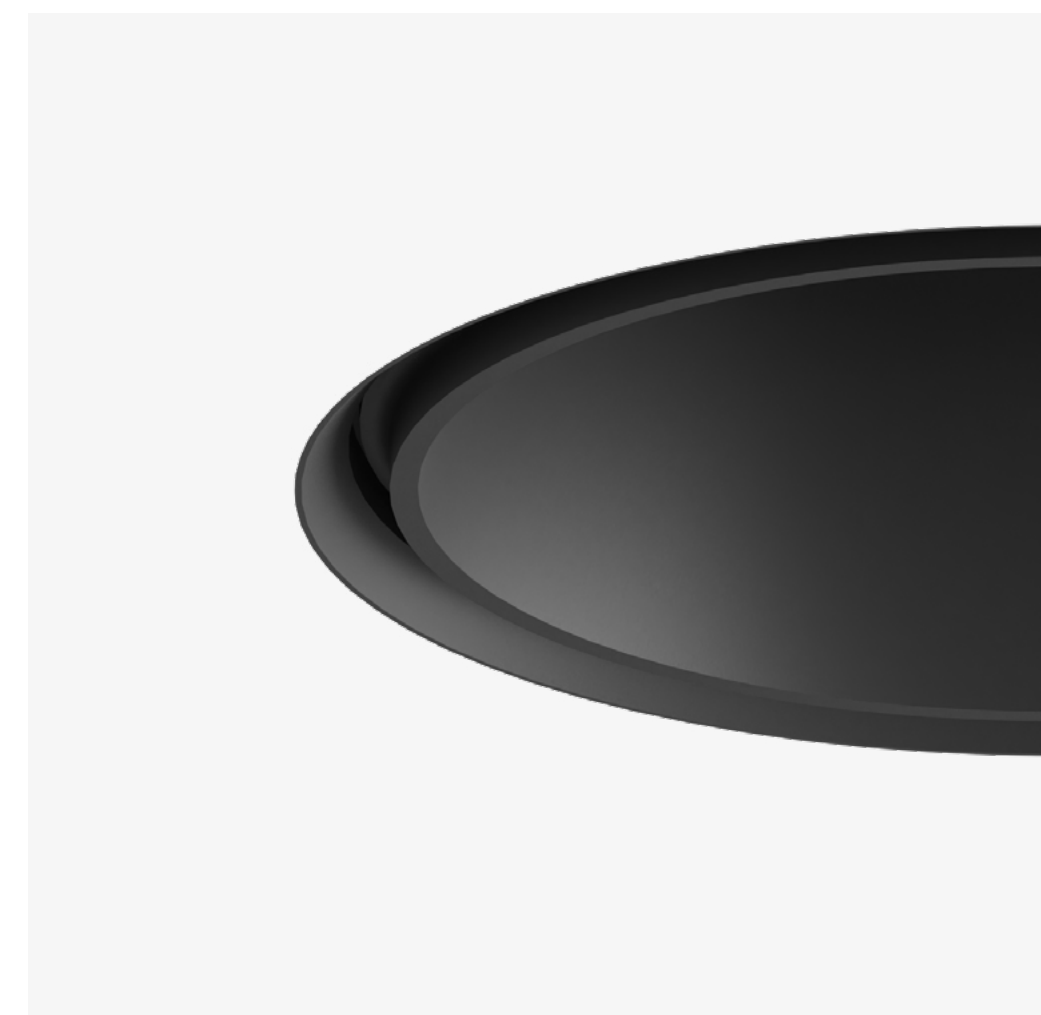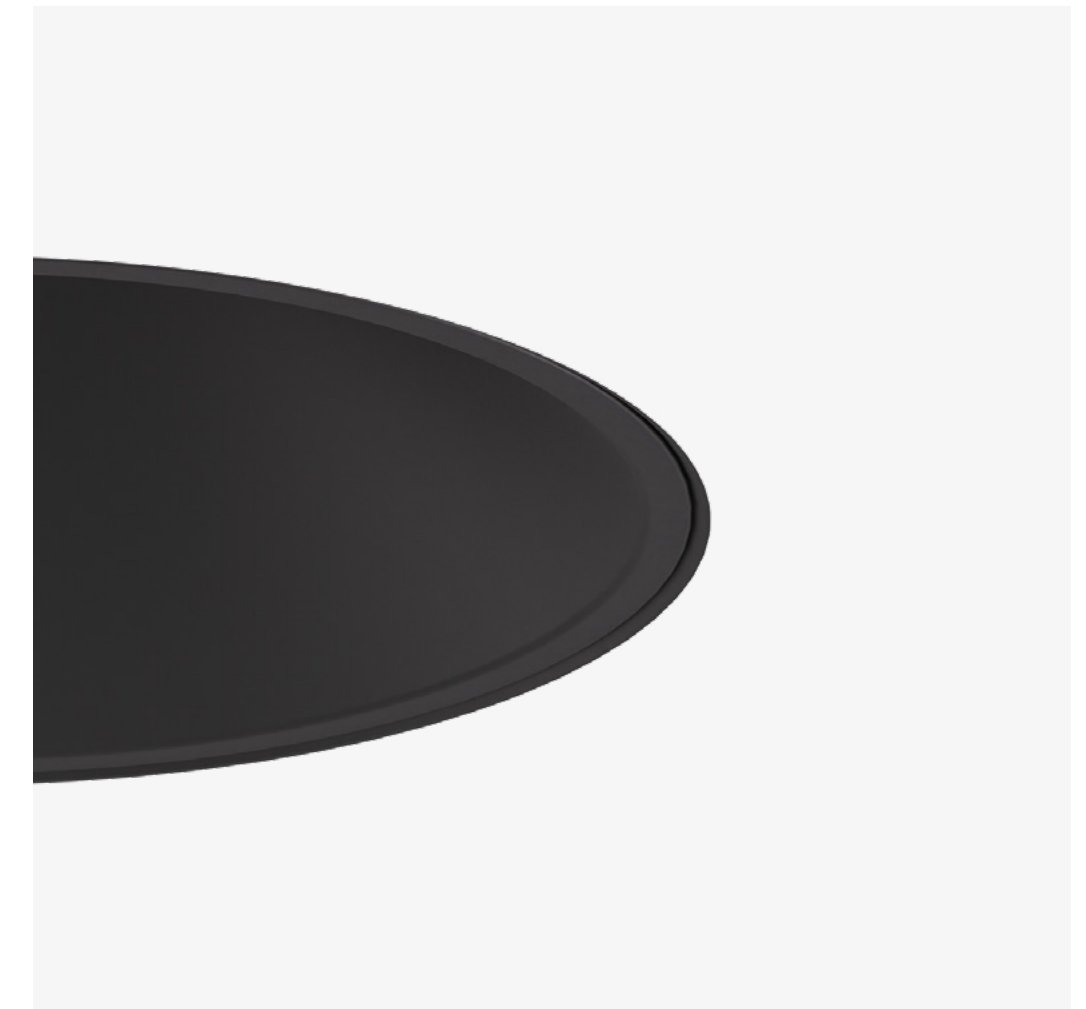

Prestigious
finishes make it a
higher level spot

ADJUSTABLE (A)



FIXED (F)



RI

Recessed trim-less

RV

Recessed visible trim

Beam angle

20°, 30°, 55°

20°, 30°, 55°

Orientation

25° / 360° (A)

25° / 360° (A)

Luminaire luminous flux

up to 1100 lm

up to 1100 lm

Led colour

927, 930, 935, 940

927, 930, 935, 940

Dynamic light

Dim to warm (D2W)**

Dim to warm (D2W)**

Driver

Casambi, DALI, FO

Casambi, DALI, FO

Driver position

Remote

Remote

IP protection*

IP44

IP44

RI kit / Frame colour



Inner colour



Dimensions

