

Rylo Pro

Office first





Private office / Visualisation: Studio Spacer



Private office, Germany / Visualisation: Studio Spacer



Private office, Germany / Visualisation: Studio Spacer



Private office / Visualisation: Studio Spacer


Your best office buddy

Whether it is suspended, recessed or floor, Rylo Pro is mostly intended for offices – for single ones, open spaces and conference rooms, offering illumination with no glare, high visual comfort and wellbeing.

The floor version of Rylo Pro is really practical: no installation needed, just plug-in and start. It is easy to move from one workstation to another.

DESIGN:

Intra lighting

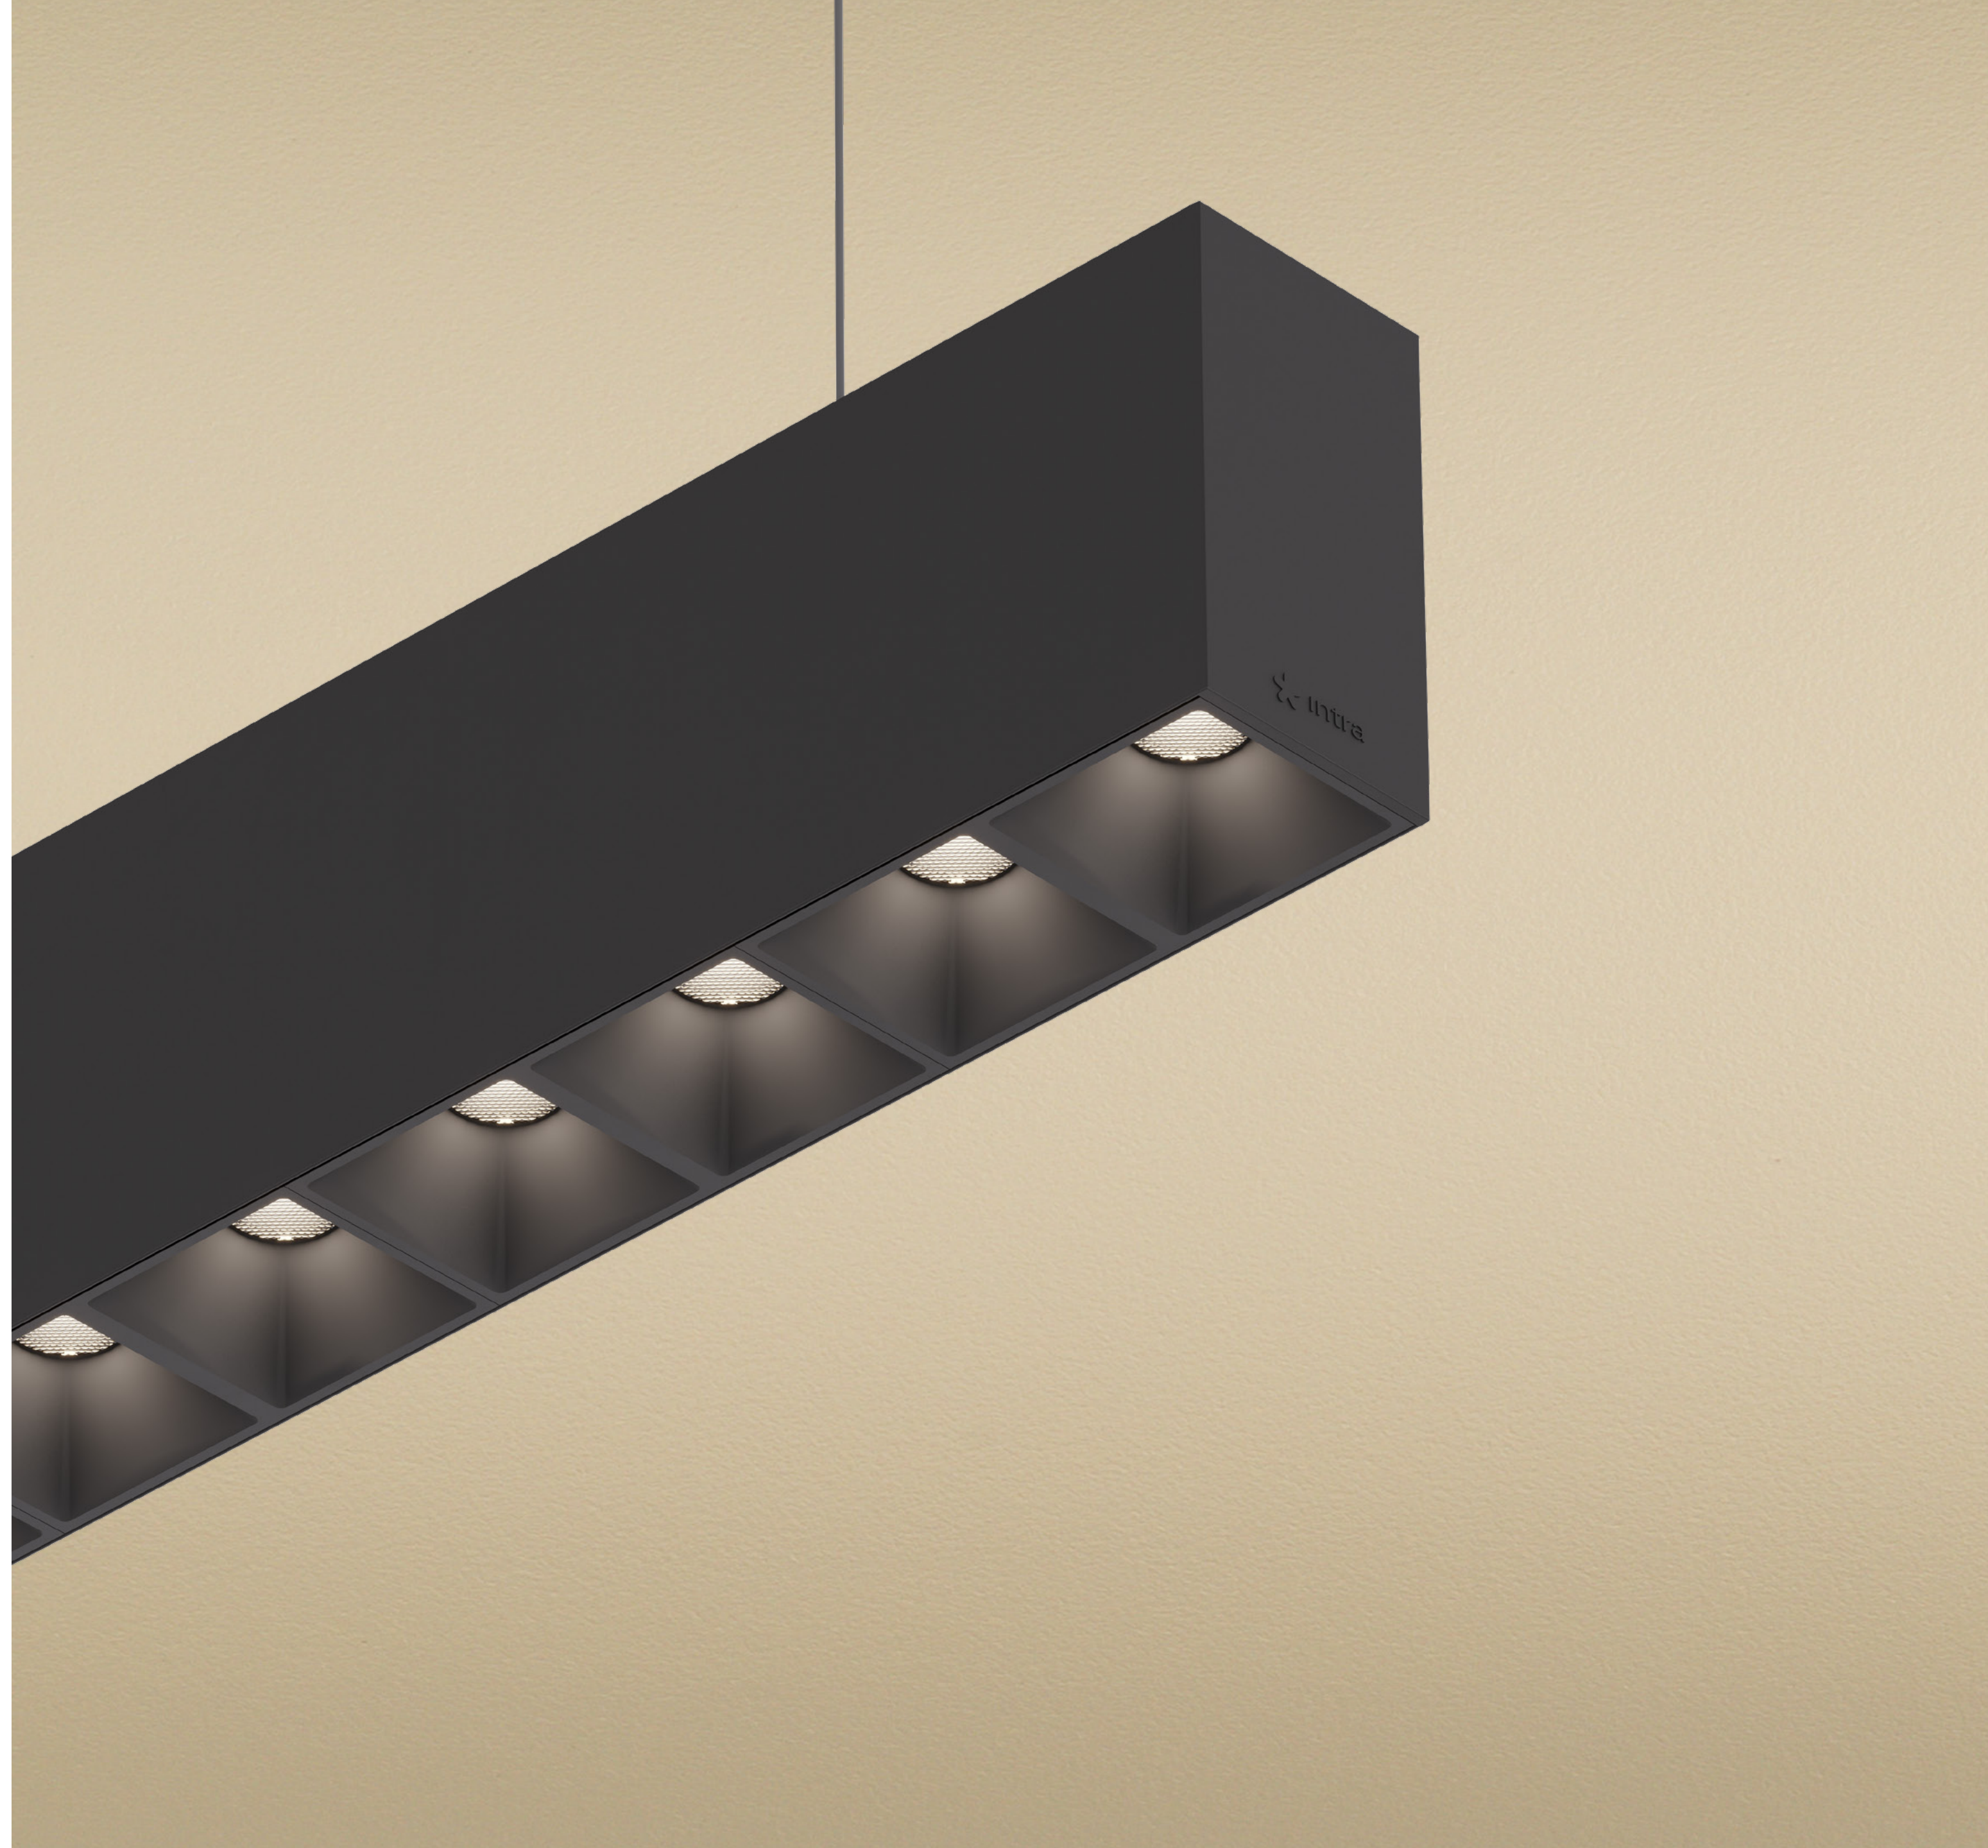

Product range

LUMINAIRE LUMINOUS FLUX

65 - 5000 lm

LED COLOUR


927, 930, 935, 940

DRIVER

Casambi, DALI, FO, IQ, sensor

OPTICS

22°, 30°, 50°, Asymetric

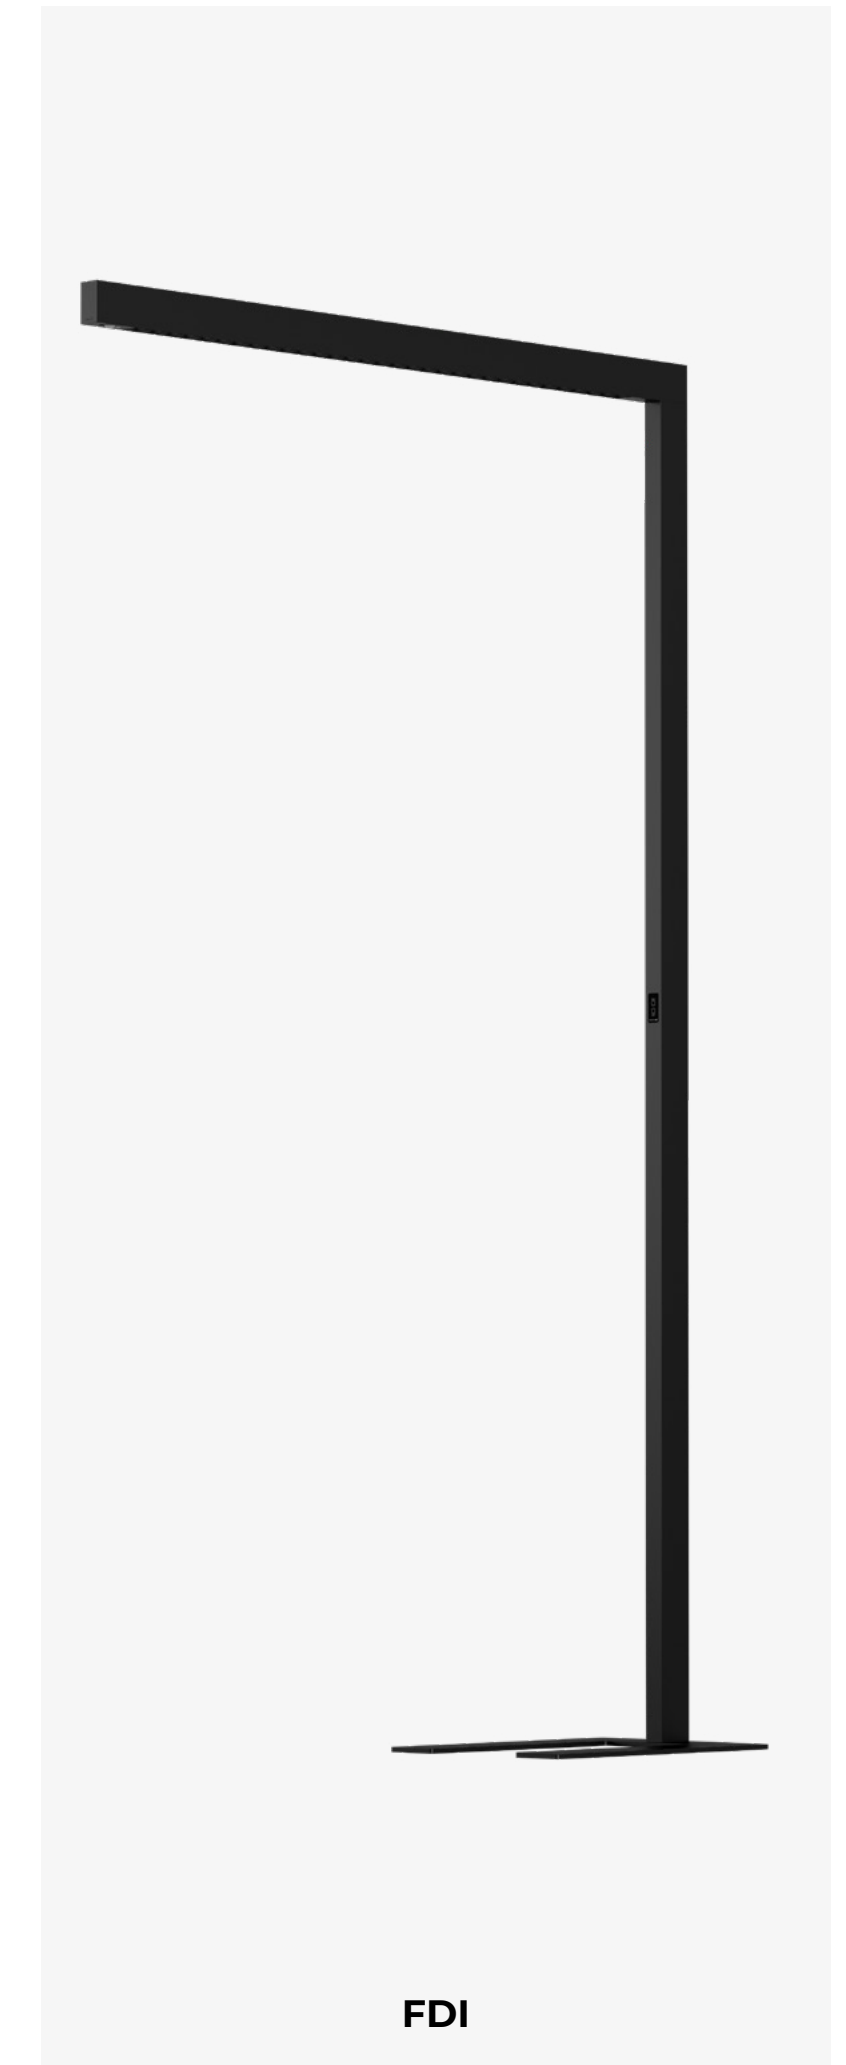


From single modules to linear systems



No glare, light comfort

Inappropriate lighting causes headaches and eye trouble. Create a healthier working environment with lighting which affects our well-being, mood and concentration.

With indirect illumination you can create a softer light environment.

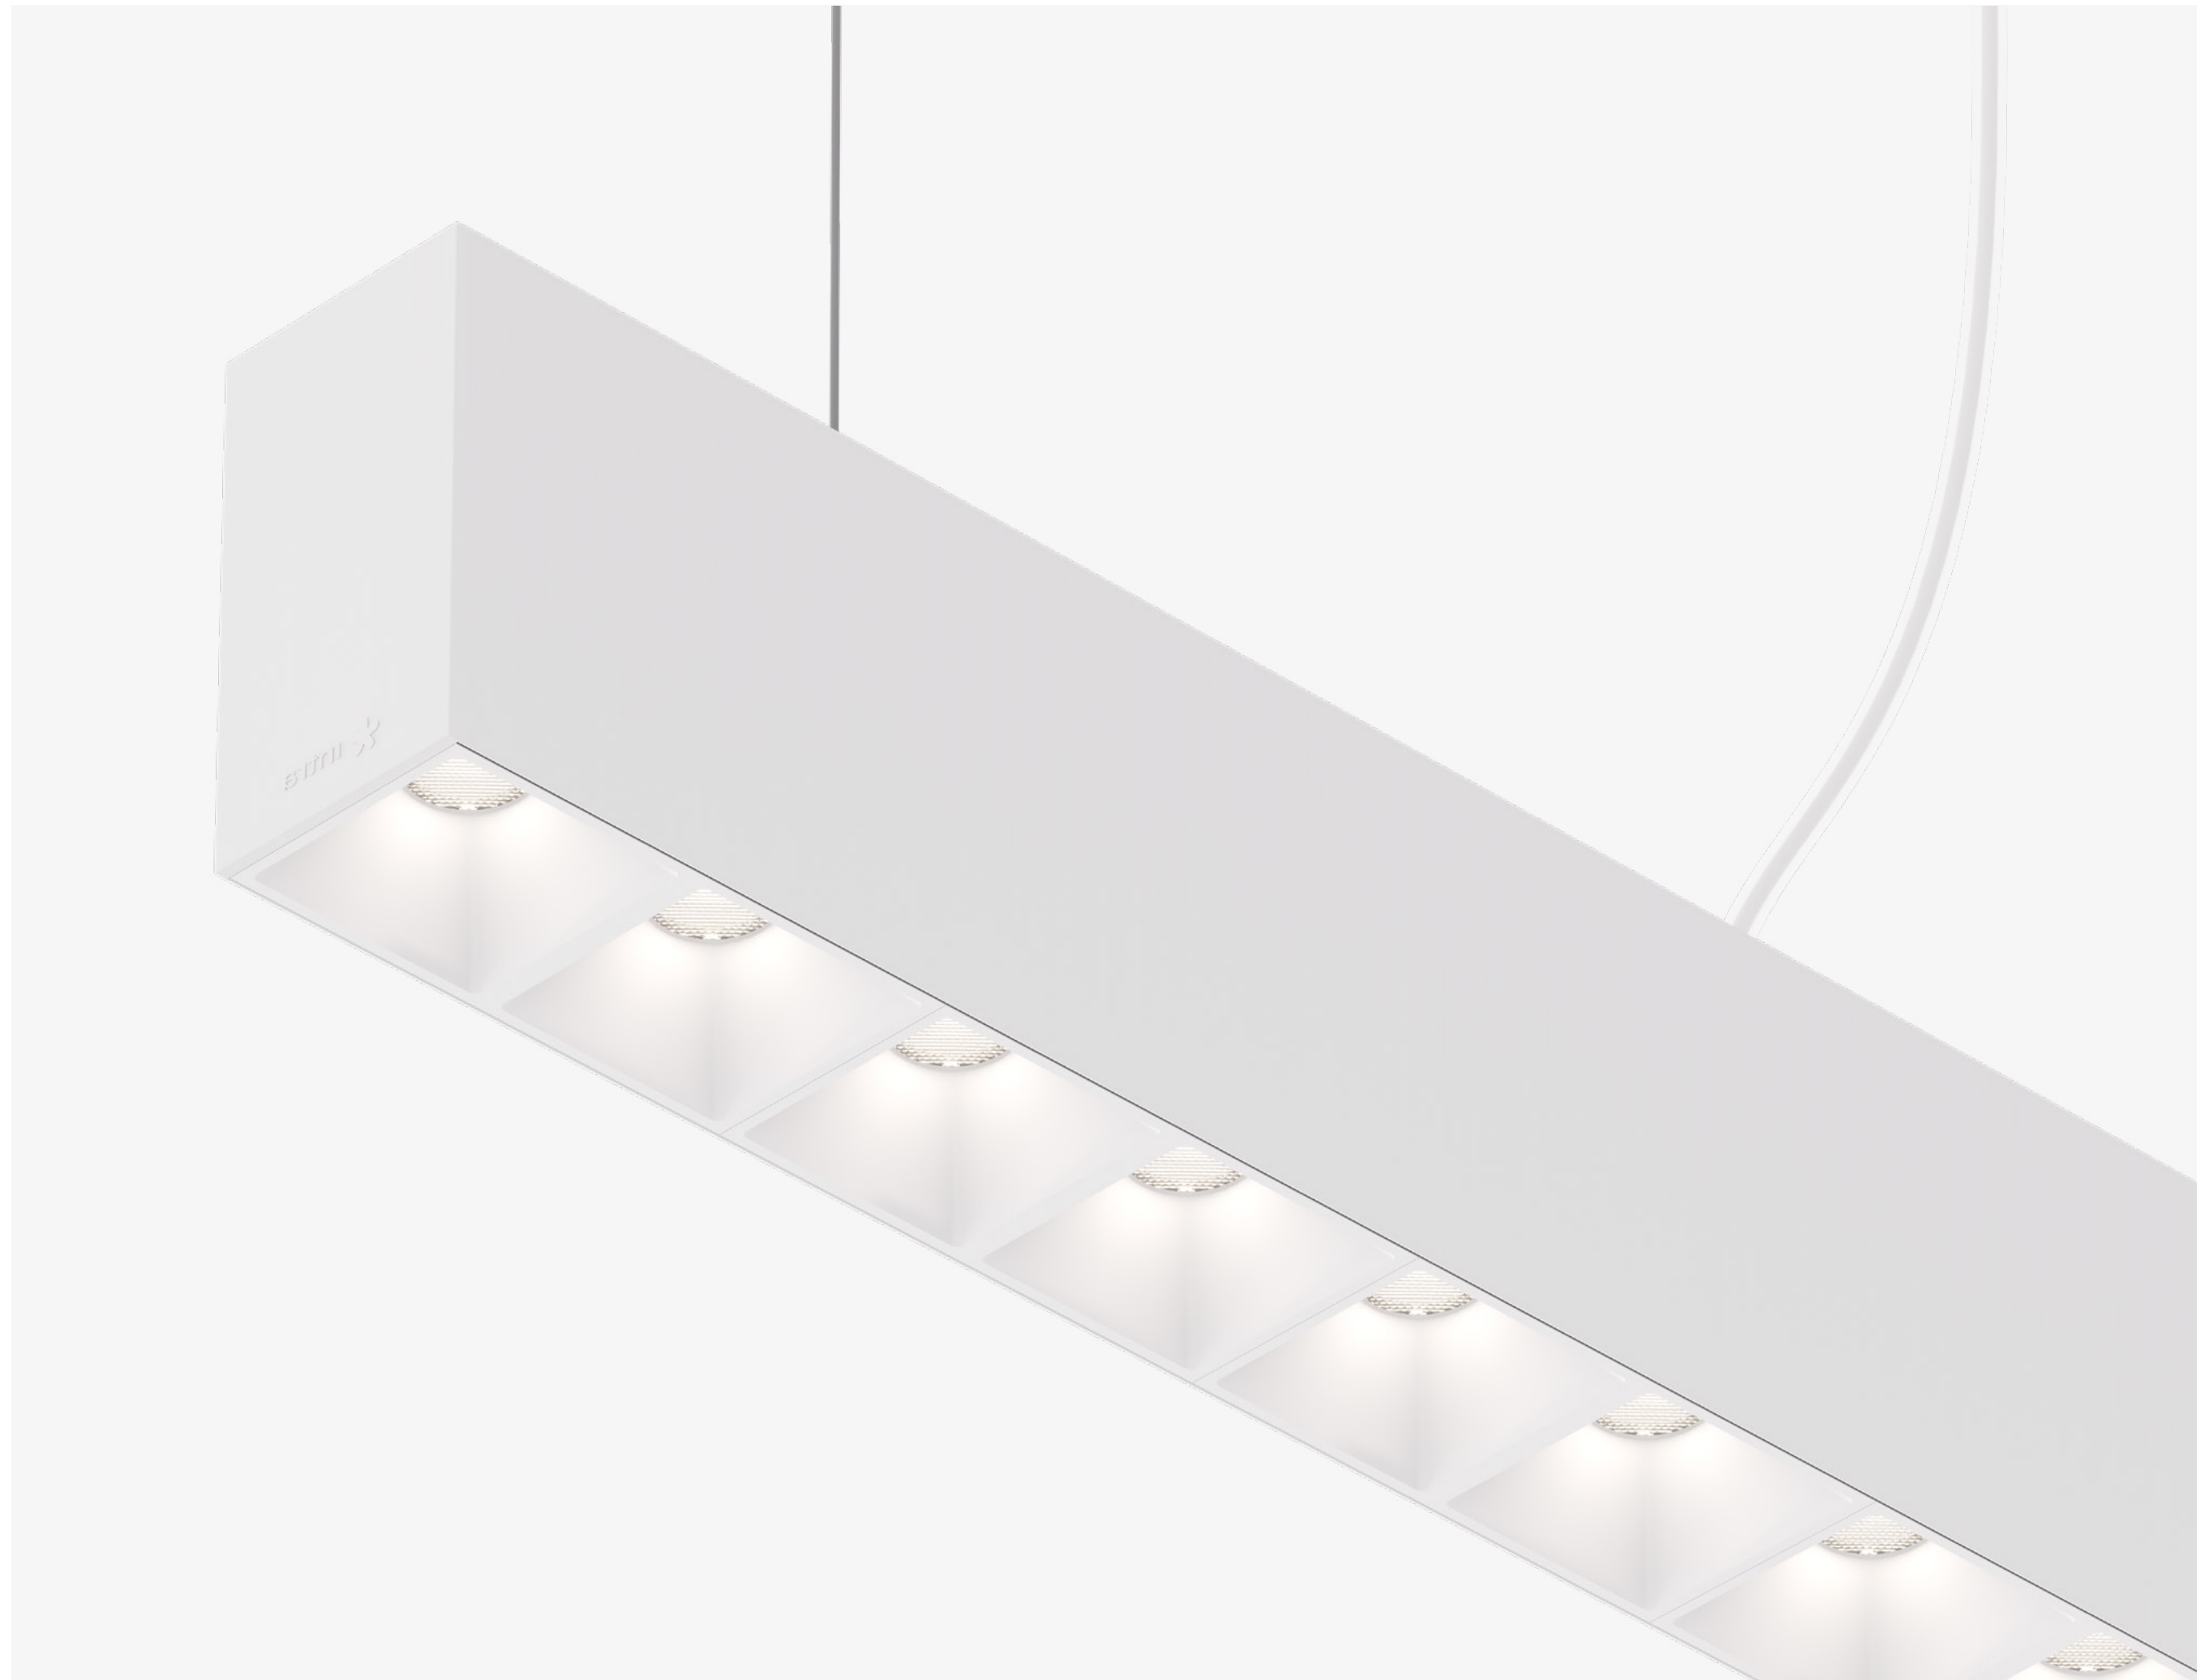

Floor

No installation needed, just plug-in and start. Just perfect for flexible offices.

Direct and indirect components can be switched and dimmed separately (TD version).



Flexible illumination

UGR
<16



Manual adjustment of light intensity (TD button)



IQ sensor

The luminaire switch on automatically due to presence and dim to desired light level depending on daylight.




IQ sensor / Advanced sensor



Advanced sensor

Wireless presence and daylight sensor communicate with other luminaires in order to keep all indirect on when presence of people are detected by single luminaire.


DAY

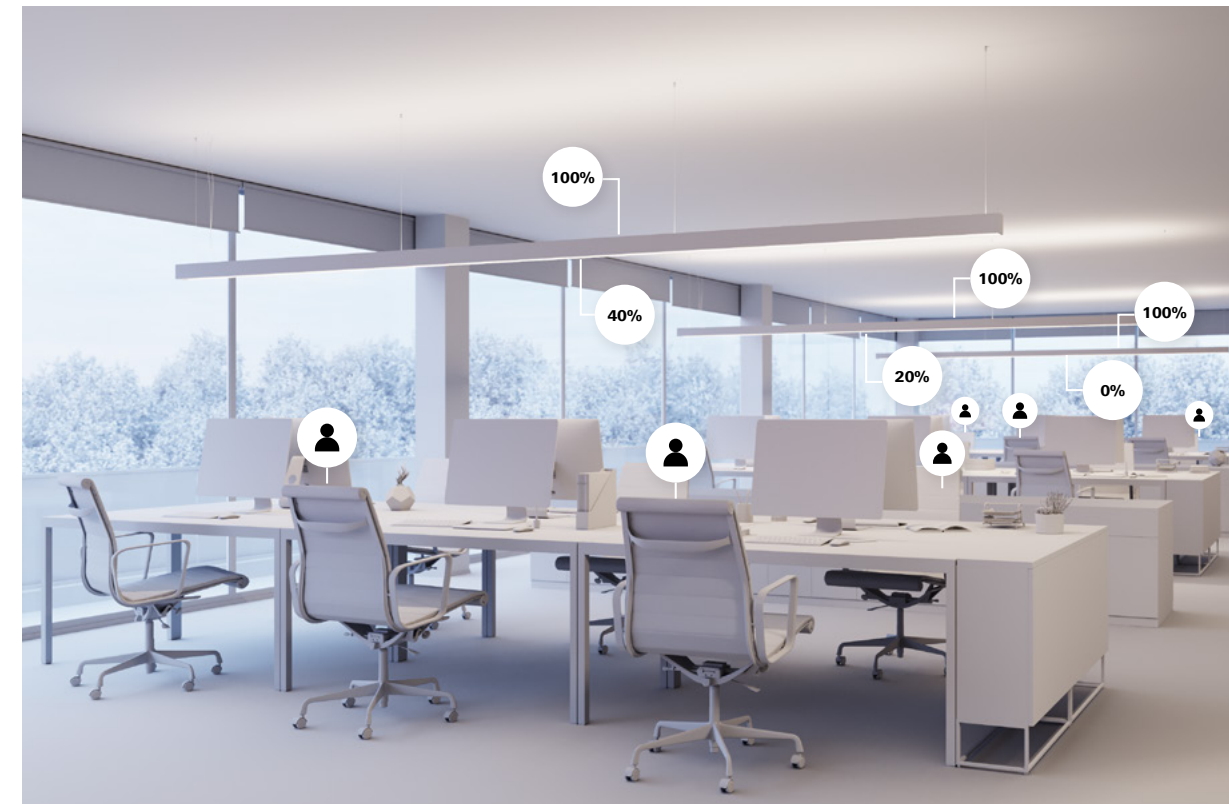


NIGHT

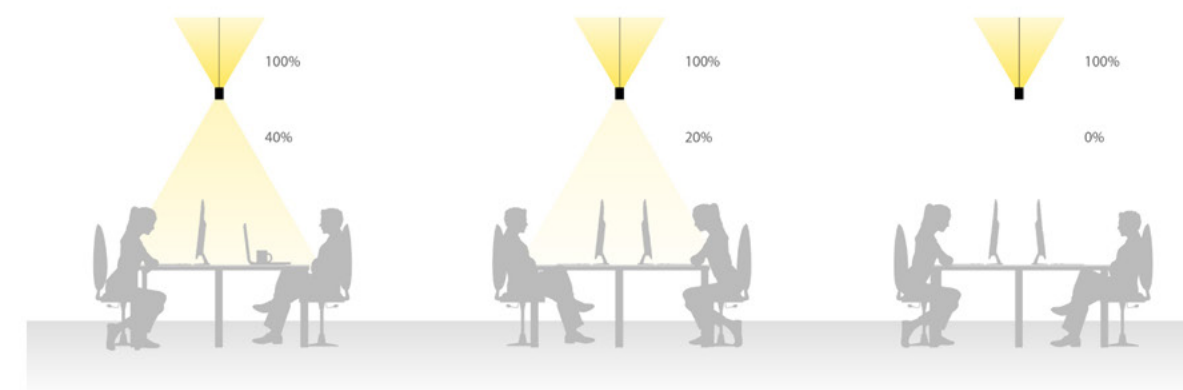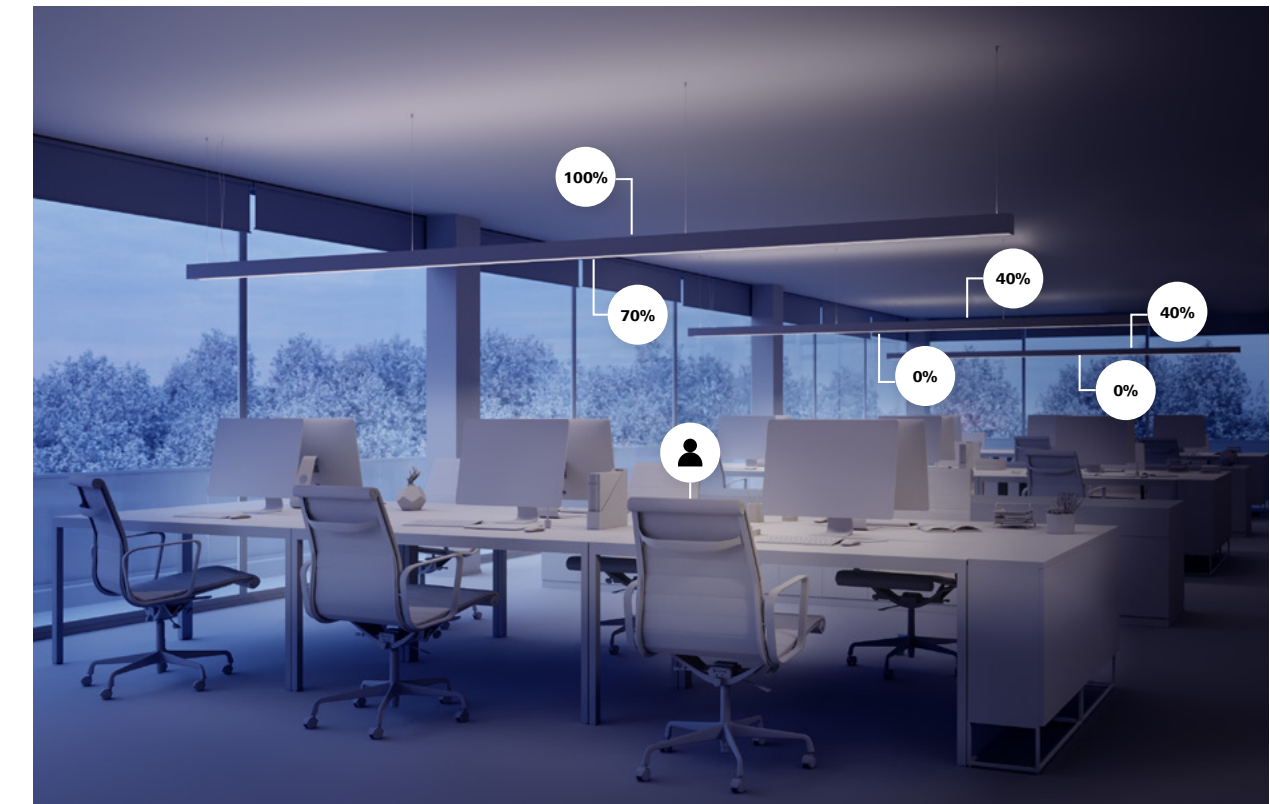

DIRECT LIGHT PERSONALIZATION

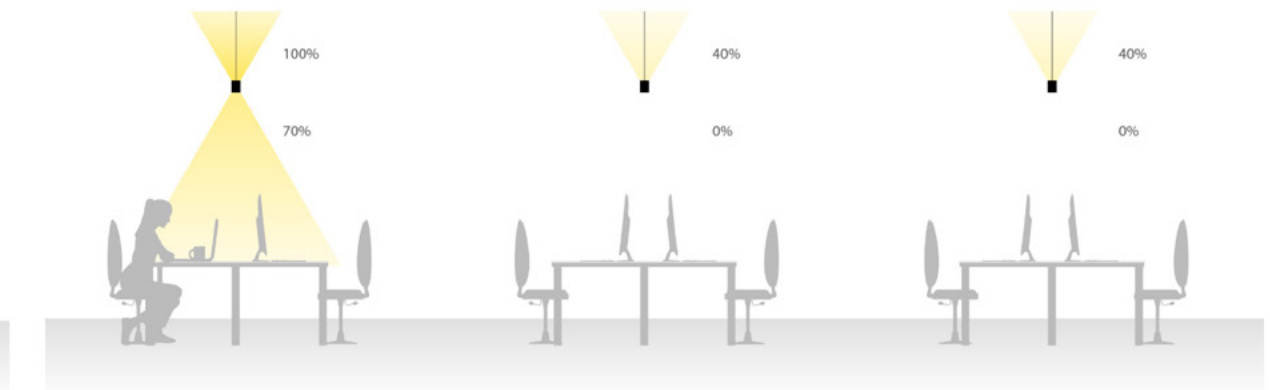


WITH THE ADVANCED SENSOR

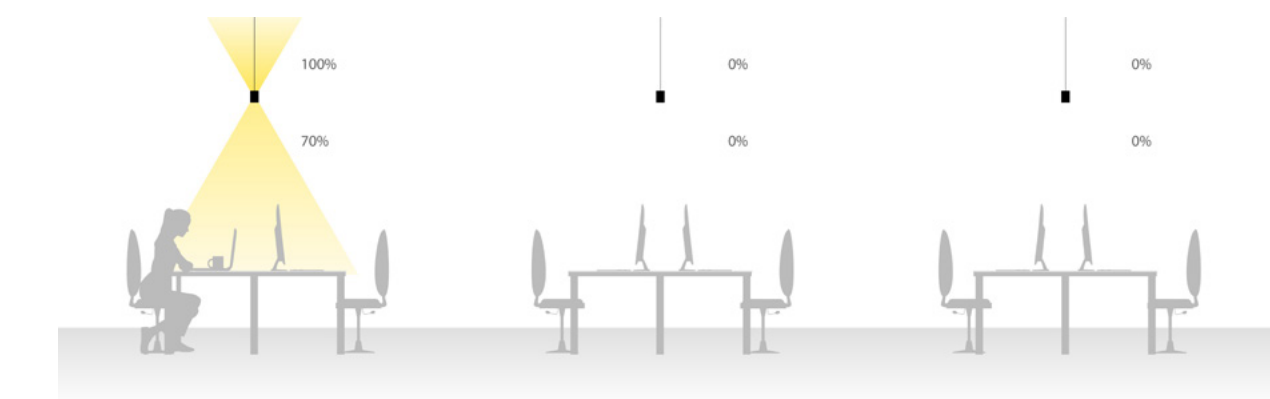


WITHOUT THE ADVANCED SENSOR




Special optic for
the highest visual
comfort

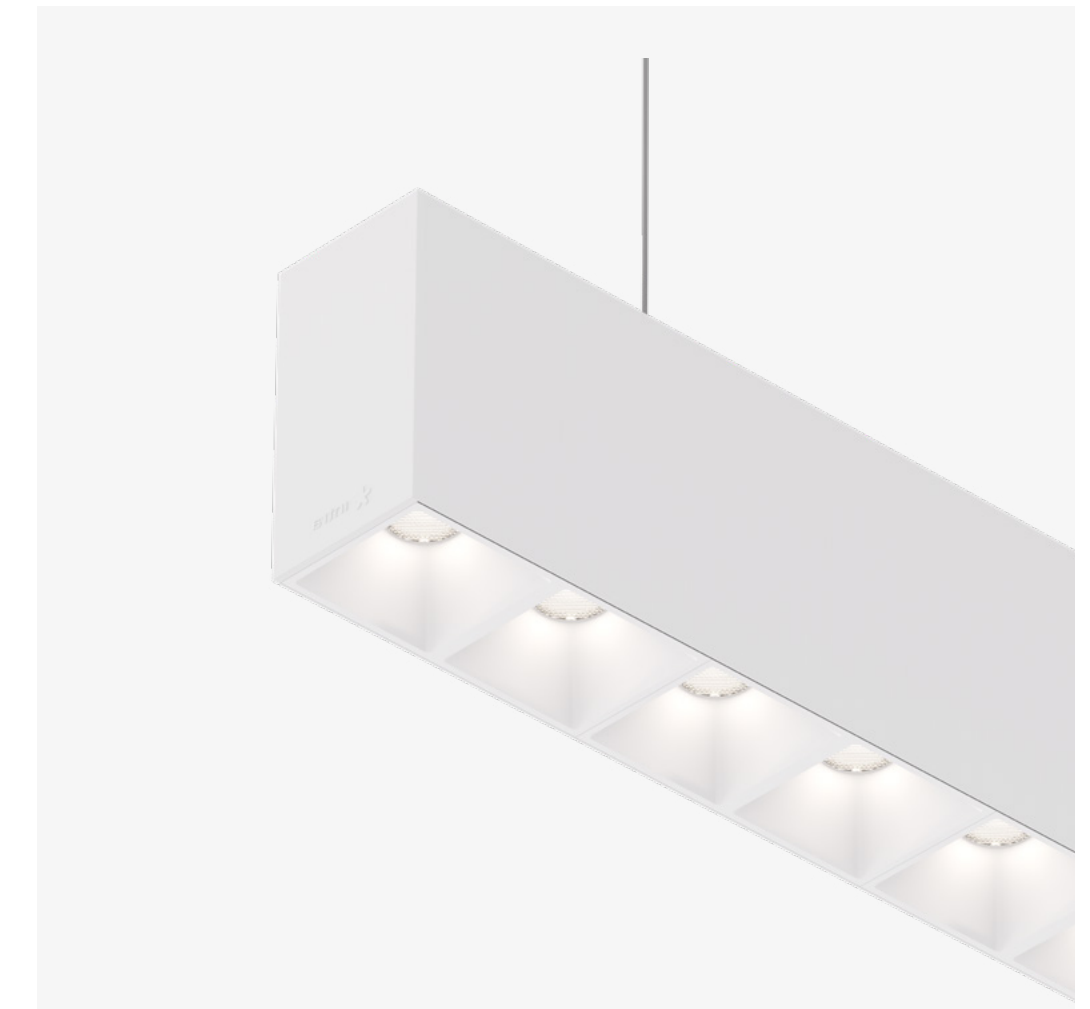

No installation
needed for F
version

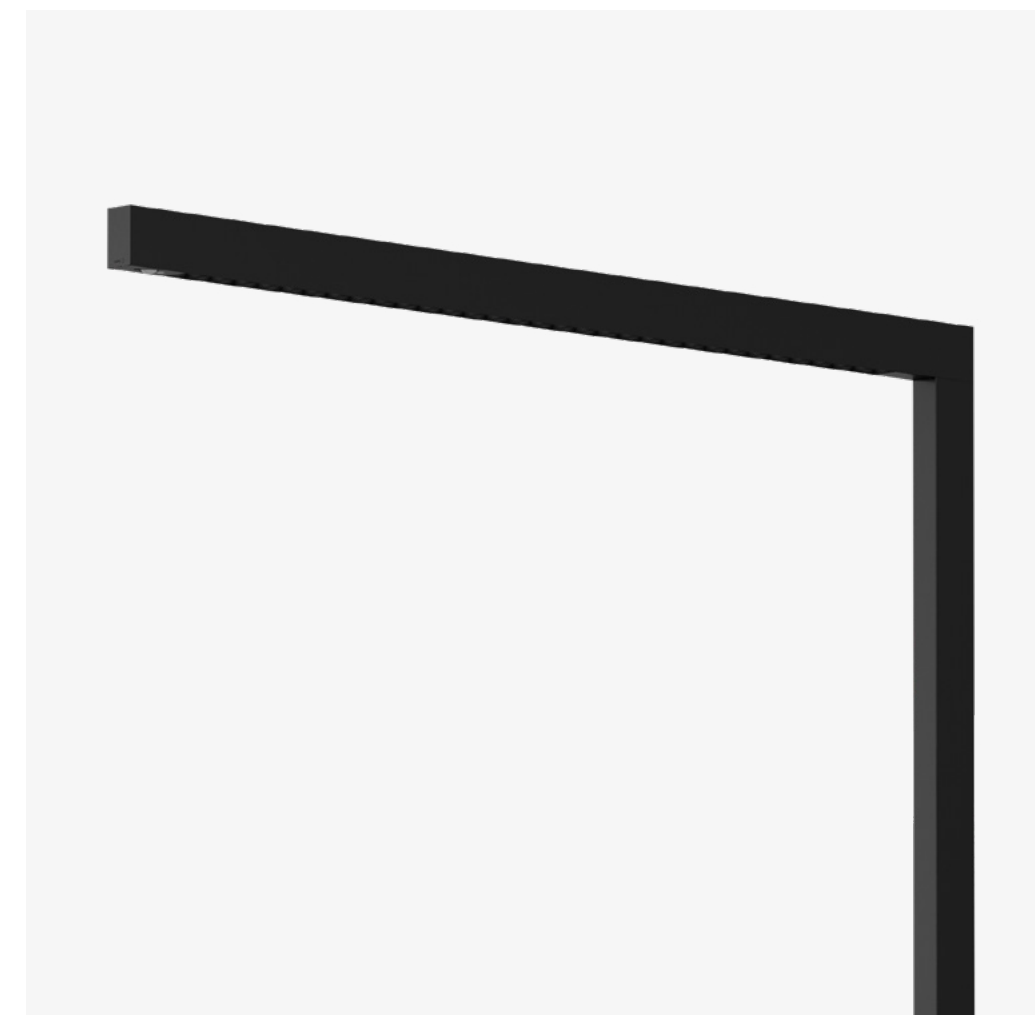

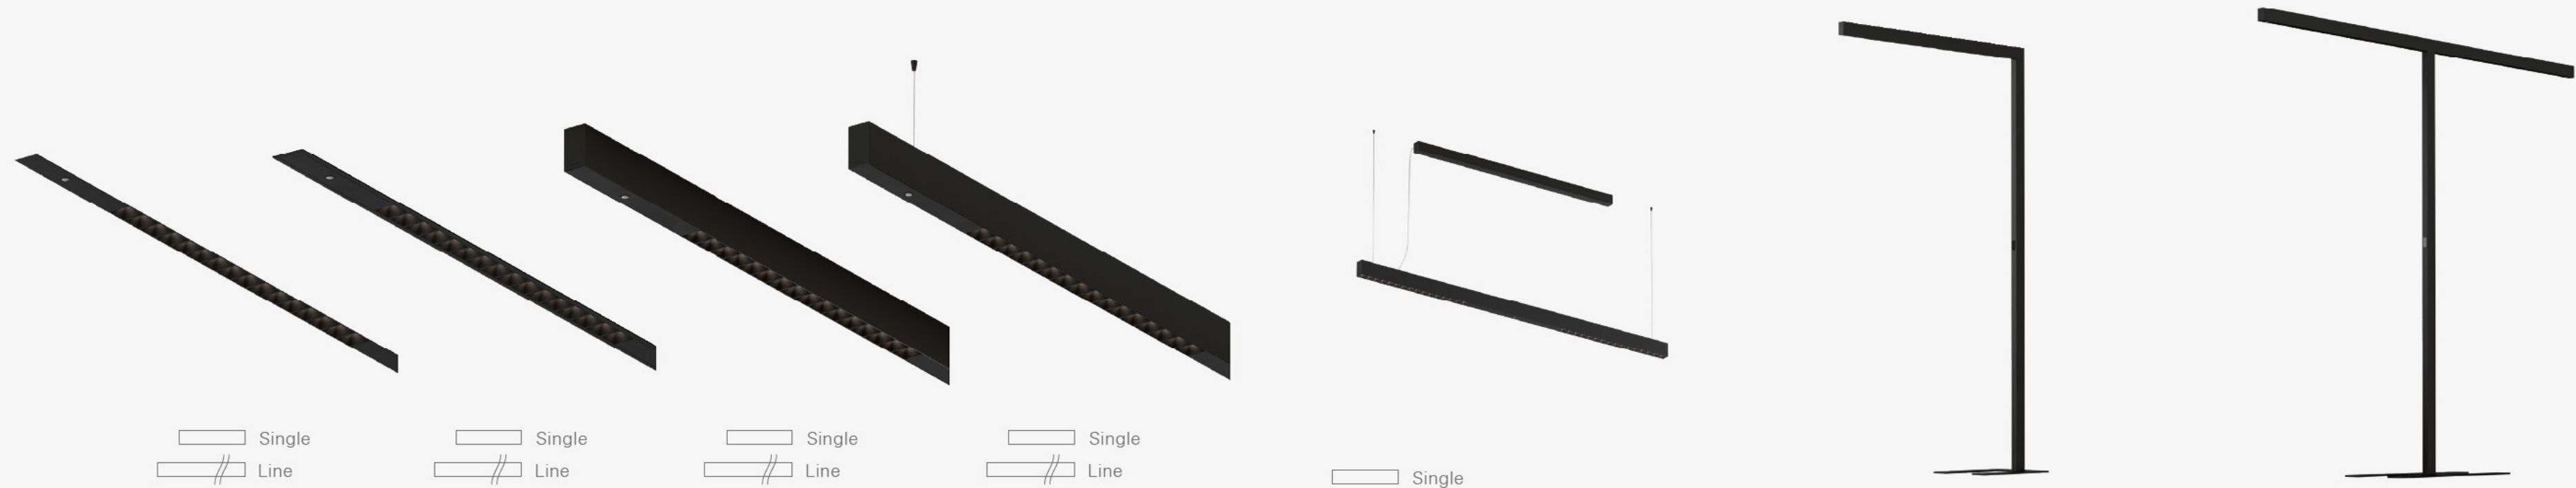

	RI Recessed trimm-less	RV Recessed visible trim	C/S Ceiling / Suspended	SDI Suspended direct-indirect	S/SDI Suspended direct / direct-indirect	FDI Floor direct-indirect	FDI T Floor direct-indirect T shape
Glare control (UGR class)	UGR<19	UGR<19	UGR<19	UGR<19	UGR<19	UGR<16	UGR<16
Luminaire luminous flux	105 - 145 lm/spot	105 - 145 lm/spot	105 - 145 lm/spot	65 - 145 lm/spot	65 - 145 lm/spot	1500 lm + 2500 lm	3000 lm + 5000 lm
Number of spots	8+8, 16+16, 24+24	8+8, 16+16, 24+24	8+8, 16+16, 24+24	8+8, 16+16	8+8, 16+16	32	32+32
Light distribution	Direct	Direct	Direct	Direct / Indirect	Direct, Direct / Indirect	Direct / Indirect	Direct / Indirect
Optics	22°, 30°, 50°, Asymetric	22°, 30°, 50°, Asymetric	22°, 30°, 50°, Asymetric	22°, 30°, 50°, Asymetric	22°, 30°, 50°, Asymetric	50°	50°
Led colour	927, 930, 935, 940	927, 930, 935, 940	927, 930, 935, 940	927, 930, 935, 940	927, 930, 935, 940	927, 930, 935, 940	927, 930, 935, 940
Driver	Casambi, DALI, FO, IQ sensor	Casambi, DALI, FO, IQ sensor	Casambi, DALI, FO, IQ sensor	Casambi, DALI, FO, IQ sensor	Casambi, DALI, FO, IQ sensor	Casambi, FO, IQ sensor, TD	Casambi, FO, IQ sensor, TD
Driver position	Remote	Remote	Ceiling cup	Ceiling cup	Ceiling cup with driver included	Integrated	Integrated
Colour	1 2	1 2	See the colour options below	See the colour options below	See the colour options below	1 2	1 2

Dimensions	L (mm): 1682 - 3082	L (mm): 1682 - 3082	L (mm): 1682 - 3082	L (mm): 1962 - 3082 SH (mm): 1500, 3000, 5000	L (mm): 1122 - 2802 SH (mm): 1500, 3000, 5000		