


# FLOW

Wallcovering

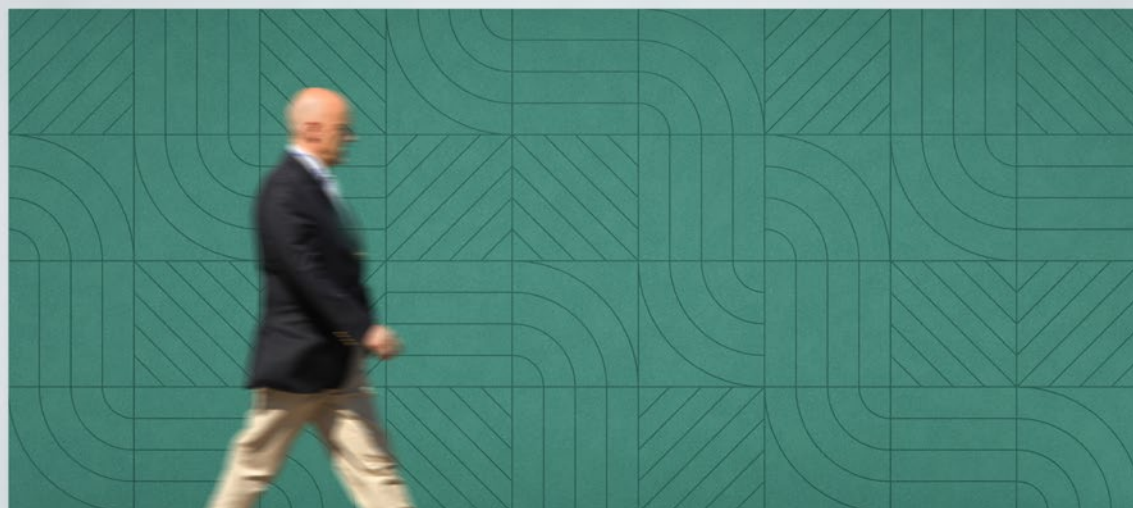

# FLOW 24MM

Wallcovering

FLOW is an acoustic wall solution with a playful and dynamic pattern that creates moving lines that flows from one panel to the other. A continuous or a series pattern could be altered by inverting the panel alternately.

## ARTICLE NUMBER


732.24.11.000.00

## DIMENSIONS

Length:	1800mm	70.86"
Width:	2400 mm	94.48"
Thickness:	24mm	0.94"


## CONNECTION

FLOW is mounted on the wall with a bio-degradable double-contact glue.

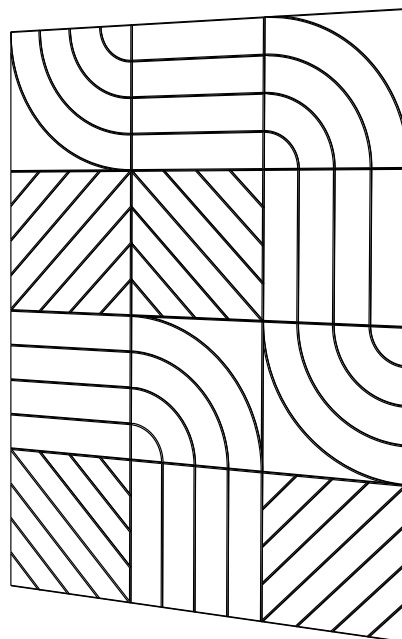

**SIDE**

**FRONT**

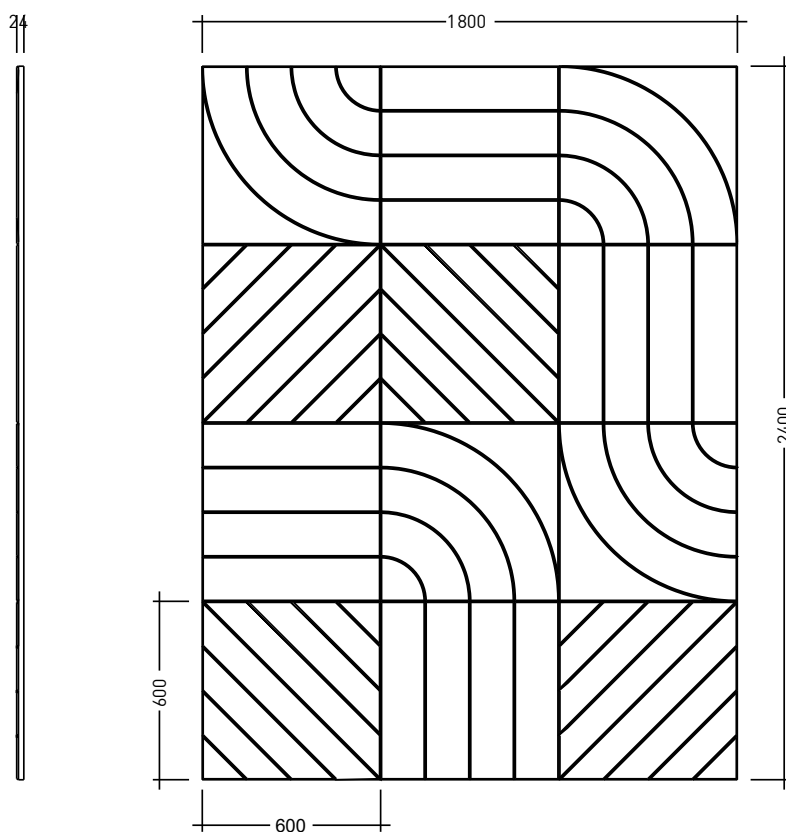

TECHNICAL DATA SHEET

# FLOW 12MM

Wallcovering

FLOW is an acoustic wall solution with a playful and dynamic pattern that creates moving lines that flows from one panel to the other. A continuous or a series pattern could be altered by inverting the panel alternately.

## ARTICLE NUMBER


732.12.11.000.00

## DIMENSIONS

Length:	1200mm	47.24"
Width:	2800 mm	110.23"
Thickness:	12 mm	0.47"


## CONNECTION

FLOW is mounted on the wall with a bio-degradable double-contact glue.

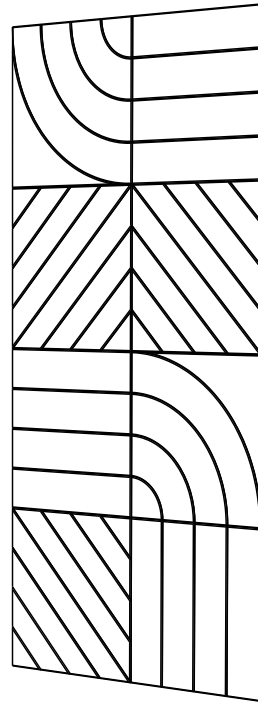

**SIDE**

**FRONT**

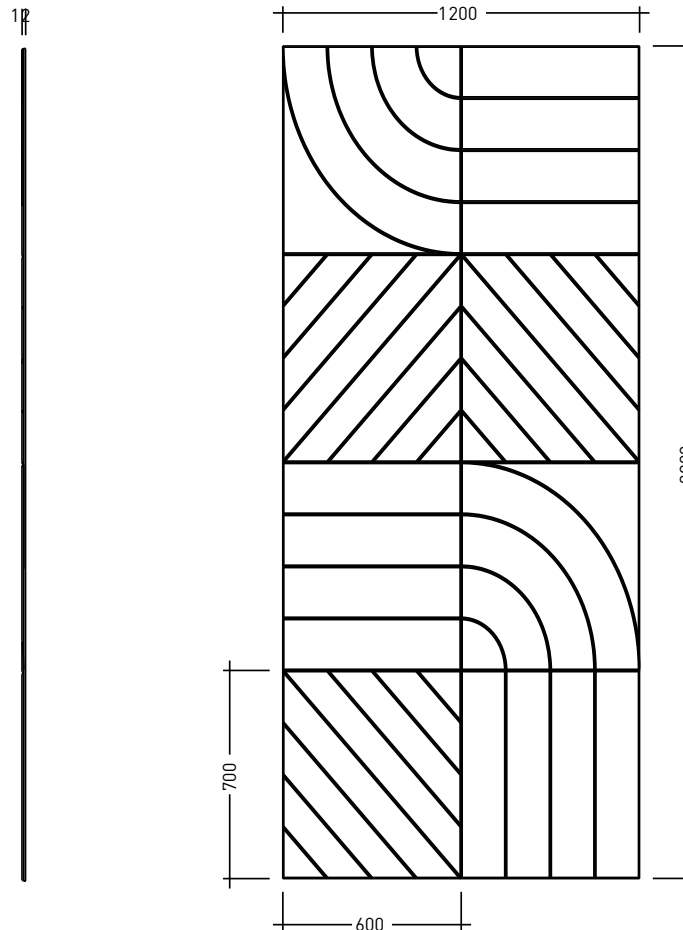

TECHNICAL DATA SHEET

# ARCHISONIC®

## Colour Families


ARCHISONIC® is a high-performance sustainable acoustic absorber made from upcycled plastic bottles which is Cradle to Cradle certified and LEED accredited.

ARCHISONIC® is manufactured at the highest quality standards, yet slight color and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print. Please request a material sample to verify colours.

### QUIET NEUTRALS

24 mm

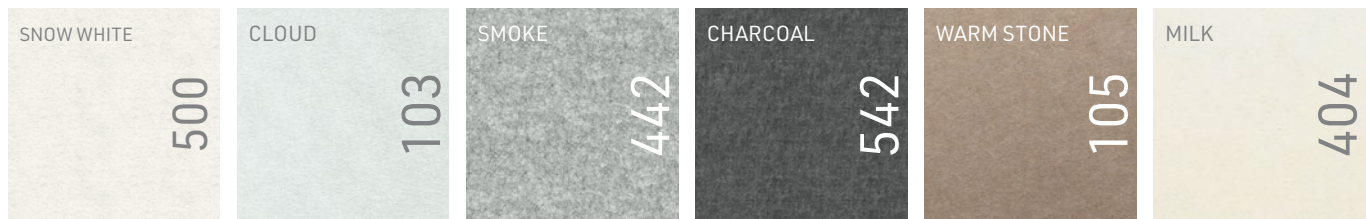


### WARM NEUTRALS

24 mm



### LIVING GREENS

24 mm

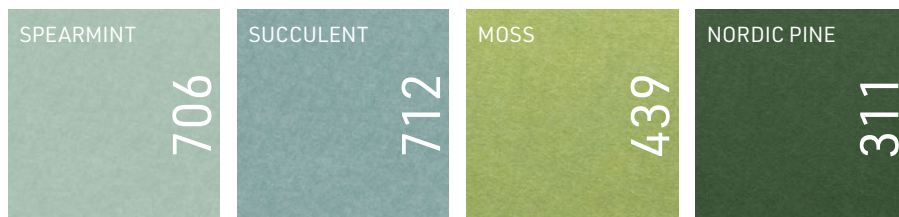

### ELEMENTAL BLUES

24 mm



## SOOTHING PASTELS

24 mm




## ELEGANT DARKS

24 mm



## ENERGETIC BRIGHTS

24 mm

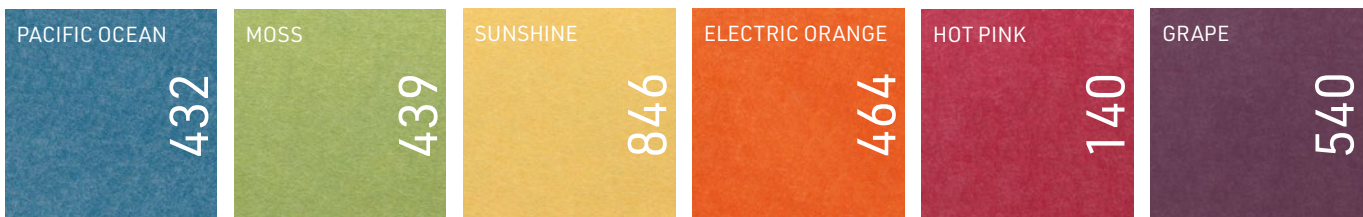

## PRIMARY PLAY

24 mm



## DIMENSIONS

ARCHISONIC® 24 mm 1800 x 2400 x 24 mm (70" x 94" x 0.94")

ARCHISONIC® 12 mm 1200 x 2800 x 12 mm (47" x 10" x 0.47")

## COMPOSITION

100% PET (min. 60% post-consumer)

## FIRE TEST

DIN EN 13501-1 B-s1, d0

ASTM E-84 Class A

## VOC EMISSION

CDPH 01350 Pass

ISO 16000 (CDPH/EHLB/Standard Method V1.2.)

EN 16516

## COLOUR FASTENESS

EN ISO 105-B02, A1 Grade 6

## SOUND ABSORPTION

DIN ISO 11654

24 mm aw 0.55 (no airgap)  
aw 0.65 (50 mm / 2" air gap)  
aw 0.90 (100 mm / 4" air gap)  
aw 0.95 (200 mm / 8" air gap)  
aw 0.95 (300 mm / 11" air gap).

12 mm aw 0.30 (no air gap)

## MATERIAL REUTILISATION

ARCHISONIC® 24 mm 88 plastic bottles/m<sup>2</sup>

ARCHISONIC® 12 mm 53 plastic bottles/m<sup>2</sup>

## ENVIRONMENTAL

Cradle to Cradle Certified™

Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit (Low-emitting products)

## SUPPORTED BY

Climate KIC

