


FEAL

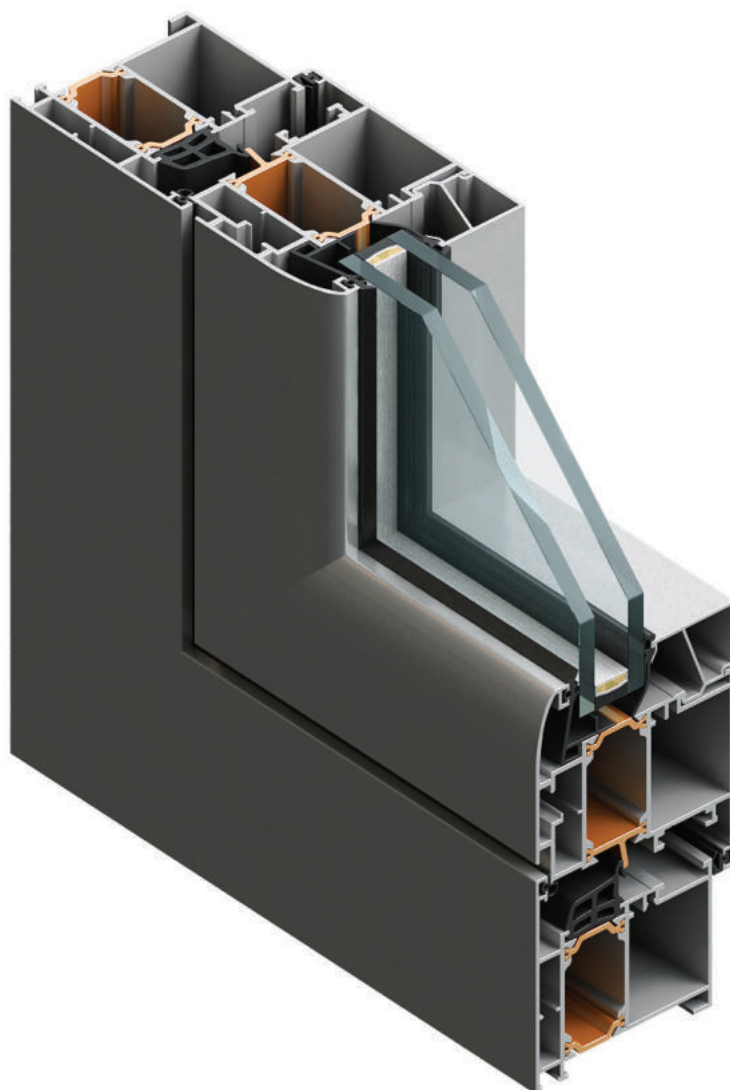

TERM0 65

PROZORI I VRATA
WINDOWS AND DOORS







Knjiga B / *Book B*







SADRŽAJ CONTENT







06	VEZNI ELEMENTI	204.06.000-009
06	CONNECTION ELEMENTS	204.06.000-009
07	PVC ELEMENTI	204.07.000-007
07	PVC ELEMENTS	204.07.000-007
08	MEHANIZMI	204.08.000-093
08	MECHANISMS	204.08.000-093
09	BRTVILA	204.09.000-007
09	GASKETS	204.09.000-007
10	DODACI	204.10.000-009
10	ACCESSORIES	204.10.000-009
11	OBRADA I MONTAŽA	204.11.000-325
11	PROCESSING AND MONTAGE	204.11.000-325
12	REZNE LISTE	204.12.000-023
12	CUTTING LISTS	204.12.000-023







Vezni elementi







Connection elements



Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Napomena Remark
710.461		- Kutna spojnica 8, L=28.5 (s vijcima) - Corner bracket 8, L=28.5 (with screws)	Al.	
710.443		- Kutna spojnica 12.5, L=9.3 - Corner bracket 12.5, L=9.3	Al.	
710.450		- Kutna spojnica 14.6, L=28.5 - Corner bracket 14.6, L=28.5	Al.	
710.458	 M8x13	- Kutna spojnica 14.6, L=28.5 (s vijcima) - Corner bracket 14.6, L=28.5 (with screws)	Al.	
710.503		- Kutna spojnica 14.6, L=7.1 - Corner bracket 14.6, L=7.1	Al.	
710.469		- Kutna spojnica 16, L=28.5 (s vijcima) - Corner bracket 16, L=28.5 (with screws)	Al.	







Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Napomena Remark
710.452		- Kutna spojnica 16, L=7 -Corner bracket 16, L=7	Al.	
710.453		- Kutna spojnica 16, L=9.3 - Corner bracket 16, L=9.3	Al.	
710.454		- Kutna spojnica 16, L=15 - Corner bracket 16, L=15	Al.	
710.459	 M8x13	- Kutna spojnica 16, L=15 (s vijcima) - Corner bracket 16, L=15 (with screws)	Al.	
710.479		- Kutna spojnica 8, L=28.5 - Corner bracket 8, L=28.5	Al.	
725.712	 l=26 mm	- Kutna spojnica 10, L=26 - Corner bracket 10, L=26	Al.	







Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Napomena Remark
725.711		- Kutna spojnica 10, L=26 (s vijcima) - Corner bracket 10, L=26 (with screws)	Al.	
725.705		- Kutna spojnica 24.6, L=8 - Corner bracket 24.6, L=8	Al.	
710.059		- Kutna spojnica 34.6, L=28.5 - Corner bracket 34.6, L=28.5	Al.	
710.072	 M8x13	- Kutna spojnica 34.6, L=28.5 (s vijcima) - Corner bracket 34.6, L=28.5 (with screws)	Al.	
710.172		- Kutna spojnica 34.6, L=14.7 - Corner bracket 34.6, L=14.7	Al.	
710.099	 M8x13	- Kutna spojnica 34.6, L=28.4 - nesimetrična (s vijcima) - Corner bracket 34.6, L=28.4 - asymmetric (with screws)	Al.	

Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Napomena Remark
710.189		- Kutna spojnica 34.6, L=7.5 - Corner bracket 34.6, L=7.5	Al.	
710.214	 M8x13	- Kutna spojnica 34.6, L=26.9 (s vijcima) - Corner bracket 34.6, L=26.9 (with screws)	Al.	
710.425		- Kutna spojnica 34.6, L=11.4 - Corner bracket 34.6, L=11.4	Al.	
710.216		- Kutna spojnica 29.4, L=7.1 - Corner bracket 29.4, L=7.1	Al.	
710.215	 M8x13	- Kutna spojnica 29.4, L=28 (s vijcima) - Corner bracket 29.4, L=28 (with screws)	Al.	
710.062		- Kutna spojnica 46, L=28 - Corner bracket 46, L=28	Al.	

Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Napomena Remark
710.133	 M8x13	- Kutna spojnica 46, L=28.1 (s vijcima) - Corner bracket 46, L=28.1 (with screws)	Al.	
710.211	 M8x13	- Kutna spojnica 34.6, L=23 (s vijcima) - Corner bracket 34.6, L=23 (with screws)	Al.	
730.008		- Kutna spojnica 14.5, L=28.5 (Stara oznaka: 0409, 1001) - Corner bracket 14.5, L=28.5 (Former code: 0409, 1001)	Al.	
730.009		- Kutna spojnica 34.6, L=28.5 (Stara oznaka: 0447, 2001) - Corner bracket 34.6, L=28.5 (Former code: 0447, 2001)	Al.	
731.001		- Kutna spojnica za promjenjivi kut 14.5, L=26.9 - Oznaka proizvođača Monticelli: 0909 - Corner bracket for variable angle 14.5, L=26.9 - Manufacturer code Monticelli: 0909	Al. Čelik	
731.010		- Kutna spojnica za komoru 19.1x1.6 - Oznaka proizvođača Monticelli: 2019 - Corner bracket for chamber 19.1x1.6 - Manufacturer code Monticelli: 2019	Al.	







Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Napomena Remark
730.005		- Kutna spojница za komoru 27.5x4 (Stara oznaka: K65-01) - Corner bracket for chamber 27.5x4 (Former code: K65-01)	Al.	
730.001		- Kutna spojница za komoru 4.8x2 (Stara oznaka: G112, 0365) - Corner bracket for chamber 4.8x2 (Former code: G112, 0365)	Inox	
730.002		- Kutna spojница za komoru 4.8x2 (Stara oznaka: G112/A) - Corner bracket for chamber 4.8x2 (Former code: G112/A)	Inox	







Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Napomena Remark
710.066	 M8x13 inbus M6x10	- Veznik L=14.7 (Stara oznaka: E-200) - Connector L=14.7 (Former code: E-200)	Al.	
710.069		- Dodatni veznik, L=12.8 - Additional connector, L=12.8	Al.	
710.070		- Dodatni veznik, L=100 - Additional connector, L=100	Al.	
710.179	 M8x13 inbus M6x10	- Veznik L=34.8 - Connector L=34.8	Al.	
710.154		- Dodatni veznik, L=12.8 - Additional connector, L=12.8	Al.	
710.180		- Dodatni veznik, L=78 - Additional connector, L=78	Al.	






Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Napomena Remark
710.181		- Dodatni veznik, L=78 - Additional connector, L=78	Al.	
710.182		- Dodatni veznik, L=91 - Additional connector, L=91	Al.	
710.183		- Dodatni veznik, L=91 - Additional connector, L=91	Al.	
710.184		- Dodatni veznik, L=101 - Additional connector, L=101	Al.	
710.209		- Dodatni veznik, L=141 - Additional connector, L=141	Al.	
710.212		- Dodatni veznik, L=12.8 - Additional connector, L=12.8	Al.	







Pvc elementi



Pvc elements

OZNAKA CODE	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
365.063		- Umetak za profil kombatute FT-0286 (otvaranje unutra) - Insert for flying mullion profile FT-0286 (inward opening)	Tvrda guma Hard rubber	Par Pair
365.048		- Umetak za profil kombatute FT-0211-A (otvaranje unutra) - Insert for flying mullion profile FT-0211/A (inward opening)	Tvrda guma Hard rubber	Par Pair
365.065		- Umetak za profil kombatute FT-2281 (otvaranje vani) - Insert for flying mullion profile FT-2281 (outward opening)	Tvrda guma Hard rubber	Par Pair
363.068		- Umetak za profil kombatute FT-0213/A (otvaranje vani) - Insert for flying mullion profile FT-0213/A (outward opening)	Tvrda guma Hard rubber	Par Pair
365.035		- Umetak za profil kombatute FT-0237 (otvaranje unutra) - Insert for profile FT-0237 (inward opening)	Tvrda guma Hard rubber	Par Pair
365.043		- Umetak profil kombatute FT-0237 (otvaranje unutra) - Insert for flying mullion profile FT-0237 (inward opening)	Tvrda guma Hard rubber	Par Pair







OZNAKA CODE	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
363.080		- Umetak za profil kombatute FT-0277 (otvaranje unutra) - Insert for flying mullion profile FT-0277 (inward opening)	Tvrda guma Hard rubber	Par Pair
363.001		- Umetak za profil kombatute FT-0211 (otvaranje unutra) - Stara oznaka ZK85-01 - Insert for flying mullion profile FT-0211 (inside opening) - Former code ZK85-01	Tvrda guma Hard rubber	Par Pair
365.009		- Umetak za profil FT-0223 prema FT-0201 - (otvaranje unutra) - Insert for profile FT-0223 towards FT-0201- (inward opening)	Tvrda guma Hard rubber	Par Pair
365.010		- Umetak za profil FT-0223 prema FT-0220 (otvaranje vani) - Insert for profile FT-0223 towards FT-0220 (outward opening)	Tvrda guma Hard rubber	Par Pair
363.050		- Umetak za profil FT-0288 - Insert for profile FT-0288	Tvrda guma Hard rubber	Par Pair
363.065		- Umetak za profil F-1483 - Insert for profile F-1483	Tvrda guma Hard rubber	Par Pair







OZNAKA CODE	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
373.055		- Umetak za profil F-1567 - Insert for profile F-1567	Tvrda guma Hard rubber	Par Pair
363.079		- Umetak za profil F-1661 - Insert for profile F-1661	Tvrda guma Hard rubber	Par Pair
374.037		- Profil za ugradnju - Stara oznaka PI-110 - Profile for installation - Former code PI-110	PVC	
373.002		- Umetak za profil okapnice Z40-657 (Stara oznaka: PRO 23) - Insert for drip profile Z40-657 (Former code: PRO 23)	PVC	Par Pair
373.079		- Umetak za profil okapnice F-1842 - End insert for drip cap profile F-1842	Tvrda guma Hard rubber	Par Pair
373.003.01 02 03		- Maska za drenažni otvor - Boje: 01-bijela; 02-siva; 03-crna (Stara oznaka: 2328) - Drainage slot mask - Color: 01-white; 02-gray; 03-black (Former code: 2328)	PVC	






OZNAKA CODE	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
370.070.01 03		- Maska s klapnom za drenažni otvor - Oznaka proizvođača Master: A2145R9010 - bijela - Boje: 01- bijela; 03 - crna - Drainage slot mask with a flap - Manufacturer code Master: A2145R9010 - white - A2145 - black - Color: 01- white; 03 - black	PVC	
375.048		- Kopča za profil - Clamp for profile	PVC	
370.000 370.001 370.002		- Podmetači za staklo - Glazing packers 3 mm 370.000 (L x H=18 x 27 mm) 5 mm 370.001 (L x H=18 x 27 mm) 7 mm 370.002 (L x H=18 x 27 mm)	PVC	
370.023		- Čep za maskiranje rupe Ø10 mm - Cap for drilled hole Ø10 mm	PVC	
370.024		- Čep za maskiranje rupe Ø12 mm - Cap for drilled hole Ø12 mm	PVC	
360.009		- Sustav odvodnje kapljevina Monodrain - Oznaka proizvođača Monodrain: 302006 - Drainage system Monodrain - Manufacturer code Monodrain: 302006	Guma Rubber	





OZNAKA CODE	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
373.054		- Gornji čep okomice francuskog balkona - Upper cover cap of french balcony profile	PVC	
373.028		- Umetak za profil ojačane prečke FT-0209 - Insert for reinforced crossbar profile FT-0209	PVC	


Mehanizmi Mechanisms

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
111.001.01 02 03		- Dvodijelna šarka EURO ŽLIJEB - Stara oznaka: E-100 - Boje: 01- bijela; 02 - siva;03 - crna - Two-part hinge EURO GROOVE - Former code: E-100 - Color: 01- white; 02 - gray;03 - black		
111.002.01 02 03		- Trodijelna šarka EURO ŽLIJEB - Stara oznaka: E-120 - Boje: 01- bijela; 02 - siva;03 - crna - Three-part hinge EURO GROOVE - Former code: E-120 - Color: 01- white; 02 - gray;03 - black		
111.003.01 02 03		- Dvodijelna šarka EURO ŽLIJEB - Stara oznaka: EV-110 - Boje: 01- bijela; 02 - siva; 03 - crna - Two-part hinge EURO GROOVE (opening outward) - Former code: EV-110 - Color: 01- white; 02 - gray;03 - black		
111.004.01 02 03		- Trodijelna šarka EURO ŽLIJEB (otvaranje vani) - Stara oznaka: EV-130 - Boje: 01- bijela; 02 - siva; 03 - crna - Three-part hinge-outside EURO GROOVE (opening outward) - Former code: EV-130 - Color: 01- white; 02 - gray;03 - black		
114.001.01 02 03		- Dvodijelna šarka-EURO ŽLIJEB - Oznaka proizvođača Stublina: 2006.00.310 -bijela 315 -siva 313 -crna - Boje: 01- bijela; 02 - siva;03 - crna - Two-part hinge-EURO GROOVE - Manufacturer code Stublina: 2006.00.310 -white 315 -gray 313 -black - Color: 01- white; 02 - gray;03 - black		
114.004.01 02 03		- Dvodijelna šarka-EURO ŽLIJEB - Oznaka proizvođača Stublina: 2024.00.310 -bijela 315 -siva 313 -crna - Boje: 01- bijela; 02 - siva;03 - crna - Two-part hinge-EURO GROOVE - Manufacturer code Stublina: 2024.00.310 -white 315 -gray 313 -black - Color: 01- white; 02 - gray;03 - black		

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
114.005.01 02 03		- Trodijelna šarka-<i>EURO ŽLIJEB</i> - Oznaka proizvođača Stublina: 2129.00.310 -bijela 315 -siva 313 -crna - Boje: 01- bijela; 02 - siva;03 - crna - Three-part hinge-<i>EURO GROOVE</i> - Manufacturer code Stublina: 2129.00.310 -white 315 -gray 313 -black - Color: 01- white; 02 - gray;03 - black		
114.006.01 02 03		- Trodijelna šarka-<i>EURO ŽLIJEB</i> - Oznaka proizvođača Stublina: 2124.00.310 -bijela 315 -siva 313 -crna - Boje: 01- bijela; 02 - siva;03 - crna - Three-part hinge-<i>EURO GROOVE</i> - Manufacturer code Stublina: 2124.00.310 -white 315 -gray 313 -black - Color: 01- white; 02 - gray;03 - black		
113.009.01 02 03		- Dvodijelna šarka OSNO 68 - Oznaka proizvođača ALU-B: Max3D 68 - Boje: 01- bijela; 02 - siva;03 - crna - Two-part hinge OSNO 68 - Manufacturer code ALU-B: Max3D 68 - Color: 01- white; 02 - gray;03 - black	Al. Čelik Steel	
113.011.01 02 03		- Dvodijelna šarka OSNO 94 - Oznaka proizvođača ALU-B: Max3D 94 - Boje: 01- bijela; 02 - siva;03 - crna - Two-part hinge OSNO 94 - Manufacturer code ALU-B: Max3D 94 - Color: 01- white; 02 - gray;03 - black	Al. Čelik Steel	
113.016.01 02 03		- Podložna pločica d=8mm - Oznaka proizvođača ALU-B: 02108 - Boje: 01- bijela; 02 - siva;03 - crna - Washer plate d=8mm - Manufacturer code ALU-B: 02108 - Color: 01- white; 02 - gray;03 - black	Al.	
113.012		- Set za TERMO 65 - Set za dvodijelnu šarku (Max3D xx) - Set for TERMO 65 - Set for two-part hinge (Max3D xx)		

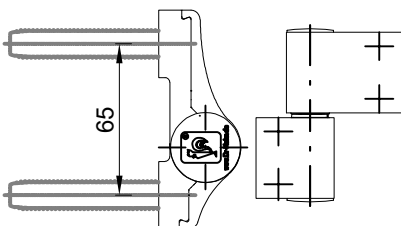
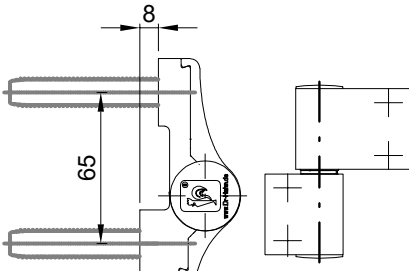

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
113.013		- Set za TERMO 50 - Set za dvodijelnu šarku (Max3D xx) - Set for TERMO 50 - Set for two-part hinge (Max3D xx)		
112.015.01 .10		- Dvodijelna šarka OSNO 65 (Türband 4 AT - bez anker vijaka) - Oznaka proizvođača Dr. Hahn: M901G0477- bijela, bijeli čepovi M90110477 - EV1, crni čepovi - Boje: 01- bijela, bijeli čepovi, 10- EV1, crni čepovi - Two-piece hinge axial distance 65 (Türband 4 AT - without anchor screws) - Manufacturer code Dr. Hahn: M901G0477 - white, white PVC parts M90110477 - EV1, black PVC parts - Color: 01-white, white PVC parts, 10-EV1, black PVC parts	Al.	
112.016		- Šablon za dvodijelnu šarku OSNO 65 (Türband 4 AT) - Oznaka proizvođača Dr. Hahn: T101A0000 - Drilling jig for two-piece hinge, axial distance 65 Türband 4 AT - Manufacturer code Dr. Hahn: T101A0000		
112.021.01 .10		- Dvodijelna šarka OSNO 65 s preklopom 8 (Türband 4 AT - bez anker vijaka) - Oznaka proizvođača Dr. Hahn: M901G1420 - bijela, bijeli čepovi: M90111420 - EV1, crni čepovi - Boje: 01-bijela, bijeli PVC dijelovi, 10-EV1, crni PVC dijelovi - Two-piece hinge axial distance 65 with overlap 8 (Türband 4 AT - without anchor screws) - Manufacturer code Dr. Hahn: M901G1420 - white, white PVC parts M90111420 - EV1, black PVC parts - Color: 01-white, white PVC parts, 10-EV1, black PVC parts	Al.	
112.022		- Šablon za dvodijelnu šarku OSNO 65 s preklopom 8 (Türband 4 AT) - Oznaka proizvođača Dr. Hahn: T101A0008 - Drilling jig for two-piece hinge axial distance 65 - with overlap 8 (Türband 4 AT) - Manufacturer code Dr. Hahn: T101A0008		

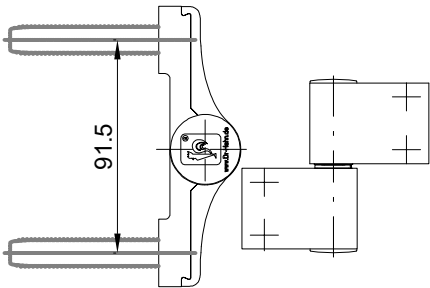Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
112.019.01 .10		- Dvodijelna šarka OSNO 91.5 (Türband 4 AT - bez anker vijaka) - Oznaka proizvođača Dr. Hahn: M905G0477 - bijela, bijeli čepovi; M90510477 - EV1, crni čepovi - Boje: 01-bijela, bijeli PVC dijelovi, 10-EV1, crni PVC dijelovi - Two-piece hinge axial distance 91.5 (Türband 4 AT - without anchor screws) - Manufacturer code Dr. Hahn: M905G0477 - white, white PVC parts; M90510477 - EV1, black PVC parts - Color: 01-white, white PVC parts, 10-EV1, black PVC parts	Al.	
112.020		- Šablon za dvodijelnu šarku OSNO 91.5 (Türband 4 AT) - Oznaka proizvođača Dr. Hahn: T105A0000 - Drilling jig for two-piece hinge axial distance 91.5 (Türband 4 AT) - Manufacturer code Dr. Hahn: T105A0000		
112.023		- Anker vijak 58 mm (Türband 4 AT - 4 vijka u vrećici) - Oznaka proizvođača Dr. Hahn: VP02A0016 - Anchor screw 58 mm (Türband 4 AT - 4 screws) - Manufacturer code Dr. Hahn: VP02A0016	Čelik Steel	
115.019		- Skrivena šarka za vrata - otvaranje unutra (profili s eurožlijebom) - Oznaka proizvođača Giesse: 00725 - Concealed hinge for door - inward opening (profiles with euro-groove) - Manufacturer code Giesse: 00725		
135.023		- Graničnik otvaranja krila, za L>500, od 25° do 120° - Oznaka proizvođača Giesse: 02030000 - Sash opening limiter arm, for L>500, from 25° to 120° - Manufacturer code Giesse: 02030000		

OTKLOPNO-ZAOKRETNI MEHANIZAM - STUBLINA (art.4135.00)
TILT-TURN MECHANISM - STUBLINA (art.4135.00)

Nosivost max. 100 Kg / 130 Kg
Load max. 100 Kg / 130 Kg

Fb= Širina krila / Sash width



346 (525)

ŠK-472 za 4035.00
ŠK-482 za 4036.00

*) boja / color:
01 bijela / white
02 siva / gray
03 crna / black

Osnovni okov: Basic hardware:

134.026  osnovni set: pogonski mehanizam s ravnom ručkom, škarama (134.015) i šarkama. *)
basic set: drive gear with flat handle, friction stays (134.015) and hinges

134.014  škarje 134.014 / 134.016 **)
134.016  friction stays 134.014 / 134.016

**) Napomena / Remark:

- Škarje 134.015 (za širinu krila Fb=535-1200 mm) se nalaze u osnovnom setu 134.026.

Škarje 134.014 (Fb=445-535 mm) su u setu za 134.030, a škarje 134.016 (Fb=1200-1400 mm) su u setu 134.031.

- Friction stays 134.015 (for sash width Fb=535-1200mm) are in the basic set 134.026.

Friction stays 134.014 (Fb=445-535 mm) are in the set 134.030 and friction stays 134.016 (Fb=1200-1400 mm) are in the set 134.031.

Dodatni okov: Additional hardware:

Additional hardware:

134.002  dodatni set ključanja po širini i visini
additional set for horizontal and vertical locking

134.003  dodatne škarje za širinu krila 1200-1600 mm
additional friction stays for sash width 1200-1600 mm






134.004  dodatno ključanje
134.005  additional locking




134.024  dodatni umetak gornje šarke za nosivost do 130 kg
additional upper hinge insert for weight load up to 130 kg





 klizač
slide profile

Na krajevima pogonskih letvi izbušiti otvore po dimenzijama prema detalju:
On the ends of driving rails drill holes according to the detail dimensions:



Ako se koriste adapteri na krajevima pogonskih letvi izbušiti otvore po dimenzijama prema detalju:
If the adaptors are used, on the ends of driving rails drill holes according to the detail dimensions:



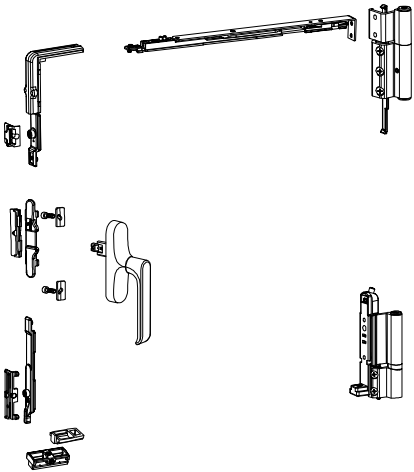
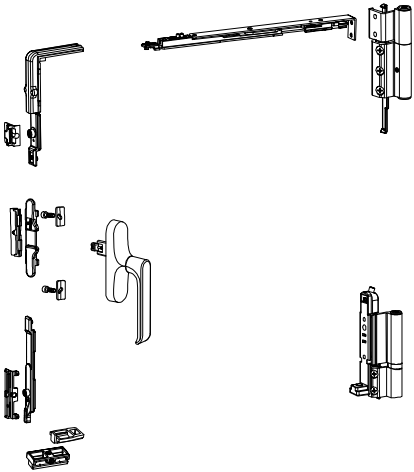
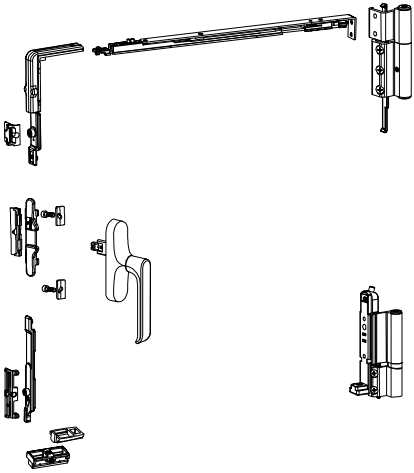
Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
134.026.01 02 03		- Osnovni set: Otklopno-zaokretni mehanizam - Oznaka proizvođača Stublina: 4135.00.310 - bijela 4135.00.315 - siva 4135.00.313 - crna - Boje: 01- bijela; 02 - siva; 03 - crna - Škare (134.015) za širinu krila 535-1200 mm (ručka ravna; donja šarka ima podešavanje u dvije osi) - Basic set: Tilt and turn mechanism - Manufacturer code Stublina: 4135.00.310 - white 4135.00.315 - gray 4135.00.313 - black - Color: 01- white; 02 - gray; 03 - black - Friction stays (134.015) for sash width from 535 to 1200 mm. (flat handle; lower hinge has two-axial adjustment)		
134.030.01 02 03		- Osnovni set: Otklopno-zaokretni mehanizam - Oznaka proizvođača Stublina: 4136.00.310 - bijela 4136.00.315 - siva 4136.00.313 - crna - Boje: 01- bijela; 02 - siva; 03 - crna - Škare (134.014) za širinu krila 445-535 mm (ručka ravna; donja šarka ima podešavanje u dvije osi) - Tilt and turn mechanism - Manufacturer code Stublina: 4136.00.310 - white 4136.00.315 - gray 4136.00.313 - black - Color: 01- white; 02 - gray; 03 - black - Friction stays (134.014) for sash width from 445 to 535 mm. (flat handle; lower hinge has two-axial adjustment)		
134.031.01 02 03		- Osnovni set: Otklopno-zaokretni mehanizam - Oznaka proizvođača Stublina: 4137.00.310 - bijela 4137.00.315 - siva 4137.00.313 - crna - Boje: 01- bijela; 02 - siva; 03 - crna - Škare (134.016) za širinu krila 1200-1400 mm (ručka ravna; donja šarka ima podešavanje u dvije osi) - Tilt and turn mechanism - Manufacturer code Stublina: 4137.00.310 - white 4137.00.315 - gray 4137.00.313 - black - Color: 01- white; 02 - gray; 03 - black - Friction stays (134.016) for sash width from 1200 to 1400 mm. (flat handle; lower hinge has two-axial adjustment)		

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
134.002		- Dodatni set ključanja po širini i visini - Oznaka proizvođača Stublina: 4010.40 - Additional set for horizontal and vertical locking - Manufacturer code Stublina: 4010.40	AlSi Zamak	
134.003		- Dodatne škare za širinu krila L=1200-1600 mm - Oznaka proizvođača Stublina: 4010.50 - Auxiliary friction stays for sash width L=1200-1600 mm - Manufacturer code Stublina: 4010.50		
134.004		- Dodatno ključanje - prihvatnik tuljca - Oznaka proizvođača Stublina: 4010.03 - Additional locking - striker - Manufacturer code Stublina: 4010.03		
134.005		- Dodatno ključanje-tuljac - Oznaka proizvođača Stublina: 4010.27 - Additional locking - adjustable fastening pawl - Manufacturer code Stublina: 4010.27		
134.024		- Dodatni umetak gornje šarke za nosivost do 130kg - Oznaka proizvođača Stublina: 4018.30.50U - Additional upper hinge insert for weight load up to 130kg - Manufacturer code Stublina: 4018.30.50U		

OKOV ZA FIKSIRANJE POMOĆNOG KRILA - STUBLINA LOCKING MECHANISM FOR AUXILIARY SASH - STUBLINA

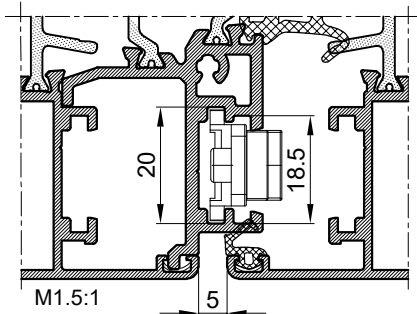






- **134.001** Okov za fiksiranje pomoćnog krila u dvije točke (montiranje okova u kombatutu)
- Oznaka proizvođača Stublina: 4001.00
- **134.001** Locking mechanism for auxiliary sash in two points (mechanism in the flying mullion)
- Manufacturer code Stublina: 4001.00

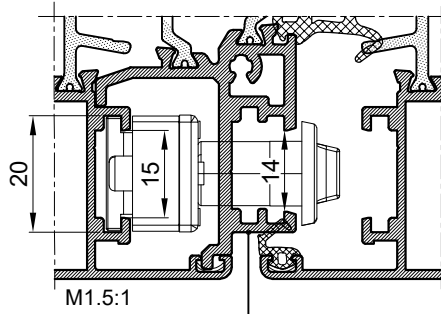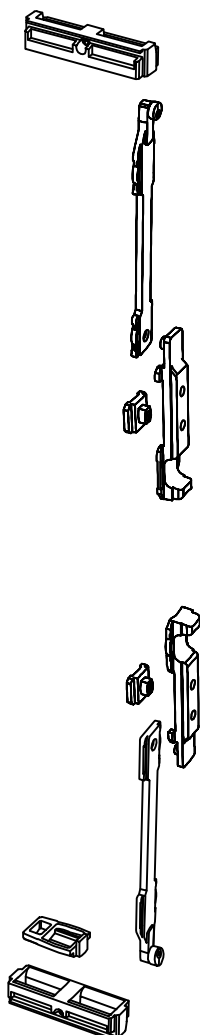


FT-0286

- **134.017** Okov za fiksiranje pomoćnog krila u dvije točke (montiranje okova u krilo)
- Oznaka proizvođača Stublina: 4005.00
- **134.017** Locking mechanism for auxiliary sash in two points (mechanism in the sash)
- Manufacturer code Stublina: 4005.00







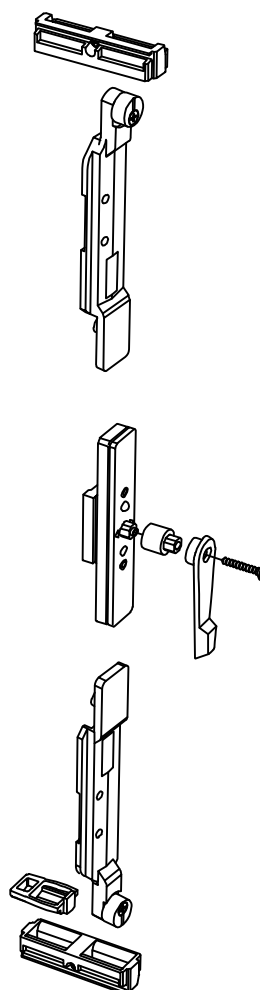


Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
134.001		- Okov za fiksiranje pomoćnog krila u dvije točke (montiranje okova u kombatutu) - Oznaka proizvođača Stublina: 4001.00 - Locking mechanism for auxiliary sash in two points (mechanism in the flying mullion) - Manufacturer code Stublina: 4001.00		
134.017		- Okov za fiksiranje pomoćnog krila u dvije točke (montiranje okova u krilo) - Oznaka proizvođača Stublina: 4005.00 - Locking mechanism for auxiliary sash in two points (mechanism in the sash) - Manufacturer code Stublina: 4005.00		
134.037.01 02 03		- Šarke nosivosti do 100 kg - Donja šarka ima podešavanje u dvije osi - Oznaka proizvođača Stublina: 4035.30.310 -bijela 4035.30.315 -siva 4035.30.313 -crna - Boje: 01- bijela; 02 - siva;03 - crna - Hinges weight load up to 100 kg - Lower hinge has two-axial adjustment - Manufacturer code Stublina: 4035.30.310 - white 4035.30.315 - gray 4035.30.313 - black - Color: 01- white; 02 - gray;03 - black		
134.038		- Dodatni element za šarke 4035.30.xxx - (samo za gornju šarku) - Oznaka proizvođača Stublina: 4047.00 - Additional element for hinges 4035.30.xxx - (only for the top hinge) - Manufacturer code Stublina: 4047.00		
134.023		- Dodatno (pasivno) ključanje - Oznaka proizvođača Stublina: 4045.00 - Additional (passive) locking - Manufacturer code Stublina: 4045.00		

OKOV ZA FIKSIRANJE POMOĆNOG KRILA - STUBLINA LOCKING MECHANISM FOR AUXILIARY SASH - STUBLINA








- **134.036** Okov za fiksiranje pomoćnog krila u više točaka (montiranje okova u krilo)
- Oznaka proizvođača Stublina: 4005.40
- **134.036** Locking mechanism for auxiliary sash in multiple points (mechanism in the sash)
- Manufacturer code Stublina: 4005.40

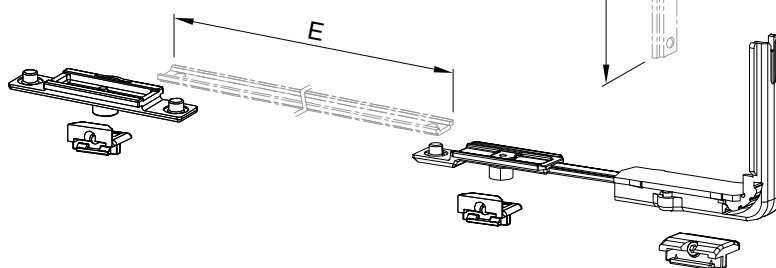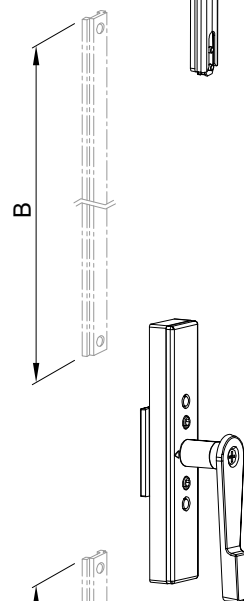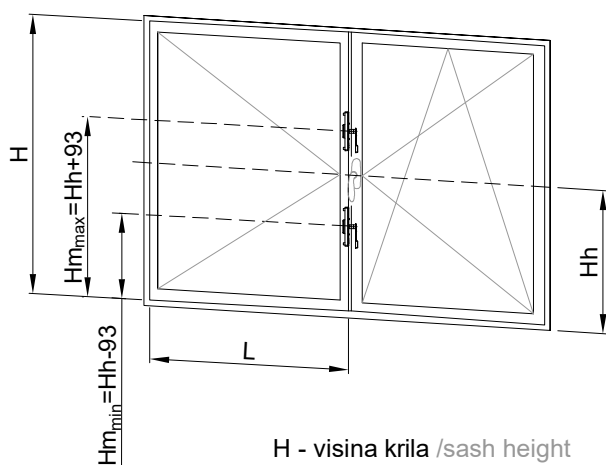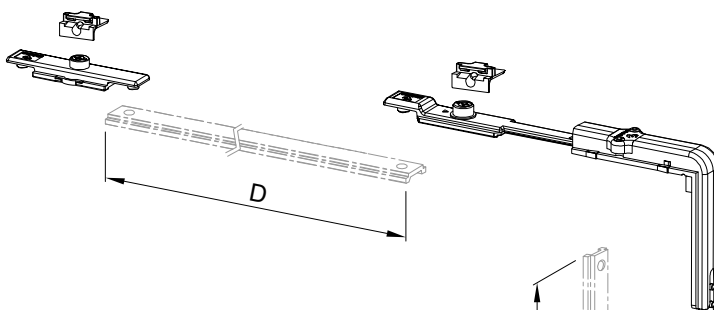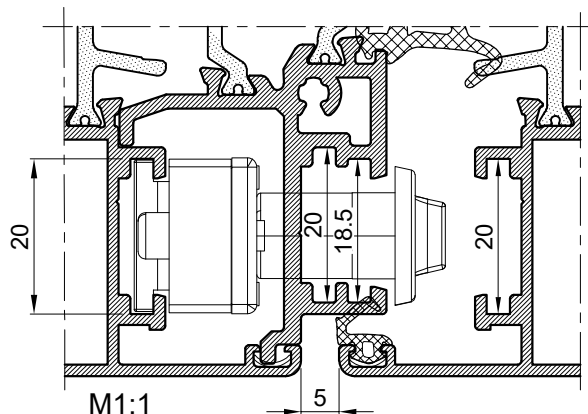

$$\begin{aligned} C &= Hm - 110 + 2X \\ B &= H - Hm - 110 + 2X \\ D &= L/2 - 192 + 2X \\ E &= L/2 - 192 + 2X \end{aligned}$$


H - visina krila /sash height
L - širina krila /sash width
Hm - položaj pogonskog mehanizma
position of the drive gear
Hh - položaj pogonske ručke
position of the drive handle

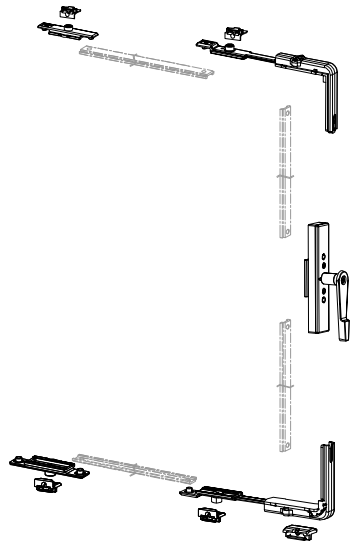




FEAL Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
134.036		- Okov za fiksiranje pomoćnog krila u više točaka (montiranje okova u krilo) - Oznaka proizvođača Stublina: 4005.40 - Locking mechanism for auxiliary sash in multiple points (mechanism in the sash) - Manufacturer code Stublina: 4005.40		
134.023		- Dodatno (pasivno) ključanje - Oznaka proizvođača Stublina: 4045.00 - Additional (passive) locking - Manufacturer code Stublina: 4045.00		
134.037.01 02 03		- Šarke nosivosti do 100 kg - Donja šarka ima podešavanje u dvije osi - Oznaka proizvođača Stublina: 4035.30.310 -bijela 4035.30.315 -siva 4035.30.313 -crna - Boje: 01- bijela; 02 - siva;03 - crna - Hinges weight load up to 100 kg - Lower hinge has two-axial adjustment - Manufacturer code Stublina: 4035.30.310 - white 4035.30.315 - gray 4035.30.313 - black - Color: 01- white; 02 - gray;03 - black		
134.038		- Dodatni element za šarke 4035.30.xxx - (samo za gornju šarku) - Oznaka proizvođača Stublina: 4047.00 - Additional element for hinges 4035.30.xxx - (only for the top hinge) - Manufacturer code Stublina: 4047.00		
134.024		- Dodatni umetak gornje šarke za nosivost do 130kg - Oznaka proizvođača Stublina: 4018.30.50U - Additional upper hinge insert for weight load up to 130kg - Manufacturer code Stublina: 4018.30.50U		




OTKLOPNO-ZAKRETNI MEHANIZAM - GIESSE FUTURA 3D (130 micro) STANDARD TILT-TURN MECHANISM - GIESSE FUTURA 3D (130 micro) STANDARD

Nosivost max. 140 Kg (FUTURA 3D 130 micro)




Load max. 140 Kg (FUTURA 3D 130 micro)

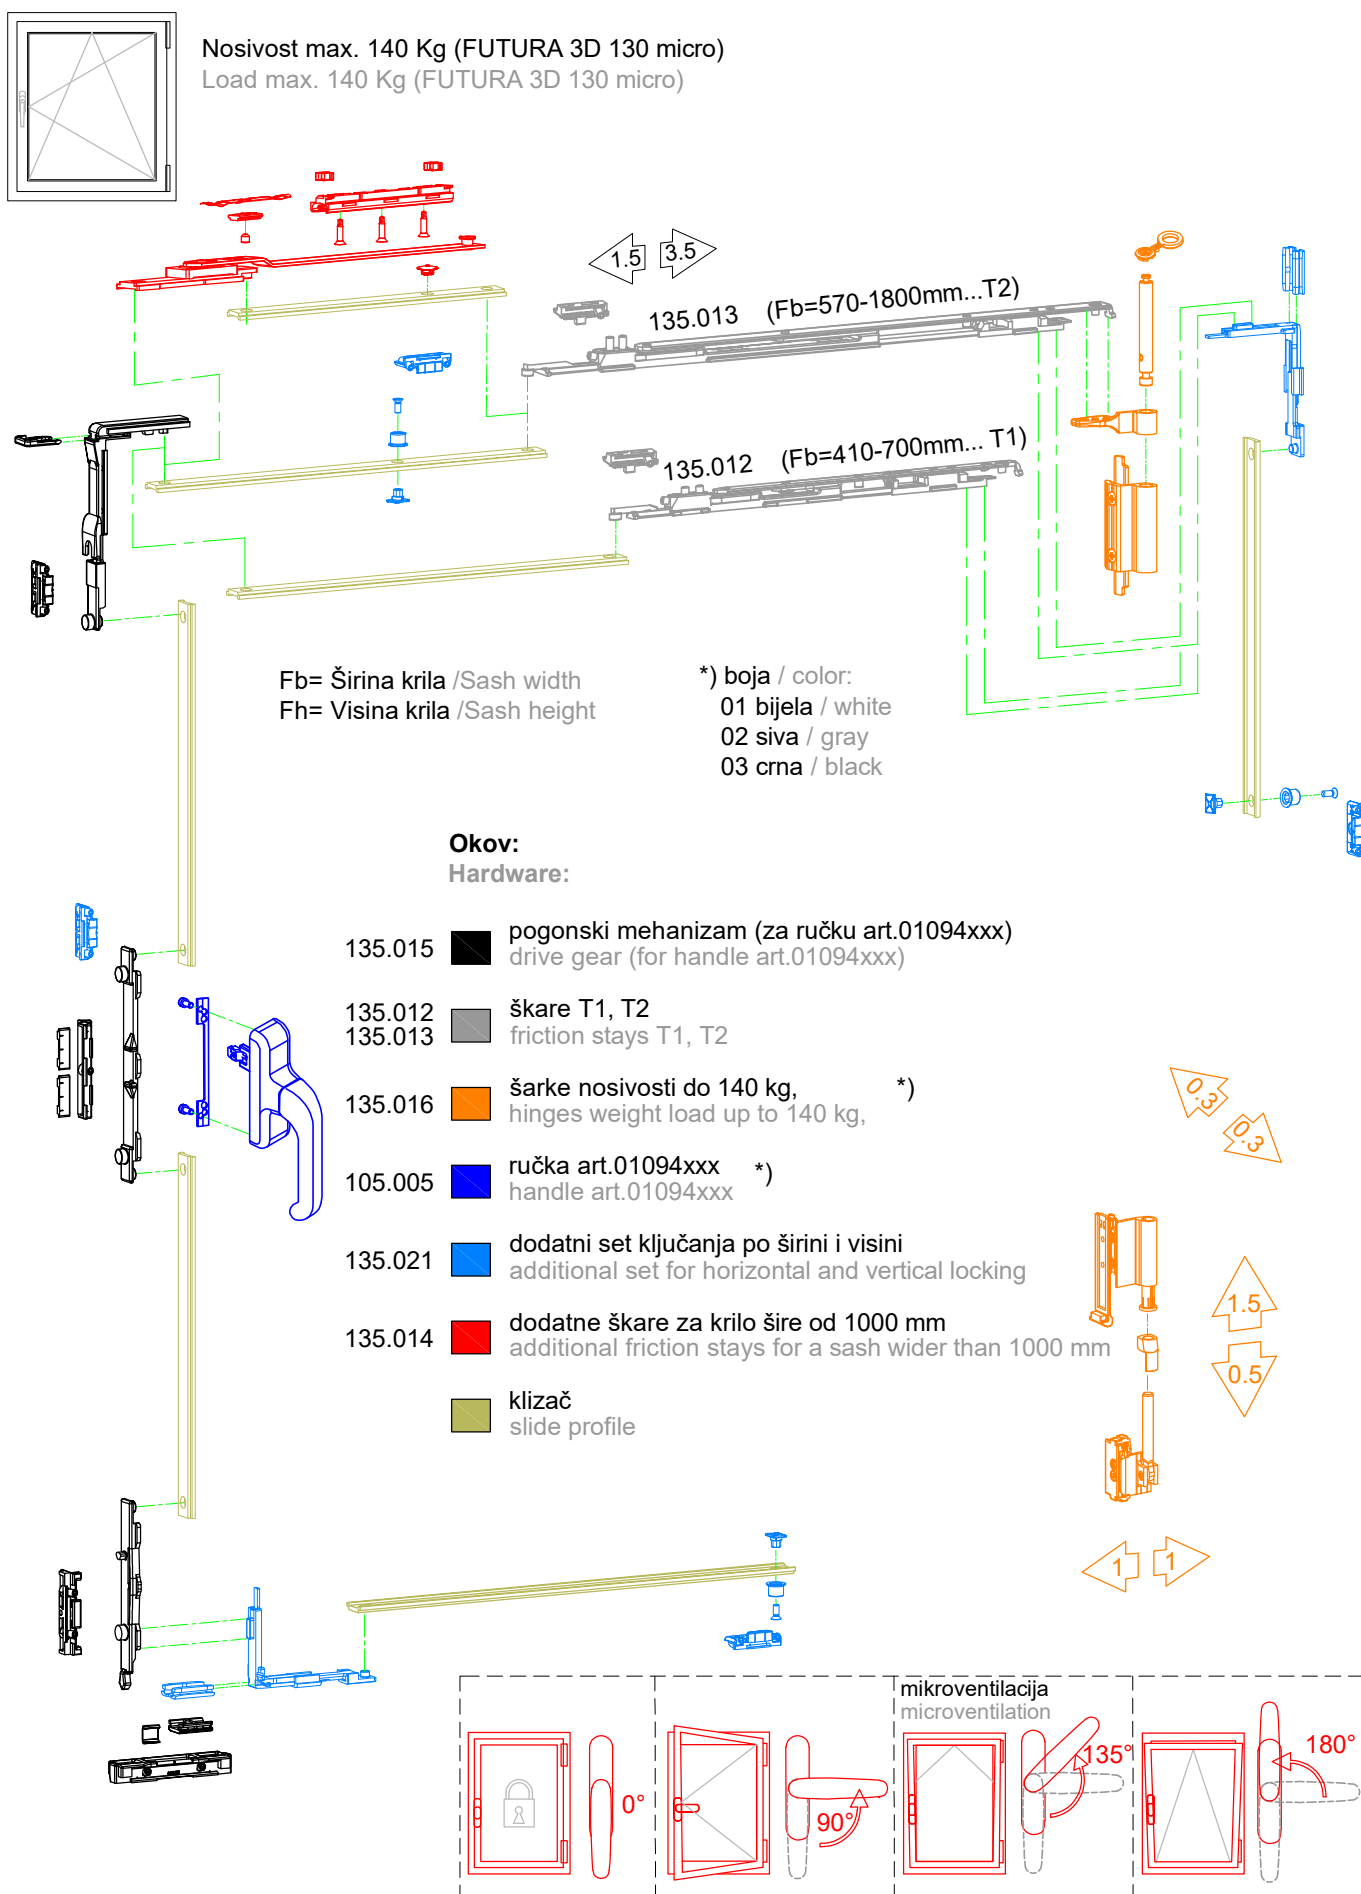


Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
135.015		- Pogonski mehanizam za FUTURA 3D 130 micro mehanizam (...ručka 01094xxx) - Oznaka proizvođača Giese: 04704000 - Drive gear for FUTURA 3D 130 micro mechanism (... handle 01094xxx) - Manufacturer code Giese: 04704000		
135.012		- Škare T1 za širinu krila 410 - 700 mm - Oznaka proizvođača Giese: 04284000 - Friction stays T1 for sash width 410 - 700 mm - Manufacturer code Giese: 04284000		
135.013		- Škare T2 za širinu krila 570 - 1800 mm - Oznaka proizvođača Giese: 04285000 - Friction stays T2 for sash width 570 - 1800 mm - Manufacturer code Giese: 04285000		
135.016.01 02 03		- Šarke nosivosti do 140 kg - Oznaka proizvođača Giese: 04711410 - bijela 04711376 - siva 04711500 - crna - Boje: 01- bijela; 02 - siva; 03 - crna - Hinges for weight load up to 140 kg - Manufacturer code Giese: 04711410 - white 04711376 - gray 04711500 - black - Color: 01- white; 02 - gray; 03 - black		
105.005.01 02 03		- Ručka; (LA 86/104mm), FUTURA 3D (130 micro) - Oznaka proizvođača Giese: 01094410 -bijela 01094376 -siva 01094500 -crna - Boje: 01- bijela; 02 - siva; 03 - crna - Handle; (LA 86/104mm), FUTURA 3D (130 micro) - Manufacturer code Giese: 01094410 -white 01094376 -gray 01094500 -black - Colors: 01- white; 02 - gray; 03 - black		
135.021		- Dodatni set ključanja po širini i visini za krilo dimenzija L>1000 mm i H>1200 mm - Oznaka proizvođača Giese: 04770000 - additional set for horizontal and vertical locking for a sash dimensions L>1000 mm and H>1200 mm - Manufacturer code Giese: 04770000		

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
135.014		- Dodatne škare za krilo šire od 1000 mm - Oznaka proizvođača Giese: 04301000 - Additional friction stays for a sash wider than 1000 mm - Manufacturer code Giese: 04301000		
135.029		- Dodatno ključanje - zapinjač - Oznaka proizvođača Giese: 04030000 - Additional locking - adjustable fastening pawl - Manufacturer code Giese: 04030000		
143.042		- Dodatno ključanje - prihvatnik zapinjača - Oznaka proizvođača Giese: 01347000 - Additional locking - striker - Manufacturer code Giese: 01347000		


OKOV ZA FIKSIRANJE POMOĆNOG KRILA - GIESSE LOCKING MECHANISM FOR AUXILIARY SASH - GIESSE


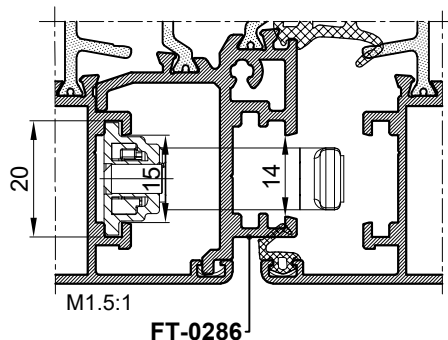



- **143.047** Okov za fiksiranje pomoćnog krila u dvije točke (montiranje okova u krilo)
- Oznaka proizvođača Giesse: 02178000
- **143.047** Locking mechanism for auxiliary sash in two points (mechanism in the sash)
- Manufacturer code Giesse: 02178000


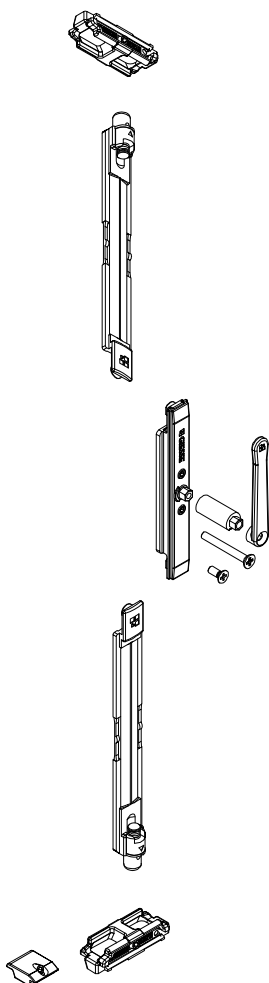


- **143.048** Okov za fiksiranje pomoćnog krila u više točaka; (montiranje okova u krilo)
- Oznaka proizvođača Giesse: 02179000
- **143.048** Locking mechanism for auxiliary sash - multiple points ; (mechanism in the sash)
- Manufacturer code Giesse: 02179000


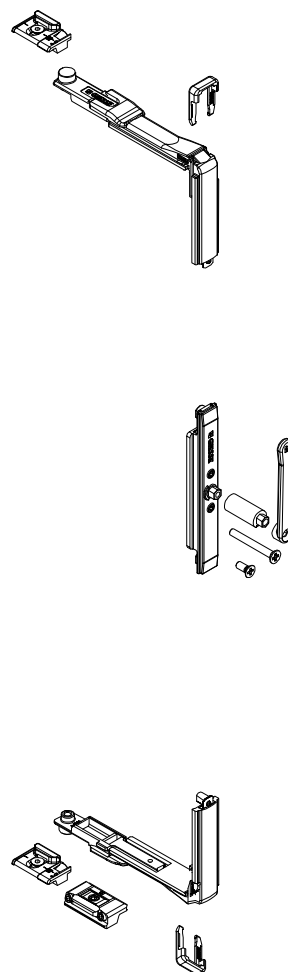







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
143.047		- Okov za fiksiranje pomoćnog krila u dvije točke (montiranje okova u krilo) - Oznaka proizvođača Giese: 02178000 - Locking mechanism for auxiliary sash in two points (mechanism in the sash) - Manufacturer code Giese: 02178000		
143.048		- Okov za fiksiranje pomoćnog krila u više točaka (montiranje okova u krilo) - Oznaka proizvođača Giese: 02179000 - Locking mechanism for auxiliary sash in two points (mechanism in the sash) - Manufacturer code Giese: 02179000		
135.016.01 02 03		- Šarke nosivosti do 140 kg - Oznaka proizvođača Giese: 04711410 - bijela 04711376 - siva 04711500 - crna - Boje: 01- bijela; 02 - siva; 03 - crna - Hinges for weight load up to 140 kg - Manufacturer code Giese: 04711410 - white 04711376 - gray 04711500 - black - Color: 01- white; 02 - gray; 03 - black		
135.041		- Dodatni element za šarke 04711xxx (samo za gornju šarku) - Oznaka proizvođača Giese: 04728000 - Additional element for hinges 04711xxx (only for the top hinge) - Manufacturer code Giese: 04728000		
143.045		- Dodatno (pasivno) ključanje - Oznaka proizvođača Giese: 01350K - Additional (passive) locking - Manufacturer code Giese: 01350K		

OKOV ZA FIKSIRANJE POMOĆNOG KRILA - GIESSE LOCKING MECHANISM FOR AUXILIARY SASH - GIESSE

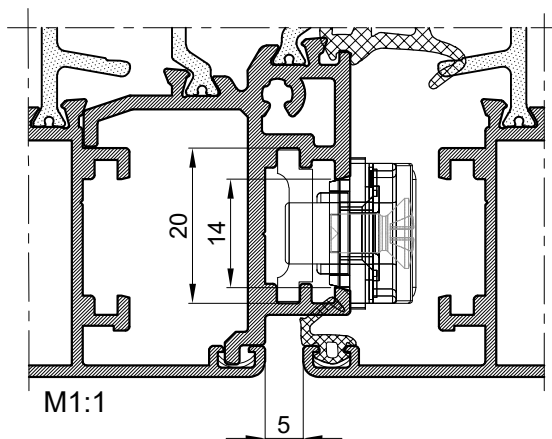


- **143.043** Okov za fiksiranje pomoćnog krila u dvije točke (montiranje okova u kombatutu)
- Oznaka proizvođača Giesse: 02191K
- **143.043** Locking mechanism for auxiliary sash in two points (mechanism in the flying mullion)
- Manufacturer code Giesse: 02191K




Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
143.043		- Okov za fiksiranje pomoćnog krila u dvije točke (montiranje okova u kombatutu) - Oznaka proizvođača Giese: 02191K - Locking mechanism for auxiliary sash in two points (mechanism in the flying mullion) - Manufacturer code Giese: 02191K		
143.046		- Prihvat zapinjača - Oznaka proizvođača Giese: 01348K - Striker - Manufacturer code Giese: 01348K		
135.016.01 02 03		- Šarke nosivosti do 140 kg - Oznaka proizvođača Giese: 04711410 - bijela 04711376 - siva 04711500 - crna - Boje: 01- bijela; 02 - siva; 03 - crna - Hinges for weight load up to 140 kg - Manufacturer code Giese: 04711410 - white 04711376 - gray 04711500 - black - Color: 01- white; 02 - gray; 03 - black		
135.041		- Dodatni element za šarke 04711xxx (samo za gornju šarku) - Oznaka proizvođača Giese: 04728000 - Additional element for hinges 04711xxx (only for the top hinge) - Manufacturer code Giese: 04728000		
143.045		- Dodatni (pasivno) ključanje - Oznaka proizvođača Giese: 01350K - Additional (passive) locking - Manufacturer code Giese: 01350K		
143.050		- Prikjučna šipka za radni mehanizam - Oznaka proizvođača Giese: 02187 - Connection rod for the operating mechanism - Manufacturer code Giese: 02187		







SKRIVENI OTKLOPNO-ZAOKRETNI MEHANIZAM - GIESSE CHIC 3D 100 STANDARD CONCEALED TILT-TURN MECHANISM - GIESSE CHIC 3D 100 STANDARD













Nosivost max. 100 Kg (CHIC 3D 100) / 150 Kg (CHIC 3D 150)


Load max. 100 Kg (CHIC 3D 100) / 150 Kg (CHIC 3D 150)

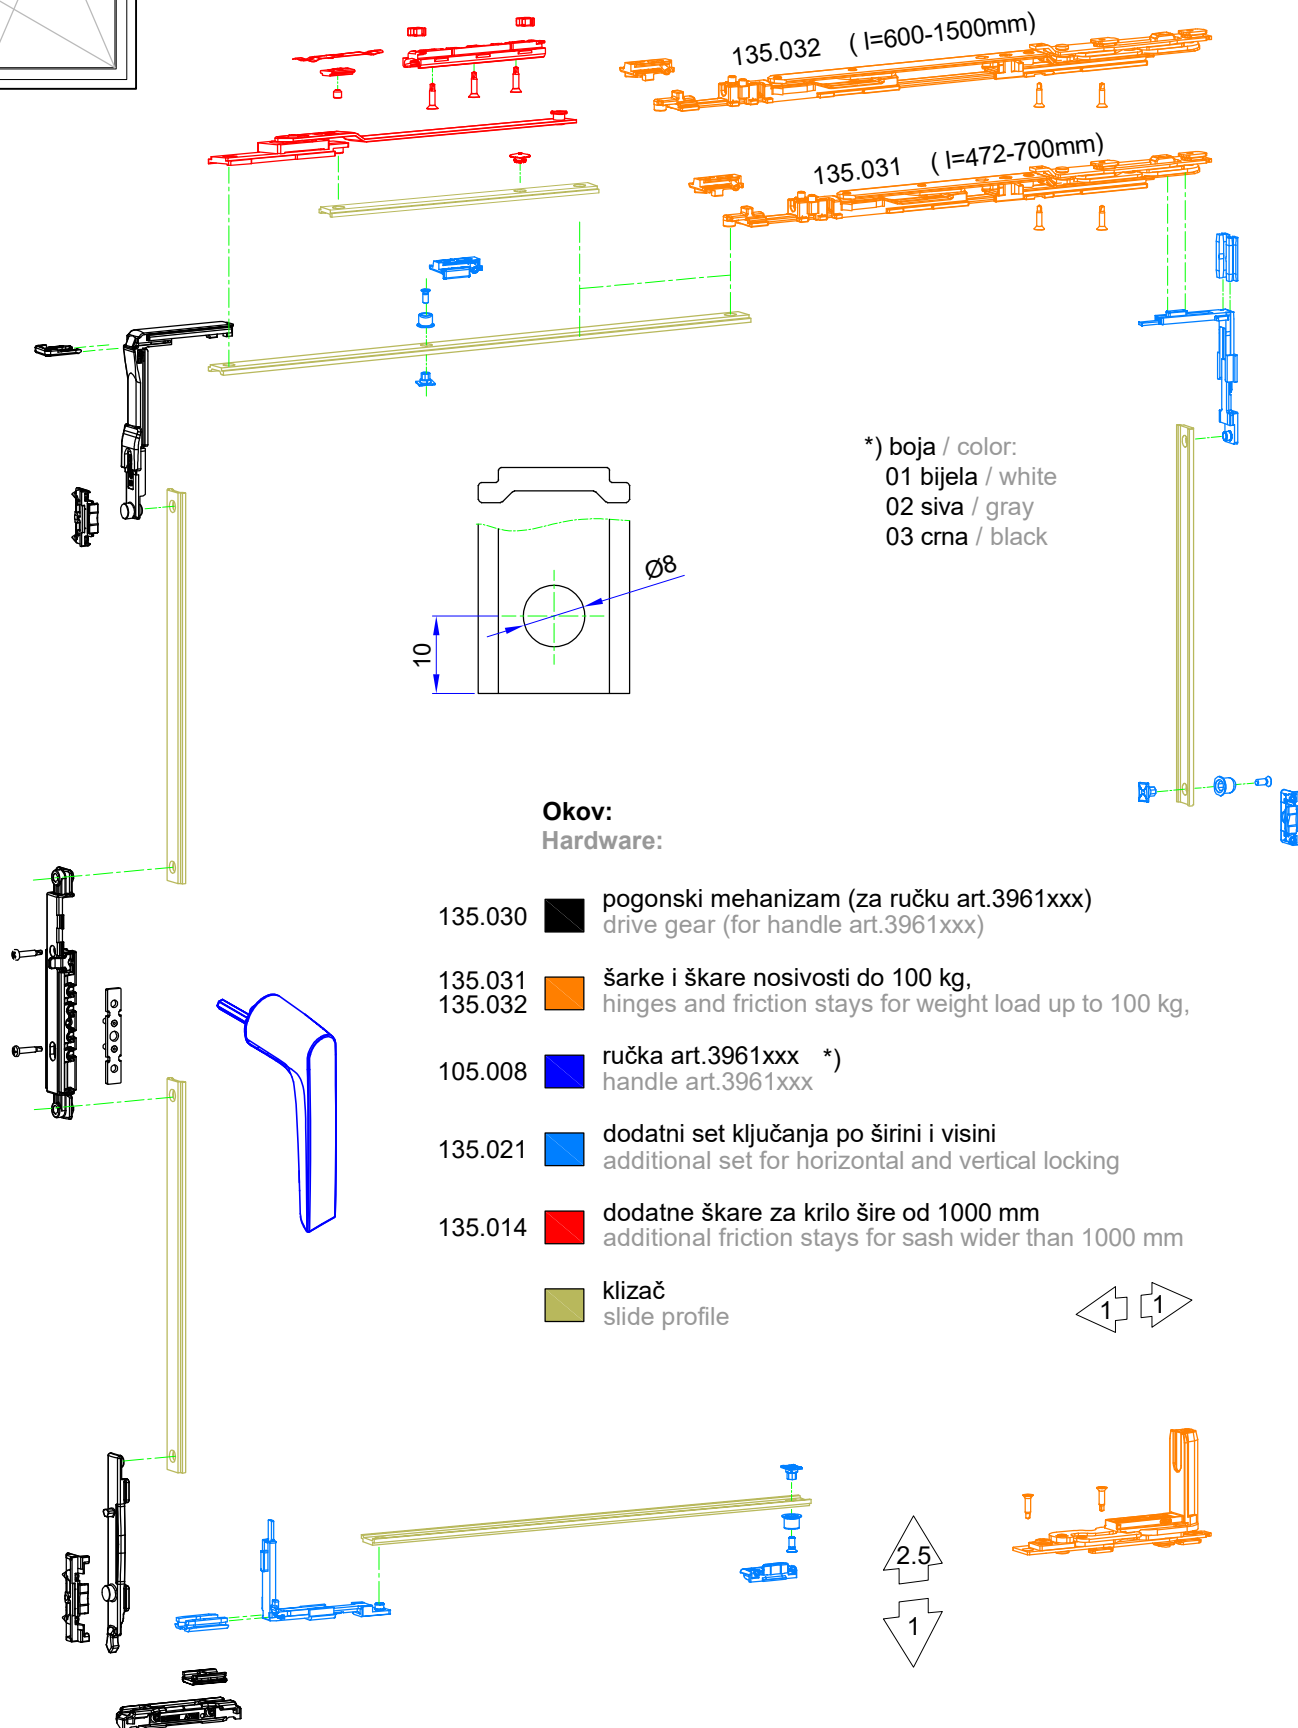


Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
135.030		- Pogonski mehanizam za Ultra mehanizam (...ručka 03961xxx) - Oznaka proizvođača Giese: 0395200001 - Drive gear for Ultra mechanism (... handle 03961xxx) - Manufacturer code Giese: 0395200001		
105.008.01 02 03		- Ručka bez rozete, za Ultra mehanizam - Oznaka proizvođača Giese: 03961410 -bijela 03961376 -siva 03961500 -crna - Boje: 01- bijela; 02 - siva; 03 - crna - Handle without rosette, for Ultra mechanism - Manufacturer code Giese: 03961410 -white 03961376 -gray 03961500 -black - Colors: 01- white; 02 - gray; 03 - black		
135.031		- Šarka+škara T1, desna za krilo širine 472-700 mm - Oznaka proizvođača Giese: 043550001 - Otvaranje krila do 180° - Za nosivost do 100 kg - Hinge+friction stays T1, right for sash width 472-700 mm - Manufacturer code Giese: 043550001 - Sash opening up 180° - For weight load up to 100 kg		
135.032		- Šarka+škara T2, desna za krilo širine 600-1500 mm - Oznaka proizvođača Giese: 043560001 - Otvaranje krila do 180° - Za nosivost do 100 kg - Hinge+friction stays T2, right for sash width 600-1500 mm - Manufacturer code Giese: 043560001 - Sash opening up 180° - For weight load up to 100 kg		
135.033		- Šarka+škara T1, lijeva za krilo širine 472-700 mm - Oznaka proizvođača Giese: 043550002 - Otvaranje krila do 180° - Za nosivost do 100 kg - Hinge+friction stays T1, left for sash width 472-700 mm - Manufacturer code Giese: 043550002 - Sash opening up 180° - For weight load up to 100 kg		
135.034		- Šarka+škara T2, lijeva za krilo širine 600-1500 mm - Oznaka proizvođača Giese: 043560002 - Otvaranje krila do 180° - Za nosivost do 100 kg - Hinge+friction stays T2, left for sash width 600-1500 mm - Manufacturer code Giese: 043560002 - Sash opening up 180° - For weight load up to 100 kg		

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
135.043		- Šarka+škara T1, desna za krilo širine 472-700 mm - Oznaka proizvođača Giese: 0436500011 - Otvaranje krila do 180° - Za nosivost do 150 kg - Hinge+friction stays T1, right for sash width 472-700 mm - Manufacturer code Giese: 0436500011 - Sash opening up 180° - For weight load up to 150 kg		
135.044		- Šarka+škara T2, desna za krilo širine 600-1600 mm - Oznaka proizvođača Giese: 0436600011 - Otvaranje krila do 180° - Za nosivost do 150 kg - Hinge+friction stays T2, right for sash width 600-1600 mm - Manufacturer code Giese: 0436600011 - Sash opening up 180° - For weight load up to 150 kg		
135.045		- Šarka+škara T1, lijeva za krilo širine 472-700 mm - Oznaka proizvođača Giese: 0436500021 - Otvaranje krila do 180° - Za nosivost do 150 kg - Hinge+friction stays T1, left for sash width 472-700 mm - Manufacturer code Giese: 0436500021 - Sash opening up 180° - For weight load up to 150 kg		
135.046		- Šarka+škara T2, lijeva za krilo širine 600-1600 mm - Oznaka proizvođača Giese: 0436600021 - Otvaranje krila do 180° - Za nosivost do 150 kg - Hinge+friction stays T2, left for sash width 600-1600 mm - Manufacturer code Giese: 0436600021 - Sash opening up 180° - For weight load up to 150 kg		
135.021		- Dodatni set ključanja po širini i visini za krilo dimenzija L>1000 mm i H>1200 mm - Oznaka proizvođača Giese: 04770000 - Additional set for horizontal and vertical locking for sash dimensions L>1000 mm and H>1200 mm - Manufacturer code Giese: 04770000		
135.014		- Dodatne škarke za krilo šire od 1000 mm - Oznaka proizvođača Giese: 04301000 - Additional friction stays for a sash over 1000 mm - Manufacturer code Giese: 04301000		

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
135.023		- Graničnik otvaranja krila, za L>500, od 25° do 120° - Oznaka proizvođača Giesse: 02030000 - Sash opening limiter arm, for L>500, from 25° to 120° - Manufacturer code Giesse: 02030000		
135.035		- Dodatni element za škaru, za dimenzije krila H<1200 mm, L>1000 mm - Oznaka proizvođača Giesse: 04357000 - Additional element for friction stays, for sash dimensions H<1200 mm, L>1000 mm - Manufacturer code Giesse: 04357000		
135.036		- Šablon za pozicioniranje škara - Oznaka proizvođača Giesse: 03535 - Template for positioning friction stays - Manufacturer code Giesse: 03535		
135.029		- Dodatno ključanje - zapinjač - Oznaka proizvođača Giesse: 04030000 - Additional locking - adjustable fastening pawl - Manufacturer code Giesse: 04030000		
143.042		- Dodatno ključanje - prihvatnik zapinjača - Oznaka proizvođača Giesse: 01347000 - Additional locking - striker - Manufacturer code Giesse: 01347000		

SKRIVENI OKOV ZA FIKSIRANJE POMOĆNOG KRILA - GIESSE CHIC 3D
CONCEALED LOCKING MECHANISM FOR AUXILIARY SASH - GIESSE CHIC 3D

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
115.011		- Skrivene šarke za pomoćno krilo - lijeve - Oznaka proizvođača Giesse: 043540002 - Za nosivost do 100 kg - Concealed hinges for the auxiliary sash - left - Manufacturer code Giesse: 043540002 - For weight load up to 100 kg		
115.012		- Skrivene šarke za pomoćno krilo - desne - Oznaka proizvođača Giesse: 043540001 - Za nosivost do 100 kg - Concealed hinges for the auxiliary sash - right - Manufacturer code Giesse: 043540001 - For weight load up to 100 kg		
115.013		- Skrivene šarke za pomoćno krilo - lijeve - Oznaka proizvođača Giesse: 0436400021 - Za nosivost do 150 kg - Concealed hinges for the auxiliary sash - left - Manufacturer code Giesse: 0436400021 - For weight load up to 150 kg		
115.014		- Skrivene šarke za pomoćno krilo - desne - Oznaka proizvođača Giesse: 0436400011 - Za nosivost do 150 kg - Concealed hinges for the auxiliary sash - right - Manufacturer code Giesse: 0436400011 - For weight load up to 150 kg		
143.044		- Dodatno (pasivno) ključanje (za h=1200-1800 -1 kom, a preko 1800 -2 kom) - Oznaka proizvođača Giesse: 04358000 - Additional (passive) locking (for h=1200-1800 -1 pc, and over 1800 -2 pcs) - Manufacturer code Giesse: 04358000		



Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
143.048		- Okov za fiksiranje pomoćnog krila u više točaka (montiranje okova u krilo) - Oznaka proizvođača Giese: 02179000 - Locking mechanism for auxiliary sash in two points (mechanism in the sash) - Manufacturer code Giese: 02179000		

Otklopno-zaokretni okov za jednokrlni prozor:

1. UNI JET C (GU) -okov 16/13 (pvc) - max.nosivost 130 kg
2. UNI JET D (GU) -okov 16/13 (pvc) - max.nosivost 130 kg

Tilt and turn hardware for a single-sash window:

1. UNI JET C (GU) -hardware 16/13 (pvc) - load max.130 kg
2. UNI JET D (GU) -hardware 16/13 (pvc) - load max. 130 kg

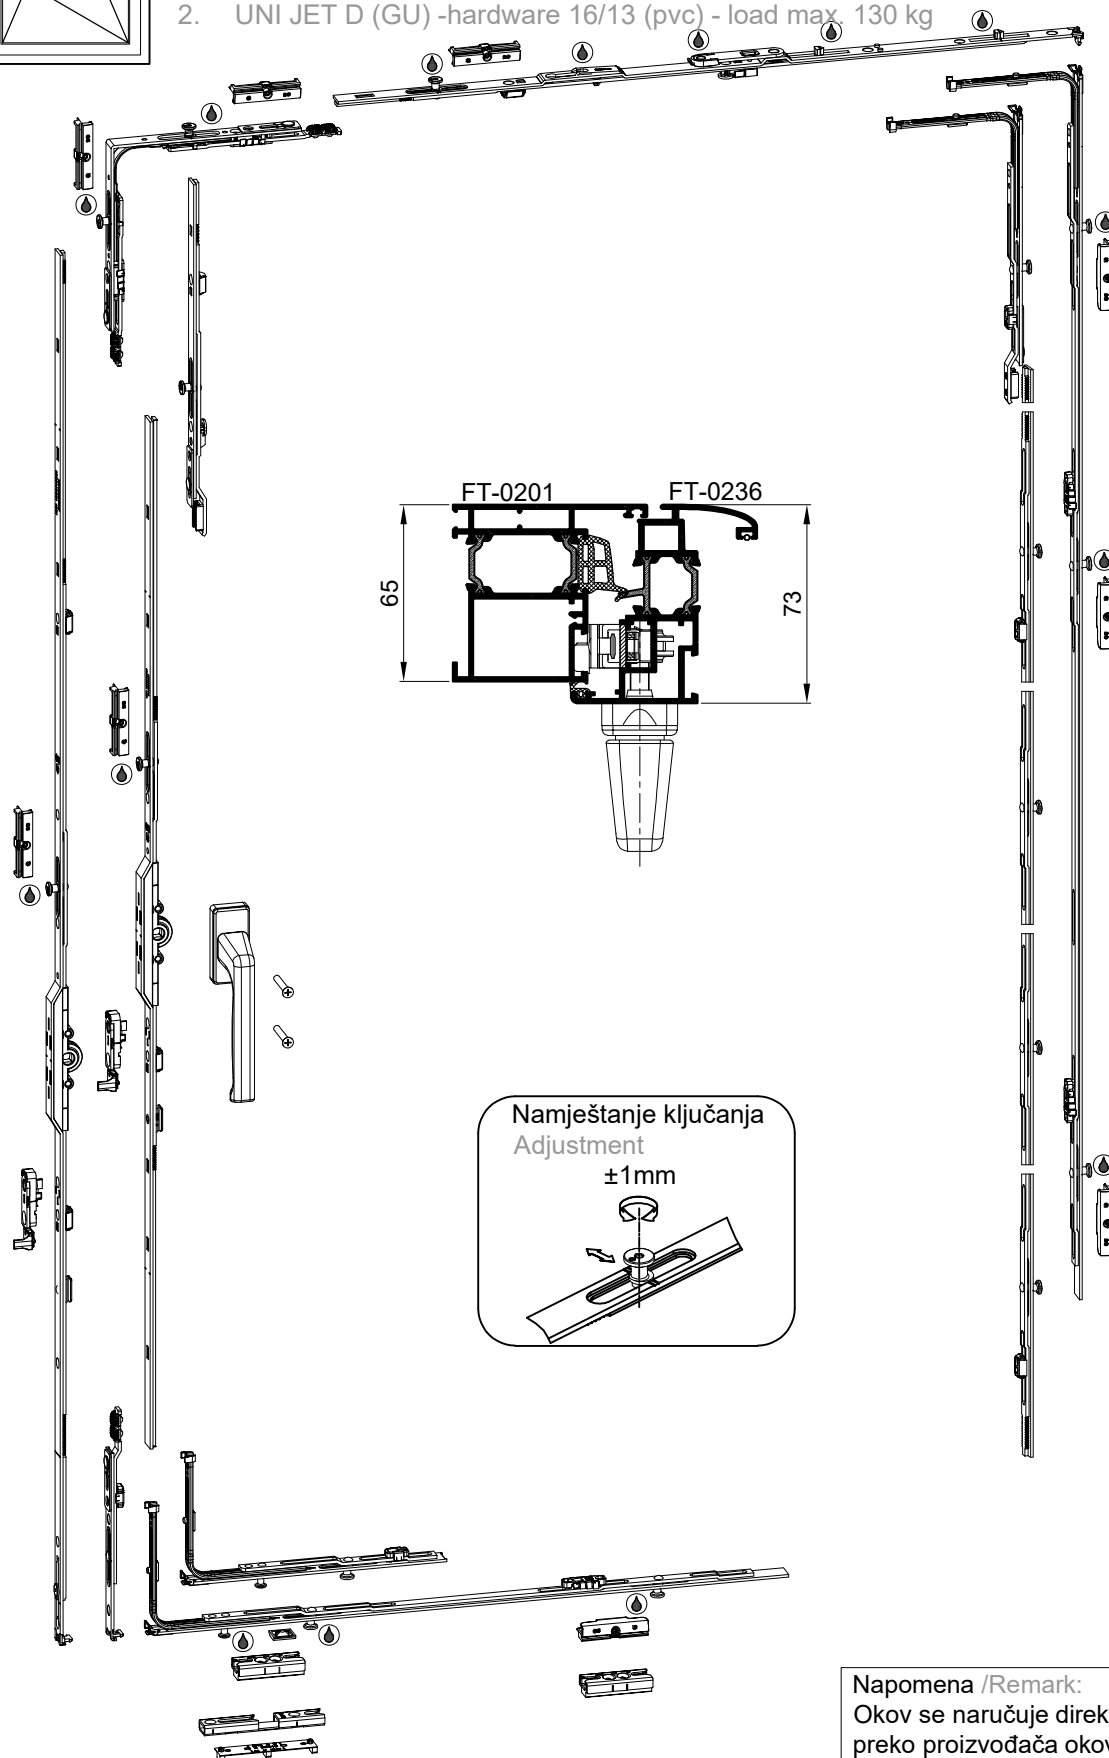



Napomena /Remark:
Okov se naručuje direktno
preko proizvođača okova -GU
The mechanism is ordered directly
through the hardware manufacturer -GU

Otklopno-zaokretni okov za dvokrilni prozor:

1. UNI JET C (GU) -okov 16/13 (pvc) - max.nosivost 130 kg
2. UNI JET D (GU) -okov 16/13 (pvc) - max.nosivost 130 kg

Tilt and turn hardware for a double-sash window:


1. UNI JET C (GU) -hardware 16/13 (pvc) - load max.130 kg
2. UNI JET D (GU) -hardware 16/13 (pvc) - load max. 130 kg


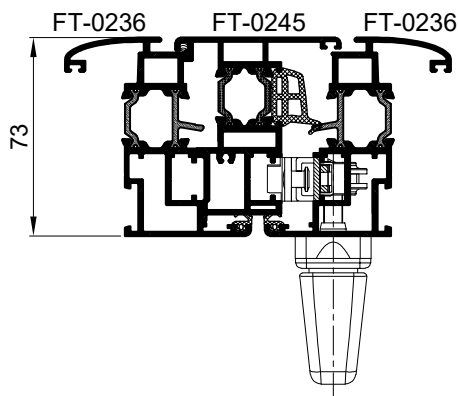




Okov pomoćnog krila se ugrađuje u žlijeb kombatute.
The auxiliary sash hardware is installed in the groove of the flying mullion.







Napomena /Remark:
Okov se naručuje direktno
preko proizvođača okova -GU
The mechanism is ordered directly
through the hardware manufacturer -GU

OKOV ZA ZAOKRETNO OTVARANJE
TURN OPENING MECHANISM

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
104.011.01 02 03		- Ručka za prozor - Oznaka proizvođača Stublina: 1102.00.310 -bijela 315 -siva 313 -crna - Boje: 01- bijela; 02 - siva;03 - crna - Window handle - Manufacturer code Stublina: 1102.00.310 -white 315 -gray 313 -black - Color: 01- white; 02 - gray;03 - black	AlSi Zamak	
144.044		- Set zapinjača s prihvatom - Oznaka proizvođača Stublina: 4009.30 - Set of locking bolts with acceptor - Manufacturer code Stublina: 4009.30		
111.001.01 02 03		- Dvodijelna šarka EURO ŽLIJEB - Stara oznaka E-100 - Boje: 01- bijela; 02 - siva;03 - crna - Two-part hinge EURO GROOVE - Former code E-100 - Color: 01- white; 02 - gray;03 - black		

OTKLOPNI MEHANIZAM (VENTUS) S BRAVICOM ZA ZATVARANJE
TILT MECHANISM (VENTUS) WITH LOCK FOR CLOSING


Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
124.005.01 02 03		- Bravica (škljoca) za zatvaranje otklopnog prozora - Oznaka proizvođača Stublina: 1014.00.310 -bijela 315 -siva 313 -crna - Boje: 01- bijela; 02 - siva;03 - crna - Closing lock for tilt window - Manufacturer code Stublina: 1014.00.310 -white 315 -gray 313 -black - Color: 01- white; 02 - gray;03 - black		
131.002		- Škare za otklopni prozor - Stara oznaka: E-350 - Friction stays for tilt window - Former code: E-350		
111.001.01 02 03		- Dvodijelna šarka EURO ŽLIJEB - Stara oznaka E-100 - Boje: 01- bijela; 02 - siva;03 - crna - Two-part hinge EURO GROOVE - Former code E-100 - Color: 01- white; 02 - gray;03 - black		

OTKLOPNI MEHANIZAM (VENTUS) S RUČKOM
TILT MECHANISM (VENTUS) WITH HANDLE

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
104.011.01 02 03		- Ručka za prozor - Oznaka proizvođača Stublina: 1102.00.310 -bijela 315 -siva 313 -crna - Boje: 01- bijela; 02 - siva;03 - crna - Window handle - Manufacturer code Stublina: 1102.00.310 -white 315 -gray 313 -black - Color: 01- white; 02 - gray;03 - black	AlSi Zamak	
131.002		- Škare za otklopni prozor - Stara oznaka: E-350 - Friction stays for tilt window - Former code: E-350		
111.001.01 02 03		- Dvodijelna šarka EURO ŽLIJEB - Stara oznaka E-100 - Boje: 01- bijela; 02 - siva;03 - crna - Two-part hinge EURO GROOVE - Former code E-100 - Color: 01- white; 02 - gray;03 - black		
144.044		- Set zapinjača s prihvatom - Oznaka proizvođača Stublina: 4009.30 - Set of locking bolts with acceptor - Manufacturer code Stublina: 4009.30		




134.006.xx- OTKLOPNI MEHANIZAM (VENTUS) S RUČKOM ZA VISINU - STUBLINA (art.4020.00)

134.006.xx- TILT MECHANISM (VENTUS) WITH HANDLE FOR HEIGHT - STUBLINA (art.4020.00)

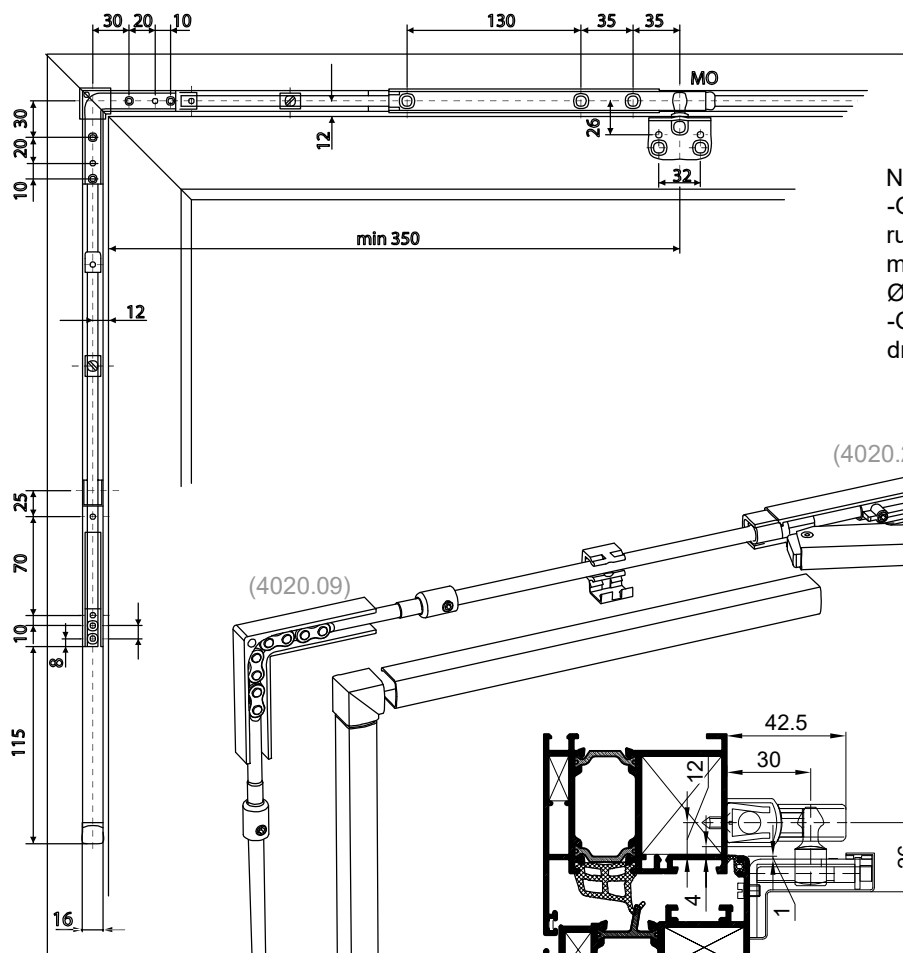



Napomena:

- Otvore na štoku za ugradnju pogonske ručice 4020.30, kutnog okova 4020.09 mehanizama otvarača 4020.20 bušiti na Ø3mm.
- Otvore na krilu za ugradnju kutnog nosača držača krila 4020.05 bušiti na Ø5.2mm

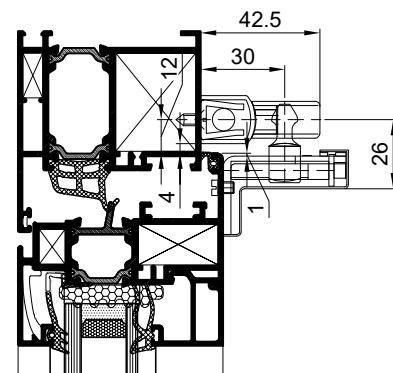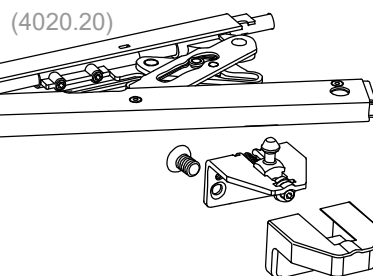


Remark:

- Openings on frame for the handle 4020.30, corner hardware 4020.09 and opening mechanism 4020.20 drill for Ø3mm
- Openings on sash for installation of corner bracket plate holder 4020.05 drill for Ø5.2mm







(4020.30)






Legenda / Legend:

Mehanizam otvarača / Opening mechanism.....Mo
Širina krila / Sash width.....ŠK

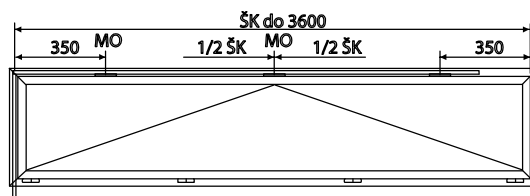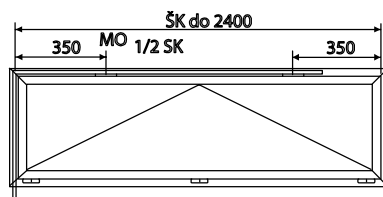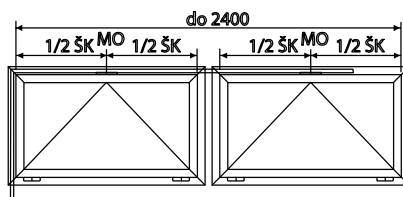




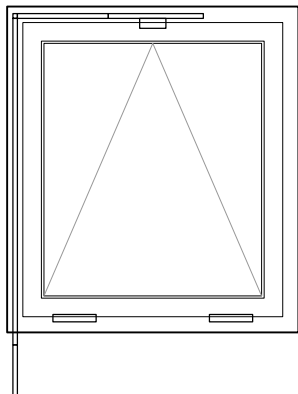
OTKLOPNI MEHANIZAM (VENTUS) S RUČKOM ZA VISINU
TILT MECHANISM (VENTUS) WITH HANDLE FOR HEIGHT

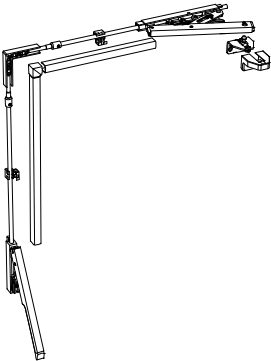
Oznaka Code		Opis Description	Materijal Material	Napomena Remark
134.006.01 02 03		- Ventus set širina krila do 1200 mm - Oznaka proizvođača Stublina: 4020.00.310 -bijela 315 -siva 313 -crna - Boje: 01- bijela; 02 - siva;03 - crna - Ventus set - sash width up to 1200 mm - Manufacturer code Stublina: 4020.00.310 -white 315 -gray 313 -black - Color: 01- white; 02 - gray;03 - black		
111.001.01 02 03		- Dvodijelna šarka EURO ŽLIJEB - Stara oznaka E-100 - Boje: 01- bijela; 02 - siva;03 - crna - Two-part hinge EURO GROOVE - Former code E-100 - Color: 01- white; 02 - gray;03 - black		

OTKLOPNI MEHANIZAM (VENTUS) S ELEKTROMOTOROM
TILT MECHANISM (VENTUS) WITH ELECTRIC MOTOR

Oznaka Code		Opis Description	Materijal Material	Napomena Remark
114.005.01 02 03		- Trodijelna šarka-<i>EURO ŽLIJEB</i> - Oznaka proizvođača Stublina: 2129.00.310 -bijela 315 -siva 313 -crna - Boje: 01- bijela; 02 - siva;03 - crna - Three-part hinge-<i>EURO GROOVE</i> - Manufacturer code Stublina: 2129.00.310 -white 315 -gray 313 -black - Color: 01- white; 02 - gray;03 - black		
142.073		Lančani motor za otvaranje i zatvaranje KS2 200 S12 24V R, hod 200 mm; Oznaka proizvođača AUMÜLLER (GU): 521620 Chain motor for opening and closing KS2 200 S12 24V R; stroke length 200 mm; Manufacturer code AUMÜLLER (GU): 521620		
142.074		Lančani motor za otvaranje i zatvaranje KS2 300 S12 24V R, hod 300 mm; Oznaka proizvođača AUMÜLLER (GU): 521630 Chain motor for opening and closing KS2 300 S12 24V R; stroke length 300 mm; Manufacturer code AUMÜLLER (GU): 521630		
142.094		Lančani motor za otvaranje i zatvaranje KS2 400 S12 24V R, hod 400 mm; Oznaka proizvođača AUMÜLLER (GU): 521640 Chain motor for opening and closing KS2 400 S12 24V R; stroke length 400 mm; Manufacturer code AUMÜLLER (GU): 521640		
142.071		K94 nosači za motor KS2 Oznaka proizvođača AUMÜLLER (GU): 523921 Frame bracket K94 Manufacturer code AUMÜLLER (GU): 523921		
142.072		F41 prihvatnik lanca motora KS2/KS4 Oznaka proizvođača AUMÜLLER (GU): 151440 Casement bracket F41 Manufacturer code AUMÜLLER (GU): 151440		

OTKLOPNI MEHANIZAM (VENTUS) S RUČKOM NA VERTIKALI TILT MECHANISM (VENTUS) WITH THE HANDLE ON THE SIDE

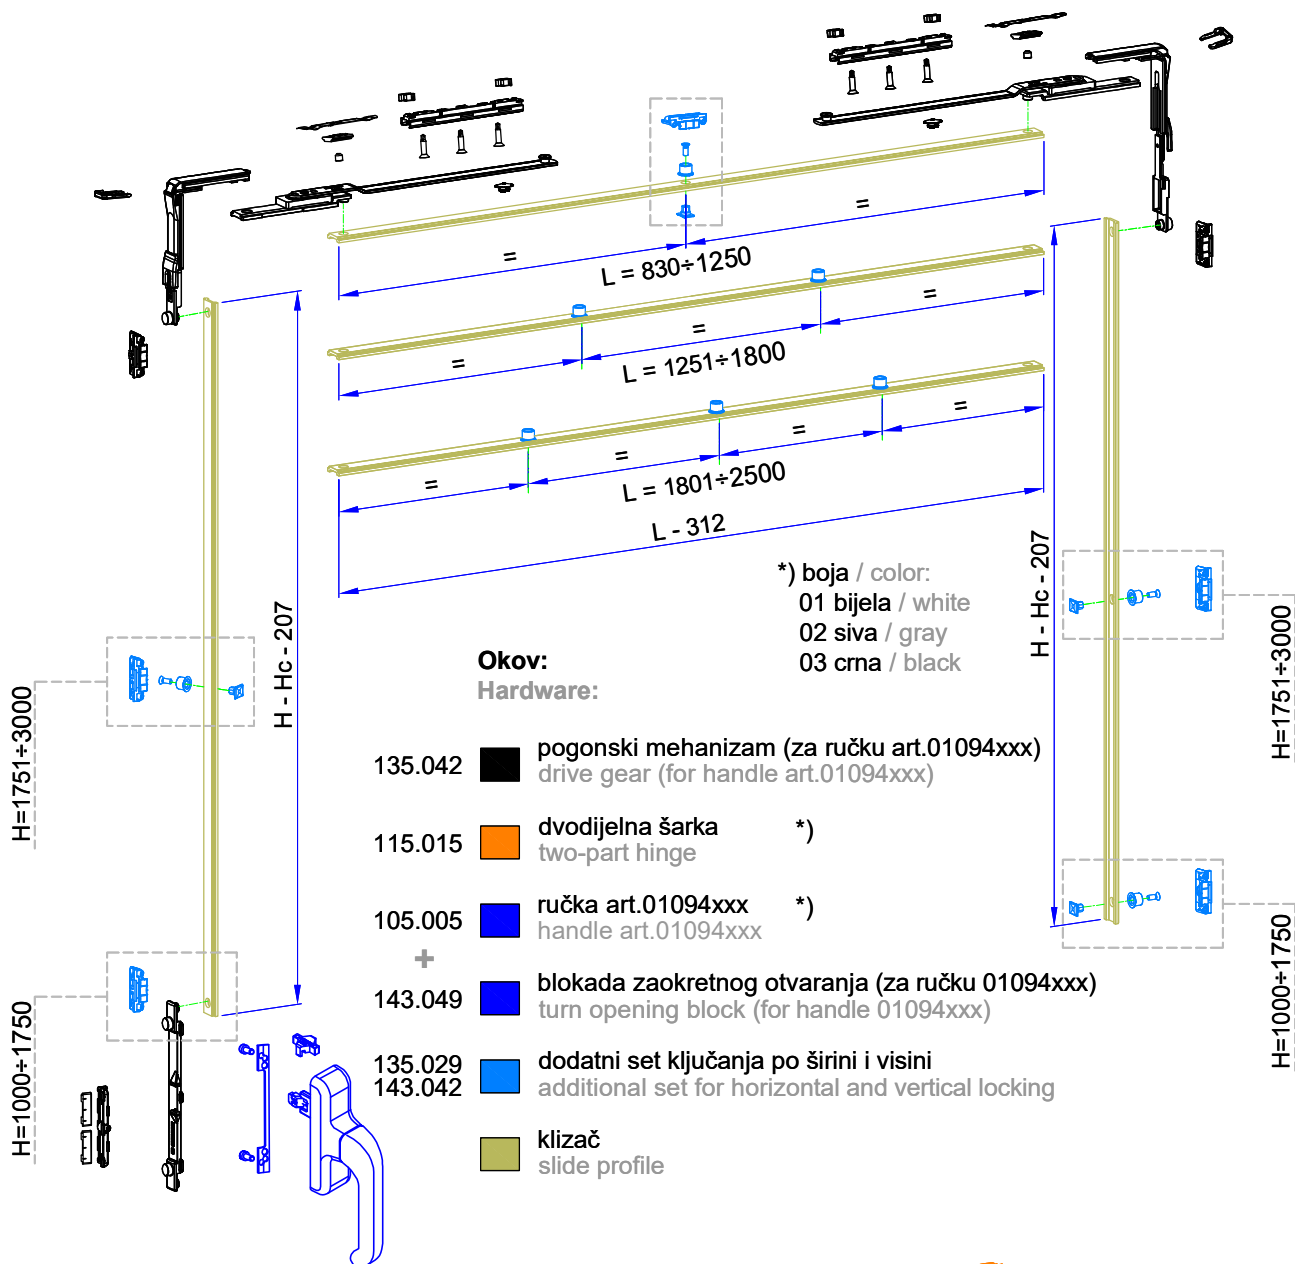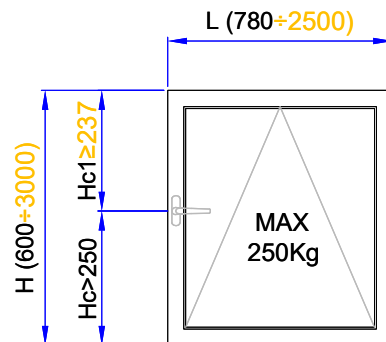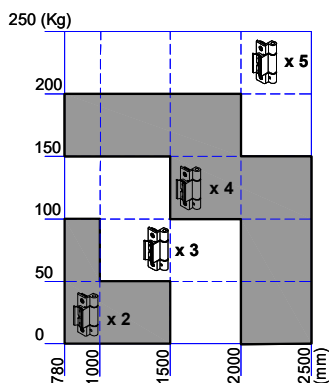



OTKLOPNI MEHANIZAM (VENTUS) S RUČKOM NA VERTIKALI
TILT MECHANISM (VENTUS) WITH THE HANDLE ON THE SIDE





Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
135.042		- Pogonski mehanizam za otklopni prozor- (ventus) s ručkom na vertikali (...ručka 01094xxx) - Oznaka proizvođača Giesse: 01175000 - Drive gear for tilt window (ventus) with the handle on the side (... handle 01094xxx) - Manufacturer code Giesse: 01175000		
115.015.01 02 03		- Dvodijelna šarka - Oznaka proizvođača Giesse: 00600410 -bijela 00600376 -siva 00600500 -crna - Boje: 01- bijela; 02 - siva;03 - crna - Two-part hinge - Manufacturer code Giesse: 00600410 -white 00600376 -gray 00600500 -black - Color: 01- white; 02 - gray;03 - black		
105.005.01 02 03		- Ručka; (LA 86/104mm), FUTURA 3D (130 micro) - Oznaka proizvođača Giesse: 01094410 -bijela 01094376 -siva 01094500 -crna - Boje: 01- bijela; 02 - siva; 03 - crna - Handle; (LA 86/104mm), FUTURA 3D (130 micro) - Manufacturer code Giesse: 01094410 -bijela 01094376 -siva 01094500 -crna - Colors: 01- white; 02 - gray; 03 - black		
143.049		- Blokada zaokretnog otvaranja (...za ručku 01094xxx) - Oznaka proizvođača Giesse: 02235 - Turn opening block - Manufacturer code Stublina: 02235		

[illegible]


OTKLOPNO (VENTUS) I ZAOKRETNO OTVARANJE TILT (VENTUS) AND TURN OPENING








Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
122.047		- Pogonski ufrezavajući mehanizam (35 mm) za otvaranje vani (... ručka Dirigent-F) - Oznaka proizvođača GU: 6-25916-35-0-1 - Drive gear for outward opening (35 mm) (... handle Dirigent-F) - Manufacturer code GU: 6-25916-35-0-1		
102.001.01 02 03		-Ručka Dirigent-F (GU) -Oznaka proizvođača: 6-28072-00-0- -Handle Dirigent-F (GU) -Manufacturer code: 6-28072-00-0-	11 siva 6 crna 7 bijela 11 gray 6 black 7 white	
111.003.01 02 03		- Dvodijelna šarka-vani <i>EURO ŽLIJEB</i> - Stara oznaka EV-110 - Boje: 01- bijela; 02 - siva;03 - crna - Two-part hinge-outside <i>EURO GROOVE</i> - Former code EV-110 - Color: 01- white; 02 - gray;03 - black		




Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
134.018		- Teleskopski graničnik otvaranja krila - Oznaka proizvođača: 4066.00 - Telescopic sash opening limiter - Manufacturer code: 4066.00 (Stub.)		
102.002	 - pilati na: L= 88 mm - shorten to: L= 88 mm	- Četvrtka (duljina četvrtke 7x7 : L=143 mm) - Oznaka proizvođača: 9-26874-81-0-1 (GU) - Square spindle (spindle length 7x7: L=143 mm) - Manufacturer code: 9-26874-81-0-1 (GU)		
431.923		- Vijak M5x70, DIN 965 - Screw M5x70, DIN 965		
134.004		- Dodatno ključanje - prihvatnik zapinjača - Oznaka proizvođača Stublina: 4010.03 - Additional locking - striker - Manufacturer code Stublina: 4010.03		
134.005		- Dodatno ključanje - zapinjač - Oznaka proizvođača Stublina: 4010.27 - Additional locking - adjustable fastening pawl - Manufacturer code Stublina: 4010.27		

142.011 - SET OKOVA ZA PROZOR - OTVARANJE OKO SREDNJE VODORAVNE OSE - GU 142.011 - WINDOW HARDWARE SET - OPENING AROUND MIDDLE HORIZONTAL AXIS - GU





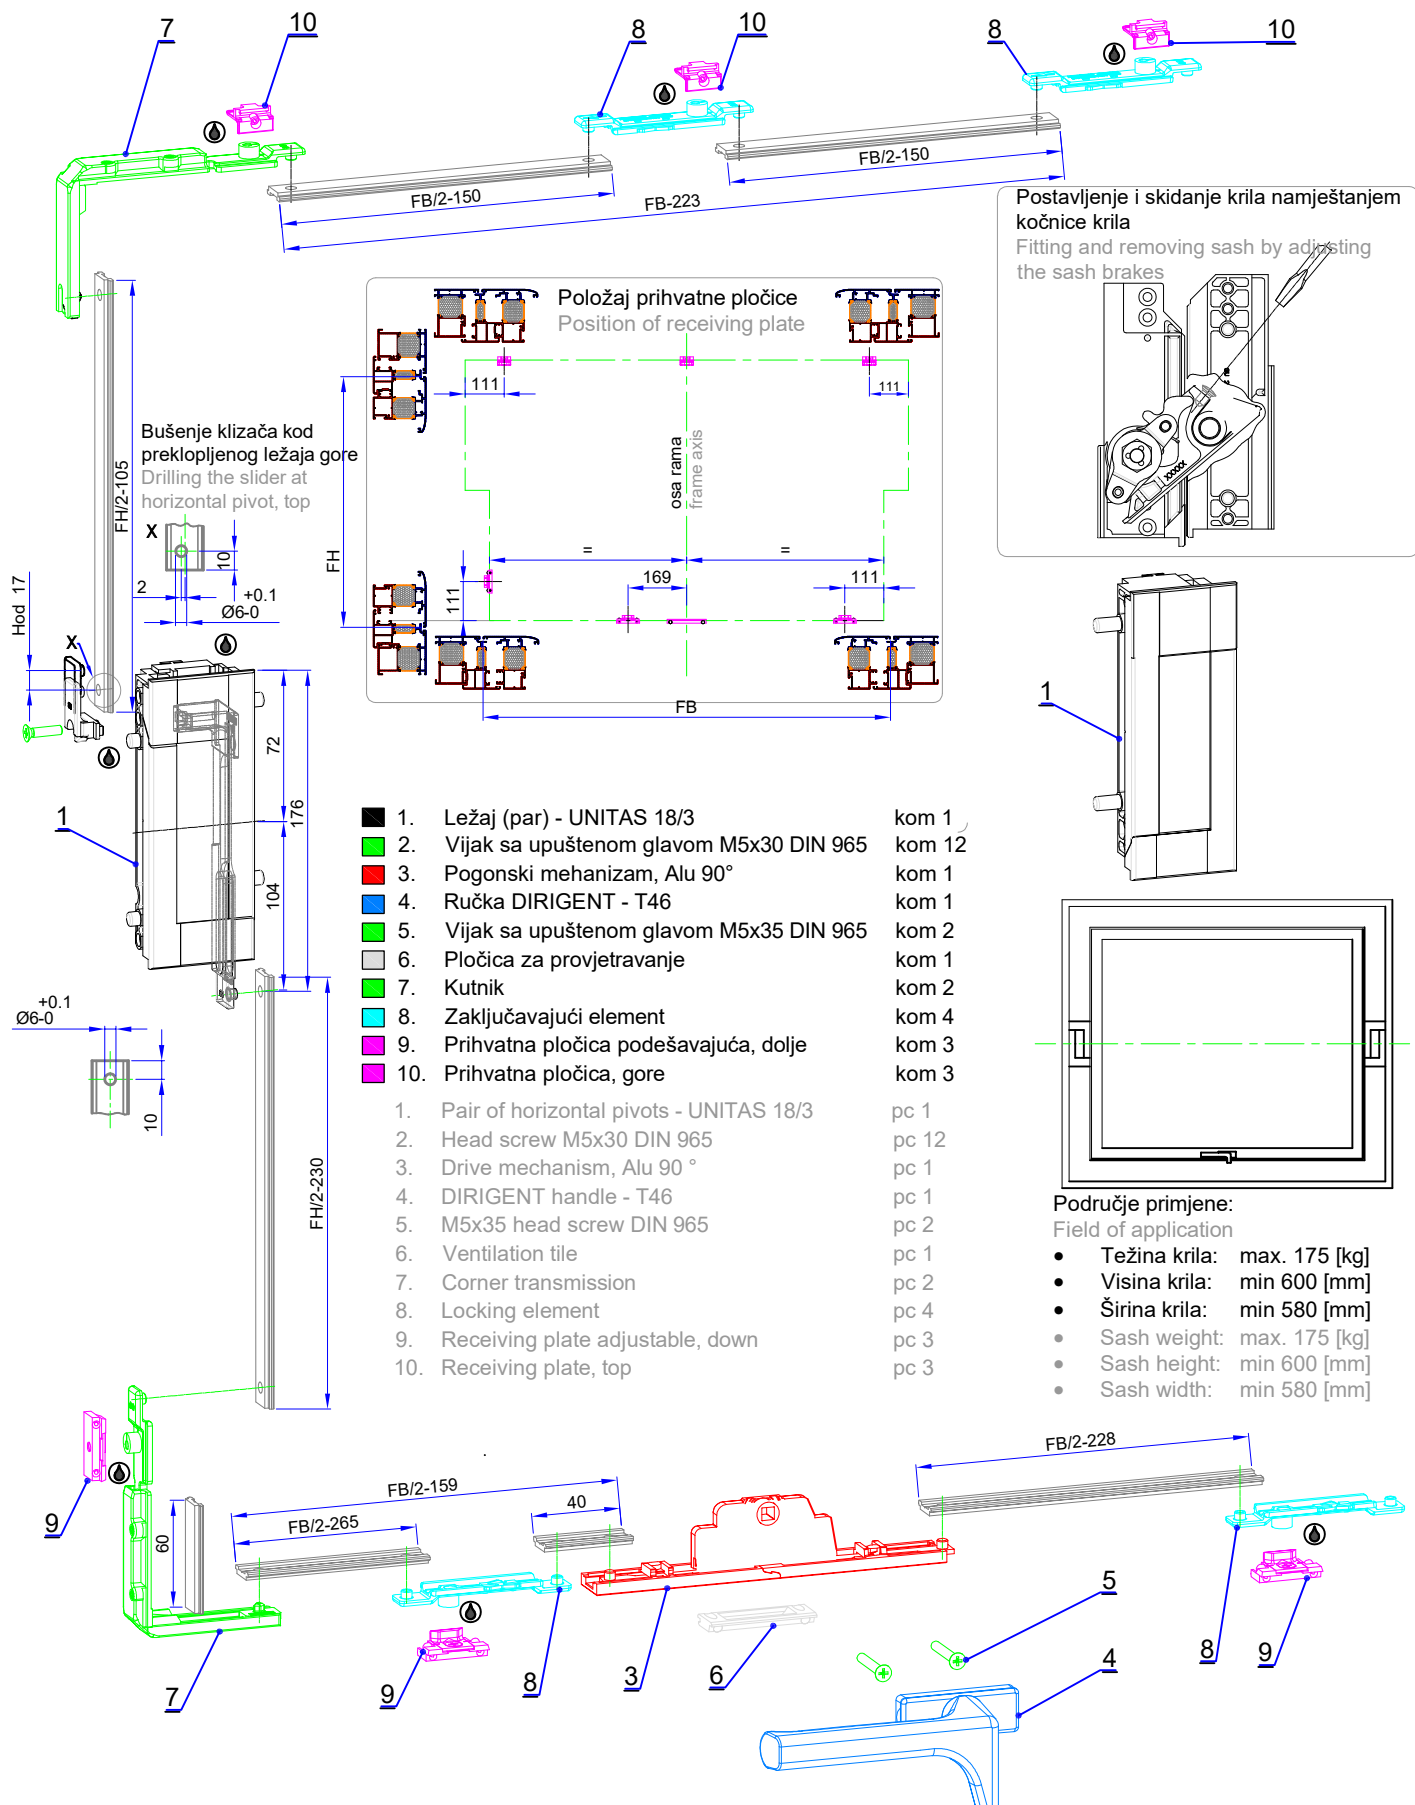




Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
142.042		-Kutnik -Oznaka proizvođača GU: 6-24529-00-0 -Corner transmission -Manufacturer code GU: 6-24529-00-0		
142.043		-Zaključavajući element -Oznaka proizvođača GU: 6-24539-00-0 -Locking element -Manufacturer code GU: 6-24539-00-0		
142.044		-Prihvatna pločica podešavajuća, dolje, žlijeb 15/20 -Oznaka proizvođača GU: 6-28832-00-0 -Receiving plate adjustable, down, groove 15/20 -Manufacturer code GU: 6-28832-00-0		
142.045		-Prihvatna pločica, gore -Oznaka proizvođača GU: 30959-01-0 -Receiving plate, top -Manufacturer code GU: 6-30959-01-0		
142.046.01 10		-Ručka DIRIGENT - S 44 -Oznaka proizvođača GU: 6-29189-30-0-7 - bijela 6-29189-30-0-11 - EV1 -Boje: 01 - bijela, 10 - EV1 -Handle DIRIGENT - S 44 -Manufacturer code GU: 6-29189-30-0-7 - white 6-29189-30-0-11 - EV1 -Color: 01 - white, 10 - EV1		Elementi po izboru Elements of your choice
142.047		-Element za zadržavanje krila u 180° -Oznaka proizvođača GU: 6-20017-00-0 -Sash retaining element 180° -Manufacturer code GU: 6-20017-00-0		Elementi po izboru Elements of your choice
142.048		-Šablon za ležaj -Oznaka proizvođača GU: 6-27419-00-0 -Drilling template for horizontal pivot -Manufacturer code GU: 6-27419-00-0		Elementi po izboru Elements of your choice

Postavljanje i skidanje krila namještanjem kočionog zatika
Fitting and removing sash by adjusting the sash brake pin

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
142.043		-Zaključavajući element -Oznaka proizvođača GU: 6-24539-00-0 -Locking element -Manufacturer code GU: 6-24539-00-0		
142.044		-Prihvatna pločica podešavajuća, dolje, žlijeb 15/20 -Oznaka proizvođača GU: 6-28832-00-0 -Receiving plate adjustable, down, groove 15/20 -Manufacturer code GU: 6-28832-00-0		
142.045		-Prihvatna pločica, gore -Oznaka proizvođača GU: 30959-01-0 -Receiving plate, top -Manufacturer code GU: 6-30959-01-0		
142.047		-Element za zadržavanje krila u 180° -Oznaka proizvođača GU: 6-20017-00-0 -Sash retaining element 180° -Manufacturer code GU: 6-20017-00-0		Elementi po izboru Elements of your choice
142.048		-Šablon za ležaj UNITAS 88 -Oznaka proizvođača GU: 6-27419-00-0 -Drilling template for vertical pivot fittings UNITAS 88 -Manufacturer code GU: 6-27419-00-0		Elementi po izboru Elements of your choice
142.039.01 10		-Ručka DIRIGENT - T 46 -Oznaka proizvođača GU: 6-29187-30-0-7 - bijela 6-29187-30-0-11 - EV1 -Boje: 01 - bijela, 10 - EV1 -Handle DIRIGENT - T 46 -Manufacturer code GU: 6-29187-30-0-7 - white 6-29187-30-0-11 - EV1 -Color: 01 - white, 10 - EV1		Elementi po izboru Elements of your choice
142.041		-Pločica za provjetravanje -Oznaka proizvođača GU: 6-25982-00-0 -Ventilation tile -Manufacturer code GU: 6-25982-00-0 samo za lijeve prozore-otvaranje unutra left window only - opening inward		Elementi po izboru Elements of your choice

OKOV ZA JEDNOKRILNA VRATA - (otvaranje unutra i vani)
HARDWARE FOR SINGLE LEAF DOOR - (inward and outward opening)





Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
104.009.01 02 03		- Ručka za vrata (duljina šipa 8x8 : L=160mm) - Oznaka proizvođača Stublina: 1132.20.310 -bijela 315 -siva 313 -crna - Boje: 01- bijela; 02 - siva;03 - crna - Door handle.....(length of pin 8x8 : L=160mm) - Manufacturer code Stublina: 1132.20.310 -white 315 -gray 313 -black - Color: 01- white; 02 - gray;03 - black	AlSi Zamak	
124.001		- Brava 35 mm s jezičkom - Oznaka proizvođača Stublina: 3022.00 - Lock 35 mm with latchbolt - Manufacturer code Stublina: 3022.00	Inox Čelik	
124.010		- Brava 35 mm s valjkom - Oznaka proizvođača Stublina: 3032.00 - Roller latch lock 35 mm - Manufacturer code Stublina: 3032.00	Inox	
124.003		- Prihvatnik jezička brave (šild) - Oznaka proizvođača Stublina: 3016.00 - Lock latchbolt acceptor - Manufacturer code Stublina: 3016.00	Čelik Zn	
124.043		- Prihvatni lim (ravni) s elektro otvaračem (SES1-008 (U-6-12V AC; I-980 mA; R-8.7Ω)) - Oznaka proizvođača Stublina: 3088.20.133 - Locking plate (flat) with electric door opener (SES1-008 (U-6-12V AC; I-980 mA; R-8.7Ω)) - Manufacturer code Stublina: 3088.20.133	Inox	Za lijeva i desna vrata For left and right door
124.002		- Uložak (cilindar) za bravu 35mm - Oznaka proizvođača Stublina: 5057.00.520 (dužina cilindra 92 mm (31+61)) - Lock insert (cylinder) 35mm - Manufacturer code Stublina: 5057.00.520 (cylinder length 92 mm (31+61))	Ni	

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
124.032.01 02 03		- Štitnik cilindra za bravu (par) - Oznaka proizvođača Stublina: 1031.04.310 -bijela 315 -siva 313 -crna - Boje: 01- bijela; 02 - siva; 03 - crna - Lock cylinder protector (two-sided) - Manufacturer code Stublina: 1031.04.310 -white 315 -gray 313 -black - Color: 01- white; 02 - gray; 03 - black	Zn Čelik	
124.035.01 02 03		- Štitnik cilindra za bravu (par) - Oznaka proizvođača Stublina: 1131.04.310 -bijela 315 -siva 313 -crna - Boje: 01- bijela; 02 - siva; 03 - crna - Lock cylinder protector (two-sided) - Manufacturer code Stublina: 1131.04.310 -white 315 -gray 313 -black - Color: 01- white; 02 - gray; 03 - black	Zn Čelik	

* Šarke za vrata biraju se po želji, ovisno o težini krila (stranica 203.08.003 i 203.08.004)

Door hinges can be chosen as desired, depending on the weight of the sash (page 203.08.003 and 203.08.004)



KLJUČANJE POMOĆNOG KRILA KOD DVOKRILNIH VRATA
LOCKING OF AUXILIARY LEAF ON DOUBLE DOOR

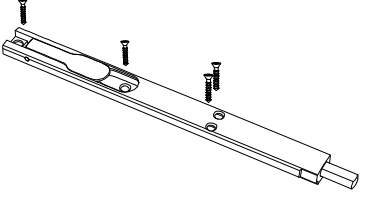Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
124.003		- Prihvatnik jezička brave (šild) - Oznaka proizvođača Stublina: 3016.00 - Lock latchbolt acceptor (safety panel) - Manufacturer code Stublina: 3016.00	Prokrom Čelik	
144.003.01 02 03		- Zapinjač-krakun za vrata - Oznaka proizvođača Stublina: 3006.00.310 -bijela 315 -siva 313 -crna - Boje: 01- bijela; 02 - siva;03 - crna - Door latch - Manufacturer code Stublina: 3006.00.310 -white 315 -gray 313 -black - Color: 01- white; 02 - gray;03 - black		
144.000.01 02 03		- Zapinjač-krakun za vrata (kratki) - Oznaka proizvođača Stublina: 3061.00.310 -bijela 315 -siva 313 -crna - Boje: 01- bijela; 02 - siva; 03 - crna - Door latch (short) - Manufacturer code Stublina: 3061.00.310 -white 315 -gray 313 -black - Color: 01- white; 02 - gray; 03 - black		
124.044		- Prihvatnik zapinjača (krakuna) za vrata - Oznaka proizvođača Stublina: 3012.20 - Latch acceptor for the door - Manufacturer code Stublina: 3012.20	Zn PVC	

* Šarke za vrata biraju se po želji, ovisno o težini krila (stranice 203.08.003 i 203.08.004)

Door hinges can be chosen as desired, depending on the weight of the sash (page 203.08.003 and 203.08.004)

BRAVA 35 mm ZA KLJUČANJE U VIŠE MJESTA - STUBLINA LOCK 35 mm FOR MULTIPLE LOCKING - STUBLINA

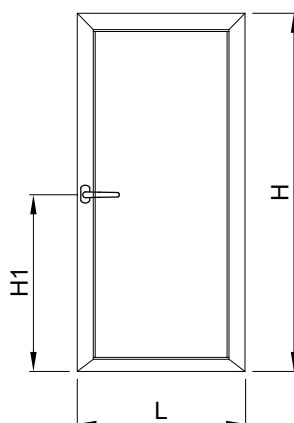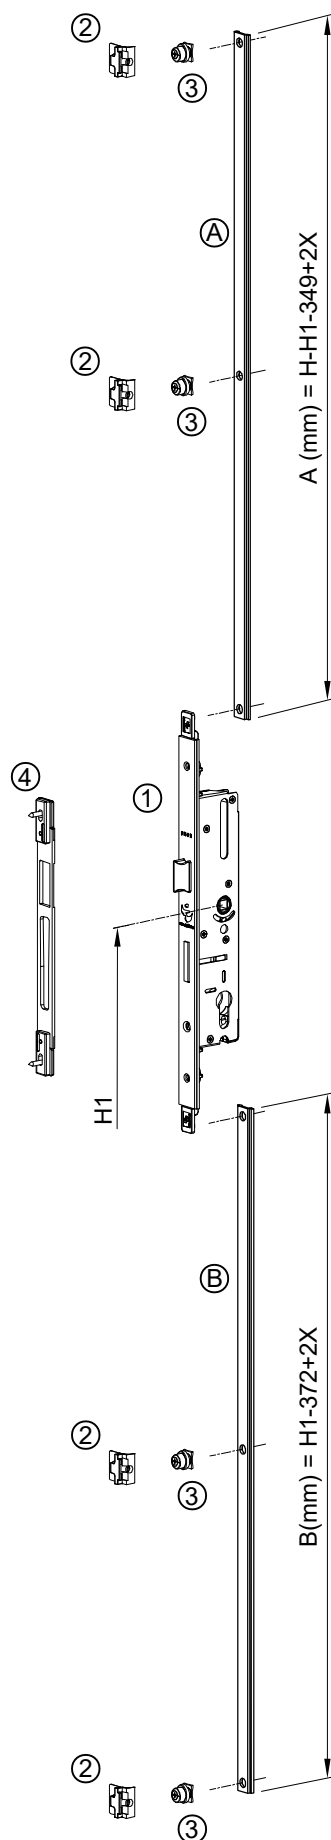

H - visina krila / leaf height
L - širina krila / leaf width
H1 - visina brave (osa ručke)
lock height (handle axis)

1) 124.042

-Brava 35mm za ključanje u više mjesta
-Oznaka proizvođača Stublina: 3147.00
-Lock 35mm for multiple locking
-Manufacturer code Stublina: 3147.00

2) 134.004

-Dodatno ključanje - prihvatnik zapinjača
- Oznaka proizvođača Stublina: 4010.03
- Additional locking - striker
- Manufacturer code Stublina: 4010.03

3) 134.005

-Dodatno ključanje - zapinjač
- Oznaka proizvođača Stublina: 4010.27
- Additional locking - adjustable fastening pawl
- Manufacturer code Stublina: 4010.27

4) 124.003


-Prihvatnik jezička brave (šild)
- Oznaka proizvođača Stublina: 3016.00
- Lock latchbolt acceptor
- Manufacturer code Stublina: 3016.00

A) NC-1459




-profil klizača
- slide profile

B) NC-1459

-profil klizača
- slide profile

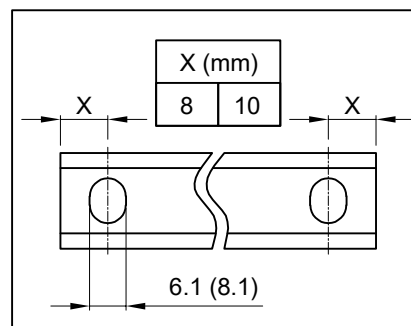







OKOV ZA JEDNOKRILNA VRATA - (otvaranje unutra i vani)
HARDWARE FOR SINGLE LEAF DOOR - (inward and outward opening)

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
122.073		- Brava (kratka) 35 mm s jezičkom - ravna potisna ploča - Oznaka proizvođača GU-BKS: B 1314 0013 (čelik) B 1314 0003 (inox)	Čelik Steel	
122.124 *		- Lock 35 mm with latchbolt - flat faceplate - Manufacturer code GU-BKS: B 1314 0013 (steel) B 1314 0003 (inox)	Inox	
122.075		- Brava (kratka) 35 mm s valjkom - ravna potisna ploča - Oznaka proizvođača GU-BKS: B 1315 0013 (čelik) B 1315 0003 (inox)	Čelik Steel	
122.126 *		- Roller latch lock 35 mm - flat faceplate - Manufacturer code GU-BKS: B 1315 0013 (steel) B 1315 0003 (inox)	Inox	
122.054		- Prihvatni lim (ravni) 22x3mm - Lijevi - Oznaka proizvođača GU: 6-39257-01-L-8 - Striking plate (flat) 22x3mm - Left - Manufacturer code GU: 6-39257-01-L-8	Inox	
122.079		- Prihvatni lim (ravni) 22x3mm - Desni - Oznaka proizvođača GU: 6-39257-01-R-8 - Striking plate (flat) 22x3mm - Right - Manufacturer code GU: 6-39257-01-R-8	Inox	
122.030		- Kućište zasuna brave (62mm) - Oznaka proizvođača GU: 9-48553-03-0-6 (Element po želji) - Latch bolt casement (62mm). - Manufacturer code GU: 9-48553-03-0-6 (Optional part)	Pvc	
122.042		- Prihvatni dio za valjek - Oznaka proizvođača GU: K-15597-01-0-6 - Receiving part for the roller - Manufacturer code GU: K-15597-01-0-6	Al Pvc	
122.055		- Elektro otvarač vrata GU ET8 standardni, bez klizača za jezičak, opruga 60N - Oznaka proizvođača GU: 6-38473-02-0-1 (Elektro otvarač se koristi po želji) - Electrical door opener GU ET8 standard, without latch slide cover, latch spring 60N - Manufacturer code GU: 6-38473-02-0-1 (Electrical door opener is optional)		



*Preporučuje se korištenje u uvjetima gdje je potrebna visoka antikoroziivna zaštita

*Recommended for use in conditions where high corrosion protection is required

OKOV ZA JEDNOKRILNA VRATA - (otvaranje unutra i vani)
HARDWARE FOR SINGLE LEAF DOOR - (inward and outward opening)

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
102.028		- Ručka za vrata s ovalnom rozetom serije BELCANTO H2.0 (s prihvatom četvrtke 8x8 mm) - jednostrano ručka - Oznaka proizvođača GU-BKS: B-70130-63-0-8 - Završna obrada: Inox - Door handle with oval rosette serie BELCANTO H2.0 (for spindle 8x8mm) - half lever set - Manufacturer code GU-BKS: B-70130-63-0-8 - Finish: stainless steel		Naručuje se po komadu It is ordered per piece
102.029		- Ručka za vrata s ovalnom rozetom serije RONDO H1.1 (s prihvatom četvrtke 8x8 mm) - jednostrano ručka - Oznaka proizvođača GU-BKS: B-70130-61-0-8 - Završna obrada: Inox - Door handle with oval rosette serie RONDO H1.1 (for spindle 8x8 mm) - half lever set - Manufacturer code GU-BKS: B-70130-61-0-8 - Finish: stainless steel		Naručuje se po komadu It is ordered per piece
102.024		- Četvrtka 8x8 mm - Oznaka proizvođača GU-BKS: B-78400-0L-0-1 (dužina četvrtke L=130 mm) - Square spindle 8x8 mm - Manufacturer code GU-BKS: B-78400-0L-0-1 (spindle length L=130 mm)		
122.098		- Ovalna rozeta za zaštitu cilindra serije BELCANTO - Oznaka proizvođača GU-BKS: B-72730-00-0-8 - Završna obrada: Inox - Oval rosette for cylinder protection BELCANTO series - Manufacturer code GU-BKS: B-72730-00-0-8 - Finish: stainless steel		Naručuje se po komadu It is ordered per piece
122.097		- Ovalna sigurnosna rozeta za zaštitu cilindra - Oznaka proizvođača GU-BKS: B-78820-0R-0-8 - Završna obrada: Inox - Oval security rosette for cylinder protection - Manufacturer code GU-BKS: B-78820-0R-0-8 - Finish: stainless steel		Naručuje se po komadu It is ordered per piece
122.092		- Uložak (cilindar) serije 88 - Oznaka proizvođača GU-BKS: B 8800 0501 (dužina cilindra 31+65 mm) - Lock insert (cylinder) series 88 - Manufacturer code GU-BKS: B 8800 0501 (cylinder length 31+65 mm)	Ni	

KLJUČANJE POMOĆNOG KRILA KOD DVOKRILNIH VRATA LOCKING OF AUXILIARY LEAF ON DOUBLE DOOR

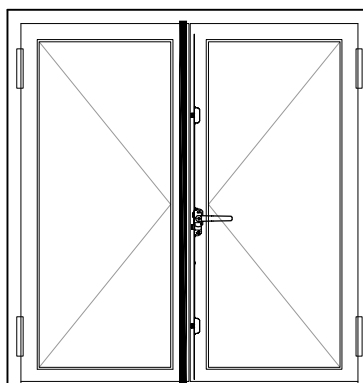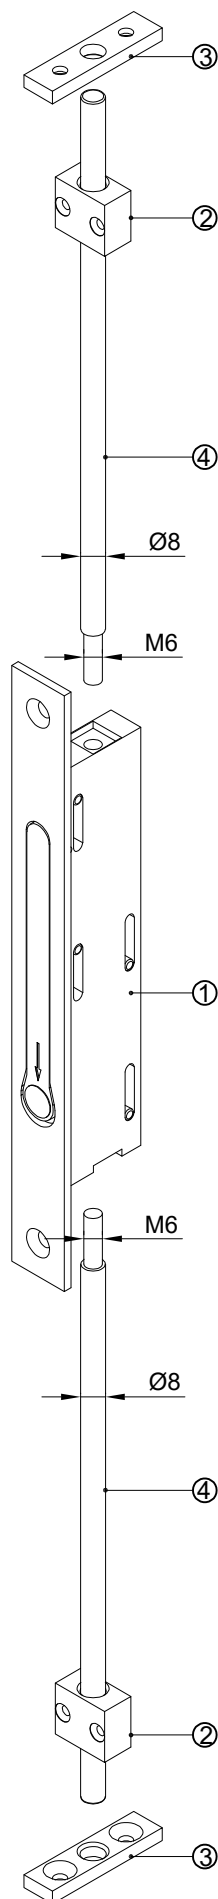

1) **122.057**

- Bravica za ključanje pomoćnog krila u ramu i pragu
- oznaka proizvođača GU-BKS: B 1899 0201
- Lock for the auxiliary leaf in the frame and threshold
- manufacturer code GU-BKS: B 1899 0201

2) **521.312**



- Usmjerivač osovinice
- Shaft positioner

3) **521.314**

- Pločica u ramu i pragu za ključanje pomoćnog krila
- Insert plate in the frame and threshold for the locking of auxiliary leaf

4) **521.315**

- Osovinica Ø8 mm; L=2000 mm
- Shaft Ø8 mm; L=2000 mm

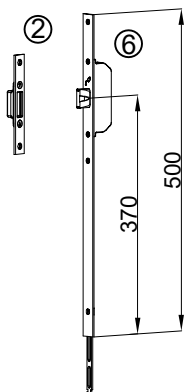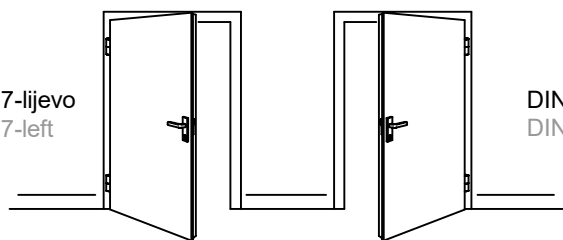SIGURNOSNA BRAVA 35mm S TRI MJESTA KLJUČANJA - GU SECURITY (MR2)
SAFETY LOCK 35 mm WITH 3 LOCKING POINTS - GU SECURITY (MR2)DIN 107- lijevo
DIN 107-leftDIN 107- desno
DIN 107-right**Okov za visine krila 1898-2414 mm**
Hardware for leaf heights 1898-2414 mm

1) Brava GU Secury s masivnim zasunima (MR2)

Multipoint lock with massive bolts GU Secury (MR2)

	Oznaka FEAL Code FEAL	Dubina Depth	Potisna ploča Push plate	Visina ručke (A) Handle height (A)	Rastojanje (E) Distance (E)	Četvrtka Quarter	Visina brave (B) Lock height (B)	(C)	(D)	Oznaka proizvođača Manufacturer code
čelik (steel)	122.052	35	24x2.5	1020	92	□ 8	2285	760	730	6-31542-14-0-1
inox	122.110*									6-31542-14-0-8

2) **122.053**

Prihvatna pločica (ravna) 22x3/NL11

- oznaka proizvođača GU: 6-40059-02-0-8

Striking plate (flat) 22x3/NL11

- manufacturer code GU: 6-40059-02-0-8

3) **122.054** (lijevi/left) ; **122.079** (desni/right)

Prihvatni lim (ravni) 22x3/NL11,

- oznaka proizvođača GU: 6-39257-01-L-8 (lijevi);
6-39257-01-R-8 (desni)

Striking plate (flat) 22x3/NL11,

- manufacturer code GU: 6-39257-01-L-8 (left);
6-39257-01-R-8 (right)4) **122.030**

Kučiste zasuna brave (62 mm)

- oznaka proizvođača GU: 9-48553-03-0-6.....(Element po želji)

Latch bolt casement (62 mm).

- manufacturer code GU: 9-48553-03-0-6.....(Optional part)

5) **122.055**

Elektro otvarač vrata GU ET8 standardni, bez klizača za jezičak, opruga 60N

- oznaka proizvođača GU: 6-38473-02-0-1.....(Elektro otvarač se koristi po želji)

Electrical door opener GU ET8 standard, without latch slide cover, latch spring 60N

- manufacturer code GU: 6-38473-02-0-1.....(Electrical door opener is optional)

Dodatni okov za visine krila 2415-2800 mm

Additional hardware for leaf heights 2415-2800 mm

6) **122.077(čelik/steel); 122.118 (inox)**

Secury produžetak brave MR2/24x3/500mm (Element po želji)

(dodatno gornje ključanje za visine krila 2415-2800 mm)

- oznaka proizvođača GU: 6-37395-12-0-1 (čelik)

6-37395-12-0-8 (inox)

Secury lock extension MR2/24x3/500mm (Optional part)

(additional upper lock for leaf heights 2415-2800 mm)

- manufacturer code GU: 6-37395-12-0-1 (steel)

6-37395-12-0-8 (inox)

2) **122.053**



Prihvatna pločica (ravna) 22x3/NL11

- oznaka proizvođača GU: 6-40059-02-0-8

Striking plate (flat) 22x3/NL11

- manufacturer code GU: 6-40059-02-0-8

*Preporučuje se korištenje u
uvjetima gdje je potrebna
visoka antikoroziivna zaštita*Recommended for use in
conditions where high
corrosion protection is required

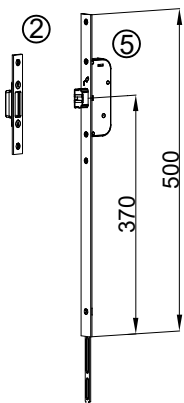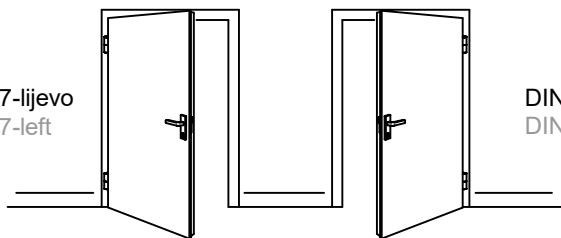SIGURNOSNA BRAVA 35 mm S TRI MJESTA KLJUČANJA - GU SECURY (SECA)
SAFETY LOCK 35 mm WITH 3 LOCKING POINTS - GU SECURY (SECA)DIN 107-lijevo
DIN 107-leftDIN 107-desno
DIN 107-right**Okov za visine krila 1898-2414 mm**
Hardware for leaf heights 1898-2414 mm1) Brava GU Secury s automatskim zasunima (SECA)
Multipoint lock with automatic bolts GU Secury (SECA)

	Oznaka FEAL Code FEAL	Dubina Depth	Potisna ploča Push plate	Visina ručke (A) Handle height (A)	Rastojanje (E) Distance (E)	Četvrtka Quarter	Visina brave (B) Lock height (B)	(C)	(D)	Oznaka proizvođača Manufacturer code
čelik (steel)	122.071	35	24x2.5	1020	92	□ 8	2285	760	730	6-28479-31-0-1
inox	122.112*									6-28479-31-0-8

2) **122.053**

Prihvatna pločica (ravna) 22x3/NL11
- oznaka proizvođača GU: 6-40059-02-0-8
Striking plate (flat) 22x3/NL11
- manufacturer code GU: 6-40059-02-0-8

3) **122.054** (lijevi/left) ; **122.079** (desni/right)

Prihvatni lim (ravni) 22x3/NL11,
- oznaka proizvođača GU: 6-39257-01-L-8 (lijevi);
6-39257-01-R-8 (desni)
Striking plate (flat) 22x3/NL11,
- manufacturer code GU: 6-39257-01-L-8 (left);
6-39257-01-R-8 (right)

4) **122.030**

Kučiste zasuna brave (62 mm)
- oznaka proizvođača GU: 9-48553-03-0-6.....(Element po želji)
Latch bolt casement (62 mm).
- manufacturer code GU: 9-48553-03-0-6.....(Optional part)

Dodatni okov za visine krila 2415-2800 mm
Additional hardware for leaf heights 2415-2800 mm5) **122.078** (čelik/steel); **122.119** (inox)




Secury produžetak brave SECA/24x3/500mm (Element po želji)
(dodatno gornje ključanje za visine krila 2415-2800 mm)
- oznaka proizvođača GU: 6-37394-12-0-1 (čelik)
6-37394-12-0-8 (inox)
Secury lock extension SECA/24x3/500mm (Optional part)
(additional upper lock for leaf heights 2415-2800 mm)
- manufacturer code GU: 6-37394-12-0-1 (steel)
6-37394-12-0-8 (inox)

2) **122.053**


Prihvatna pločica (ravna) 22x3/NL11
- oznaka proizvođača GU: 6-40059-02-0-8
Striking plate (flat) 22x3/NL11
- manufacturer code GU: 6-40059-02-0-8

*Preporučuje se korištenje u
uvjetima gdje je potrebna
visoka antikoroziivna zaštita
*Recommended for use in
conditions where high
corrosion protection is required



DODACI ZA SIGURNOSNE BRAVE 35 mm I 45 mm S TRI MJESTA KLJUČANJA - GU SECURY (MR2) I (SECA)
ACCESSORIES FOR SAFETY LOCKS 35 mm AND 45 mm WITH 3 LOCKING POINTS - GU SECURY MR2 AND SECA

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
142.056		- Set Secury A-offner Elektro motor (motorno otvaranje brave SECA) - Oznaka proizvođača GU: K-18153-01-0-0 - Set Secury A-offner electromotor (motorized opening for the SECA lock) - Manufacturer code GU: K-18153-01-0-0		
142.057		- Zaštita kabla 24x260x17 Ø10 do 100° otvaranje - Oznaka proizvođača GU: 6-29854-00-0-0 - Concealed cable duct 24x260x17 Ø10 up to 100° opening - Manufacturer code GU: 6-29854-00-0-0		
122.042		- Prihvatni dio za valjak (za bravu MR2) - Oznaka proizvođača GU: K-15597-01-0-6 - Receiving part for the roller (for lock MR2) - Manufacturer code GU: K-15597-01-0-6	Al Pvc	
122.040		- Valjak za bravu 35 mm (MR2) - Oznaka proizvođača GU: 6-36144-35-0-1 A - Roller for lock 35 mm (MR2) - Manufacturer code GU: 6-36144-35-0-1 A		







RUKOHVAT ZA VRATA (OBOSTRANO) DOOR PULL HANDLE (BOTH SIDES)






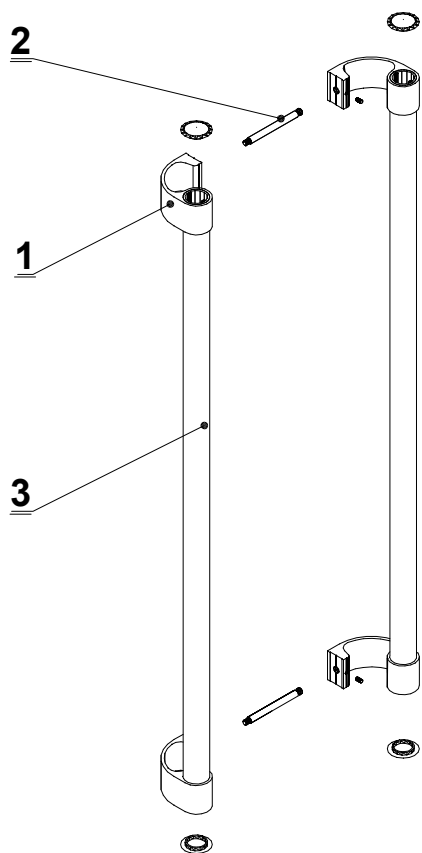







1. Art. **100.019**..... kom 1
Artikal sadržava:
 -nosač rukohvata, vanjski art.391.182 kom 2
 -nosač rukohvata, unutarnji art.391.181 kom 2
 -čep za profil rukohvata art. 375.075 kom 4
 -vijak imbus M6x10 DIN 914 art.431.342 kom 2
 -vijak imbus M5x4 DIN 913 art.431.805 kom 4
2. Art. **391.177**
 -inox osovina (L=94 mm)..... kom 2
3. Profil rukohvata vrata **F-0829**..... kom 2
 Profil F-0829 se pila na mjeru - prema zahtjevu kupca a isporučuje se u standardnoj mjeri - 6500 mm
1. Art. **100.019**..... pcs 1
 Elements of product:
 -handrail carrier, outside art.391.182 pcs 2
 -handrail carrier, inside art.391.181 pcs 2
 -plug for profile of handrail art. 375.075 pcs 4
 -screw M6x10 DIN 914 art.431.342 pcs 2
 -screw M5x4 DIN 913 art.431.805 pcs 4
2. Art. **391.177**
 inox shaft (L=94 mm)..... pcs 2
3. Handrail profile of door **F-0829** pcs 2
 The profile OF-0829 is cutted at dimension- according to request of customer and delivering in standard dimension-6500 mm






Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
100.019 01 02 03		- Nosač rukohvata F-0829 - Boje: 01- bijela; 02 - siva;03 - crna - Handrail carrier F-0829 - Color: 01- white; 02 - gray;03 - black		
391.177		- Inox osovina (L=94 mm) - Inox shaft (L=94 mm)	Inox Inox	




Brtila Gaskets

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
328.001		- Brtva u profilu krila i rama - Gasket in sash and frame profile	EPDM	60±5ShA
328.006		- Brtva u profilu krila i rama - Gasket in sash and frame profile	EPDM	60±5ShA
318.001		- Brtva prema staklu /unutarnja/ - Gasket towards glass /interior/	EPDM	70±5ShA
318.002		- Brtva prema staklu /unutarnja/ - Gasket towards glass /interior/	EPDM	70±5ShA
328.002		- Brtva prema staklu /vanjska/ - Gasket towards glass /exterior/	EPDM	60±5ShA
328.003		- Brtva prema staklu /vanjska/ - Gasket to the glass /exterior/	EPDM	60±5ShA
338.001		- Centralna brtva - Central gasket	EPDM	60±5ShA







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
314.001		- Brtva u profilu rama - Gasket in frame profile	TPE	65ShA
311.003		- Brtva prema staklu /unutarnja/ - Gasket towards glass /interior/	EPDM	71
311.004		- Brtva prema staklu /unutarnja/ - Gasket towards glass /interior/	EPDM	71
311.005		- Brtva prema staklu /unutarnja/ - Gasket towards glass /interior/	EPDM	71
318.015		- Brtva prema staklu /unutarnja/ - Glazing gasket /interior/	EPDM	70±5 ShA
318.016		- Brtva prema staklu /unutarnja/ - Glazing gasket /interior/	EPDM	70±5 ShA



Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
318.017		- Brtva prema staklu /unutarnja/ - Glazing gasket /interior/	EPDM	70±5 ShA
328.202		-Brtva prema staklu, vanjska -Gasket to the glass, exterior	EPDM i spužvasti EPDM EPDM and foam EPDM	60 ShA 0.6 g/cm3
328.203		-Brtva prema staklu, vanjska -Gasket to the glass, exterior	EPDM i spužvasti EPDM EPDM and foam EPDM	60 ShA 0.6 g/cm3
328.004		- Brtva prema staklu /vanjska/ - Gasket to the glass /exterior/	EPDM	60±5ShA
344.071		- Brtva prema pragu vrata-otvaranje unutra i vani - Gasket towards door treshold - inward and outward opening	TPE	65ShA
348.088		- Brtva prema profilu praga - Gasket towards the threshold profile	EPDM + Spužvasti EPDM EPDM + Foam EPDM	70±5ShA 0.9±0.15 g/cm³



Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
344.058		- Brtva u profilu praga - Gasket in threshold profile	TPE	65ShA
344.087		- Brtva za profil FT-0231 - Gasket for profile FT-0231	TPE	71
344.011		- Brtva za vezu-dilatacija profila - Stara oznaka 02781/S - Connection gasket-profile dilatation - Former code 02781/S	EPDM	
345.001		- Kutni umetak za centralnu brtvu 338.001 - Corner insert for central gasket 338.001	EPDM	35ShA
347.003		- Četkasta brtva 7x9, (crna) - Oznaka proizvođača Schlegel: 2A773288016CJ - Brush seal 7x9, (black) - Manufacturer code Schlegel: 2A773288016CJ	PP	
521.001		- Držać četkaste brtve L=2500 mm - Stara oznaka Z 801 - Brush gasket holder L=2500 mm - Former code Z 801		






Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
347.001		- Četkasta brtva 25 mm, L=2000 mm, (crna) (Stara oznaka: Z 802) - Oznaka proizvođača Schlegel: 2U929288 - Brush gasket 25 mm, L=2000 mm, (black) (Former code: Z 802) - Manufacturer code Schlegel: 2U929288	Al.	
347.008		- Četkasta brtva 13 mm, (A=2.9, B=2.9), (crna) - Oznaka proizvođača Schlegel: 2K120288006 - Brush gasket 13 mm, (A=2.9, B=2.9), (black) - Manufacturer code Schlegel: 2K120288006		
340.029		- Okrugla brtva Ø4 - Round gasket Ø4	TPE	
340.055		- Odstojna brtva - Spacer gasket	Elastron	65ShA



Dodaci Accessories

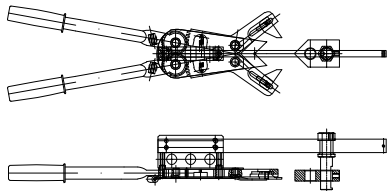CODE	Izgled-presjek View - cross-section	Opis Description	Materijal Material	Nap. Remark
301.006. 01 02 03		- Set za bočni čep klupice (za klupice do 280 mm) - Boje: 01 - bijela; 02 - siva; 03 - crna - Aluminium window sill side caps (for window sill up to 280 mm) - Color: 01 - white; 02 - gray; 03 - black	PVC TPE Al.	
301.009. 01 02 03		- Set za bočni čep klupice (za klupice do 280 mm) - Boje: 01 - bijela; 02 - siva; 03 - crna - Aluminium window sill side caps (for window sill up to 280 mm) - Color: 01 - white; 02 - gray; 03 - black	PVC TPE Al.	
301.010. 01 02 03		- Set za bočni čep klupice (za klupice do 360 mm) - Boje: 01 - bijela; 02 - siva; 03 - crna - Aluminium window sill side caps (for window sill up to 360 mm) - Color: 01 - white; 02 - gray; 03 - black	PVC TPE Al.	
240.001		- Kliješta za kutne spojnice - Manual crimping tool		
240.001.00.01		- Noževi za kliješta kutnih spojnica - Knives for crimper corner joint		
210.001		- Štanca za otklopno zaokretne sisteme prozora i vrata - Stara oznaka: Štanca S1 - Punching machine for tilt-turn systems of windows and doors: - Former code: Punch S1		

CODE	Izgled-presjek View - cross-section	Opis Description	Materijal Material	Nap. Remark
210.009		- Pneumatska štanca za obradu odvoda kondezata i provjetravanje - Stara oznaka : S9 - Pneumatic punch for processing drainage and ventilation holes - Former code : S9		
220.001		- Set glodala za obradu prečki prema profilu krila i okvira (TERMO 65) - Set of milling cutters for processing window mullions towards sash and frame profile (TERMO 65)	Čelik Steel	

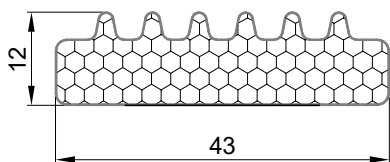CODE	Izgled-presjek View - cross-section	Opis Description	Materijal Material	Nap. Remark
340.013		- Izolacijska ispuna s ljepljivom trakom (43x12) (spužvasta ispuna po opsegu stakla) - Insulation foam with adhesive tape (43x12) (foam insulation around the glass)	XPE	
348.002		- Izolacijska ispuna s ljepljivom trakom (37x8) (spužvasta ispuna po opsegu stakla) - Insulation foam with adhesive tape (37x8) (foam insulation around the glass)	XPE	

CODE	Izgled-presjek View - cross-section	Opis Description	Materijal Material	Nap. Remark
521.286		- Element za ugradnju - Instalation elemet	Al. PVC.	
521.287.01 02 03		- Umetak za profil ojačanja prečke (za profile NP-4183 i NP-4184) - Boje: 01 - bijela; 02 - siva; 03 - crna - End insert for window crossbar reinforcement (for profiles NP-4183 and NP-4184) - Color: 01 - white; 02 - gray; 03 - black	Al.	
521.288.01 02 03		- Umetak za profil ojačanja prečke (za profile F-1634 i NP-4184) - Boje: 01 - bijela; 02 - siva; 03 - crna - End insert for window crossbar reinforcement (for profiles F-1634 and NP-4184) - Color: 01- white; 02 - gray; 03 - black	Al.	
391.148.01 02 03		- Aluminijska nosiva pločica francuskog balkona lijeva, 50 mm x 54 mm x 8 mm - Boje: 01 - bijela; 02 - siva; 03 - crna - French balcony aluminium glass support left 50 mm x 54 mm x 8 mm -Color: 01- white; 02 - gray; 03 - black	Al.	
391.149.01 02 03		- Aluminijska nosiva pločica francuskog balkona desna, 50 mm x 54 mm x 8 mm - Boje: 01 - bijela; 02 - siva; 03 - crna - French balcony aluminium glass support right 50 mm x 54 mm x 8 mm - Color: 01- white; 02 - gray; 03 - black	Al.	

CODE	Izgled-presjek View - cross-section	Opis Description	Materijal Material	Nap. Remark
521.312		- Usmjerivač osovinice Ø8 mm - Shaft positioner Ø8 mm	Al.	
521.314		- Pločica u ramu i pragu za ključanje pomoćnog krila vrata - Insert plate in the frame and threshold for the locking of the auxiliary door leaf	Al.	
521.315		- Osovinica Ø8 mm, L=2000 mm - Shaft Ø8 mm, L=2000 mm	Al.	

SET ZA BOČNI ČEP PROZORSKE KLUPICE 301.006 SET FOR SIDE CAP OF WINDOW SILL 301.006

- 1. - Osnovni profil
- 2. - PVC prihvatnik klupice
- 3. - Vanjski čep-prihvatnik klupice i profila
- 1. - Basic profile
- 2. - PVC window sill acceptor
- 3. - Outside cap - sill and profile acceptor



- 1 - Set za bočni čep klupice 301.006
- 2 - Set za bočni čep klupice 301.009
- 3 - Set za bočni čep klupice 301.010

-Setovi bočnih čepova 301.006 i 301.009 su u veličini profila klupice F-0680/J (280 mm)
-Za manje klupice se radi skraćivanje čepa prema mjerama u uputstvu artikla
-Set za bočni čep 301.010 - (360 mm)
-Izbor boje čepova prema RAL-karti



- 1 - Set for side cap of window sill 301.006
- 2 - Set for side cap of window sill 301.009
- 3 - Set for side cap of window sill 301.010




-Side cap set 301.006 i 301.009 are in size of window sill profile F-0680/J (280 mm)
-For smaller window sills side caps are shorten according to article dimensions
-Set for side cap 301.010 - (360 mm)
-Selection of cap colour according to RAL-map

- 1 - Set klupice 301.006
- 2. - Čep do otvora-prihvatnik klupice i profila
- 1 - Window sill set 301.006
- 2. - Cap next to the opening - Window sill and profile acceptor

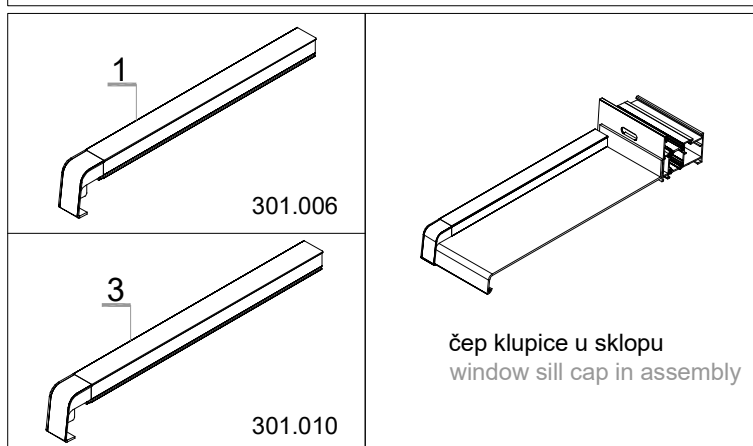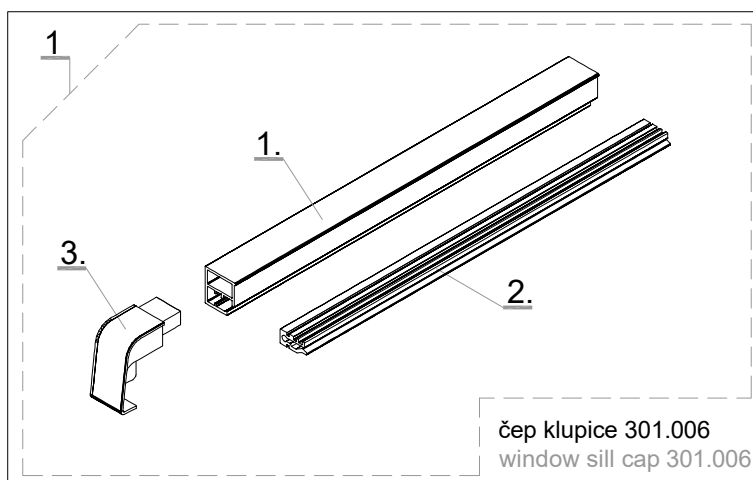


SET ZA BOČNI ČEP PROZORSKE KLUPICE 301.009 SET FOR SIDE CAP OF WINDOW SILL 301.009

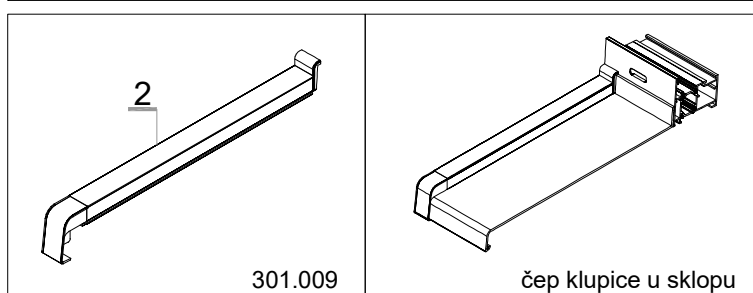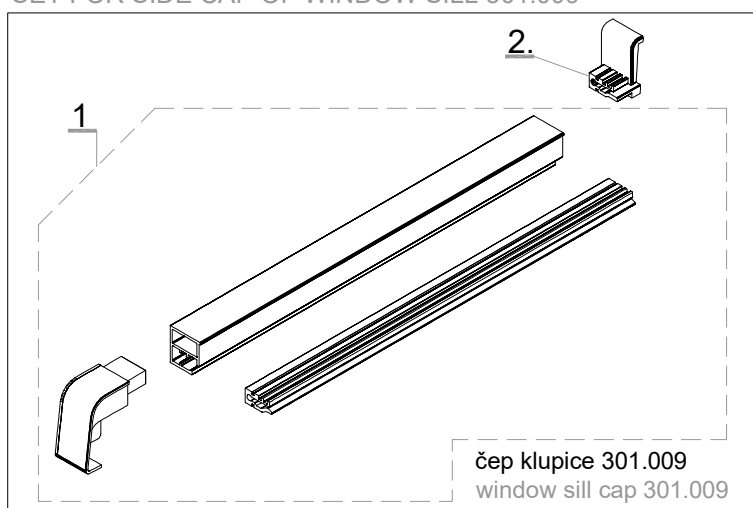

Oznaka Code	Opis Description	Izgled-presjek View-cross section	Materijal Material	Napomena Remark
433.017	vijak 3.9x16 DIN 7981 screw 3.9x16 DIN 7981		Inox A2	
433.019	vijak 3.9x22 DIN 7981 screw 3.9x22 DIN 7981		Inox A2	
433.020	vijak 3.9x25 DIN 7981 screw 3.9x25 DIN 7981		Inox A2	
433.021	vijak 3.9x32 DIN 7981 screw 3.9x32 DIN 7981		Inox A2	
433.029	vijak 4.2x16 DIN 7981 screw 4.2x16 DIN 7981		Inox A2	
433.030	vijak 4.2x19 DIN 7981 screw 4.2x19 DIN 7981		Inox A2	
433.031	vijak 4.2x22 DIN 7981 screw 4.2x22 DIN 7981		Inox A2	
433.035	vijak 4.2x38 DIN 7981 screw 4.2x38 DIN 7981		Inox A2	
433.036	vijak 4.2x45 DIN 7981 screw 4.2x45 DIN 7981		Inox A2	
433.037	vijak 4.2x50 DIN 7981 screw 4.2x50 DIN 7981		Inox A2	
433.043	vijak 4.8x19 DIN 7981 screw 4.8x25 DIN 7981		Inox A2	
433.045	vijak 4.8x25 DIN 7981 screw 4.8x25 DIN 7981		Inox A2	
433.046	vijak 4.8x32 DIN 7981 screw 4.8x32 DIN 7981		Inox A2	
433.047	vijak 4.8x38 DIN 7981 screw 4.8x38 DIN 7981		Inox A2	
433.048	vijak 4.8x45 DIN 7981 screw 4.8x45 DIN 7981		Inox A2	
433.092	vijak 3.5x16 DIN 7982 screw 3.5x16 DIN 7982		Inox A2	
433.106	vijak 3.5x19 DIN 7982 screw 3.5x19 DIN 7982		Inox A2	
433.118	vijak 4.2x19 DIN 7982 screw 4.2x19 DIN 7982		Inox A2	
433.121	vijak 4.2x32 DIN 7982 screw 4.2x32 DIN 7982		Inox A2	
433.122	vijak 4.2x38 DIN 7982 screw 4.2x38 DIN 7982		Inox A2	
433.123	vijak 4.2x45 DIN 7982 screw 4.2x45 DIN 7982		Inox A2	
433.134	vijak 4.8x38 DIN 7982 screw 4.8x38 DIN 7982		Inox A2	
433.135	vijak 4.8x45 DIN 7982 screw 4.8x38 DIN 7982		Inox A2	
430.183	turbo vijak (fischer FFS 7.5 x 52) turbo screw (fischer FFS 7.5 x 52)		Inox A2	
430.184	turbo vijak (fischer FFS 7.5 x 62) turbo screw (fischer FFS 7.5 x 62)		Inox A2	

Obrada i montaža

Processing and montage

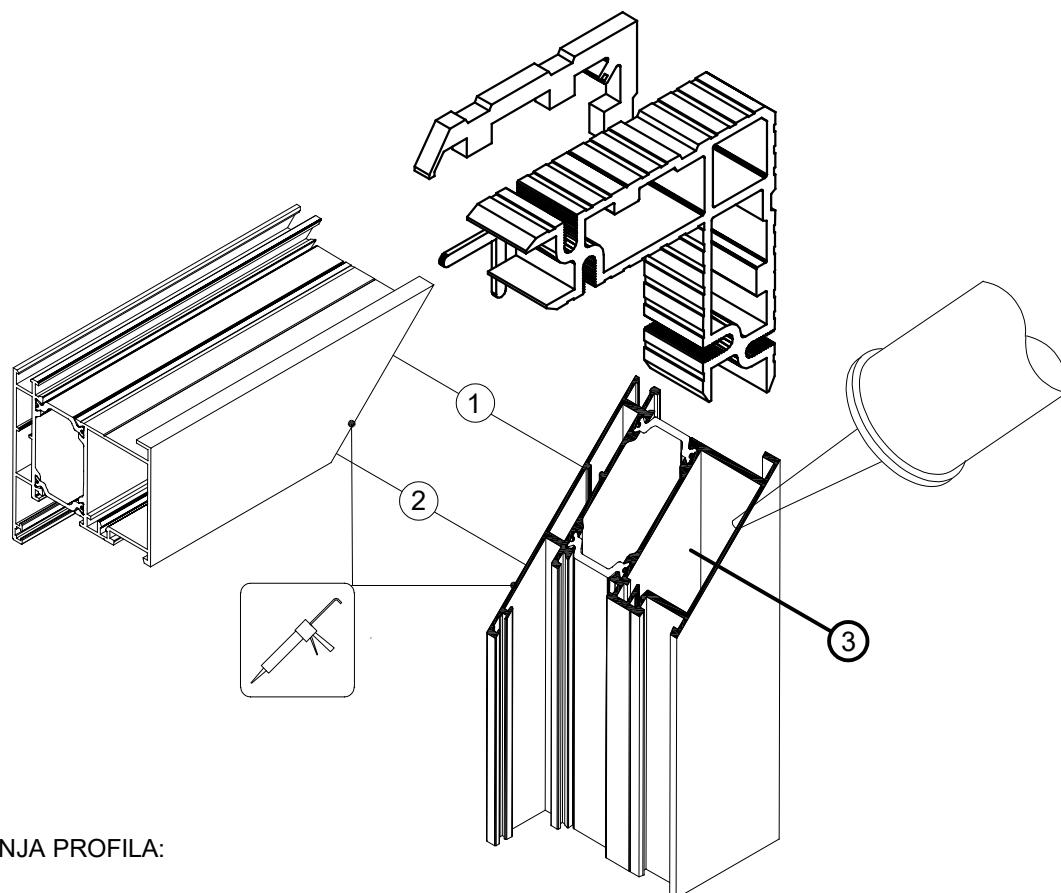SPAJANJE PROFILA KUTNIM SPOJNICAMA
CONNECTING PROFILE WITH CORNER BRACKETS

POSTUPAK SPAJANJA PROFILA:

1. Površine koje se spajaju očistiti i odmastiti odgovarajućim sredstvom (npr. Teroson VR 20 ili FL+)
2. Premazati površine koje se spajaju ljepilom (npr. Teroson MS 939).
3. Ljepilo ubrizgati u komore za kutnik (po opsegu komore)
4. Profile s kutnikom izravnati i spojiti
5. Dio ljepila koji iscuri između rezova očistiti sredstvom za čišćenje i odmašćivanje (npr. Teroson VR 20 ili FL+).

NAPOMENA:

Ovaj postupak spajanja profila primjenjiv je za sve Feal-ove kutnike i njima odgovarajuće komore.

Lijepljenjem rezova i kutnika ljepilima za metal, osigurava se potrebna zrako- i vodonepropusnosti spoja kao i dodatna mehanička čvrstoća spoja.


PROFILE CONNECTION PROCEDURE:

1. Clean and degrease all connecting surfaces with suitable products (e.g. Teroson VR 20 or FL+).
2. Smear connecting surfaces with metal glue (e.g. Teroson MS 939).
3. Inject metal glue into chambers for the corner bracket (on chamber edges)
4. Level profiles with corner brackets and connect
5. Leaked glue that comes from the joints remove with cleaning and degreasing products (e.g. Teroson VR 20 ili FL+ /).

NOTE:

This profile connection procedure is applicable for all Feal corner brackets and their appropriate chambers. By gluing the profile and corner brackets with a metal glue, necessary air and water tightness of the joint as well as additional mechanical properties is ensured

SPAJANJE PROFILA VEZNICIMA CONNECTING OF PROFILES BY USING CONNECTING ELEMENT -(T-BRACKET)

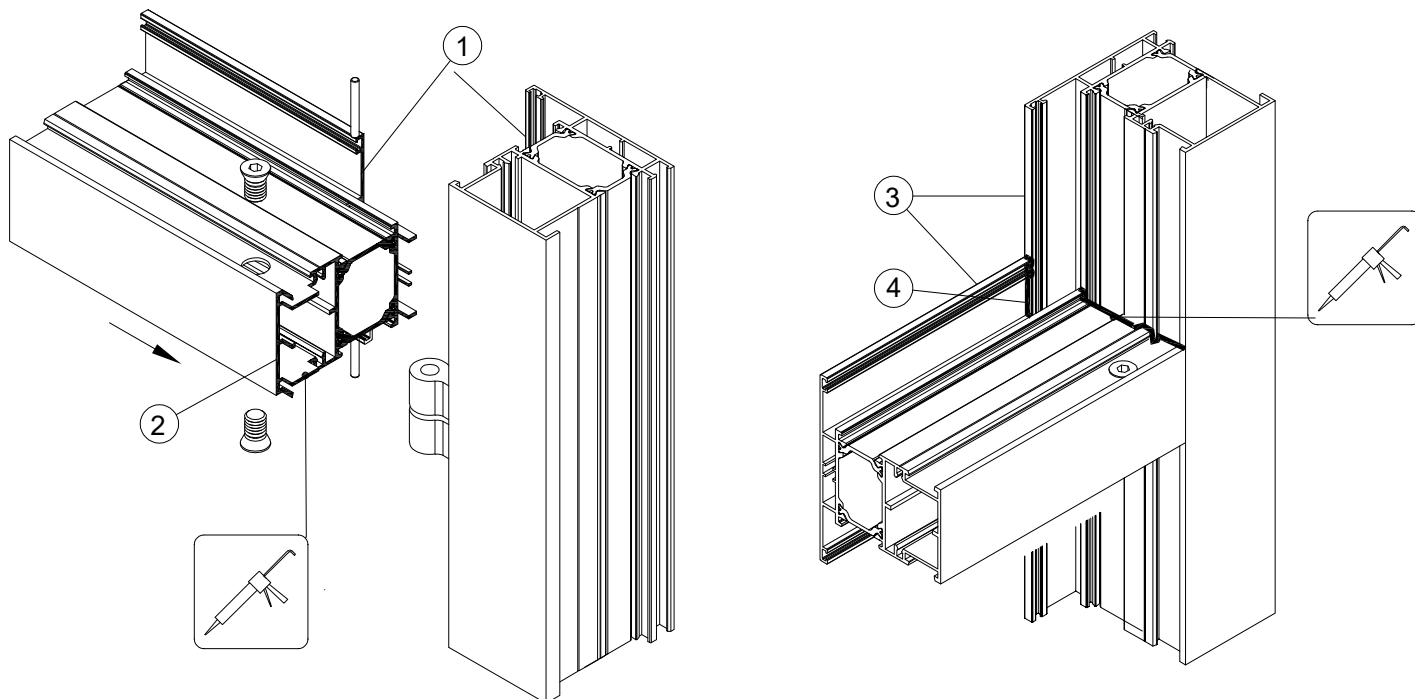

POSTUPAK SPAJANJA PROFILA

1. Površine koje se spajaju-rezove očistiti i odmastiti odgovarajućim sredstvom (npr. Teroson VR 20 ili FL+)
2. Premazati površine koje se spajaju-rezove ljepilom za metal (npr. Teroson MS 939).
3. Profile s veznicima izravnati i spojiti
4. Nakon spajanja profila, sve žljebove ispuniti ljepilom za metal (npr. Teroson MS 939 (Henkel))
5. Dio ljepila koji iscuri između rezova očistiti sredstvom za čišćenje i odmašćivanje (npr. Teroson VR 20 ili FL+).

NAPOMENA:


Lijepljenjem rezova, kao i svih spojeva profila sa ljepilima za metal, osigurava se potrebna zrako i vodonepropusnosti spoja kao i dodatna mehanička čvrstoća spoja.

PROFILE CONNECTION PROCEDURE:

1. Clean and degrease all connecting surfaces with suitable products (e.g. Teroson VR 20 ili FL+).
2. Smear connecting surfaces with metal glue (e.g. Teroson MS 939).
3. Level profiles with connecting element (T-bracket) and connect
4. After joining the profile, all profile joints must be filled with metal glue (e.g. Teroson MS 939).
5. Leaked glue that comes from the joints remove with cleaning and degreasing products (e.g. Teroson VR 20 ili Teroson FL+).

NOTE:

By gluing the profile, as well as all profile joints with a metal glue, necessary air and water tightness of the joint as well as additional mechanical properties is ensured.

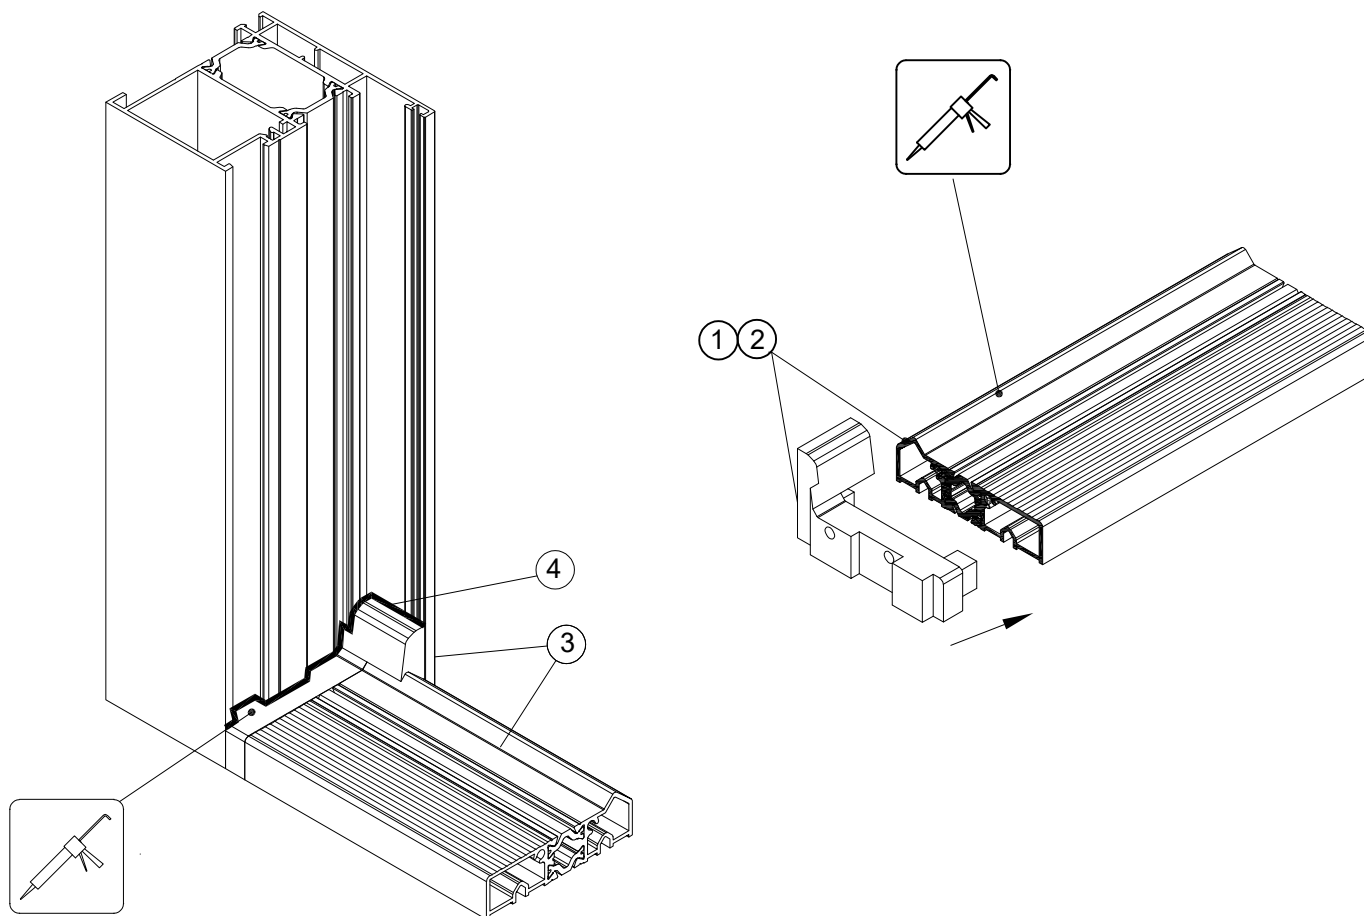SPAJANJE PROFILA PRAGA S PROFILOM RAMA POMOĆU UMETKA
CONNECTING THE THRESHOLD PROFILE WITH FRAME PROFILE USING END INSERT

POSTUPAK SPAJANJA PROFILA

1. Površine koje se spajaju-rezove očistiti i odmastiti odgovarajućim sredstvom (npr. Teroson VR 20 ili FL+)
2. Na profilu praga premazati površine koje se spajaju ljepilom za metal (npr. Teroson MS 939).
- 2.1. Ljepilo za metal ubrizgati u komore profila praga na mjestima gdje ulazi umetak (po opsegu komore)
3. Profil praga i umetak izravnati i spojiti
4. Profil praga sa spojenim umetkom izravnati i spojiti sa profilom rama
5. Nakon spajanja profila, sve spojeve profila i umetka ispuniti ljepilom za metal (npr. Teroson MS 939)
6. Dio ljepila koji iscure između rezova očistiti sredstvom za čišćenje i odmašćivanje (npr. Teroson VR 20 ili FL+).

NAPOMENA:

Lijepljenjem rezova, kao i svih spojeva profila sa ljepilima za metal, osigurava se potrebna zrako i vodonepropusnosti spoja kao i dodatna mehanička čvrstoća spoja.

PROFILE CONNECTION PROCEDURE:

1. Clean and degrease all connecting surfaces with suitable products (e.g. *Teroson VR 20 or Teroson FL+*).
2. On threshold profile smear all connecting surfaces with metal glue (e.g. *Teroson MS 939*).
- 2.1. Inject metal glue into chambers on ends of the profile for the insert (on chamber edges).
3. Level threshold profile with insert and connect them
4. Level threshold profile with the connected insert with the frame and connect them
5. **After joining the profiles, all profile connections must be filled with metal glue** (e.g. *Teroson MS 939*).
6. Leaked glue that comes from the joints remove with cleaning and degreasing products (e.g. *Teroson VR 20 or Teroson FL+*).

NOTE:

By gluing the profile, as well as all profile joints with a metal glue, necessary air and water tightness of the joint as well as additional mechanical properties is ensured.


PREPORUKA:


- Uslijed elastičnosti, dilatacije te drugih utjecaja često dolazi do povlačenja (skupljanja) brtve prema staklu u žlijebu, što dovodi do prodora vode u profil.
- Preporučuje se lijepljenje kraja brtve ljepilima za metal i EPDM (npr. trenutno ljepilo Loctite 4090)-prema skici.
- Odnosi se na sve brtve koje se uvlače u žlijeb.

RECOMMENDATION:

Due to elasticity, dilatation and other impacts gasket retraction towards the glass is possible, which can lead to water penetration in the profile.

It is recommended to glue the gasket ends with adhesives for metal and EPDM (eg. Loctite 4090- according to the drawing) This applies to all the gaskets with groove placement.

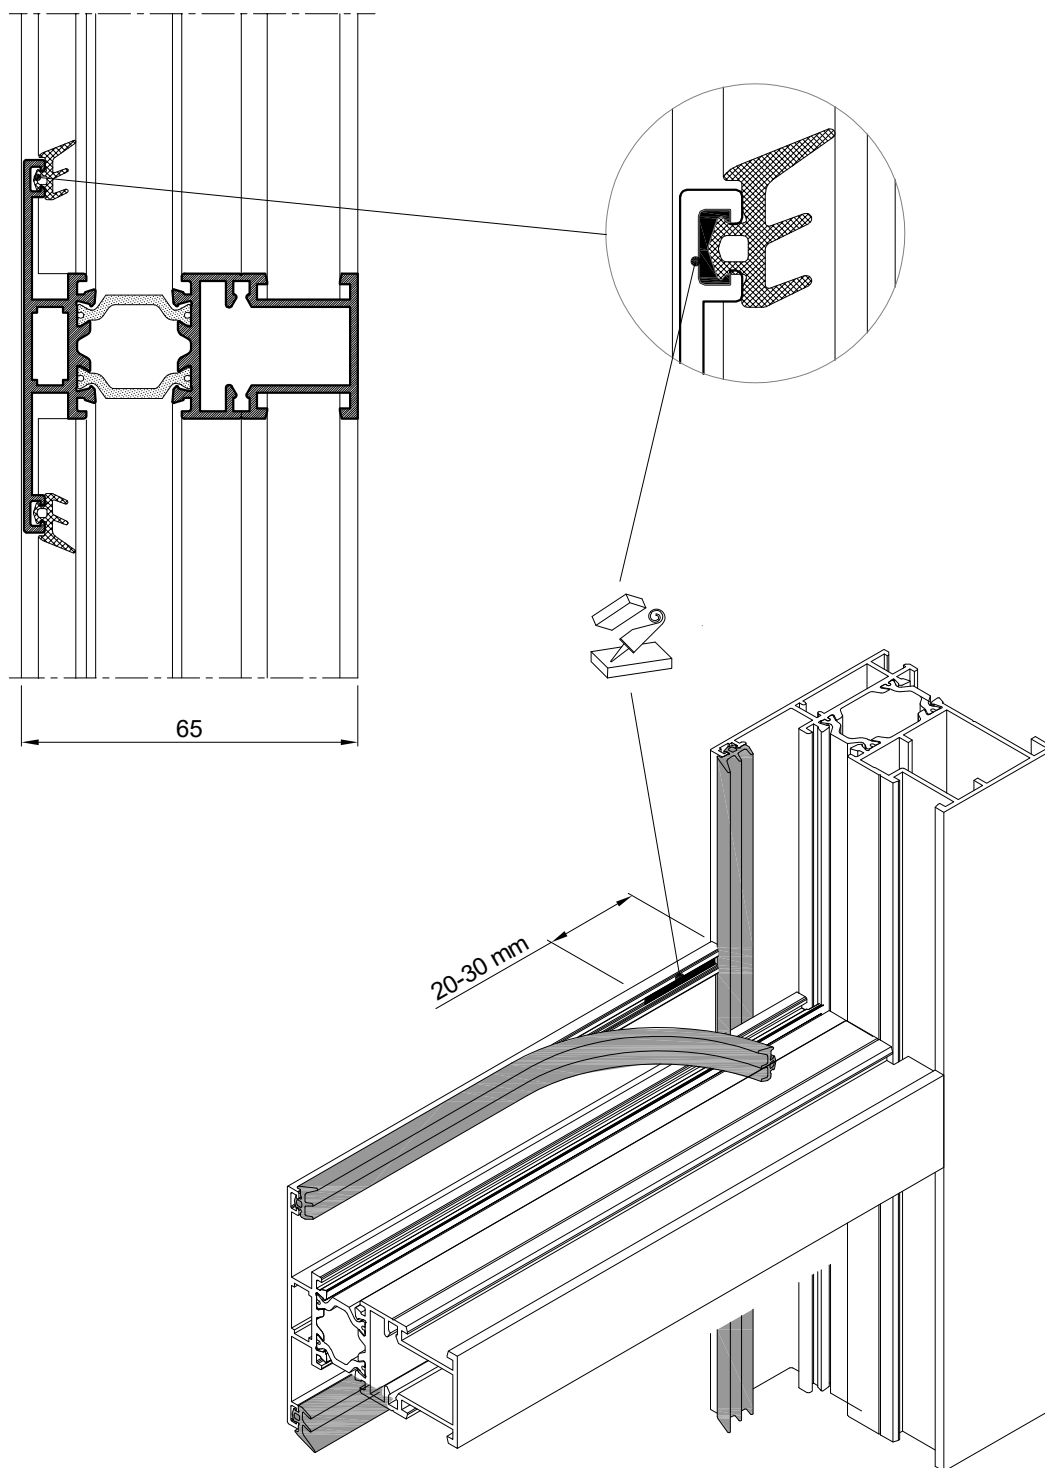



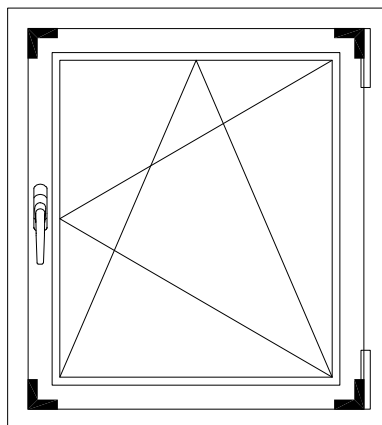
DETALJ UGRADNJE KUTNE SPOJNICE CENTRALNE BRTVE
INSTALLATION DETAIL OF THE CORNER INSERT FOR THE CENTRAL GASKET

-Preporučuje se, na mjestu dodira, lijepljenje centralne brtve 338.001 i kutne spojnice brtve 345.001 ljepilom za EPDM (npr. trenutno ljepilo Loctite 4090).


-Lijepljenjem se osigurava neprekidnost centralne brtve čime se osigurava potrebna zrakopropusnost i vodonepropusnost spoja.

-It is recommended, at the point of contact, bonding of the central gasket 338.001 and the angular joint of the gasket 345.001 with EPDM adhesive (e.g. Loctite 4090 instant adhesive).

-Gluing ensures the continuity of the central gasket, ensuring the necessary airtightness and watertightness of the joint.

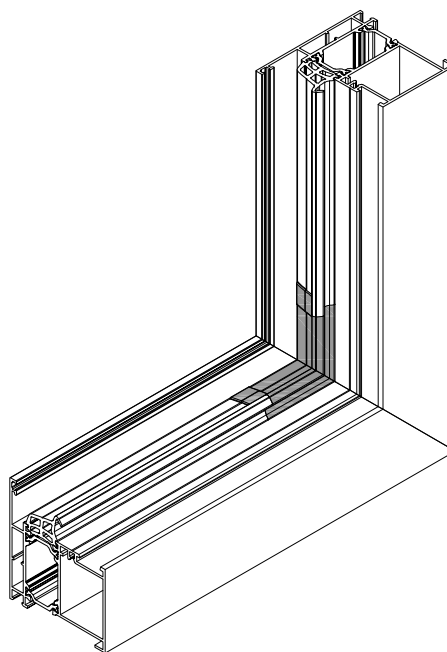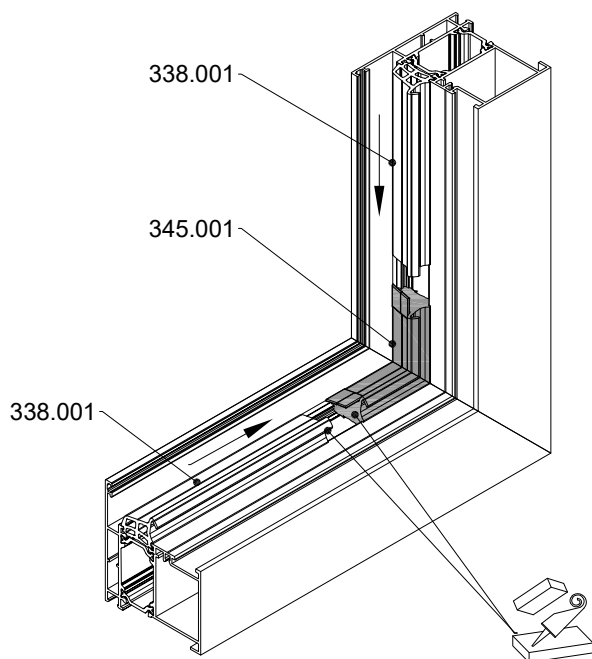

345.001-kutna spojnica
centralne brtve



UPORABA BRTVE 314.001

-Radi smanjenja ulaska padalina u prostor rama preporučuje se uporaba brtve 314.001 (stara oznaka Z-10).

-Brtvu 314.001 umetnuti po opsegu prozora.

U gornjem pojasu brtva se prekida radi omogućavanja ventilacije prozora.

-Korištenje brtve 314.001 zahtjeva uporabu kutnika 730.001 umjesto kutnika 730.002.


USE OF GASKET 314.001

-To reduce the flow of precipitation into the frame area, it is recommended to use gasket 314.001 (old mark Z-10).

-Insert gasket 314.001 by the window circumference.

In the upper belt, the gasket breaks to allow window ventilation.

-Using gasket 314.001 requires the use of angle 730.001 instead of angle 730.002.

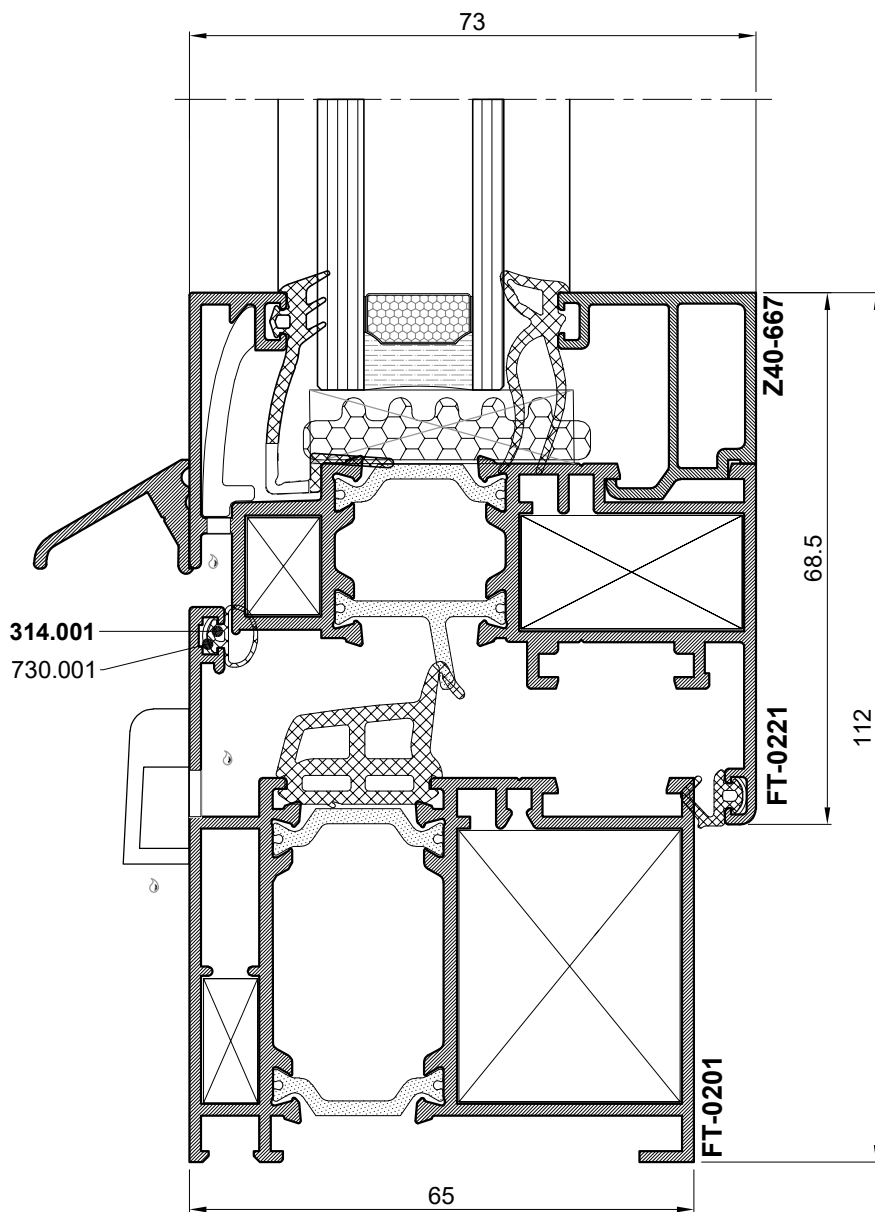

ODVOD KAPLJEVINA IZ OTVARAJUĆEG PROZORA


Kapljevine koje uđu u krilo prozora između brtve i ispune vode se kroz otvor na brtvi i profilu krila prema vani. Dio kapljevina iz krila i kapljevina s vana ulaze u predviđeni prostor u profilu rama te ga napuštaju kroz otvore u profilu koji se maskiraju čepom 373.003 ili 370.070.

Napomena: Otvore na profilu rama uvijek držati prohodnim.

WINDOW DRAINAGE

Liquids that enter the portion of window between gasket and filling are guided through opening on gasket and sash profile towards outside. Portion of liquids from sash and liquids from outside enter the appropriated space in profile and leave it through openings on profile that are masked with cap 373.003 or 370.070.

Remark: Openings on profile should be always passable.

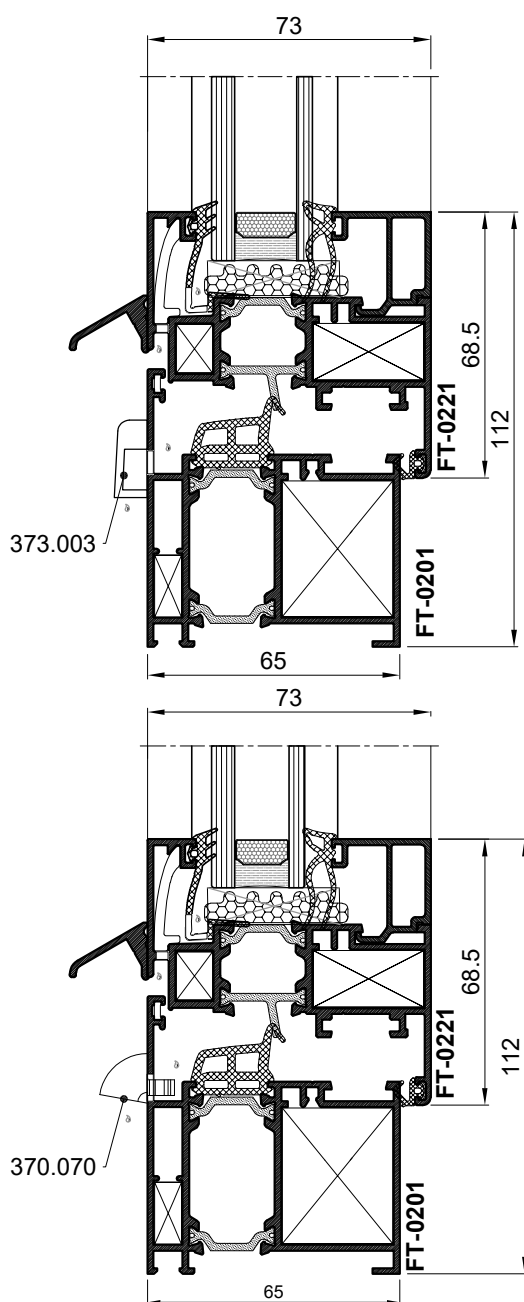**ODVOD KAPLJEVINA IZ FIKSNOG PROZORA**

Kapljevine koje uđu u fiksni prozor između brtve i ispune vode se kroz otvor na brtvi i profilu rama prema vani. Otvori se maskiraju čepom 373.003 ili 370.070.


Napomena: Otvore na profilu rama uvijek držati prohodnim.

WINDOW DRAINAGE

Liquids that enter the fixed window between gasket and filling are led through opening on gasket and the frame profile outwards.

The openings are masked with cap 373.003 or 370.070.

Remark: Openings on profile should be always passable.

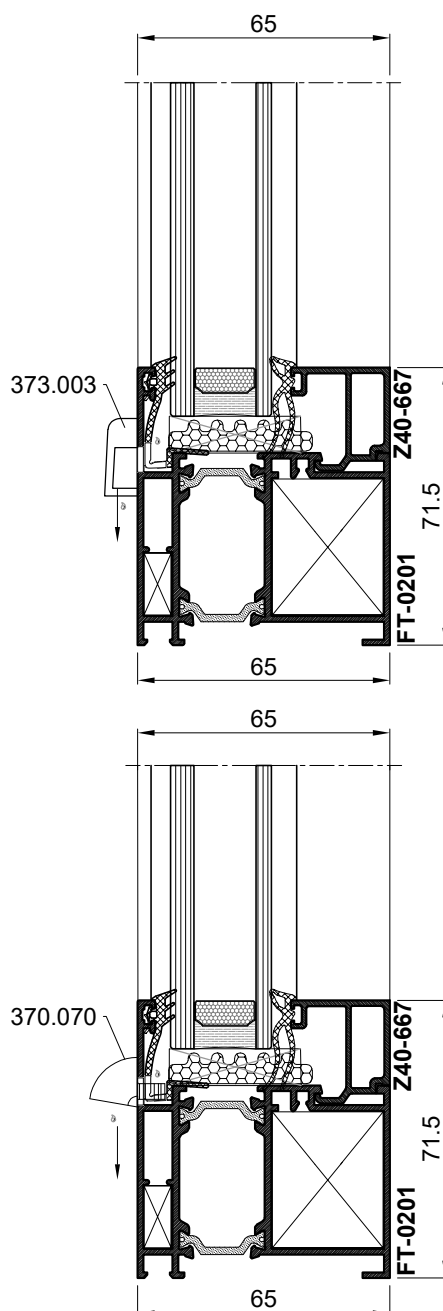

U uvjetima izraženih padalina (kiša, vjetar) može se koristiti opcija s većim otvorom za kapljevину (maska 370.070).
In case of heavy precipitation (rain, wind), an option with a larger drainage opening (mask 370.070) may be used.

PREPORUKE ZA LIJEPLJENJE STAKLA NA PROFIL KRILA

RECOMMENDATIONS FOR BONDING OF GLASS ON SASH PROFILE

Postupak lijepljenja se preporučuje izvoditi s krilom u položajem položaju. Ljepilo mora biti kompatibilno s kitom po obodu stakla jer u suprotnom lijepljenje neće biti uspješno.



Postupak lijepljenja

1. Postaviti XPE termoizolaciju na profil i izrezati je na mjestima na kojima će se nanositi ljepilo i postavljati podmetači za staklo.
2. Očistiti i odmastiti sve površine na koje će se nanositi ljepilo odgovarajućim sredstvom. /npr. DOWSIL R-40/ (ako je na površini na koju će se nanositi ljepilo brtva, prije čišćenja ukloniti taj dio brtve)
3. Nanijeti primer na očišćenu površinu profila /npr. DOWSIL PRIMER-1200 OS/
4. Nanijeti ljepilo na profil /npr. DOWSIL 993/ (slika 1),
5. Postaviti staklo
6. Postaviti podmetače za staklo na odgovarajuća mjesta (potrebno je odmah točno pozicionirati staklo jer nakon stvrdnjavanja ljepila nisu moguće korekcije)
7. Nanijeti ljepilo ispod stakla (slika 2)

Napomena

Otvori na profilu krila prozora radi odvoda kapljevina i ventiliranja komora krila moraju biti na udaljenosti većoj od 200 mm od unutarnjeg spoja krila tako da se ne začepi zbog ljepila ili podmetača za staklo. Prije daljnje obrade krila ljepilo se treba osušiti. (provjeriti upute proizvođača)

— ljepilo

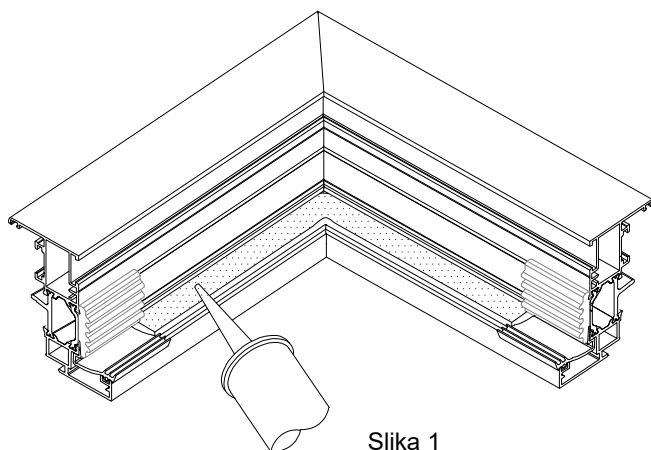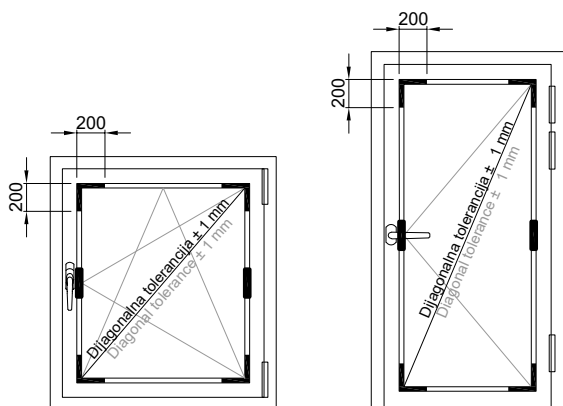

Slika 1
Picture 1

It is recommended to perform glazing with sash profile in horizontal position. The adhesive must be compatible with the sealant on the glass edge, otherwise the bonding will not be successful.



Bonding process

1. Place the XPE thermal insulation on the profile and cut it in the places where the adhesive will be applied and the glass packers placed.
2. Clean and degrease all surfaces on which the adhesive will be applied with a suitable product. /eg. DOWSIL R-40/ (if there is a gasket on the surface to which the adhesive will be applied, remove that part of the seal)
3. Apply the primer to the surface of the profile /eg. DOWSIL PRIMER-1200 OS/
4. Apply adhesive to the profile /eg. DOWSIL 993/ (picture 1)
5. Place the glass
6. Place the glass packers (it is necessary to position the glass exactly right away, as corrections are not possible after curing of the adhesive)
7. Apply adhesive under the glass (picture 2)



Note

Openings on the profile of the window sash for draining liquids and ventilating the sash chambers must be at a distance of more than 200 mm from the corner of the sash so that they are not blocked by glue or glass packers. Before continuing with processing of the sash curing of the adhesive must be ensured. (check the instructions of the adhesive manufacturer)

— adhesive

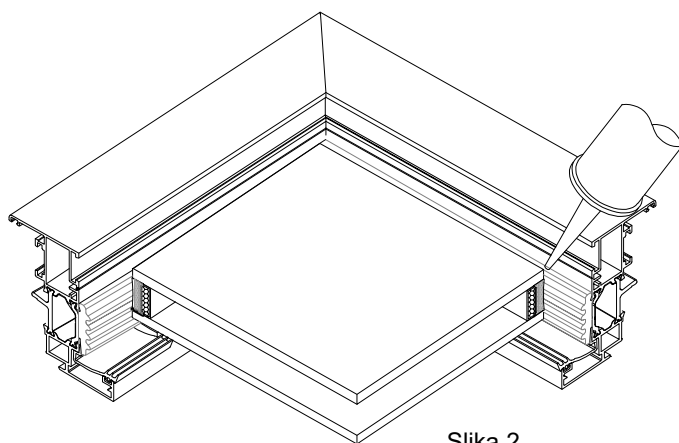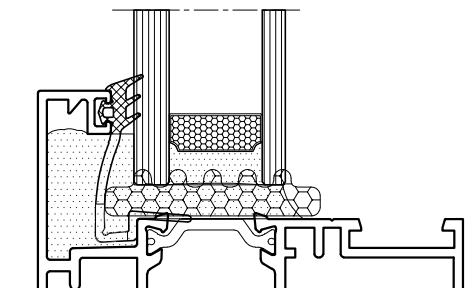

Slika 2
Picture 2







LIJEPLJENJE CENTRALNE BRTVE ZA PODLOGU

U uvjetima veće izloženosti prozora padalinama ,radi mogućeg prodora kapljevina, preporučuje se lijepljenje centralne brtve 331.004 za podlogu, neutralnim ljepilom (npr. "Henkel" - *Teroson MS 939*), prema crtežu.

GLUEING OF CENTRAL GASKET TO THE PROFILE

In conditions of larger precipitation, for preventing possible liquid breach, it is recommended to glue the central gasket 331.004 to the profile with glue (e.g. "Henkel" - *Teroson MS 939*), as shown on the drawing.

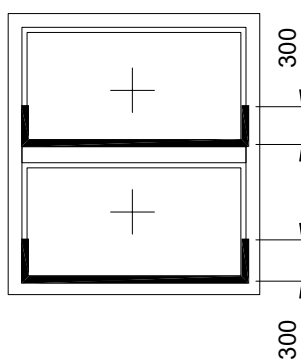
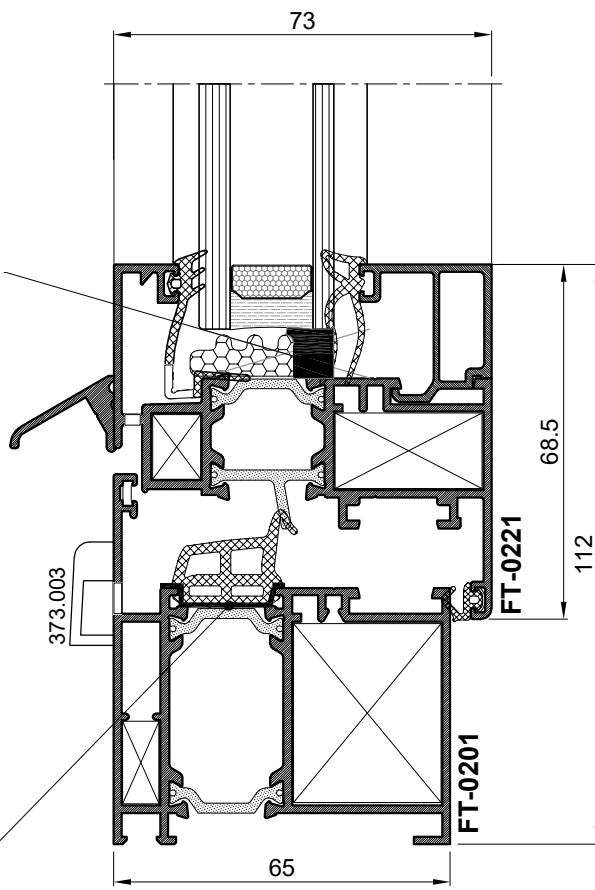


LIJEPLJENJE ISPUNE ZA PODLOGU

U uvjetima veće izloženosti prozora padalinama ,radi mogućeg prodora kapljevina, preporučuje se lijepljenje ispune 348.002 za podlogu, neutralnim ljepilom (npr. "Henkel" - *Teroson MS 939*),prema crtežu.


GLUEING OF FILLING

In conditions of larger precipitation, for preventing possible liquid breach, it is recommended to glue filling 314.013 with glue (e.g."Henkel" - *Teroson MS 939*), as shown to the drawing.



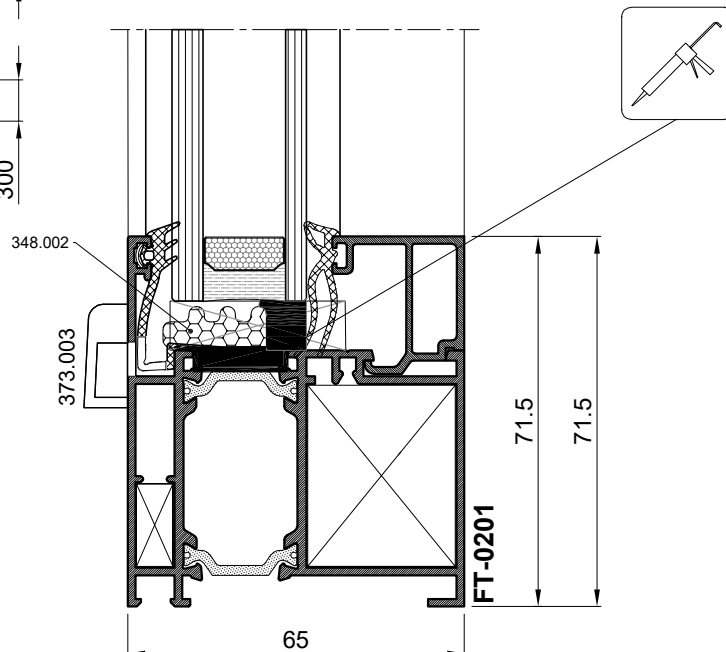


OBRADA NA PROFILU RAMA FT-0201 ZA ODVOD KAPLJEVINA PROCESSING OF FRAME PROFILE FT-0201 FOR WATER DRAINAGE


- obrada donjeg pojasa rama /štancanjem/
Alat: Štanca S1
- 373.003- pvc maska za drenažni otvor
- processing of frame lower zone /metal punching/
Tool: Metal punching machine S1
- 373.003- pvc mask for drainage hole

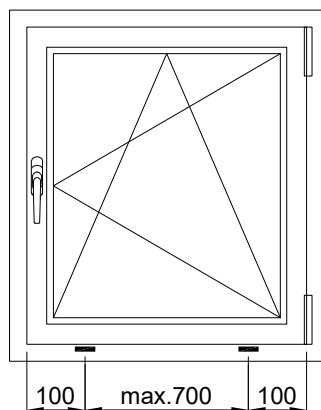


Presjek A-A
Cross-section A-A

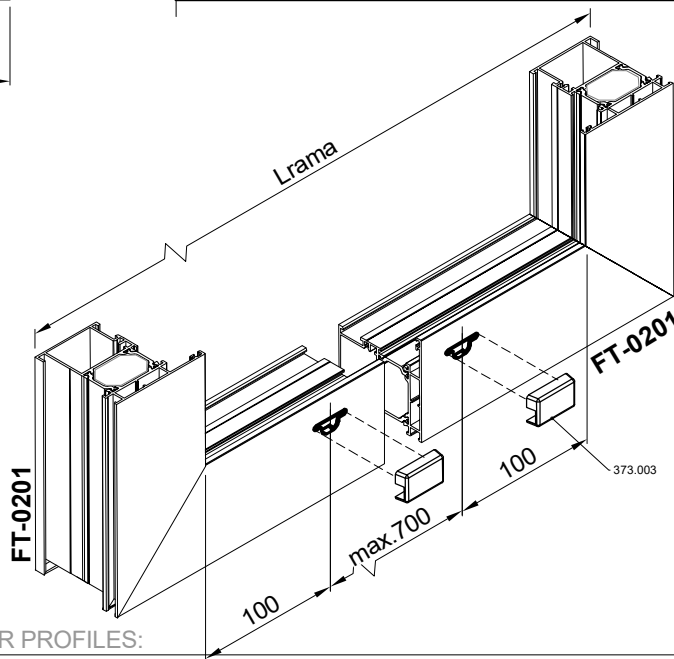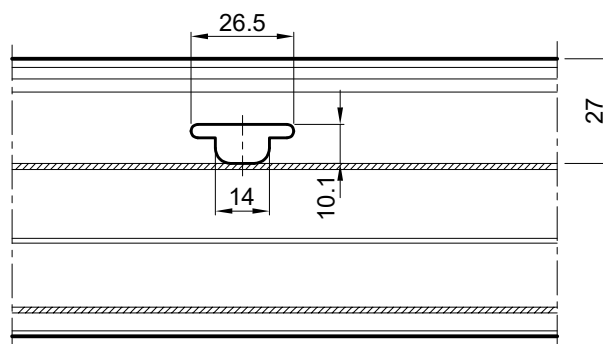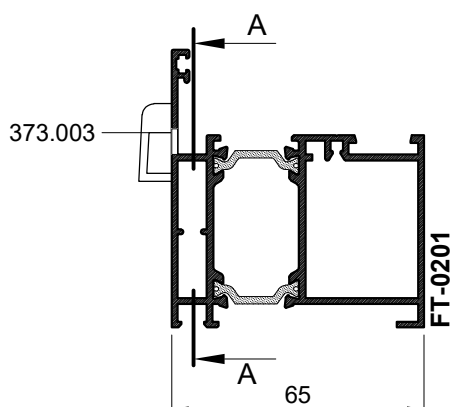

OBRADA PROFILA JE ISTA I ZA PROFILE:
PROFILE PROCESSING IS THE SAME FOR PROFILES:



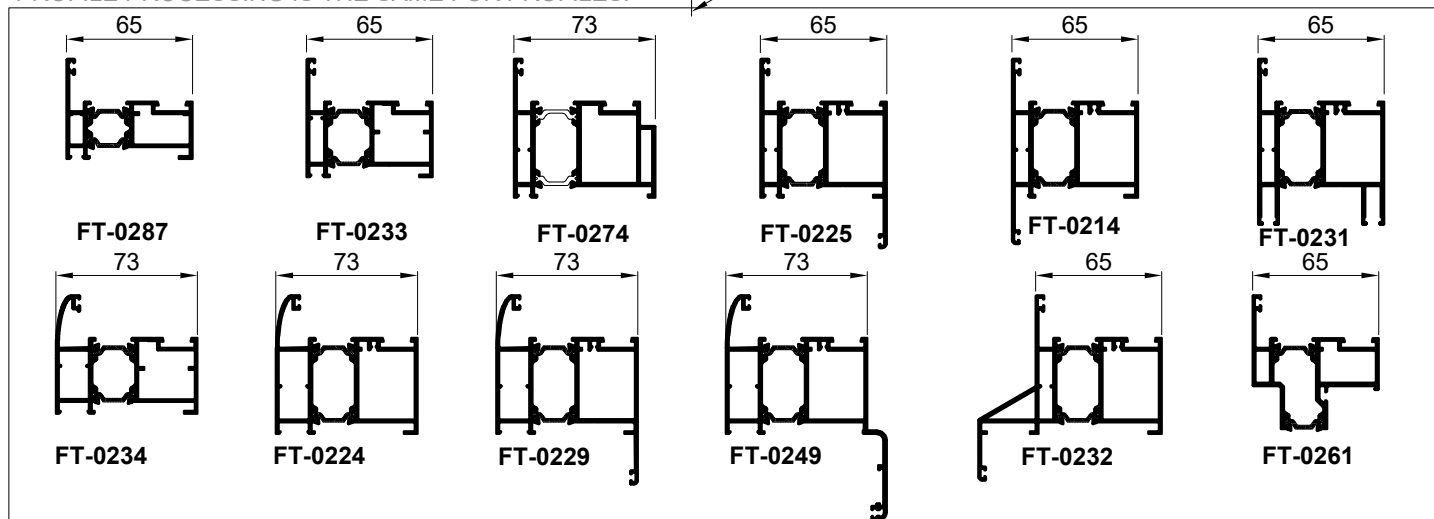


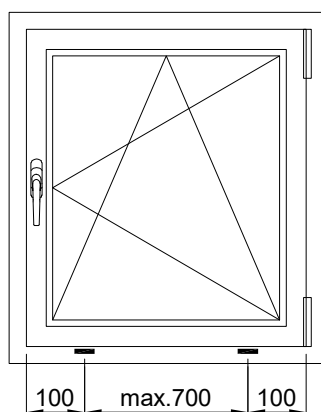


OBRADA NA PROFILU RAMA FT-0201 ZA ODVOD KAPLJEVINA PROCESSING OF FRAME PROFILE FT-0201 FOR WATER DRAINAGE


- obrada donjeg pojasa rama
Alat: vretenasto glodalo Ø7
- 370.070- pvc maska za drenažni otvor
- processing of frame lower zone
Tool: end mill Ø7
- 370.070- pvc mask for drainage hole

Presjek A-A
Cross-section A-A

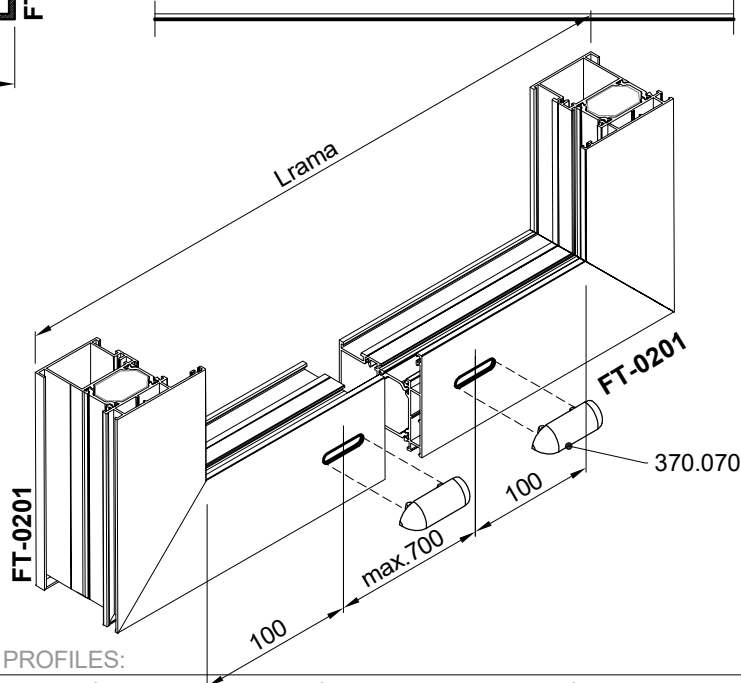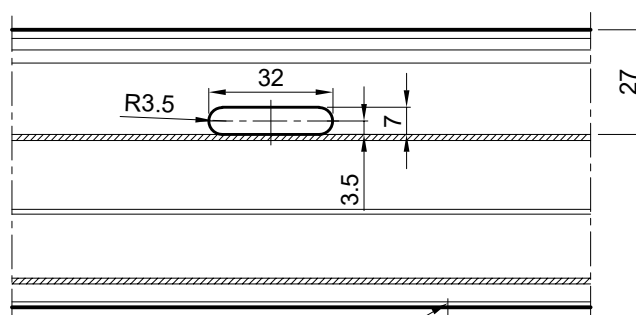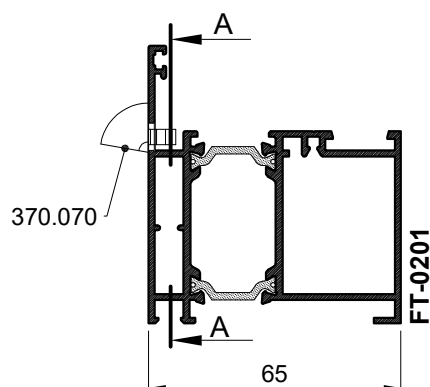





OBRADA PROFILA JE ISTA I ZA PROFILE:
PROFILE PROCESSING IS THE SAME FOR PROFILES:

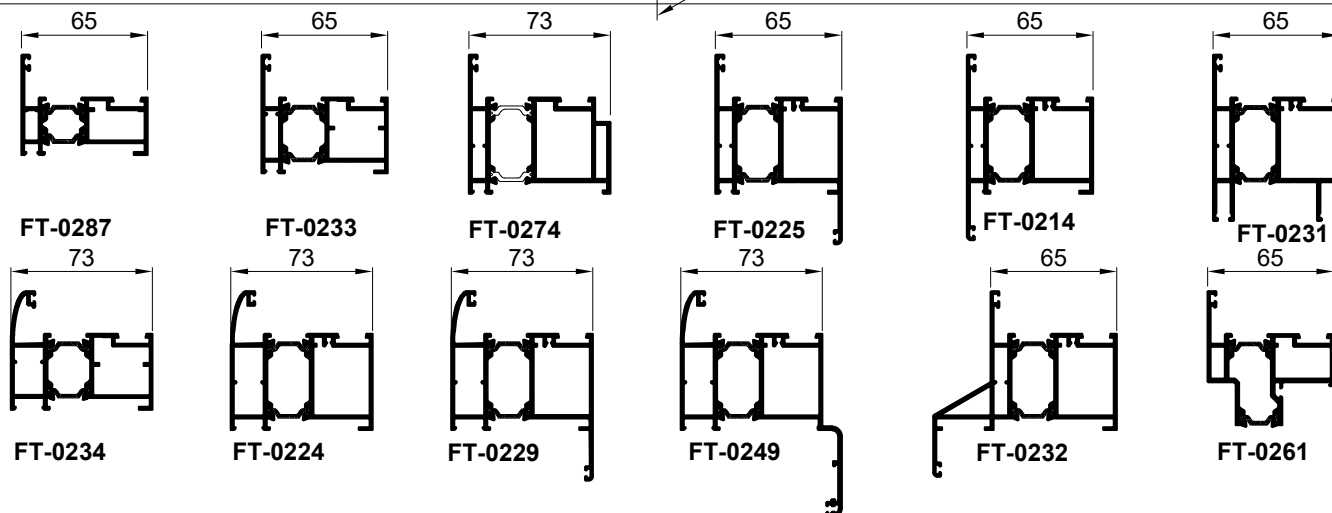

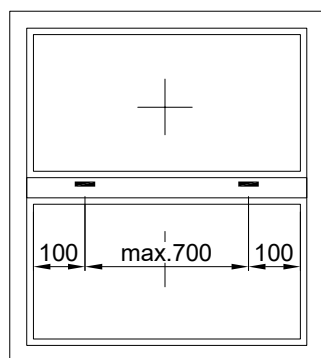



OBRADA NA PROFILU PREČKE FT-0206 ZA ODVOD KAPLJEVINA PROCESSING OF FRAME PROFILE FT-0206 FOR WATER DRAINAGE

1. obrada FT-0206
Alat: štanca S1, 373.003- pvc maska za drenažni otvor
- processing of FT-0206
Tool: Metal punching machine S1, 373.003- pvc mask for drainage hole
2. obrada FT-0206
Alat: vretenasto glodalo Ø7, 370.070- pvc maska za drenažni otvor
- processing of FT-0206
Tool: end mill Ø7, 370.070- pvc mask for drainage hole

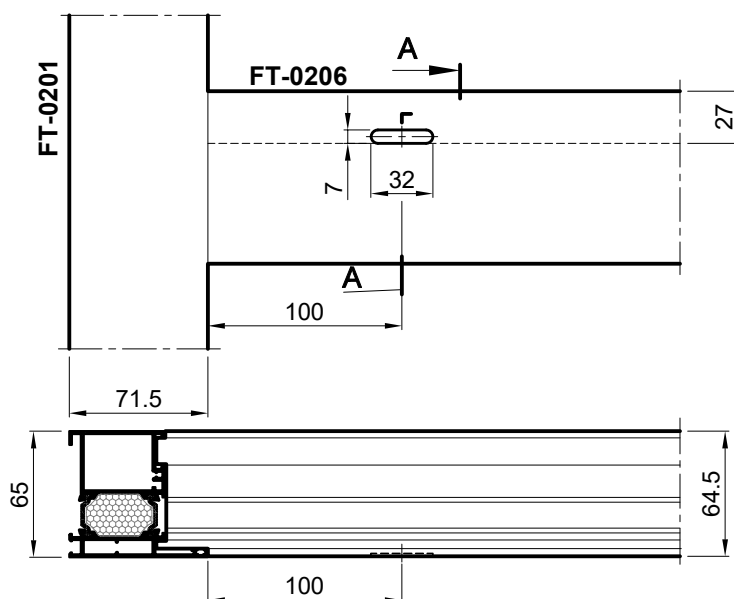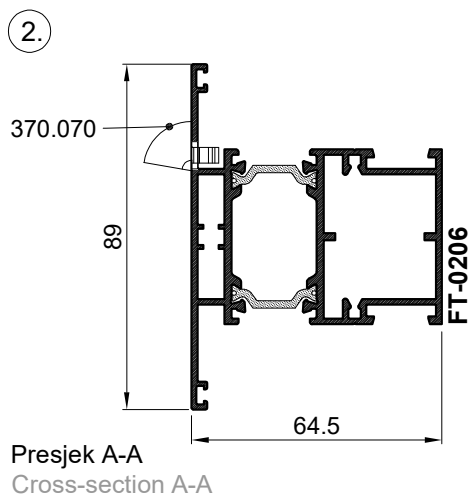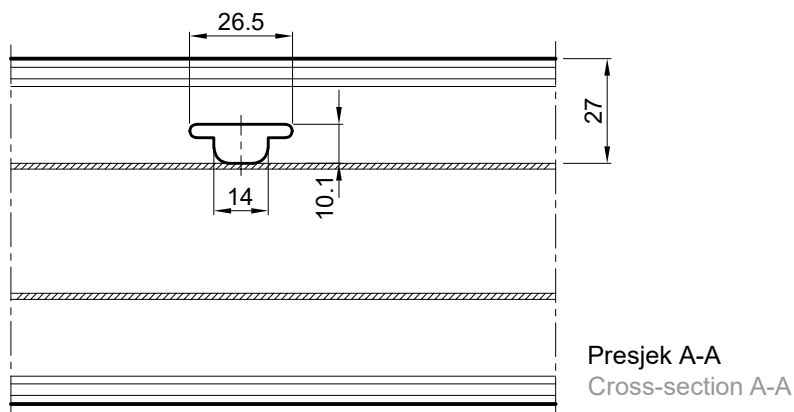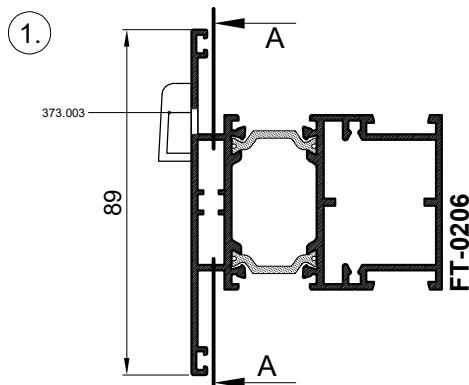

OBRADA PROFILA JE ISTA I ZA PROFILE:
PROFILE PROCESSING IS THE SAME FOR PROFILES:

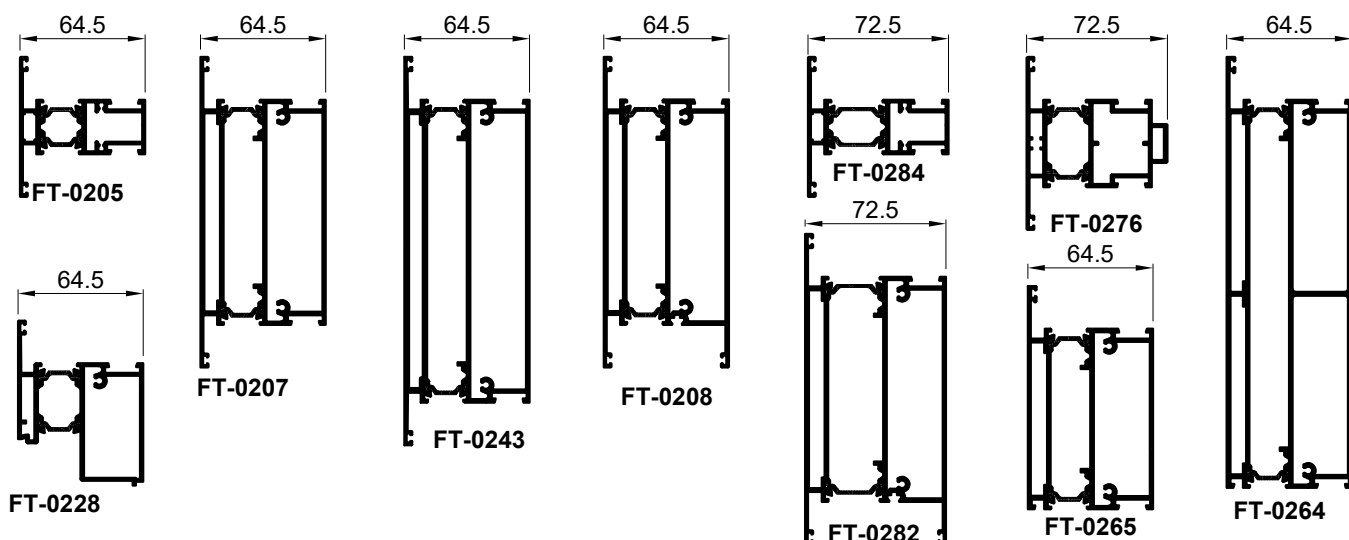

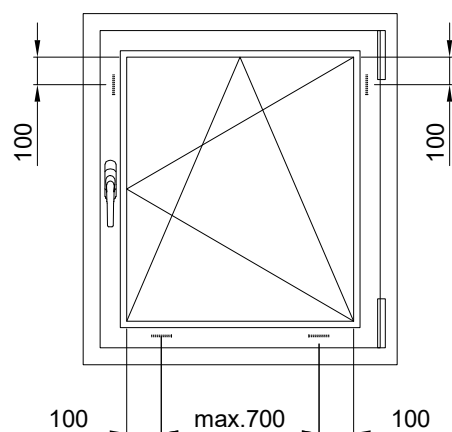

OBRADA NA PROFILU KRILA PROZORA

RADI ODVODA KAPLJEVINA I VENTILIRANJA PROZORA

-obrada donjeg i okomitih pojasa krila (štancanjem iz dva prolaza)

-obrada na štanci S1




-uslijed probijenih otvora unutar prozora dolazi do uspostave strujanja zraka i isušivanja mogućih kapljevina

PROCESSING ON SASH PROFILE FOR DRAINAGE AND VENTILATION

-processing of lower and vertical zones on sash (two pass punching)


-processing on punch S1


-due to punched openings in the window, air ventilation is established that dries possible liquids

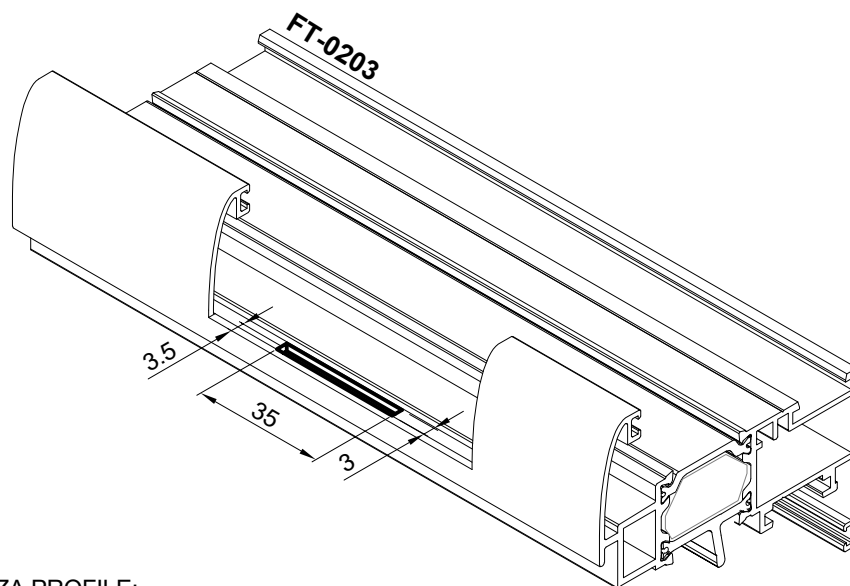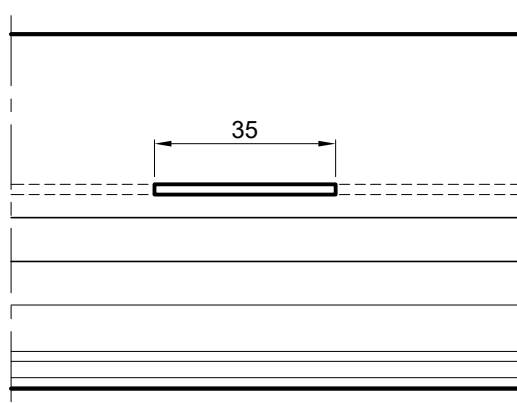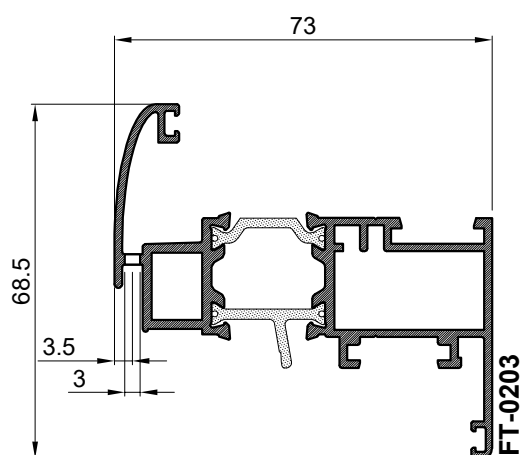

OBRADA PROFILA JE ISTA I ZA PROFILE:

PROFILE PROCESSING IS THE SAME FOR PROFILES:



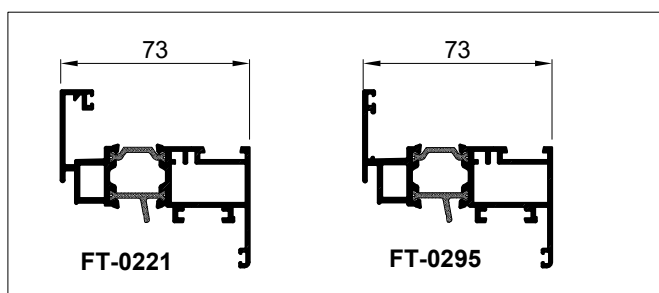


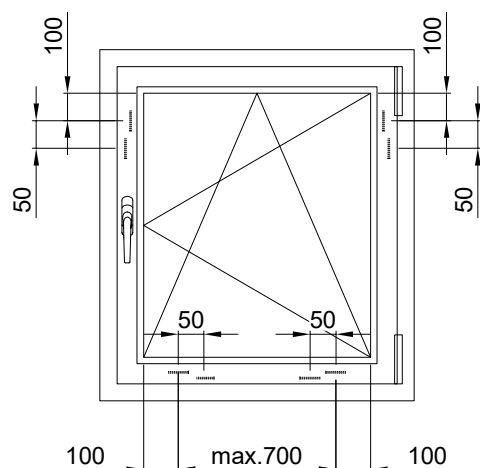


OBRADA NA PROFILU KRILA PROZORA RADI ODVODA KAPLJEVINA I VENTILIRANJA PROZORA

-obrada donjeg i okomitih pojasa krila (štancanjem iz dva prolaza)
-obrada na štanci S9
-uslijed probijenih otvora unutar prozora dolazi do uspostave
strujanja zraka i isušivanja mogućih kapljevina
PROCESSING ON SASH PROFILE FOR DRAINAGE AND
VENTILATION

-processing of lower and vertical zones on sash (two pass punching)
-processing on punch S9
-due to punched openings in the window, air ventilation is established
that dries possible liquids

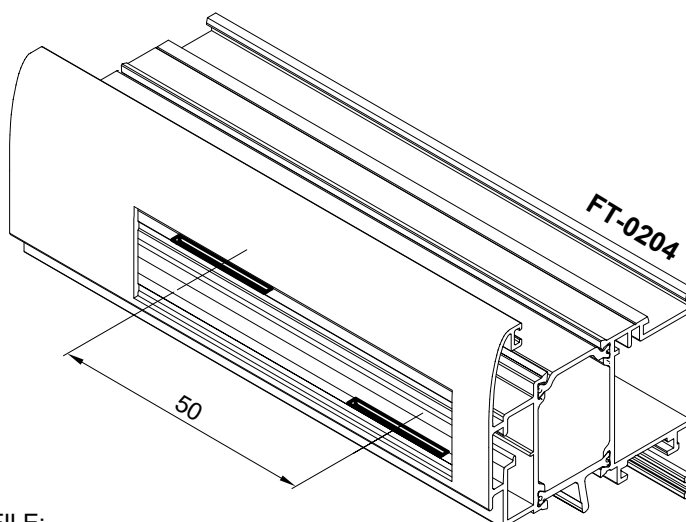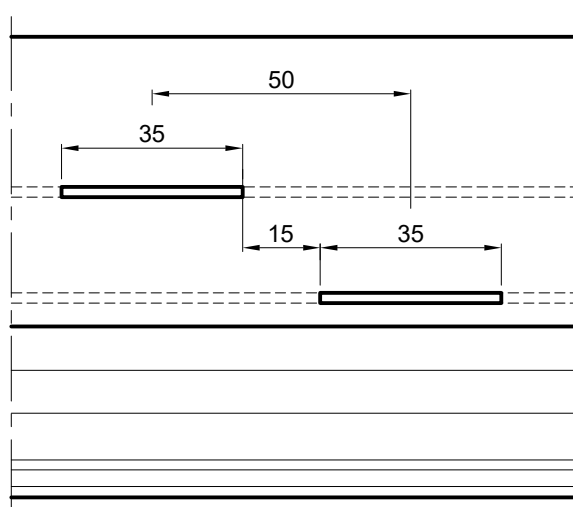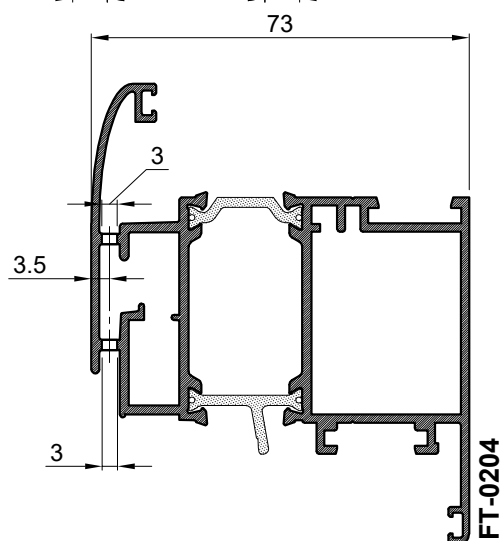

OBRADA PROFILA JE ISTA I ZA PROFILE:
PROFILE PROCESSING IS THE SAME FOR PROFILES:


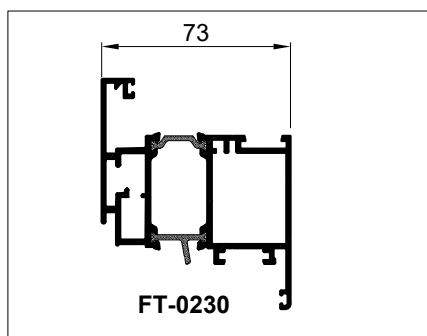


OBRADA BRTVE 328.004




- obrada brtve u donjem pojasu prozora radi odvoda kapljevina
- otvore na brtvi izrezati svakih 300 mm

PROCESSING OF GASKET 328.004



- processing of gasket in lower zone of the window for drainage
- cut the gasket every 300 mm

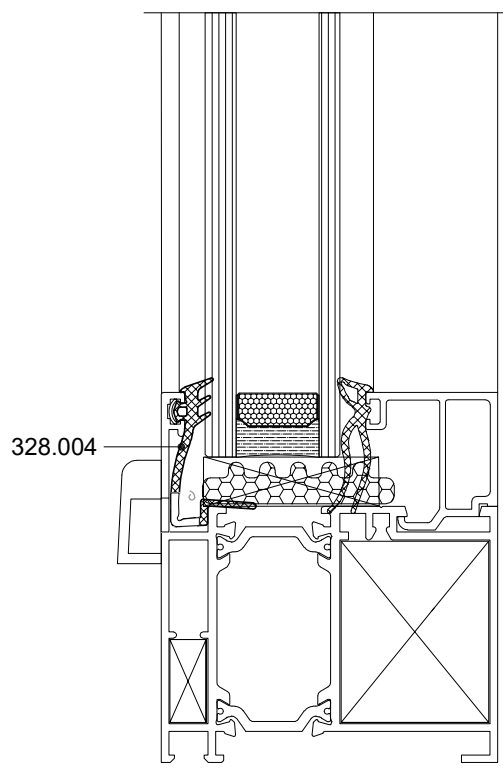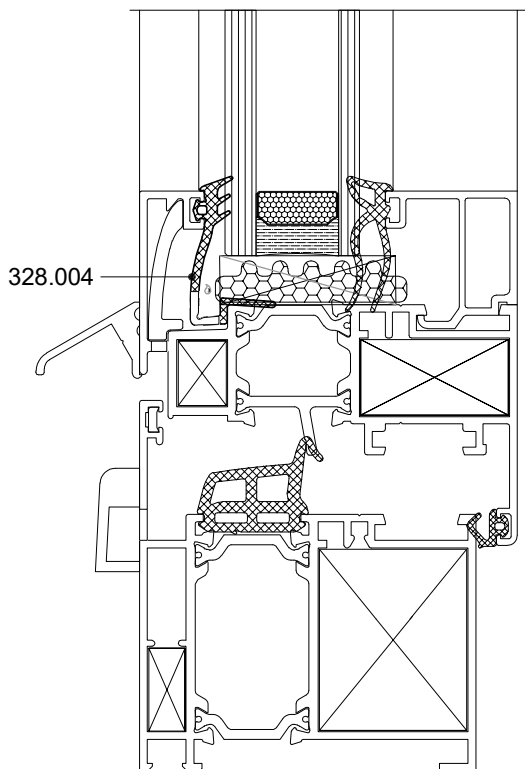

328.004

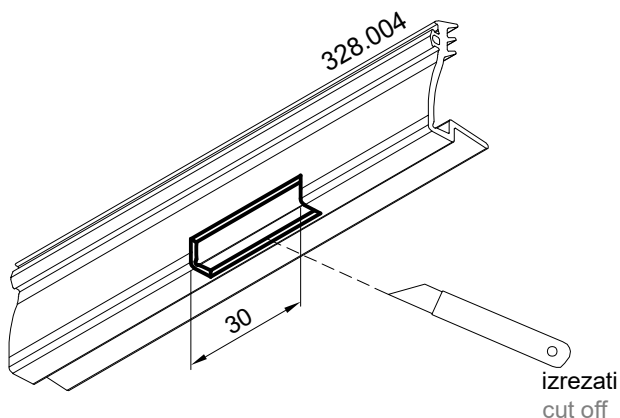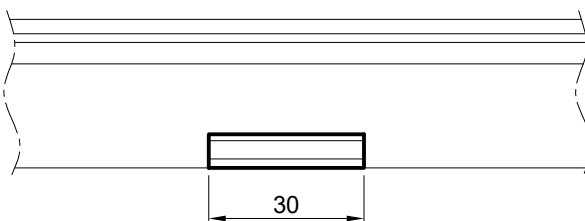


ODVOD KAPLJEVINA IZ KRILA VRATA (otvaranje unutra) DRAINAGE FROM DOOR SASH (inward opening)

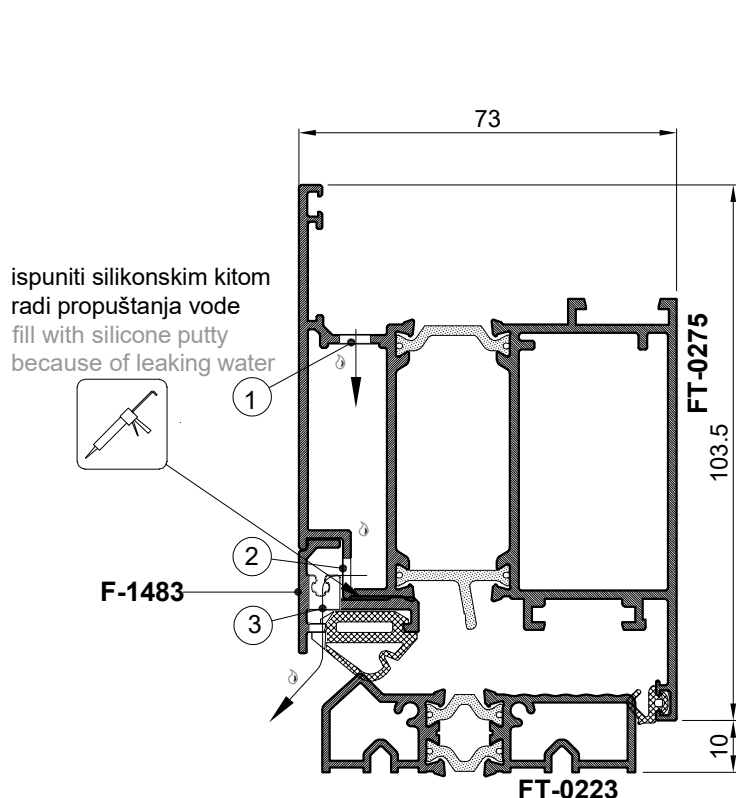


- ① = 6 x 25
- ② = 6 x 25
- ③ = obrada processing

OBRADA PROFILA KRILA FT-0275 PROCESSING OF SASH PROFILE FT-0275

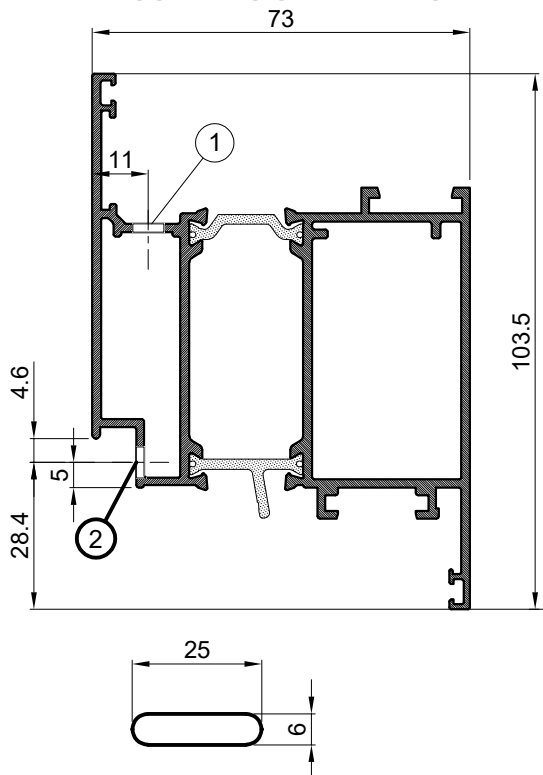


OBRADA PROFILA F-1483 PROCESSING OF PROFILE F-1483

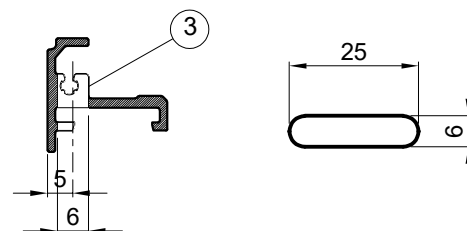

- Obradu raditi vretenastim glodalom, max.700 mm (minimalno dva po krilu) -170 mm od kraja
- Process with end mill, max. 700 mm (min. two per sash) -170 mm from the end



OBRADA BRTVE 344.071 PROCESSING OF GASKET 344.071




- Obradu raditi vretenastim glodalom, max.700 mm (minimalno dva po krilu) -100 mm od kraja unutarnje kote profila krila
- Process with end mill max. 700 mm (min. two places per sash) -100 mm from the end of inside dimension of sash profile

- Brtvu zarezati na mjestu obrade profila F-1483
- Notch the gasket at the profile F-1483 processing site

ODVOD KAPLJEVINA IZ KRILA VRATA (otvaranje unutra) DRAINAGE FROM DOOR SASH (inward opening)

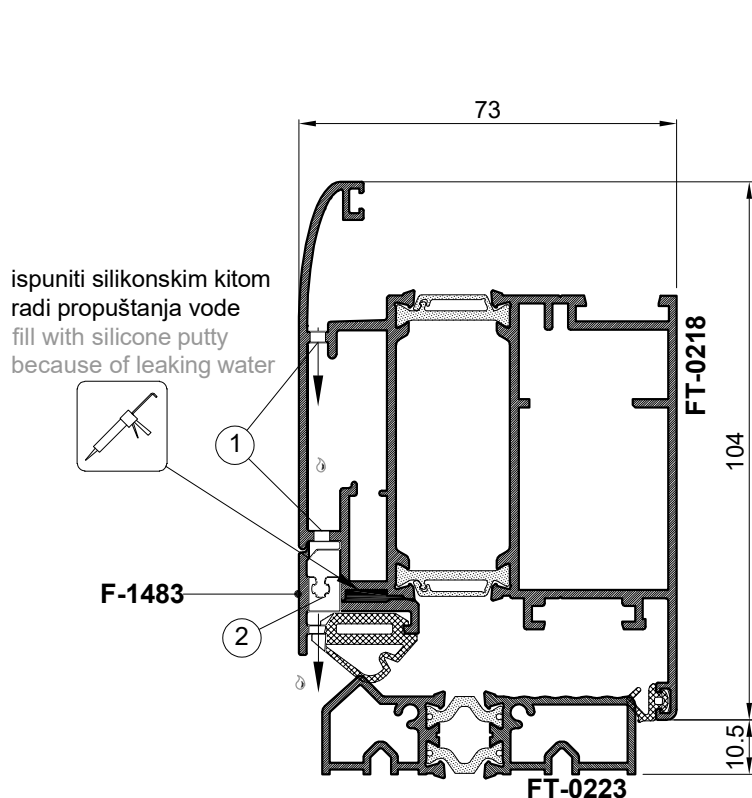


OBRADA PROFILA KRILA FT-0218 PROCESSING OF SASH PROFILE FT-0218

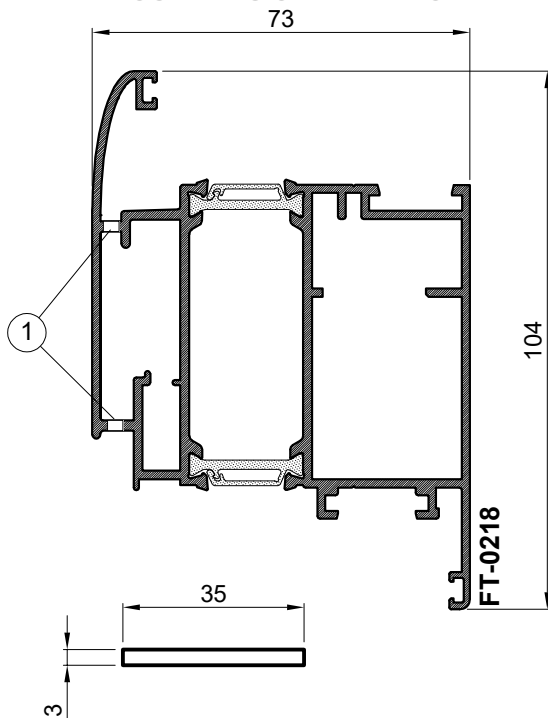


- Obradu raditi na štanci S9
- Processing work on bracket S9

OBRADA PROFILA F-1483 PROCESSING OF PROFILE F-1483

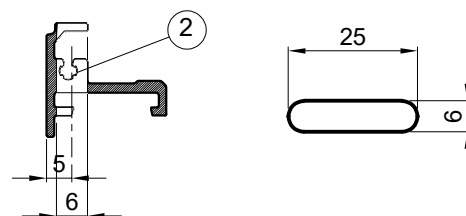



- Obradu raditi vretenastim glodalom, max.700 mm (minimalno dva po krilu) -215 mm od kraja
- Process with end mill, max.700 mm (min. two per sash) -215 mm from the end

OBRADA BRTVE 344.071 PROCESSING OF GASKET 344.071



- Brtvu zarezati na mjestu obrade profila F-1483
- Notch the gasket at the profile F-1483 processing site


ODVOD KAPLJEVINA IZ KRILA VRATA (otvaranje unutra) DRAINAGE FROM DOOR SASH (inward opening)

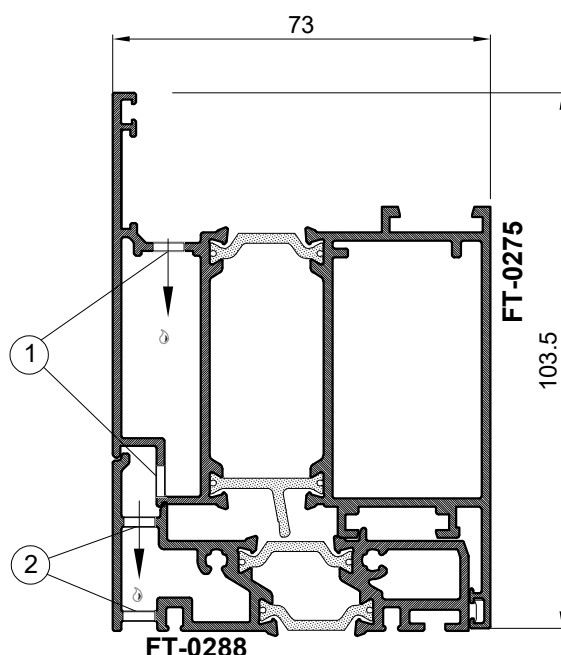


① = 6 x 25

② = 6 x 25

OBRADA PROFILA KRILA FT-0275 PROCESSING OF SASH PROFILE FT-0275

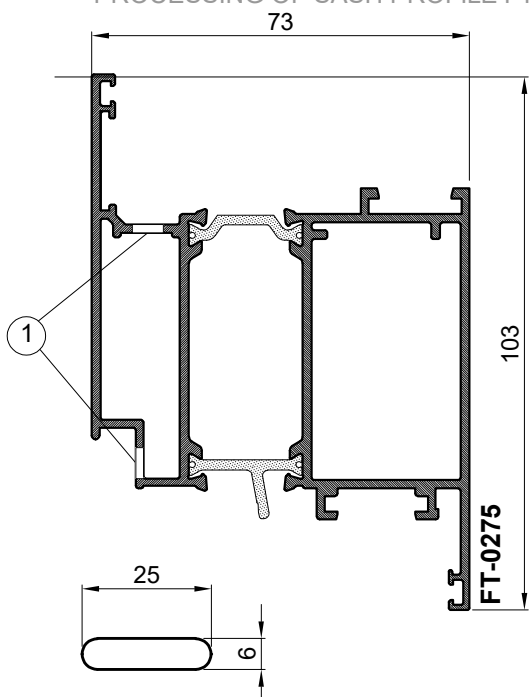



OBRADA PROFILA FT-0288 PROCESSING OF PROFILE FT-0288

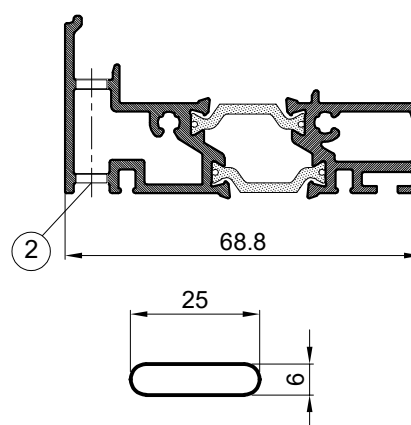

- Obradu raditi vretenastim glodalom, max.700 mm (minimalno dva po krilu) -100 mm od kraja unutarnje kote profila krila
- Process with end mill max. 700 mm (min. two places per sash) -100 mm from the end of inside dimension of sash profile


- Obradu raditi vretenastim glodalom, max.700 mm (minimalno dva po krilu) -150 mm od kraja
- Process with end mill, max.700 mm (min. two per sash) -150 mm from the end

ODVOD KAPLJEVINA IZ KRILA VRATA (otvaranje unutra) DRAINAGE FROM DOOR SASH (inward opening)

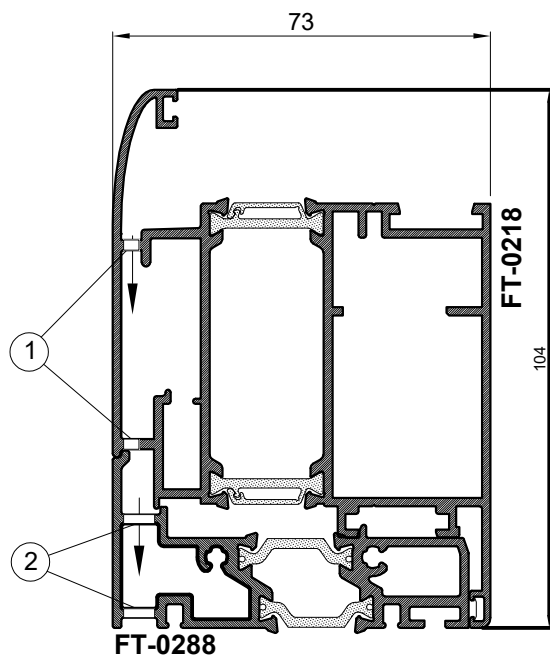


- ① obrada na štanci S9
processing on bracket S9
- ② = 6 x 25

OBRADA PROFILA KRILA FT-0218 PROCESSING OF SASH PROFILE FT-0218

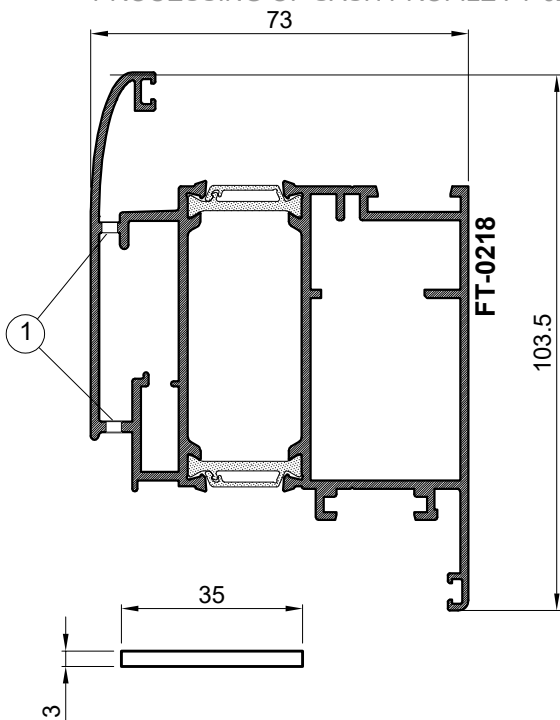



- Obradu raditi na štanci S9
- Processing work on bracket S9

OBRADA PROFILA FT-0288HF PROCESSING OF PROFILE FT-0288HF

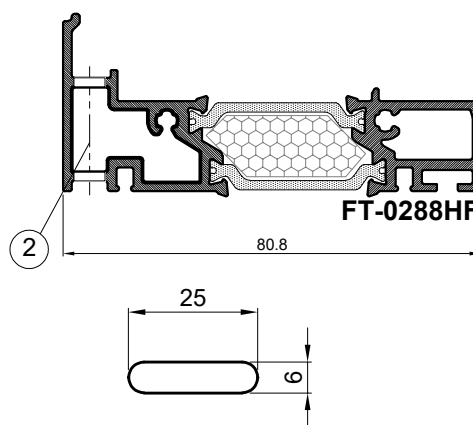


- Obradu raditi vretenastim glodalom, max.700 mm (minimalno dva po krilu) -150 mm od kraja
- Process with end mill, max.700 mm (min. two per sash) -150 mm from the end

ODVOD KAPLJEVINA IZ KRILA BALKONSKIH VRATA DRAINAGE FROM DOOR BALCONY SASH

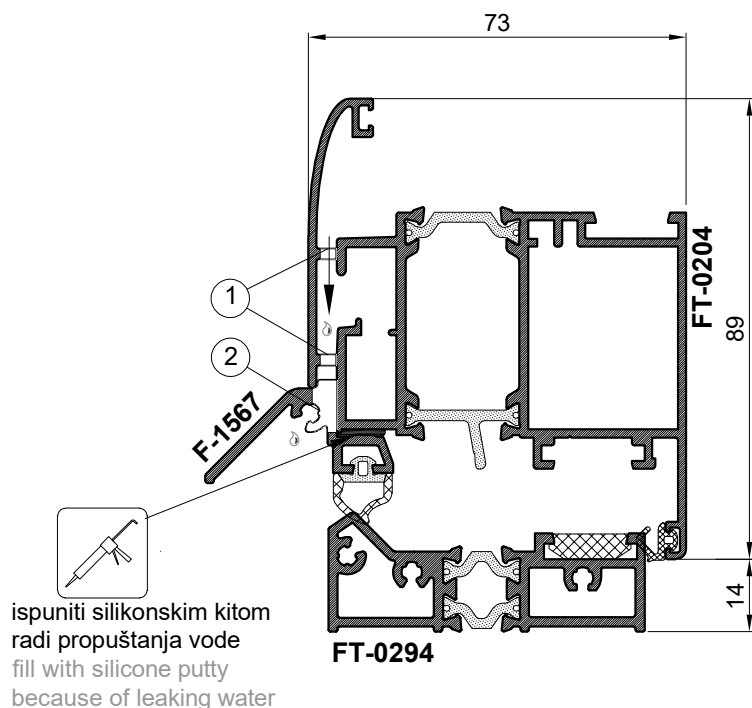


- ① obrada na štanci S9
processing on bracket S9
- ② obrada processing

OBRADA PROFILA KRILA FT-0204 PROCESSING OF SASH PROFILE FT-0204

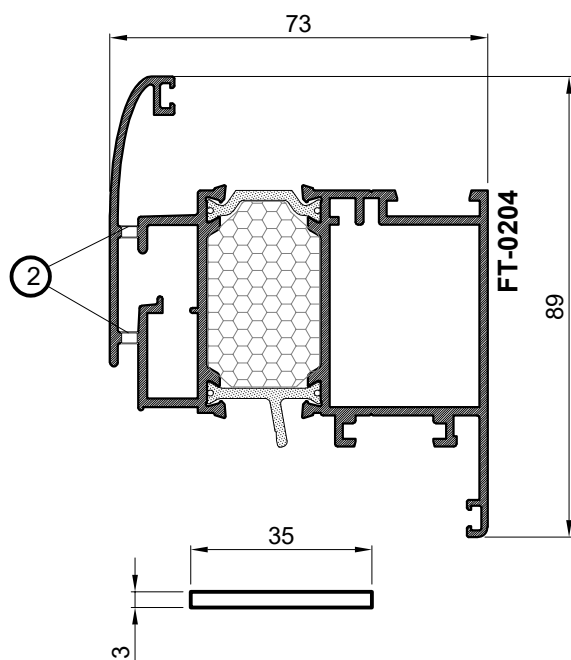



- Obradu raditi na štanci S9
- Processing work on bracket S9

OBRADA PROFILA F-1567 PROCESSING OF PROFILE F-1567

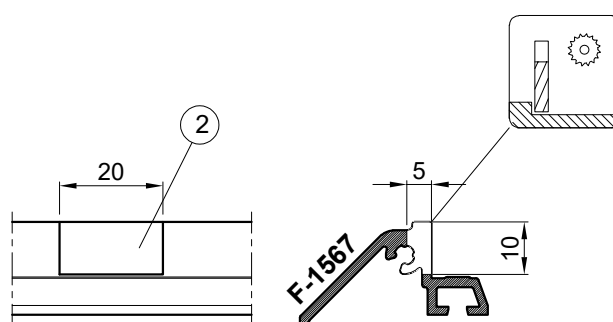


- Obradu raditi vretenastim glodalom, max.700 mm (minimalno dva po krilu) -200 mm od kraja
- Process with end mill, max.700 mm (min. two per sash) -200 mm from the end

ODVOD KAPLJEVINA IZ KRILA VRATA (otvaranje unutra) DRAINAGE FROM DOOR SASH (inward opening)

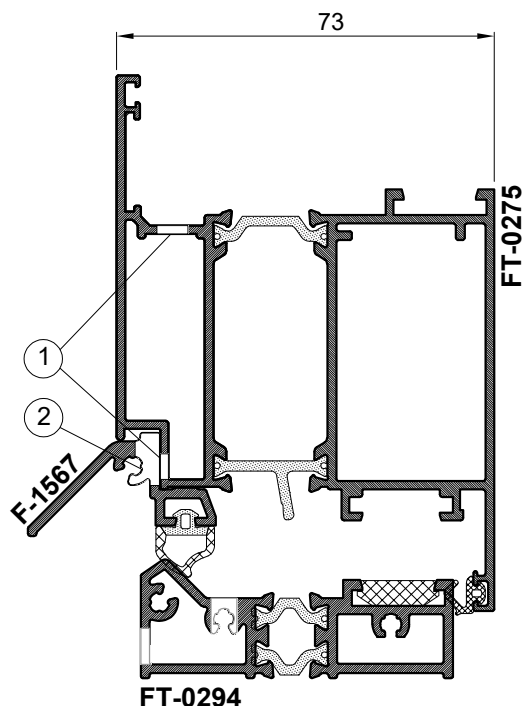


- ① obrada processing
- ② obrada processing

OBRADA PROFILA KRILA FT-0275 PROCESSING OF SASH PROFILE FT-0275

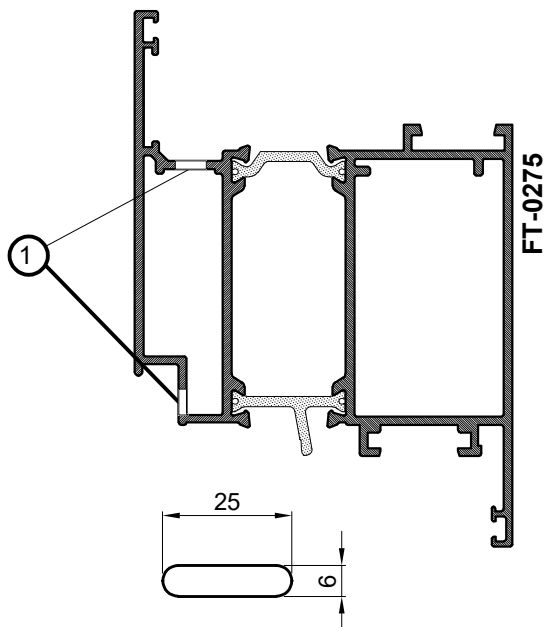


- Obradu raditi vretenastim glodalom na razmaku max.700 mm (minimalno dva po krilu), 100 mm od kraja unutarnje kote profila krila
- Process with end mill max. 700 mm (min. two places per sash) 100 mm from the end of inside dimension of sash profile

OBRADA PROFILA F-1567 PROCESSING OF PROFILE F-1567



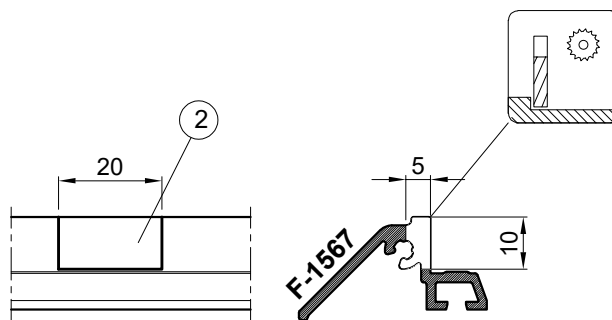


- Obradu raditi vretenastim glodalom na razmaku max.700 mm (minimalno dva po krilu), položaj obrade uskladiti prema obradi na krilu
- Process with end mill max.700 mm (min. two per sash) coordinate the processing position according to the processing on the sash


ODVOD KAPLJEVINA IZ PRAGA VRATA FT-0294 (otvaranje unutra)
DRAINAGE FROM DOOR THRESHOLD FT-0294 (inward opening)

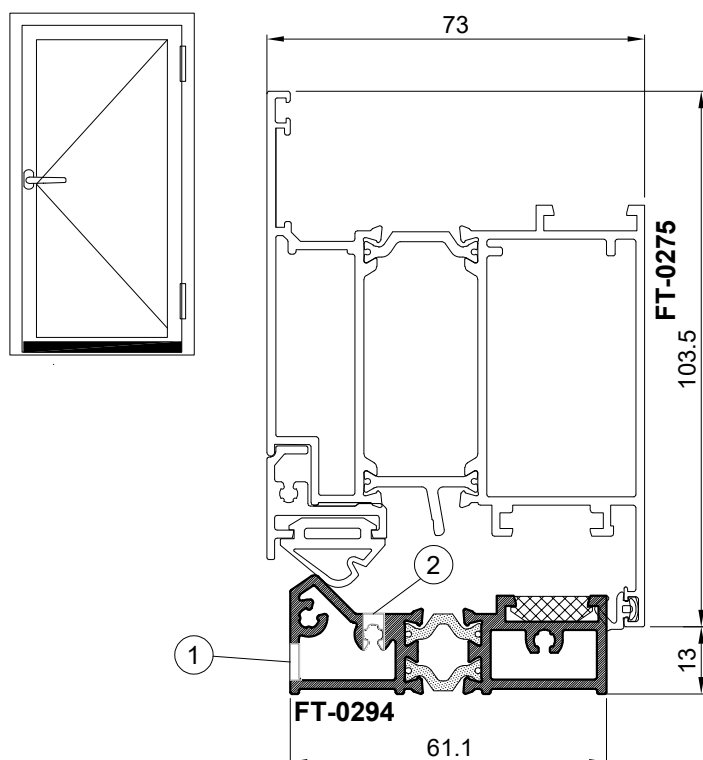

OBRADA PROFILA PRAGA FT-0294
PROCESSING OF SASH PROFILE FT-0294

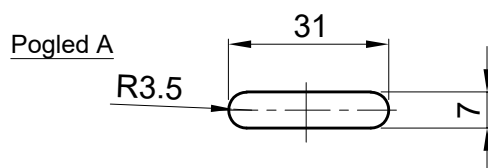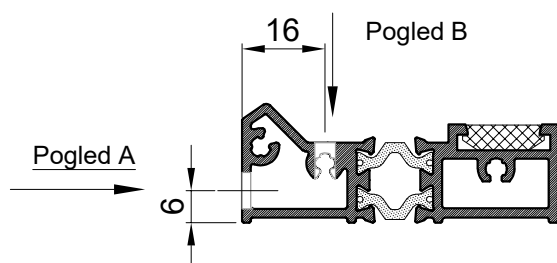


- Obradu raditi vretenastim glodalom, max.700 mm (minimalno dva po krilu) -100 mm od kraja unutarnje kote profila krila
- Process with end mill max. 700 mm (min. two places per sash) -100 mm from the end of inside dimension of sash profile



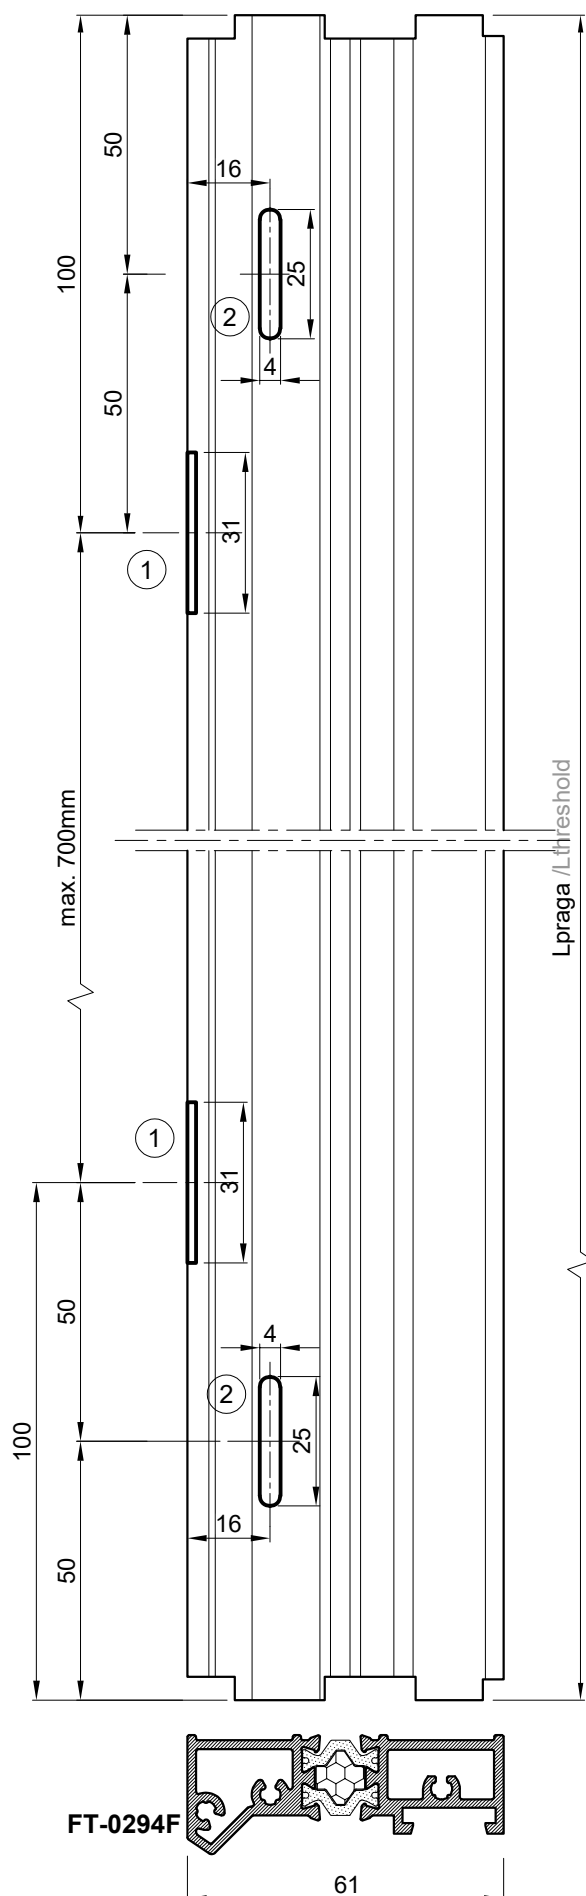


UGRADNJA MONODRAIN CJEVČICE 360.009 MONTAGE OF MONODRAIN TUBE 360.009


OBRADA PROFILA FT-0275 PROCESSING OF SASH FT-0275

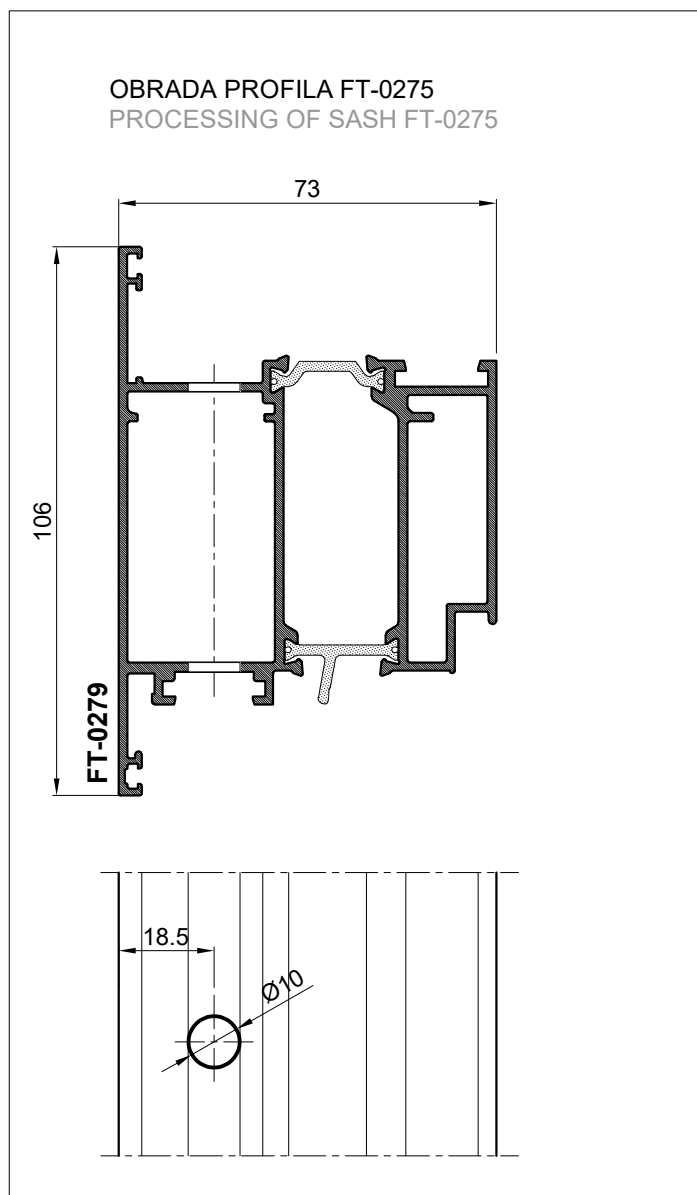



Obrada za ugradnju monodrain cjevčice 360.009
-rupa $\varnothing 10$, max.700 mm (min.dva po krilu), 100 mm od kraja
Processing for installation of monodrain tube 360.009
-hole $\varnothing 10$, max.700 mm (min.two on sash), 100 mm from end

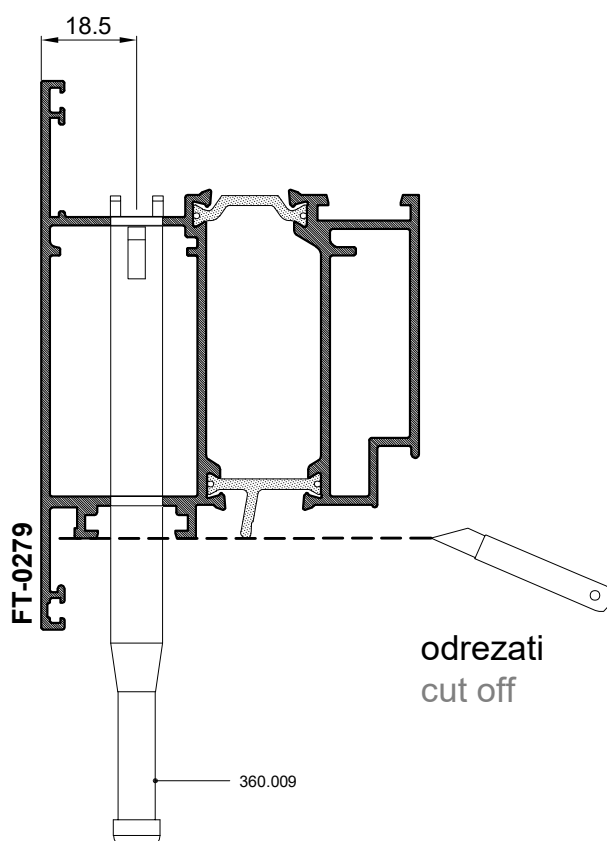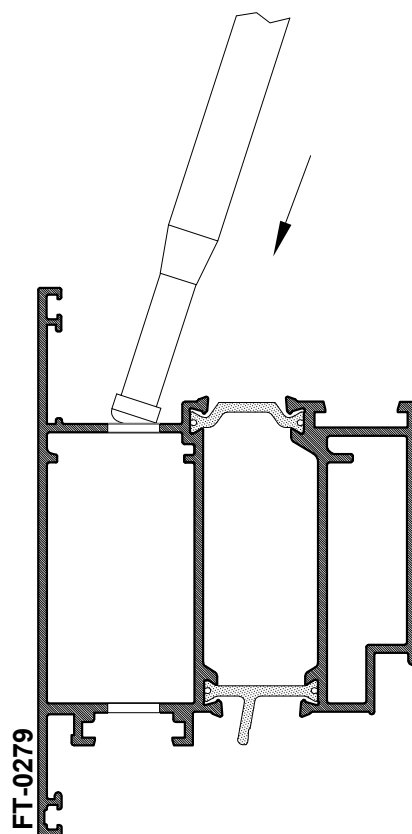

OBRADE ZA ODVOD KAPLJEVINA PROCESSING FOR LIQUID DRAINAGE

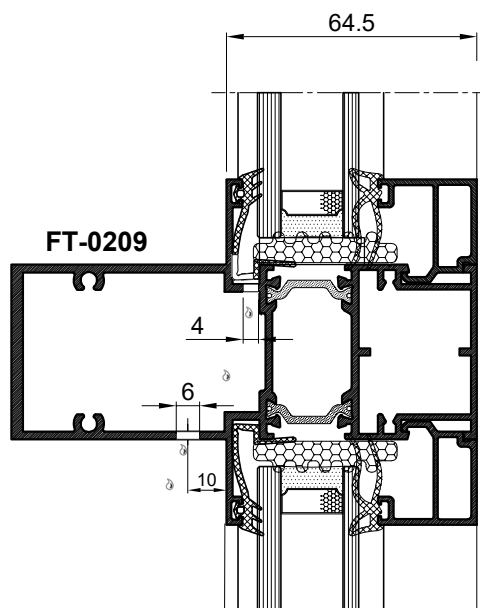



POGLED 1-1
VIEW 1-1

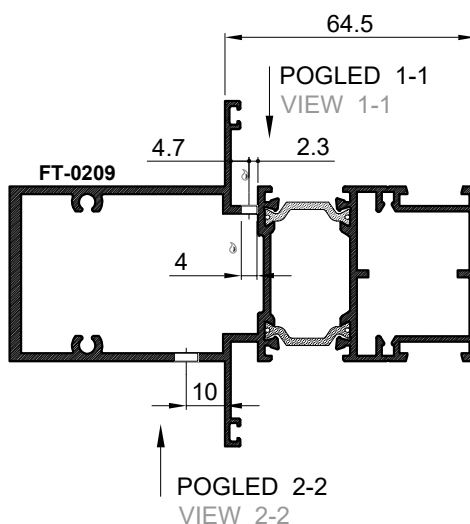

POGLED 2-2
VIEW 2-2

- obradu raditi vretenastim glodalom max.700 mm (minimalno dva po krilu)
- 150 mm od spoja s ramom
- do the processing with a spindle cutter max.700 mm (minimum two per wing)
- 150 mm from the joint with the frame

- obradu raditi vretenastim glodalom svakih 700 mm, 150 mm od krajeva spoja s ramom
- do the processing with a spindle cutter every 700 mm, 150 mm from the ends connection with the frame

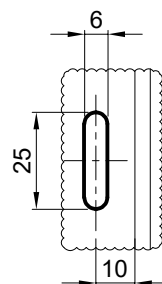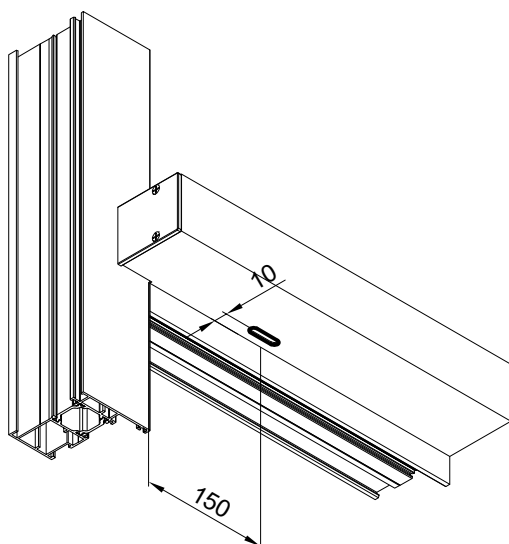


POGLED 2-2
VIEW 2-2

365.063 - UMETAK ZA PROFIL FT-0286




- Obavezna uporaba kod ključanja pomoćnog krila u više točaka

365.063 - INSERT FOR PROFILE FT-0286

- Necessarily use when locking the auxiliary sash in multiple points



365.063

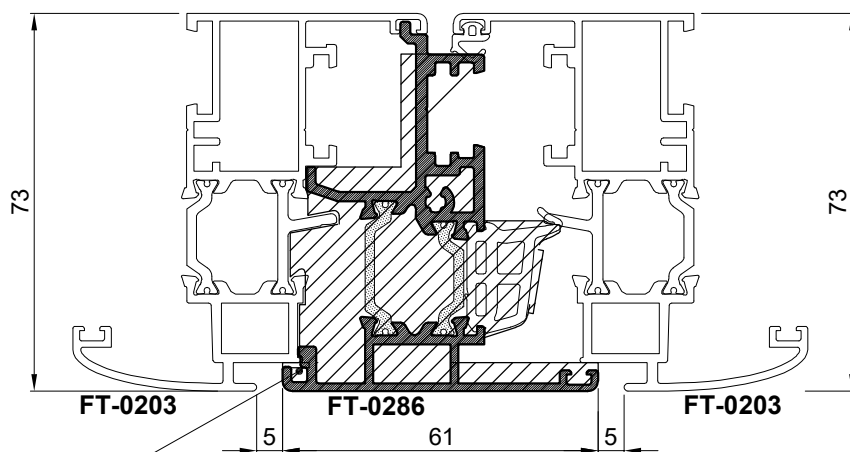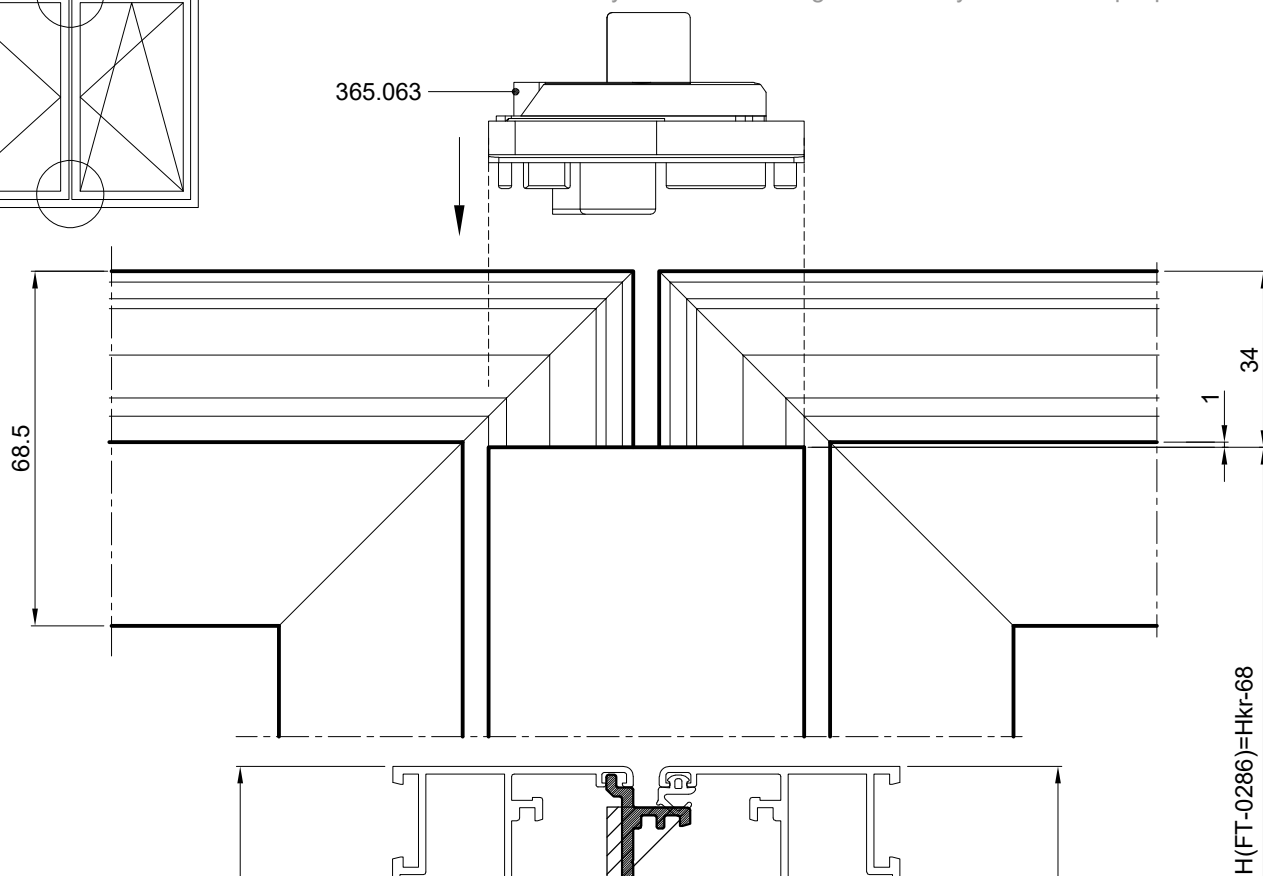

ljepilo za metal
(npr. Teroson MS 939)
metal glue
(eg. Teroson MS 939)

365.063

-gornji i donji umetak-simetrično

-materijal:tvrdna guma

-mjera pilanja profila FT-0286 $H(FT-0286)=H_{kr} - 68$


365.063

-upper and lower insert-symmetrical


-material:hard rubber

-cutting length of profile FT-0286 $H=(FT-0286)=H_{kr} - 68$

365.063

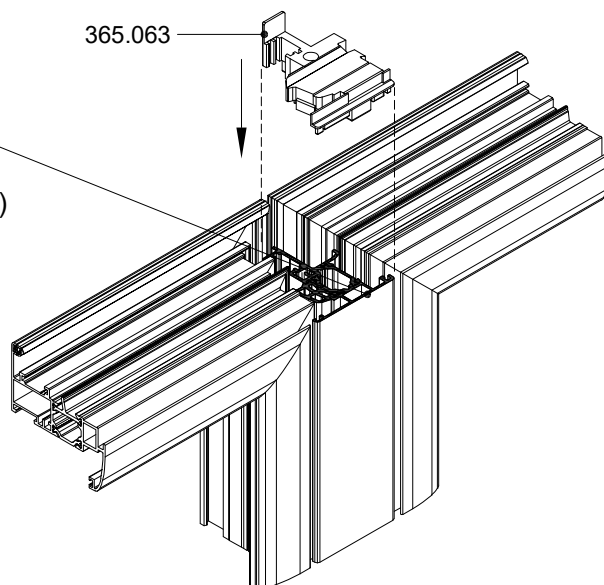

363.001 - UMETAK ZA PROFIL FT-0211 363.001 - INSERT FOR PROFILE FT-0211

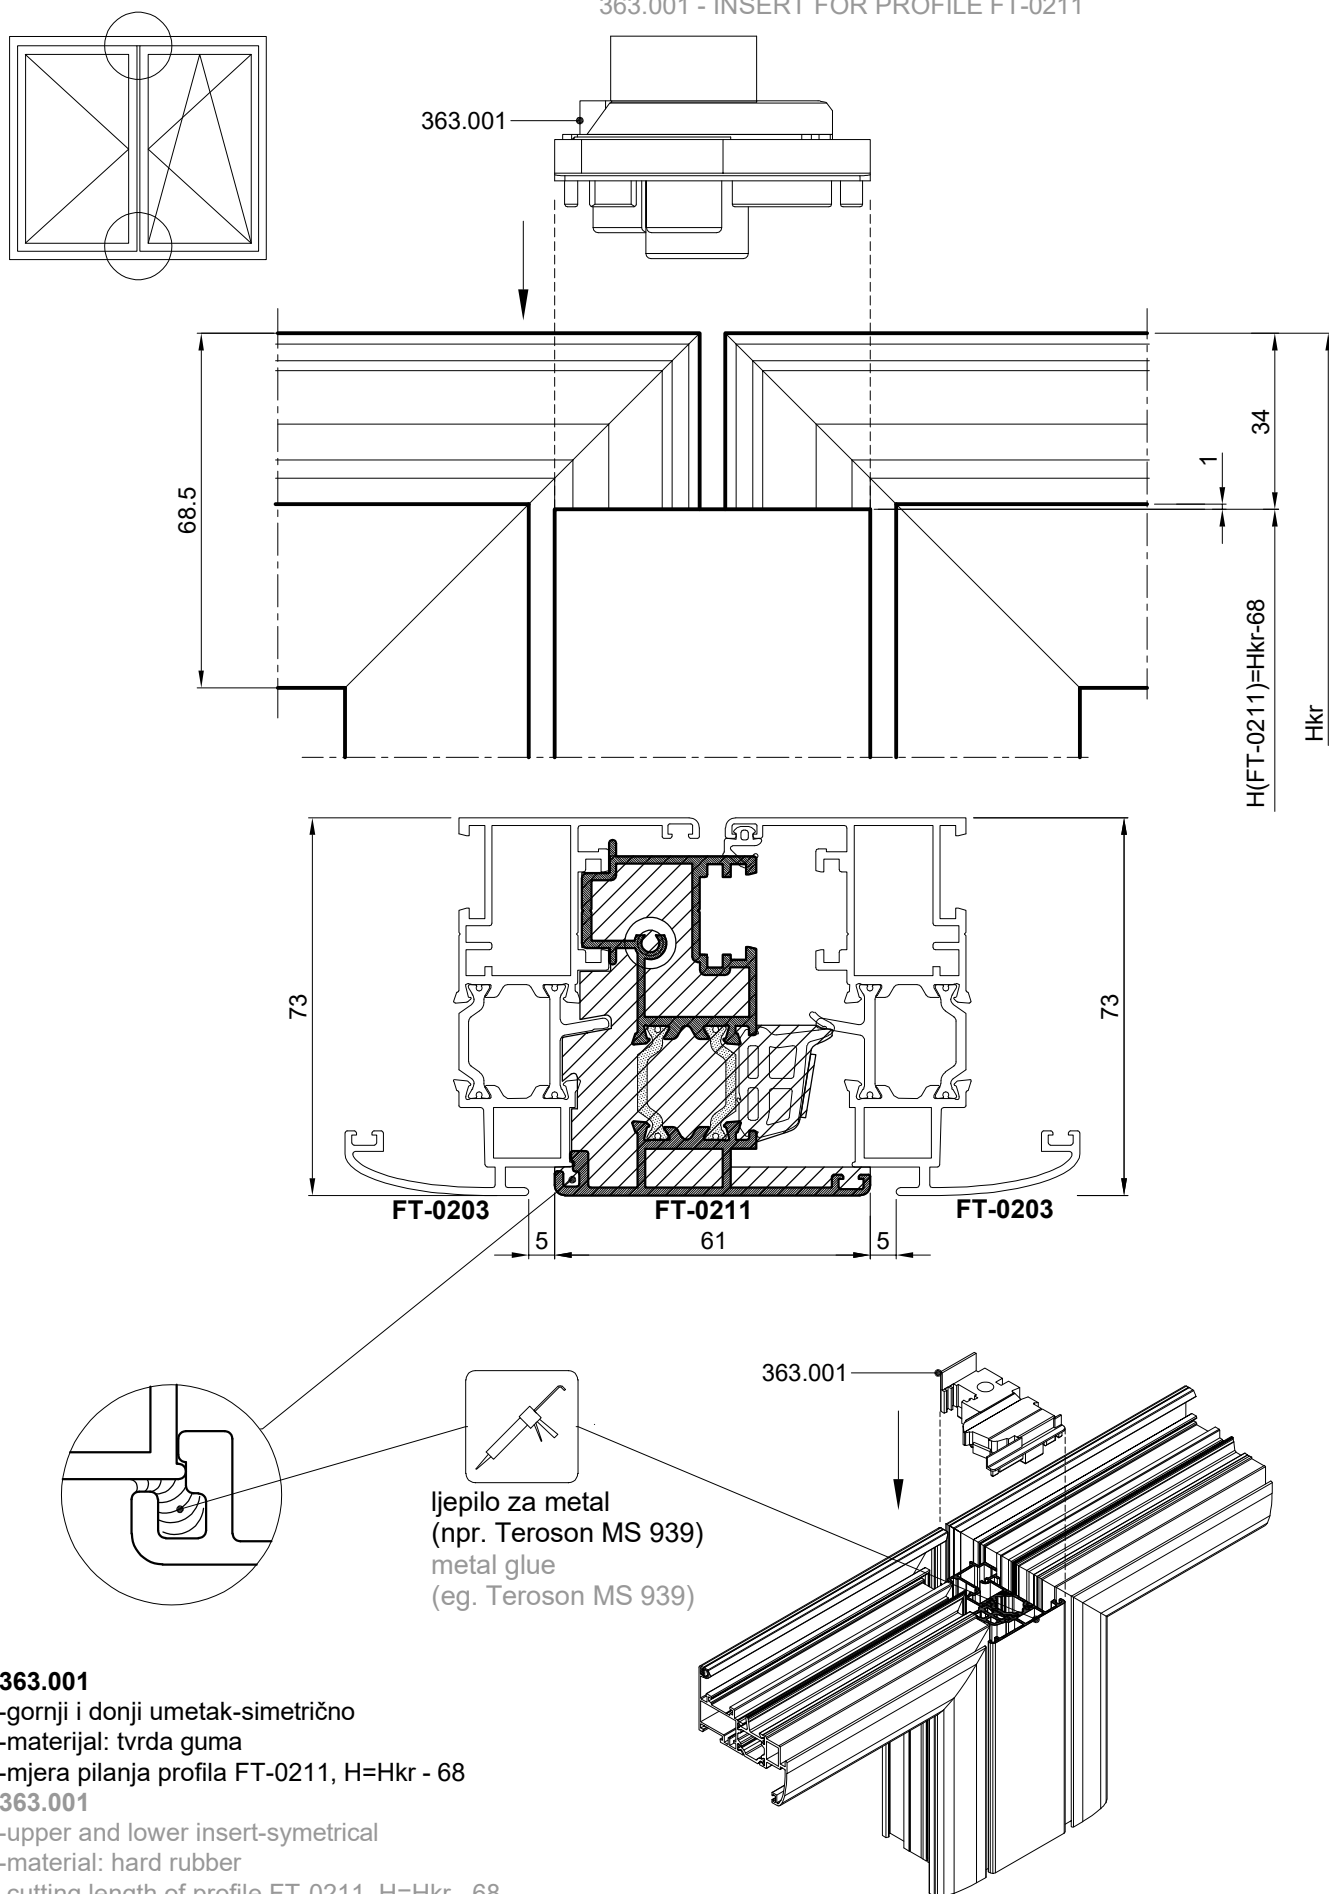

363.001

- gornji i donji umetak-simetrično
- materijal: tvrda guma
- mjera pilanja profila FT-0211, H=Hkr - 68




363.001

- upper and lower insert-symmetrical
- material: hard rubber
- cutting length of profile FT-0211, H=Hkr - 68

363.080- UMETAK ZA PROFIL FT-0277 - ZA KRILO VRATA FT-0275

363.080- INSERT FOR PROFILE FT-0277 - FOR DOOR SASH FT-0275

OTVARANJE UNUTRA
INWARD OPENING

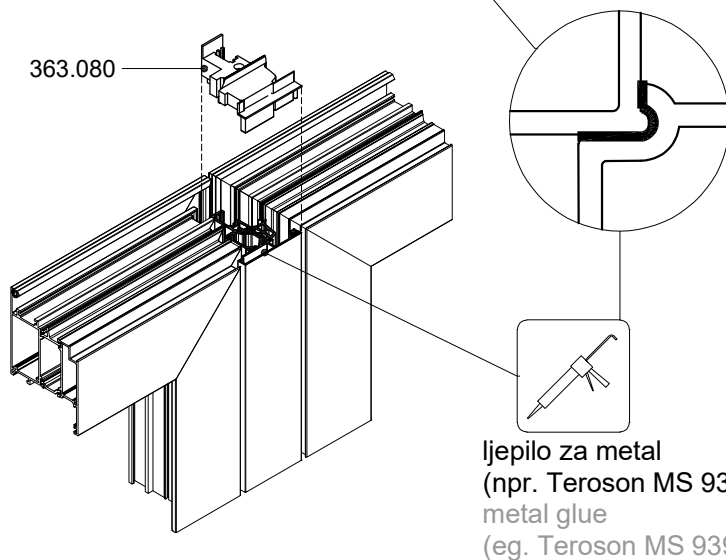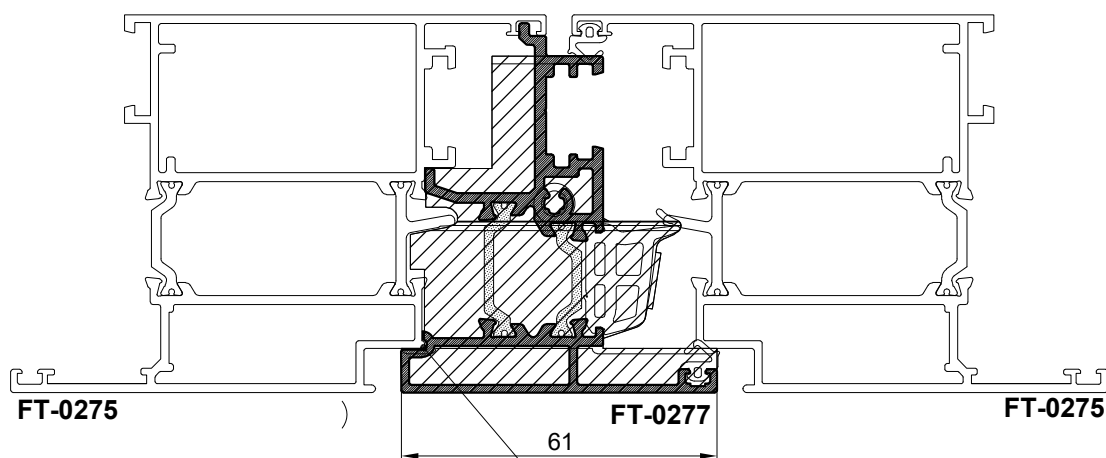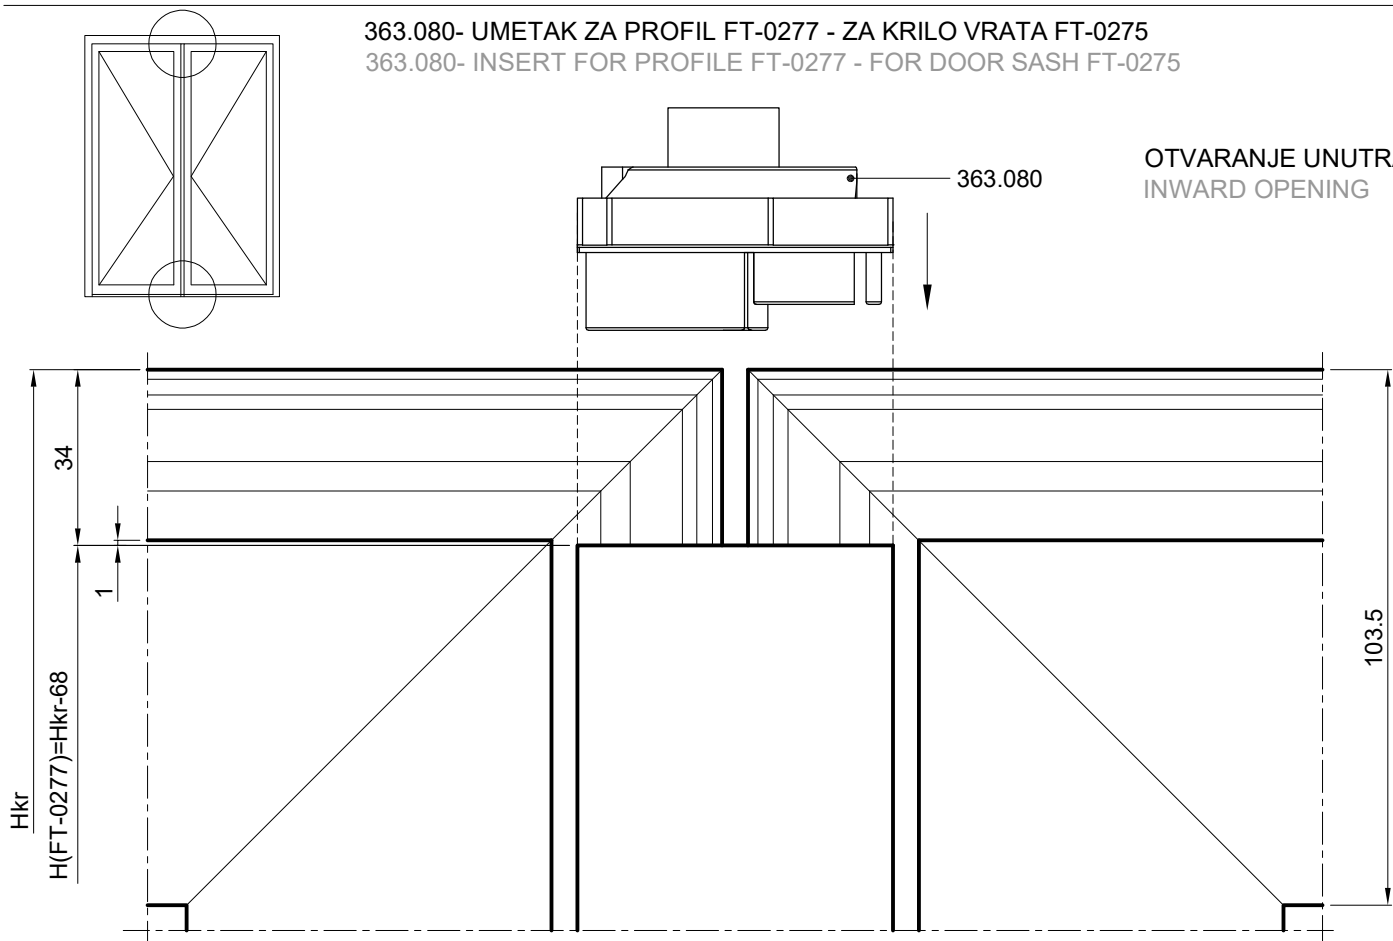

363-080

-gornji i donji umetak-simetrično
-materijal: tvrda guma
-mjera pilanja profila FT-0277
 $H = H_{kr} - 68$




363-080

-upper and lower insert-symmetrical
-material: hard rubber
-cutting length of profile FT-0277
 $H = H_{sh} - 68$

ljepilo za metal
(npr. Teroson MS 939)
metal glue
(eg. Teroson MS 939)

365.048- UMETAK ZA PROFIL FT-0211-A - ZA KRILO VRATA OD FT-0218 i FT-0247

365.048- INSERT FOR PROFILE FT-0211-A - FOR DOOR SASH OF FT-0218 and FT-0247

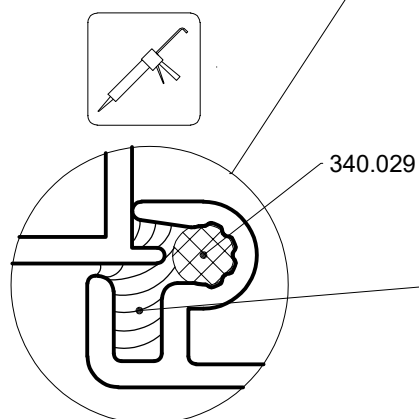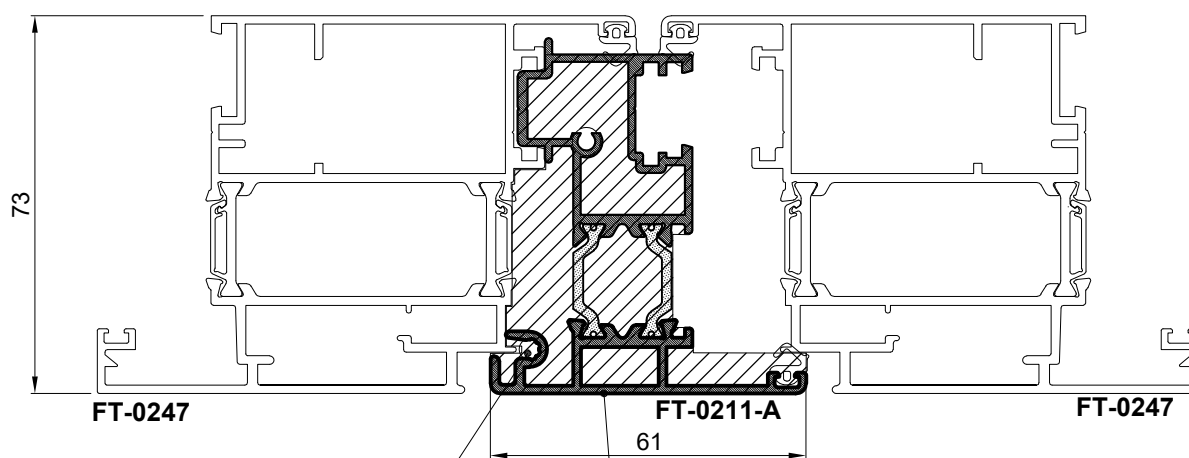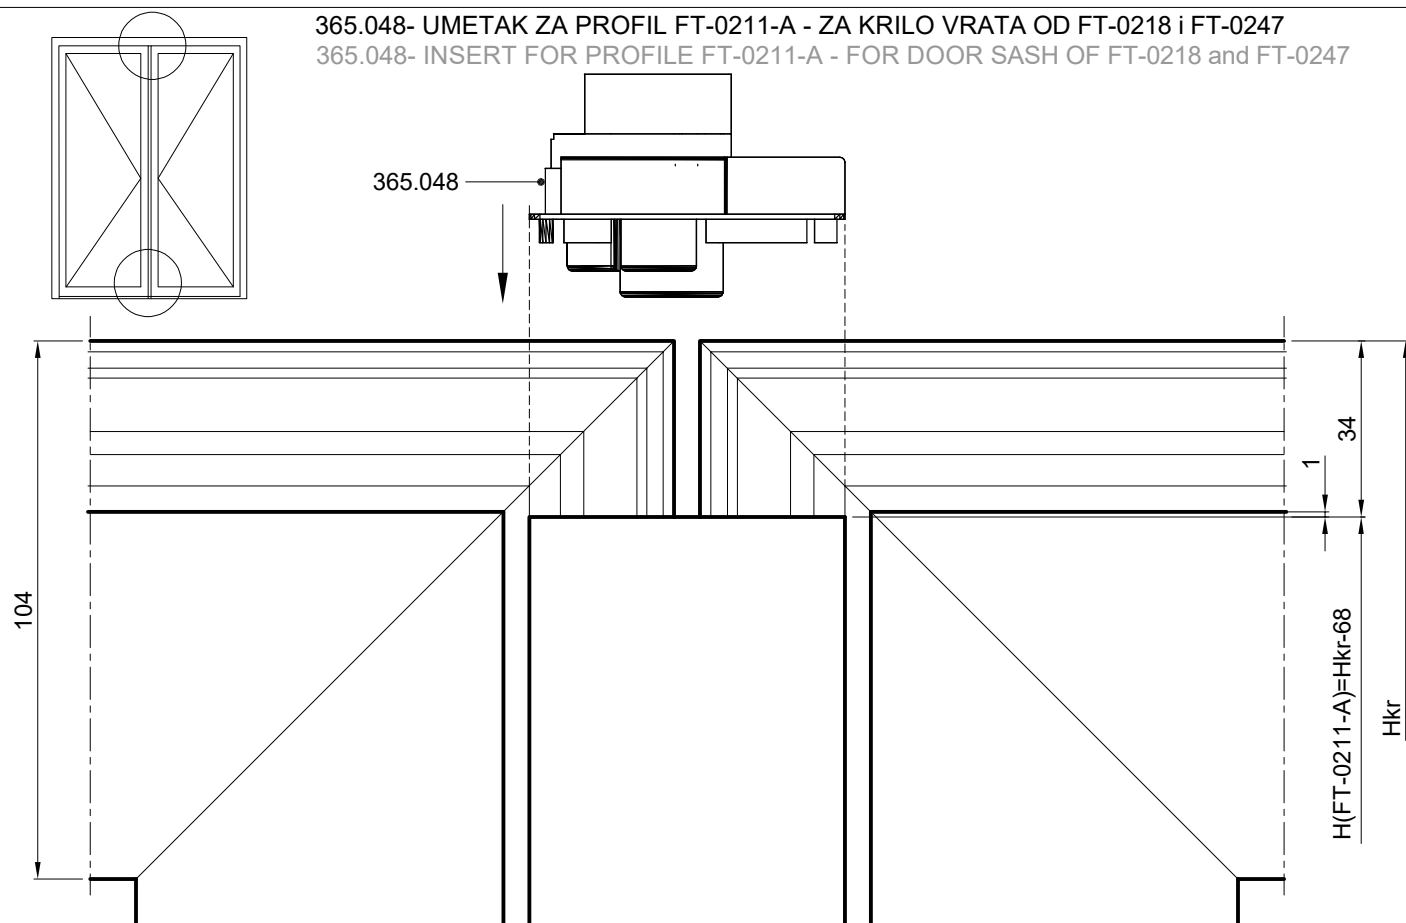

ljepilo za metal
(npr. Teroson MS 939)
metal glue
(eg. Teroson MS 939)


365.048

-gornji i donji umetak-simetrično
-materijal: tvrda guma
-mjera pilanja profila FT-0211-A
H=Hkr - 68

365.048


-upper and lower insert-symmetrical
-material: hard rubber
-cutting length of profile FT-0211-A
H=Hkr - 68

365.065- UMETAK ZA PROFIL FT-2281 - ZA KRILO VRATA FT-0279
365.065- INSERT FOR PROFILE FT-2281 - FOR DOOR SASH FT-0279

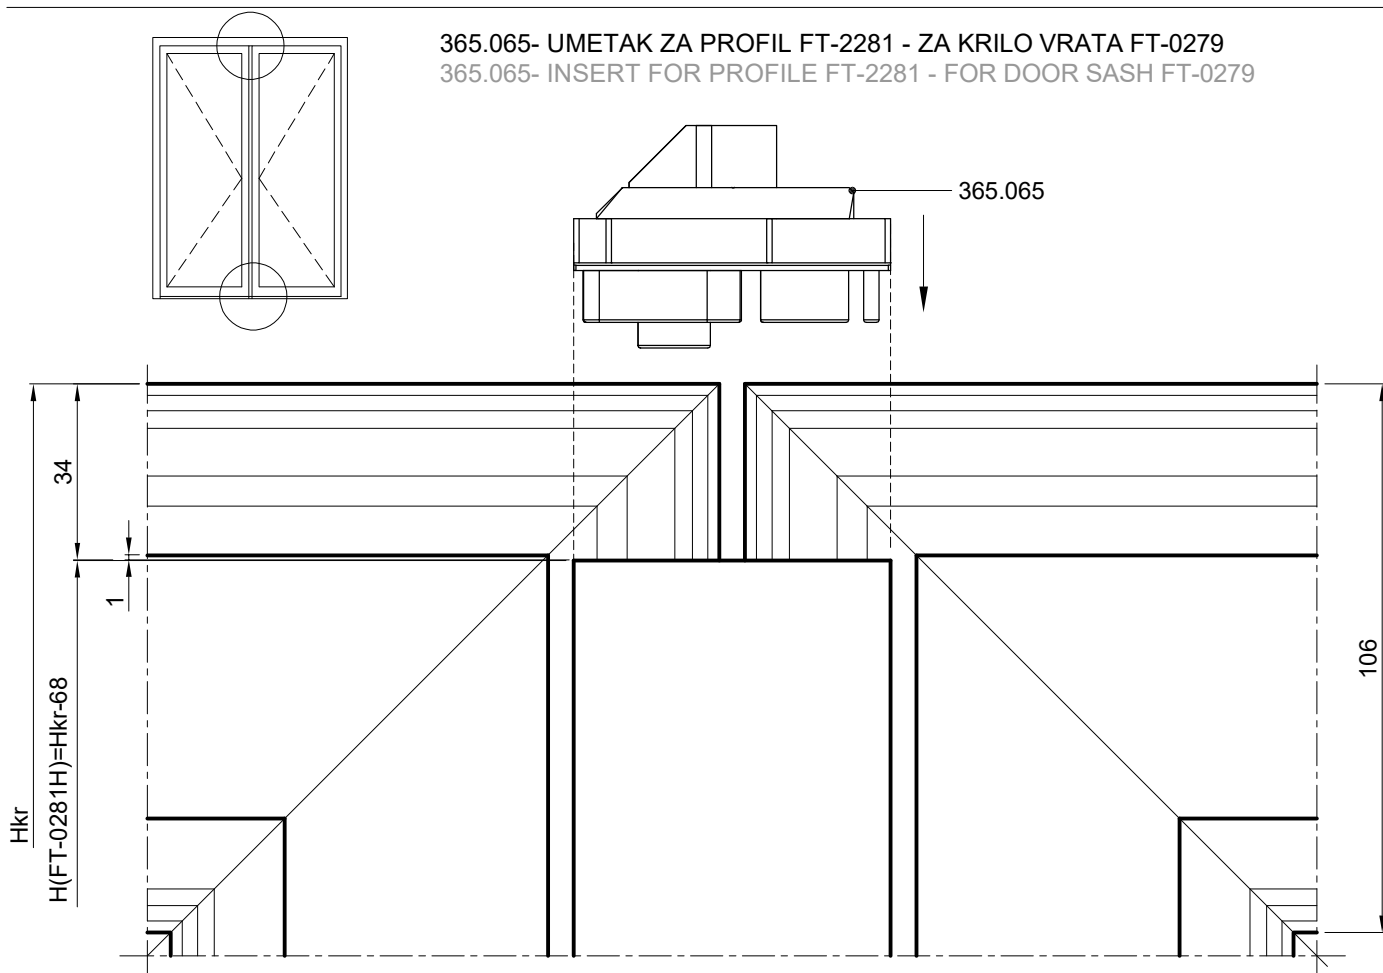


FT-0279

FT-0279

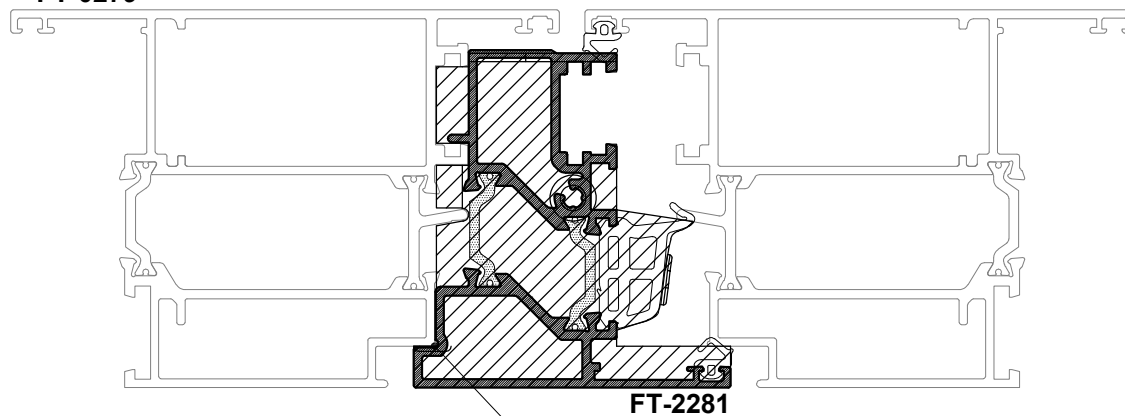

FT-2281

365.065

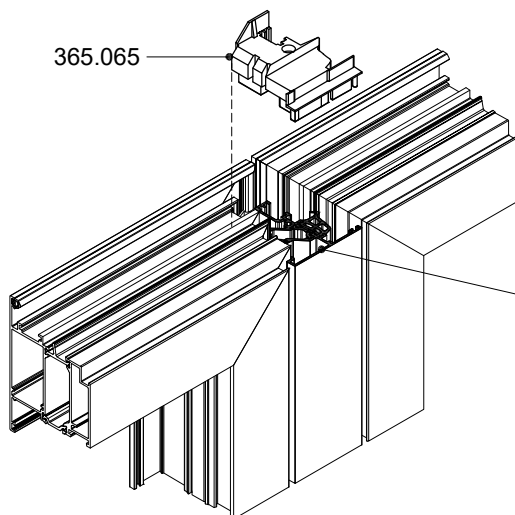

365.065





-gornji i donji umetak-simetrično
-materijal: tvrda guma
-mjera pilanja profila FT-0281 H=Hkr
- 68

365.065


-upper and lower insert-symetrical
-material:hard rubber
-cutting length of FT-0281 H=Hsh - 68

ljepilo za metal
(npr. Teroson MS 939)
metal glue
(eg. Teroson MS 939)

363.068- UMETAK ZA PROFIL FT-0213-A - ZA KRILLO VRATA OD FT-0219
363.068- INSERT FOR PROFILE FT-0213-A - FOR DOOR SASH OF FT-0219

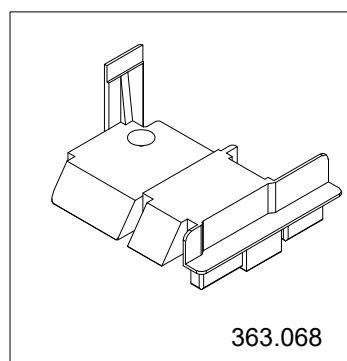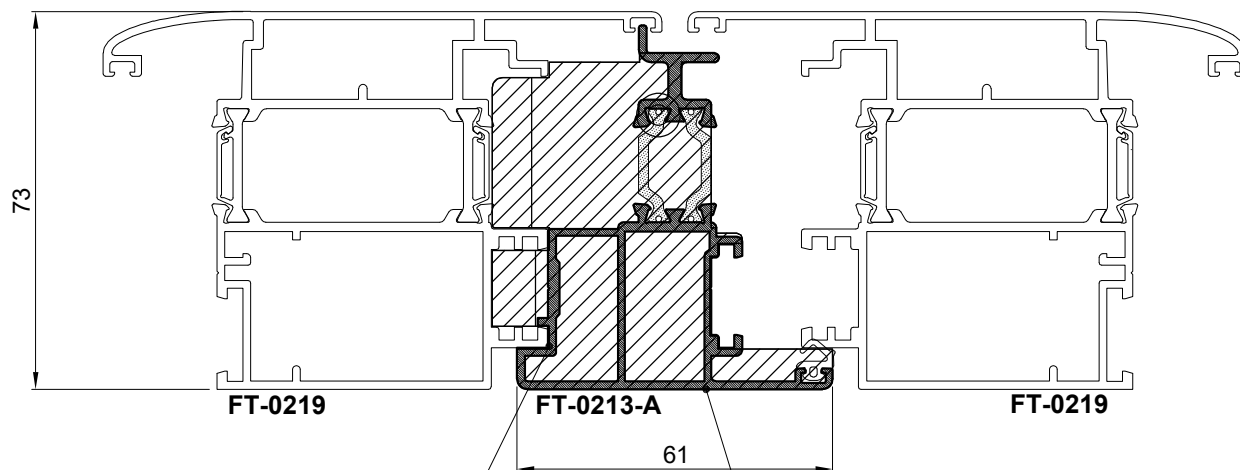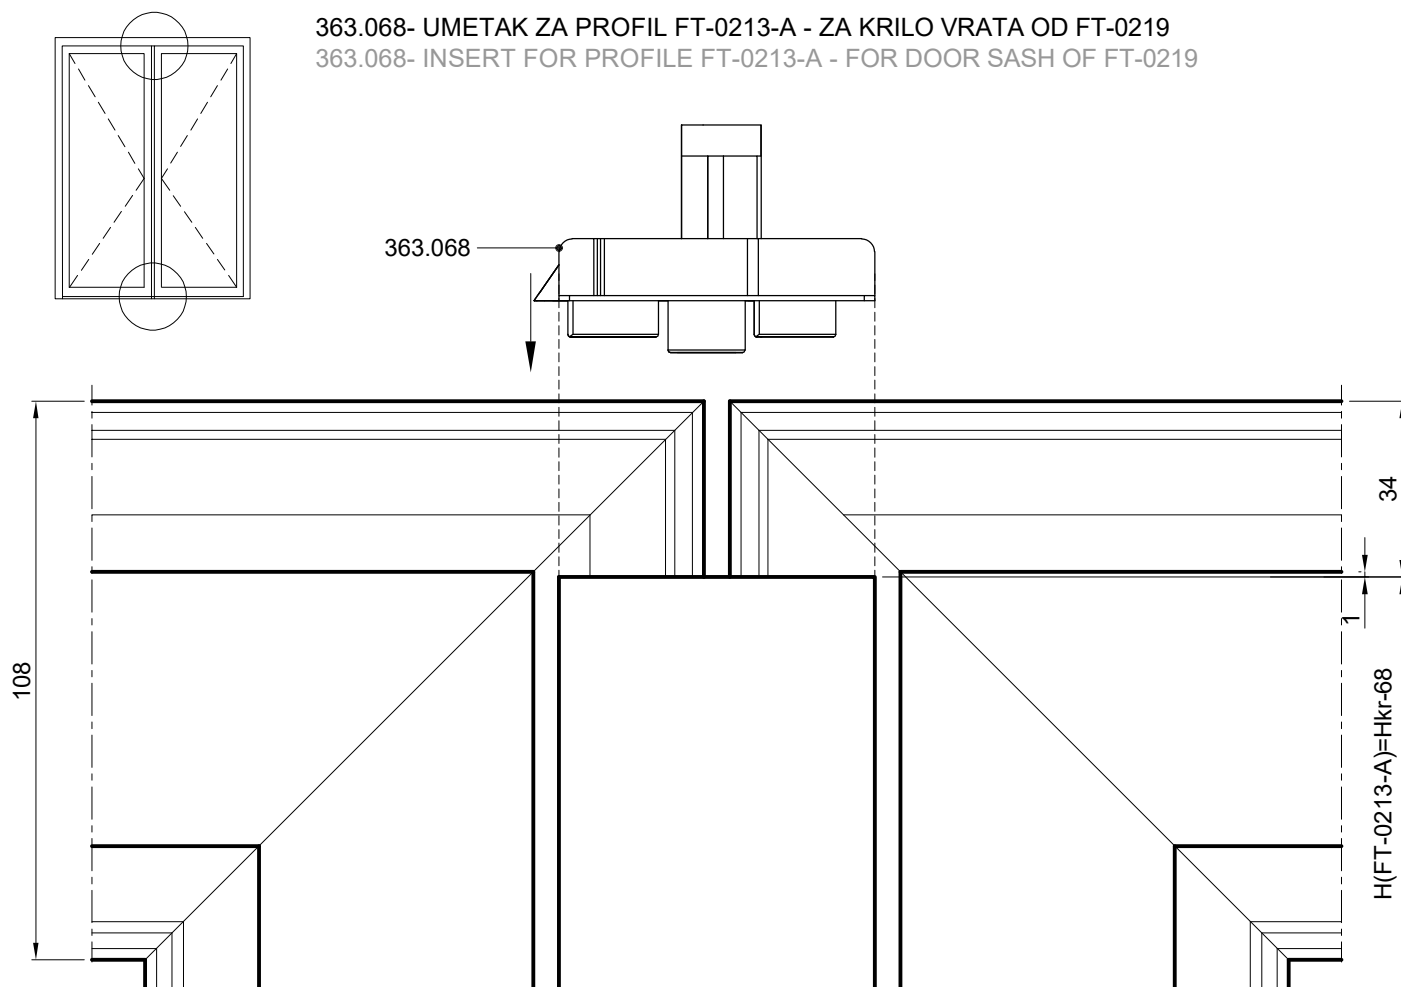

ljepilo za metal
(npr. Teroson MS 939)
metal glue
(eg. Teroson MS 939)




363.068





- gornji i donji umetak-simetrično
- materijal: tvrda guma
- mjera pilanja profila FT-0213-A
 $H = H_{kr} - 68$

364.013


- upper and lower insert-symmetrical
- material: hard rubber
- cutting length of profile FT-0213-A
 $H = H_{kr} - 68$



365.035 - UMETAK ZA PROFIL FT-0237- ZA KRILO PROZORA (pvc)
365.035 - INSERT FOR PROFILE FT-0237 - FOR WINDOW SASH (pvc)

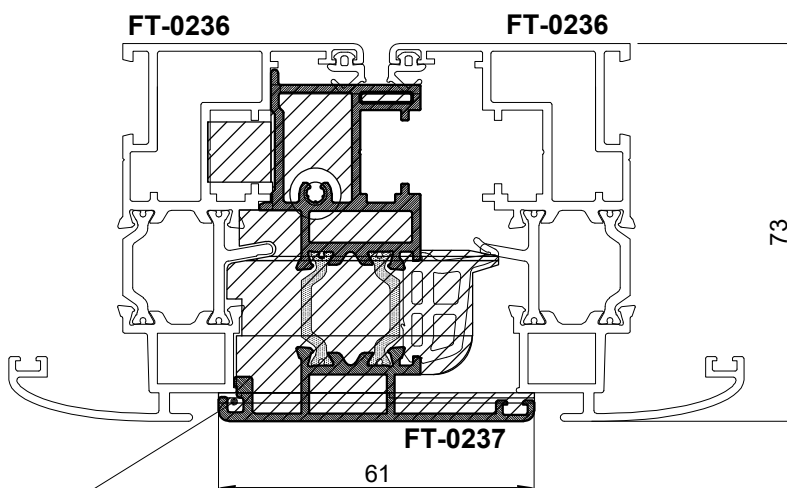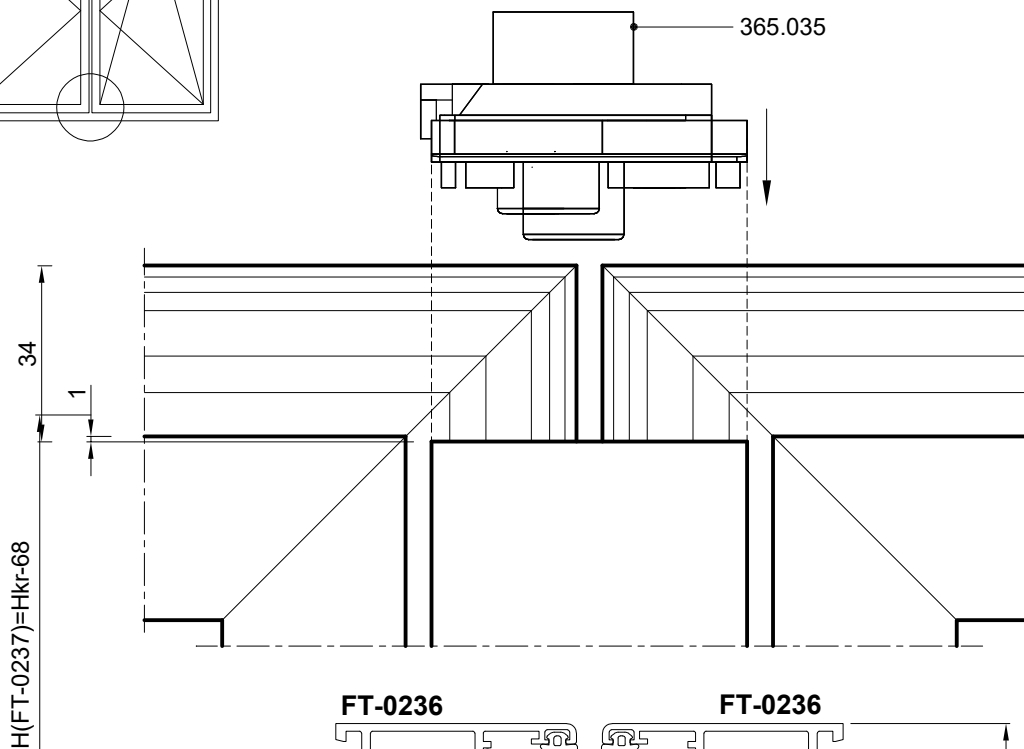

ljepilo za metal
(npr. Teroson MS 939)
metal glue
(eg. Teroson MS 939)

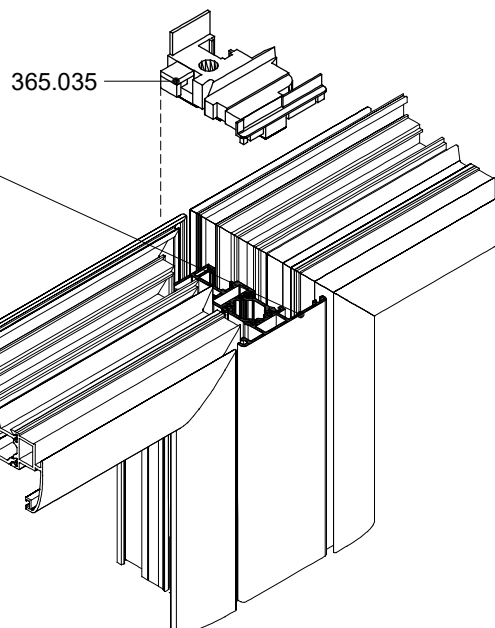


365.035




- gornji i donji umetak-simetrično
- materijal: tvrda guma
- mjera pilanja profila FT-0237 $H=H_{kr} - 68$


365.035

- upper and lower insert-symmetrical
- material:hard rubber
- cutting length of FT-0237 $H=H_{sh} - 68$



365.043 - UMETAK ZA PROFIL FT-0237- ZA KRILO PROZORA (pvc)
365.043 - INSERT FOR PROFILE FT-0237 - FOR WINDOW SASH (pvc)

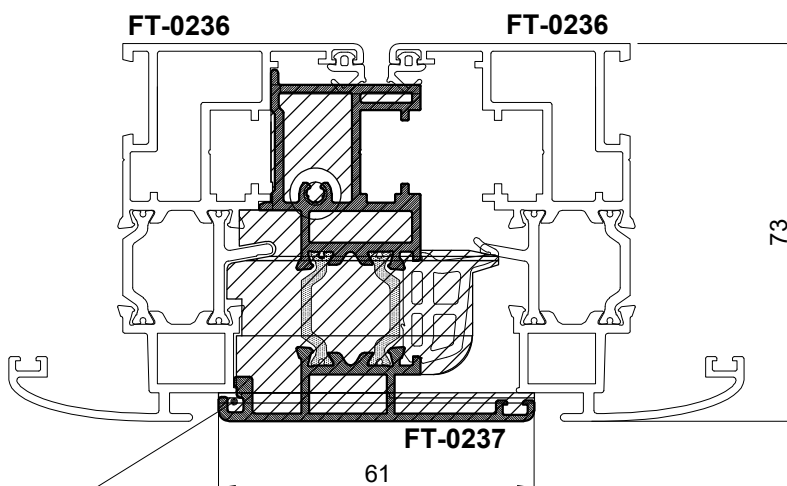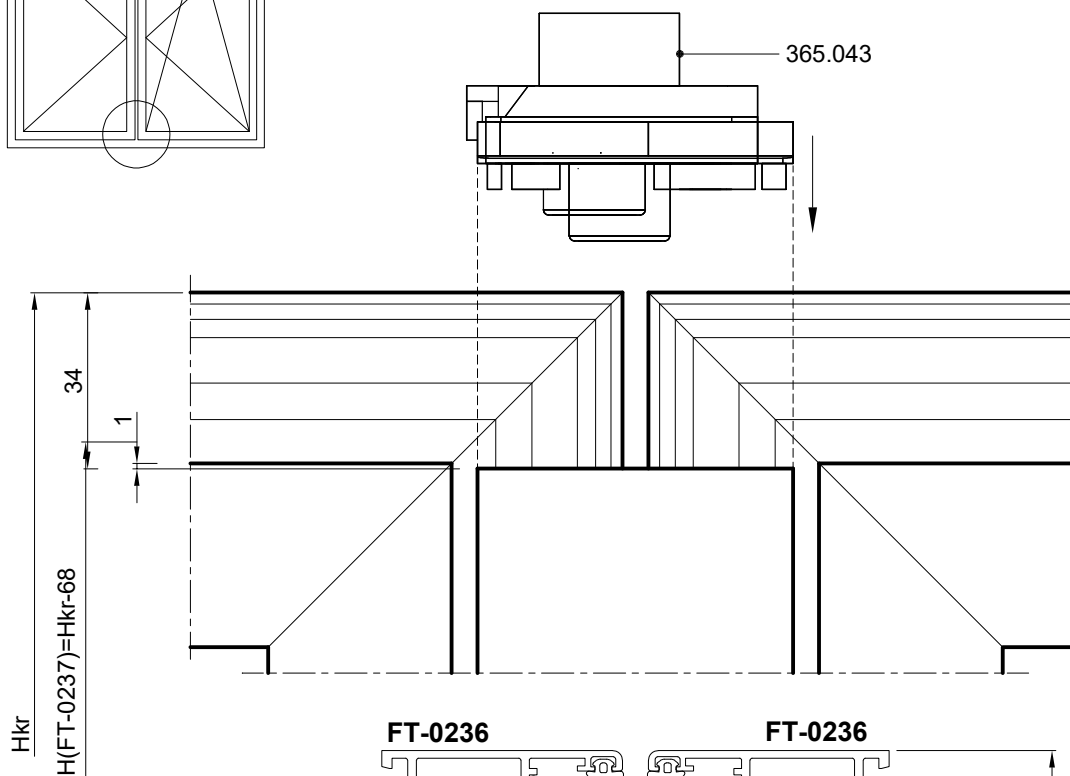



ljepilo za metal
(npr. Teroson MS 939)
metal glue
(eg. Teroson MS 939)

365.043



- gornji i donji umetak-simetrično
- materijal: tvrda guma
- mjera pilanja profila FT-0237 $H=H_{kr} - 68$

365.043


- upper and lower insert-symmetrical
- material:hard rubber
- cutting length of FT-0237 $H=H_{sh} - 68$

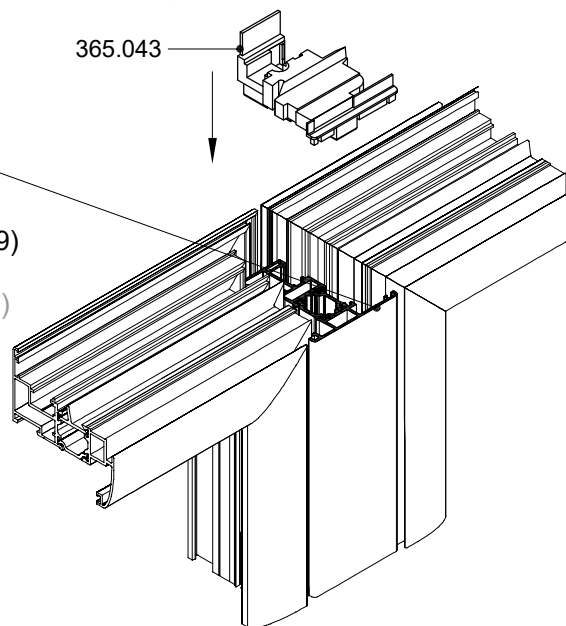



UGRADNJA I OBRADA PROFILA PRAGA FT-0223 ZA UMETAK 365.009 U PROFIL FT-0201-otvaranje unutra
MOUNTING AND PROCESSING THRESHOLD PROFILE FT-0223 FOR INSERT 365.009
IN PROFILE FT-0201- inward opening

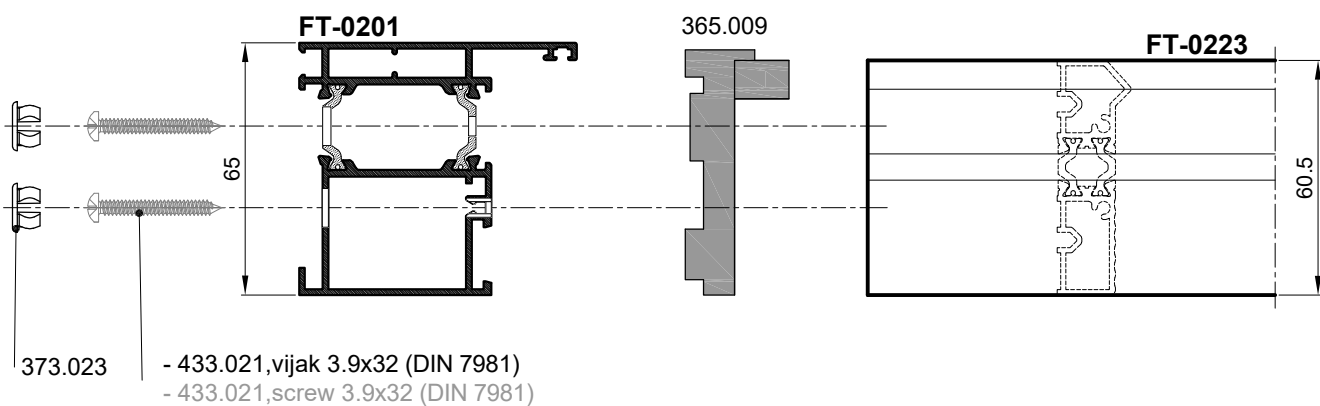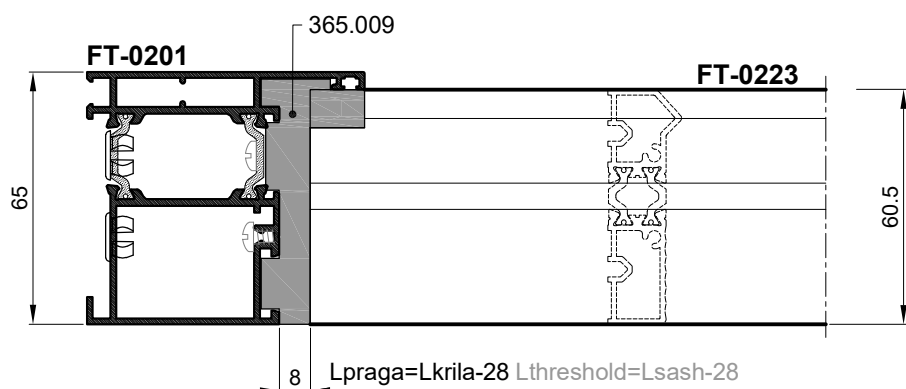


OBRADA PROFILA FT-0201 ZA UGRADNJU PRAGA S UMETKOM
PROCESSING PROFILE FT-0201 FOR TRESHOLD MONTAGE WITH INSERT

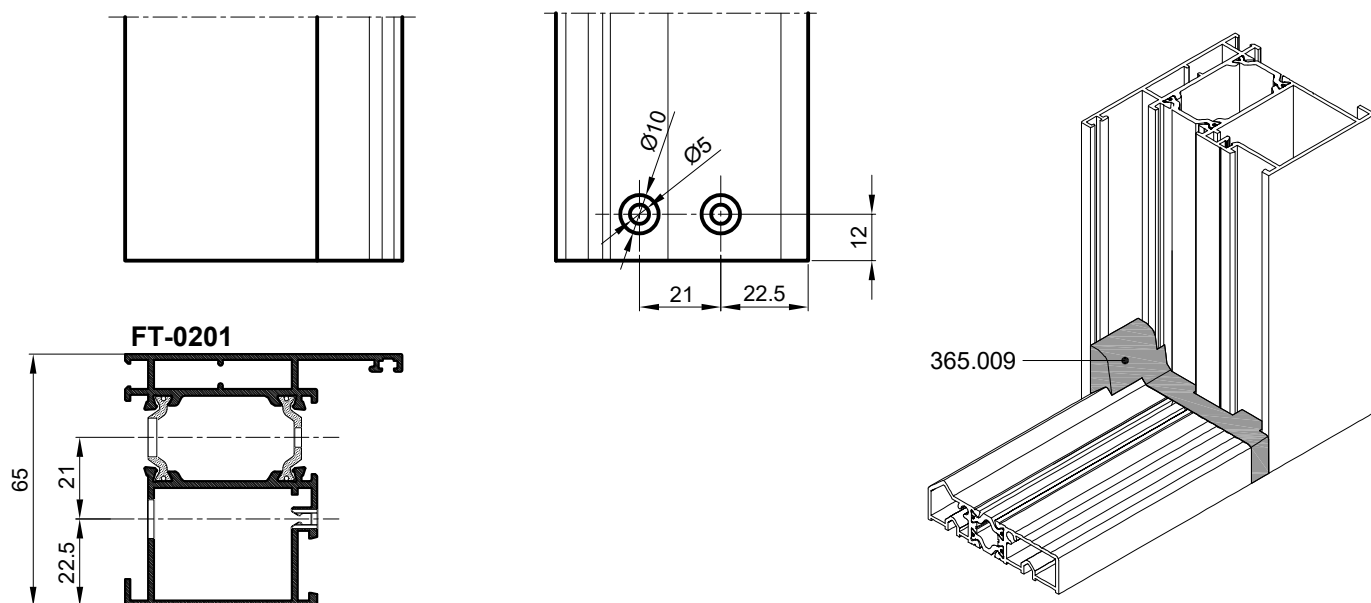

UGRADNJA I OBRADA PROFILA PRAGA FT-0223 ZA UMETAK 365.009 U PROFIL FT-0274 - otvaranje unutra
MOUNTING AND PROCESSING THRESHOLD PROFILE FT-0223 FOR INSERT 365.009
IN PROFILE FT-0274 - inward opening

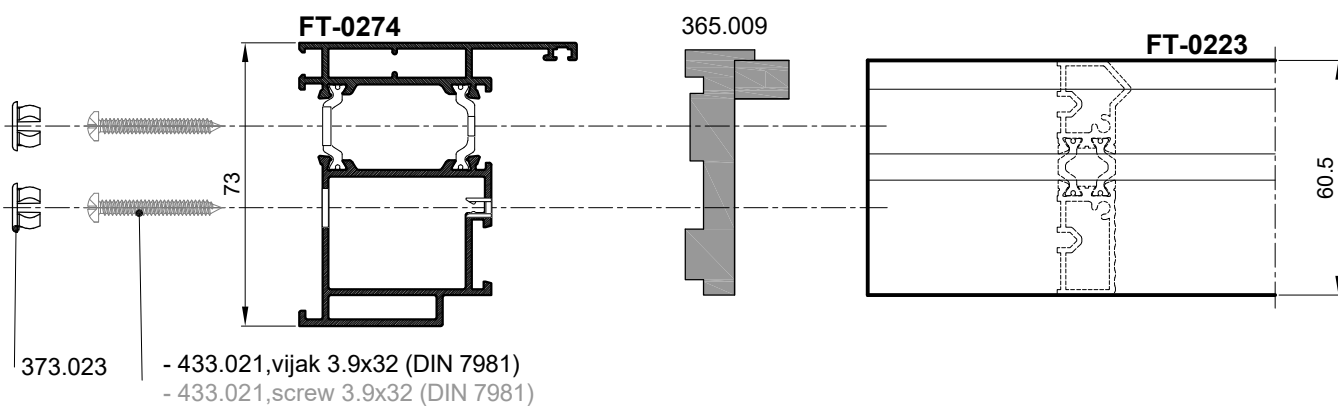
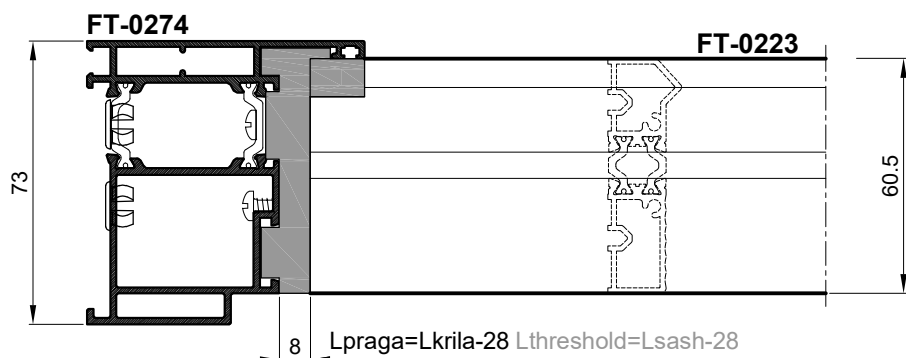


OBRADA PROFILA FT-0201 ZA UGRADNJU PRAGA S UMETKOM
PROCESSING PROFILE FT-0201 FOR THRESHOLD MONTAGE WITH INSERT

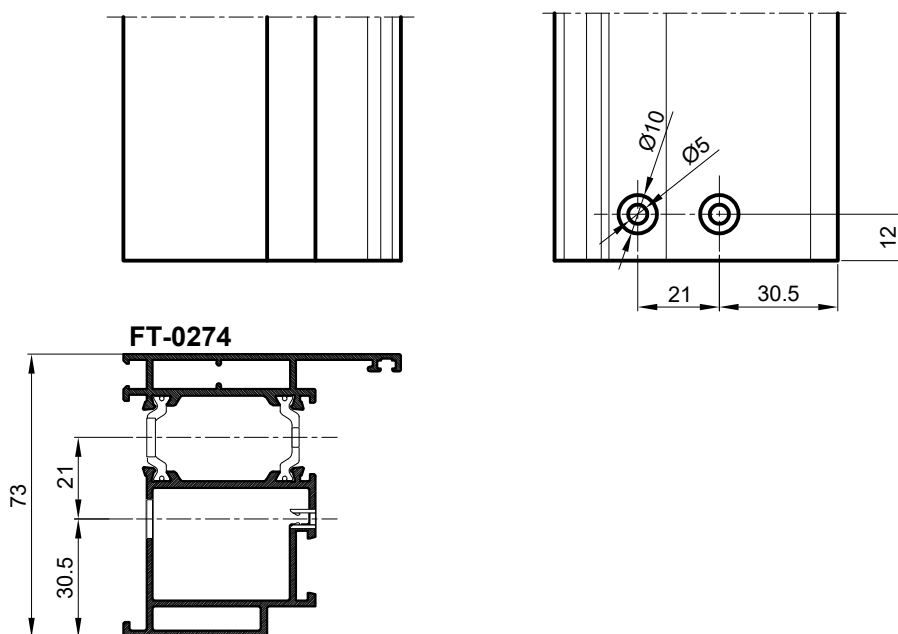


UGRADNJA I OBRADA PROFILA PRAGA FT-0223 PREMA PROFILU FT-0278 - otvaranje vani



MONTAGE AND PROCESSING OF THRESHOLD PROFILE FT-0223 INTO PROFILE FT-0278 - outward opening

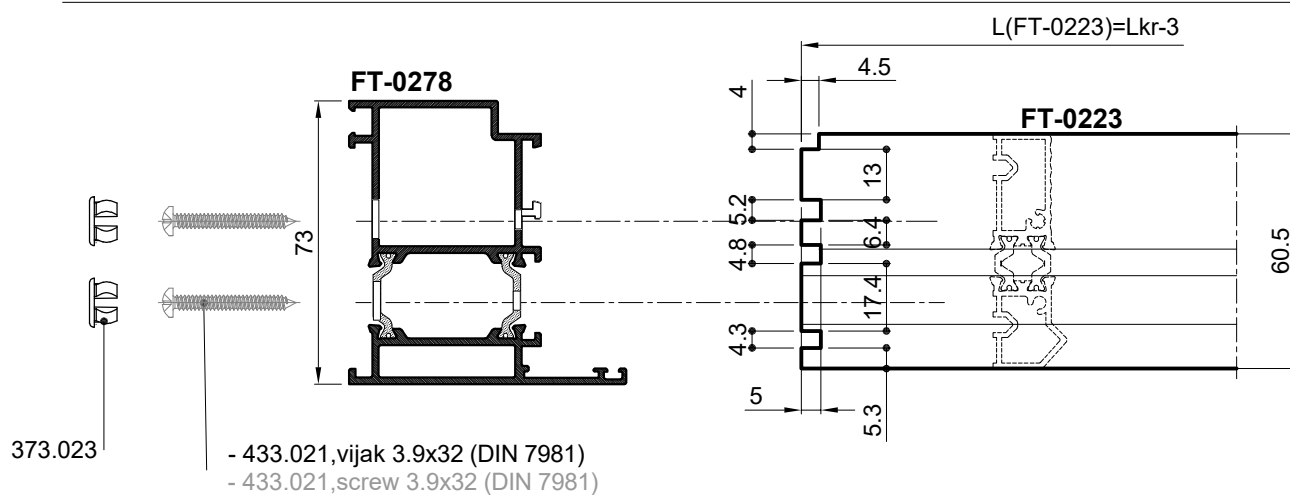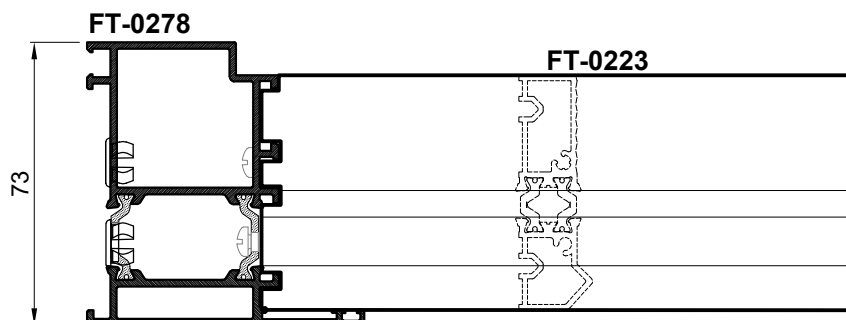


OBRADA PROFILA FT-0278 ZA UGRADNJU PRAGA
PROCESSING PROFILE FT-0278 FOR THRESHOLD MONTAGE

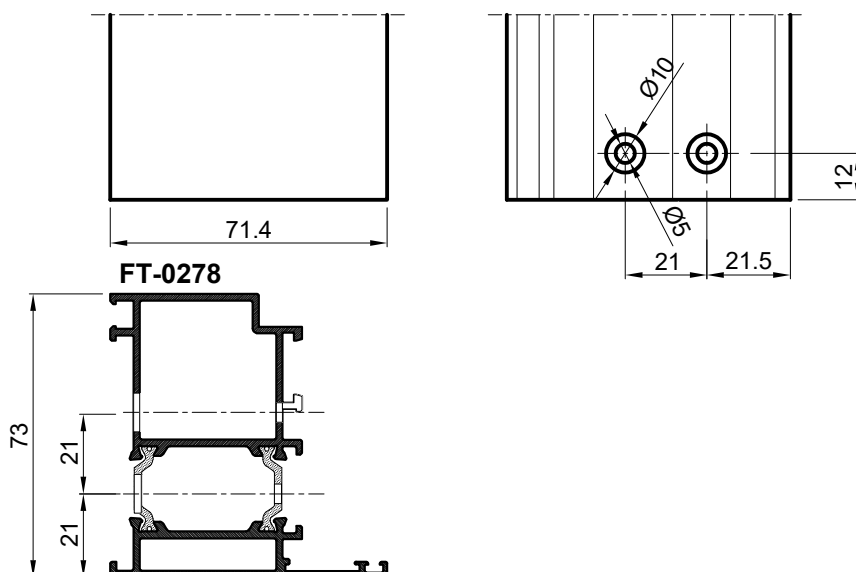


UGRADNJA I OBRADA PROFILA PRAGA FT-0223 ZA UMETAK 365.010 U PROFIL FT-0220 - otvaranje vani
MONTAGE AND PROCESSING OF PROFILE FT-0223 FOR INSERT 365.010 IN PROFILE FT-0220 - outward opening

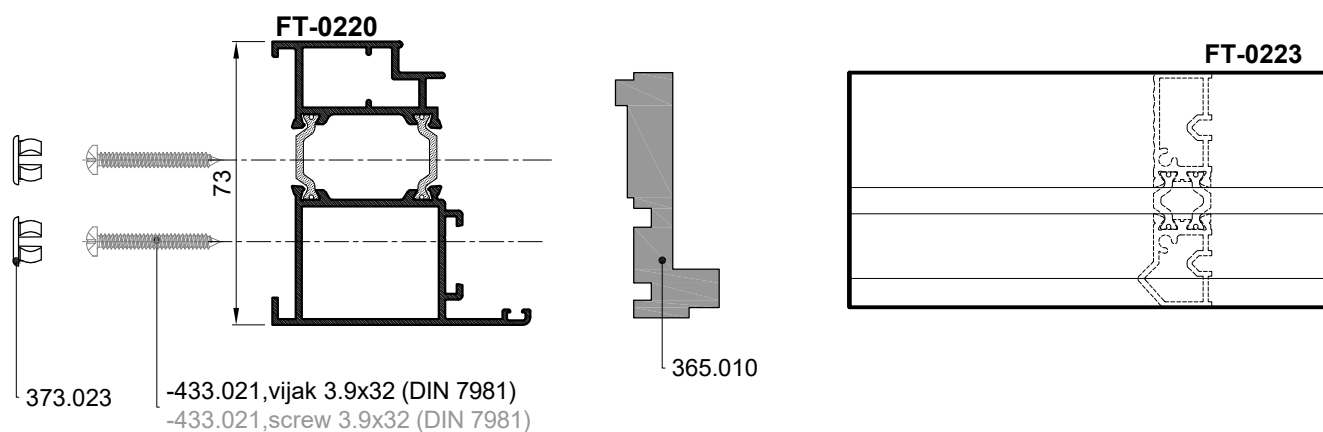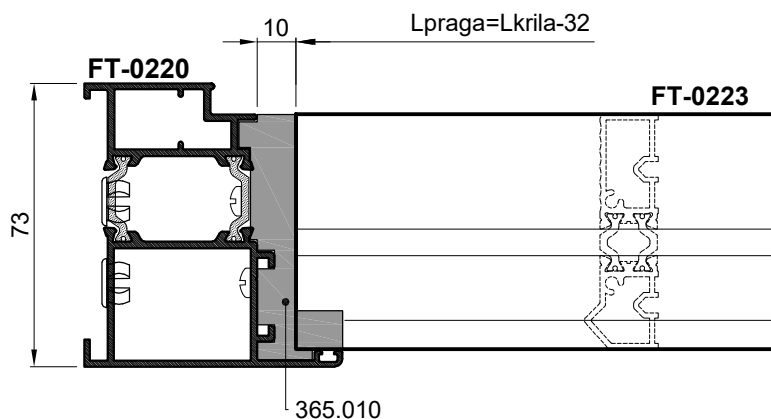


OBRADA PROFILA FT-0220 ZA UGRADNJU PRAGA S UMETKOM
PROCESSING PROFILE FT-0220 FOR THRESHOLD MONTAGE WITH INSERT

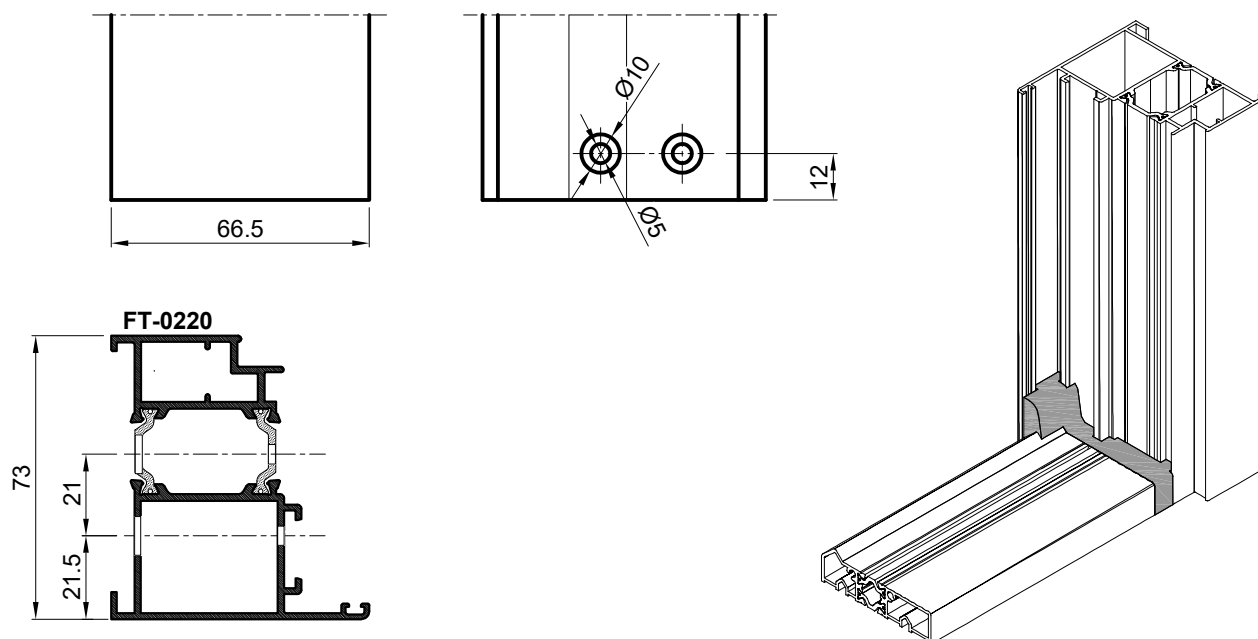

UGRADNJA I OBRADA PROFILA PRAGA FT-0294 U PROFIL FT-0201 MONTAGE AND PROCESSING OF PROFILE FT-0294 IN PROFILE FT-0201

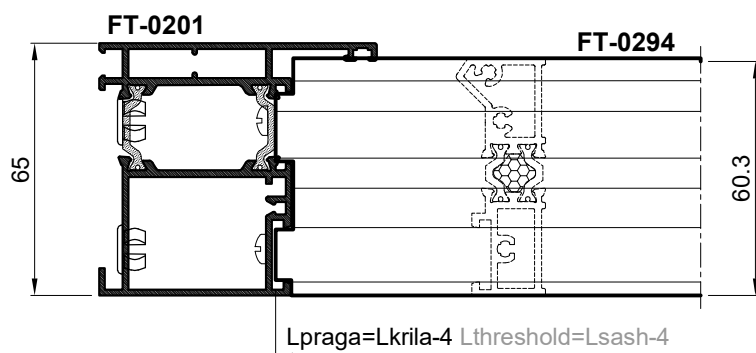


MJERA PILANJA PRAGA
CUTTING LENGTH

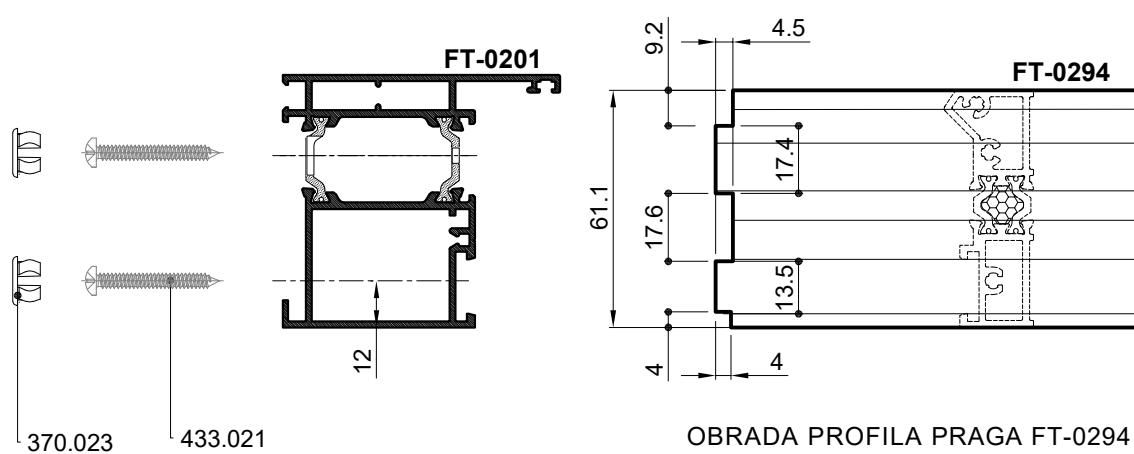


OBRADA PROFILA PRAGA FT-0294
PROCESSING THRESHOLD PROFILE FT-0294


OBRADA PROFILA RAMA FT-0201 PROCESSING FRAME PROFILE FT-0201

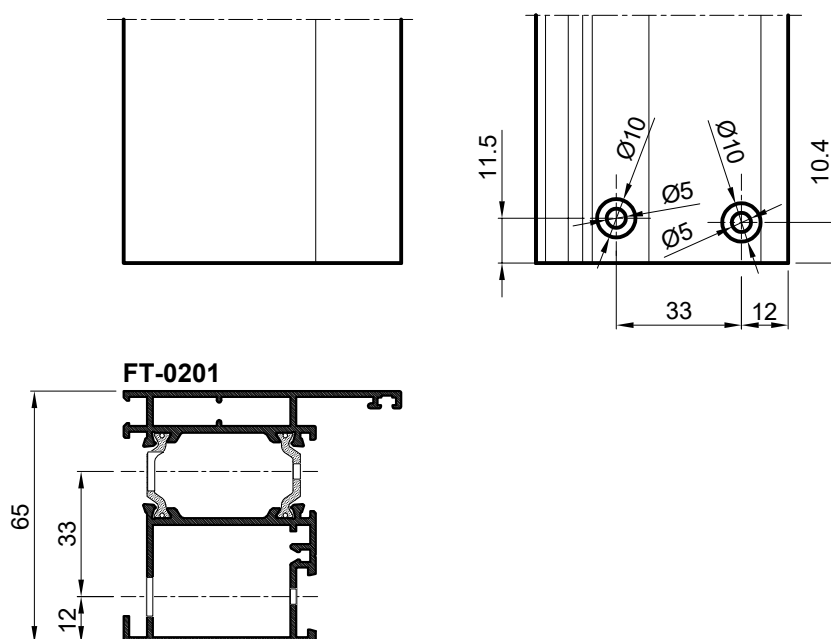


UGRADNJA PROFILA F-1483 U KRILU VRATA FT-0275 S UMETKOM 363.065 - otvaranje unutra
MOUNTING PROFILE F-1483 IN DOOR SASH FT-0275 WITH INSERT 363.065 - inward opening

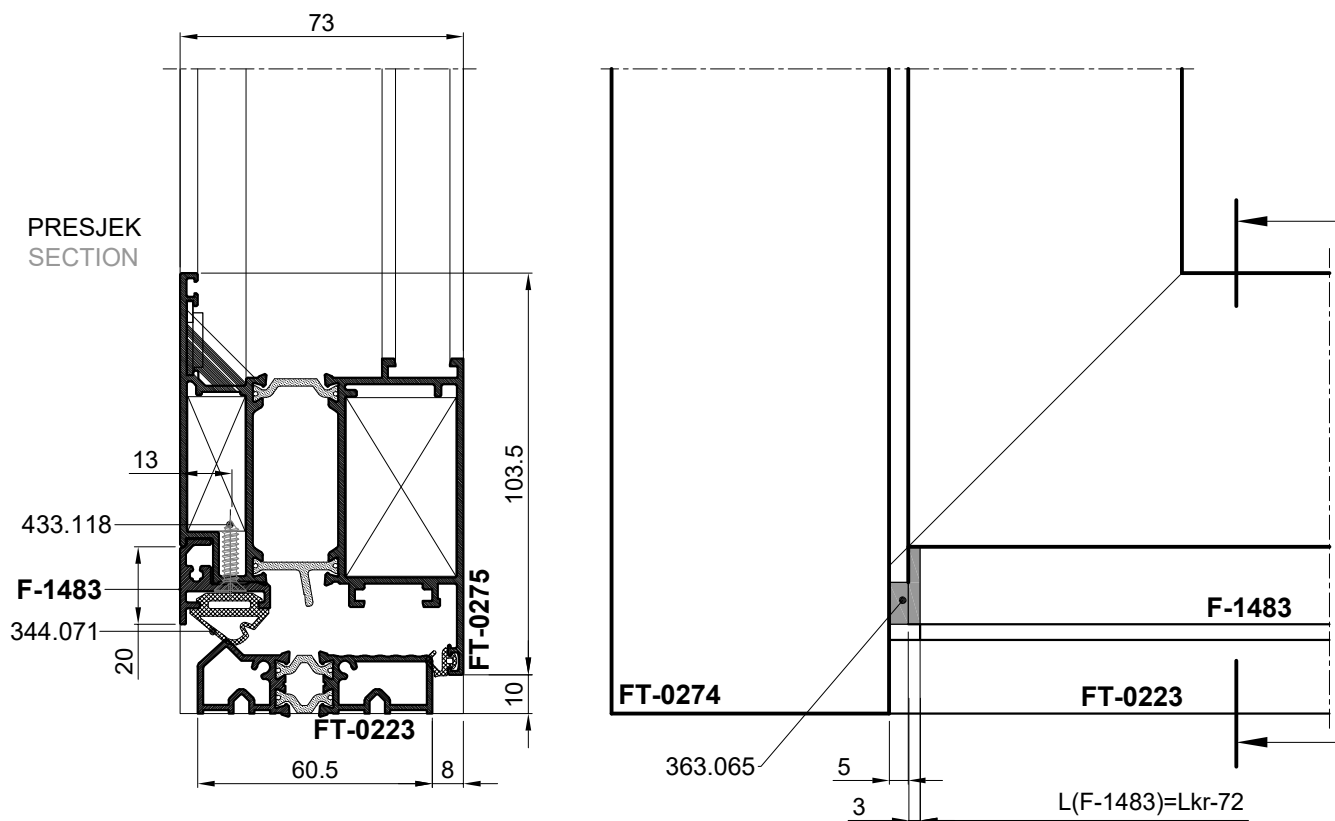




- Profil F-1483 se pila ravno
Mjera pilanja $L(F-1483) = Lkr-72$
- The profile F-1483 is cut straight
Cutting measure $L(F-1483) = Lkr-72$

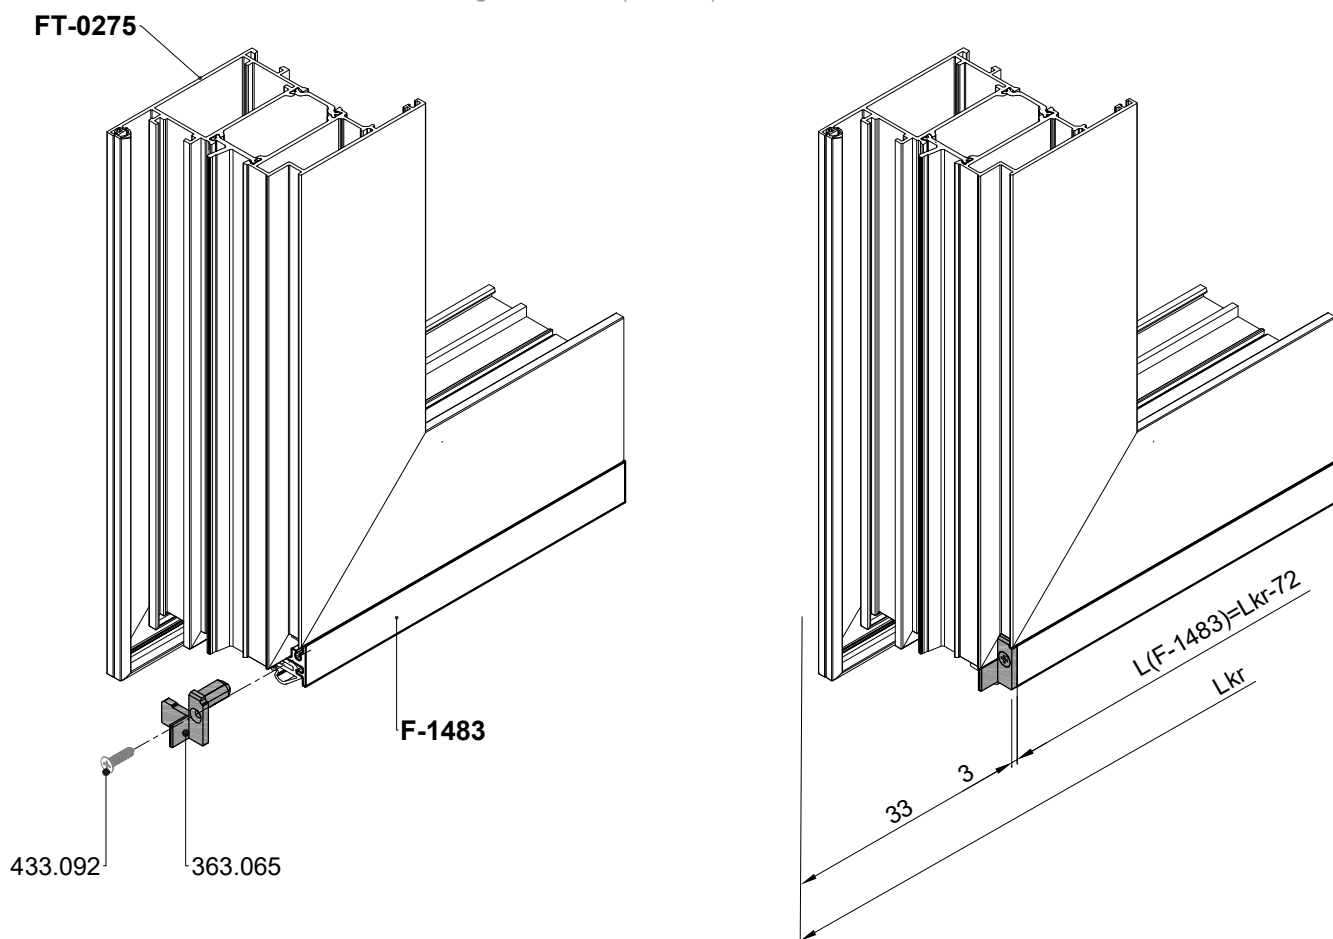


UGRADNJA PROFILA F-1483 U KRILO VRATA FT-0218 SA UMETKOM 363.065 - otvaranje unutra
MOUNTING PROFILE F-1483 IN DOOR SASH FT-0218 WITH INSERT 363.065 - inward opening

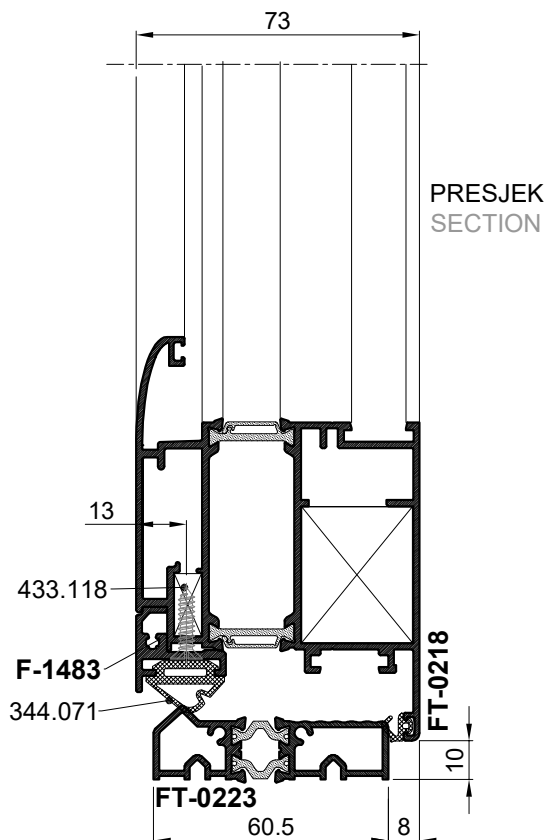

- Profil F-1483 se pila ravno
Mjera pilanja $L(F-1483) = Lkr-72$
- The profile F-1483 is cut straight
Cutting measure $L(F-1483) = Lkr-72$

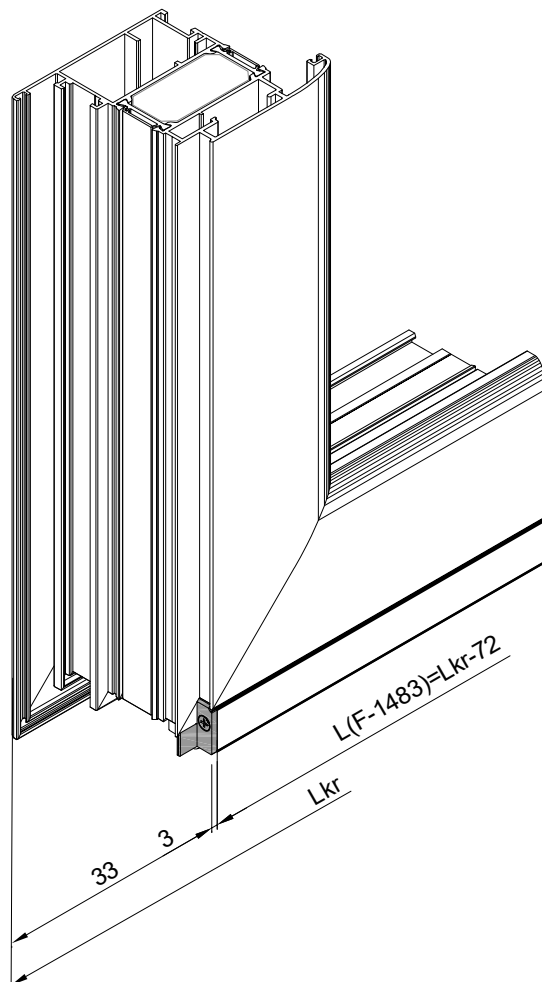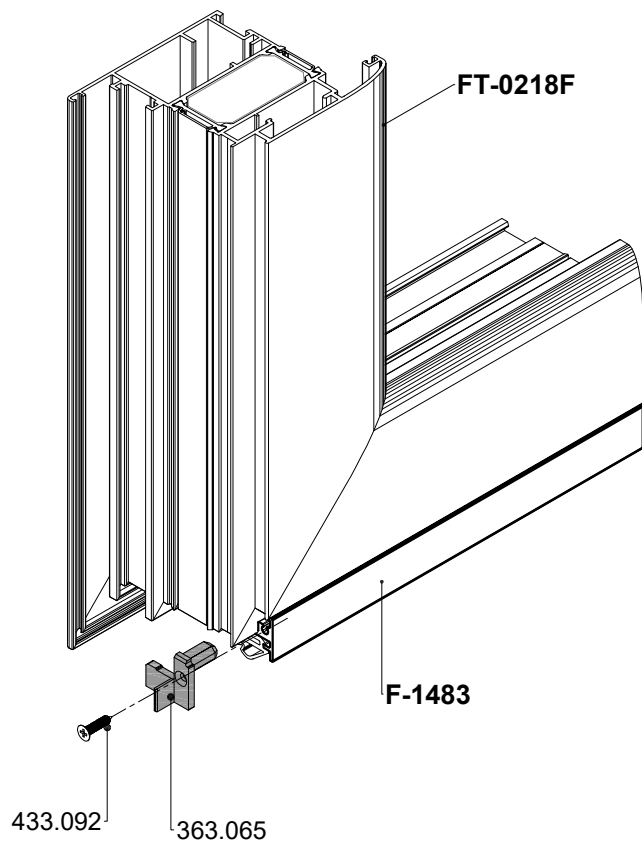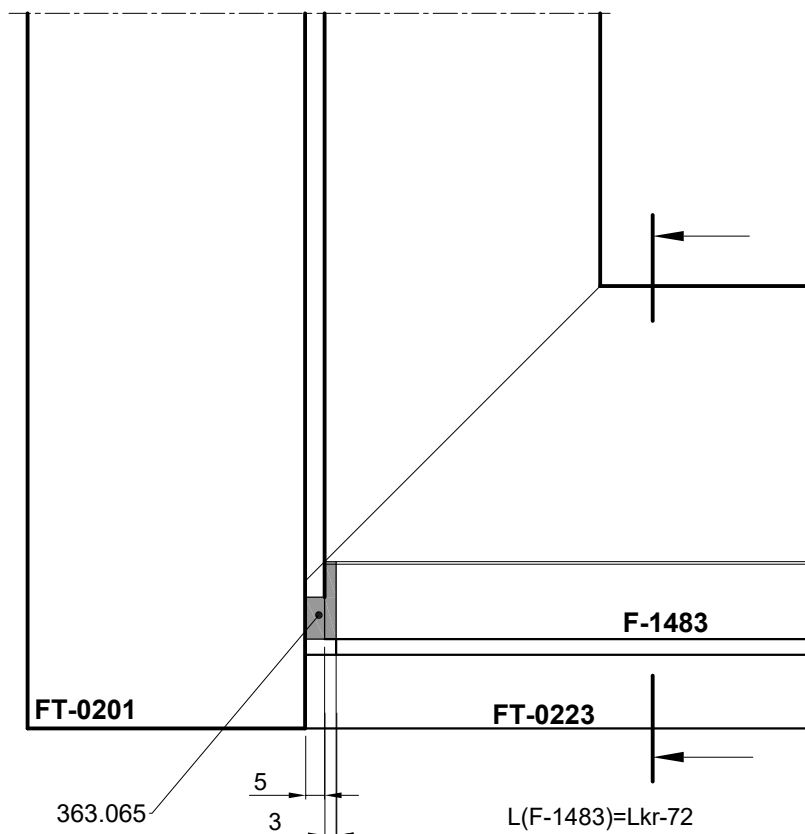


UGRADNJA PROFILA F-1567 U KRILO VRATA FT-0204 S UMETKOM 373.055 - otvaranje unutra
MOUNTING PROFILE F-1567 IN DOOR SASH FT-0204 WITH INSERT 373.055 - inward opening



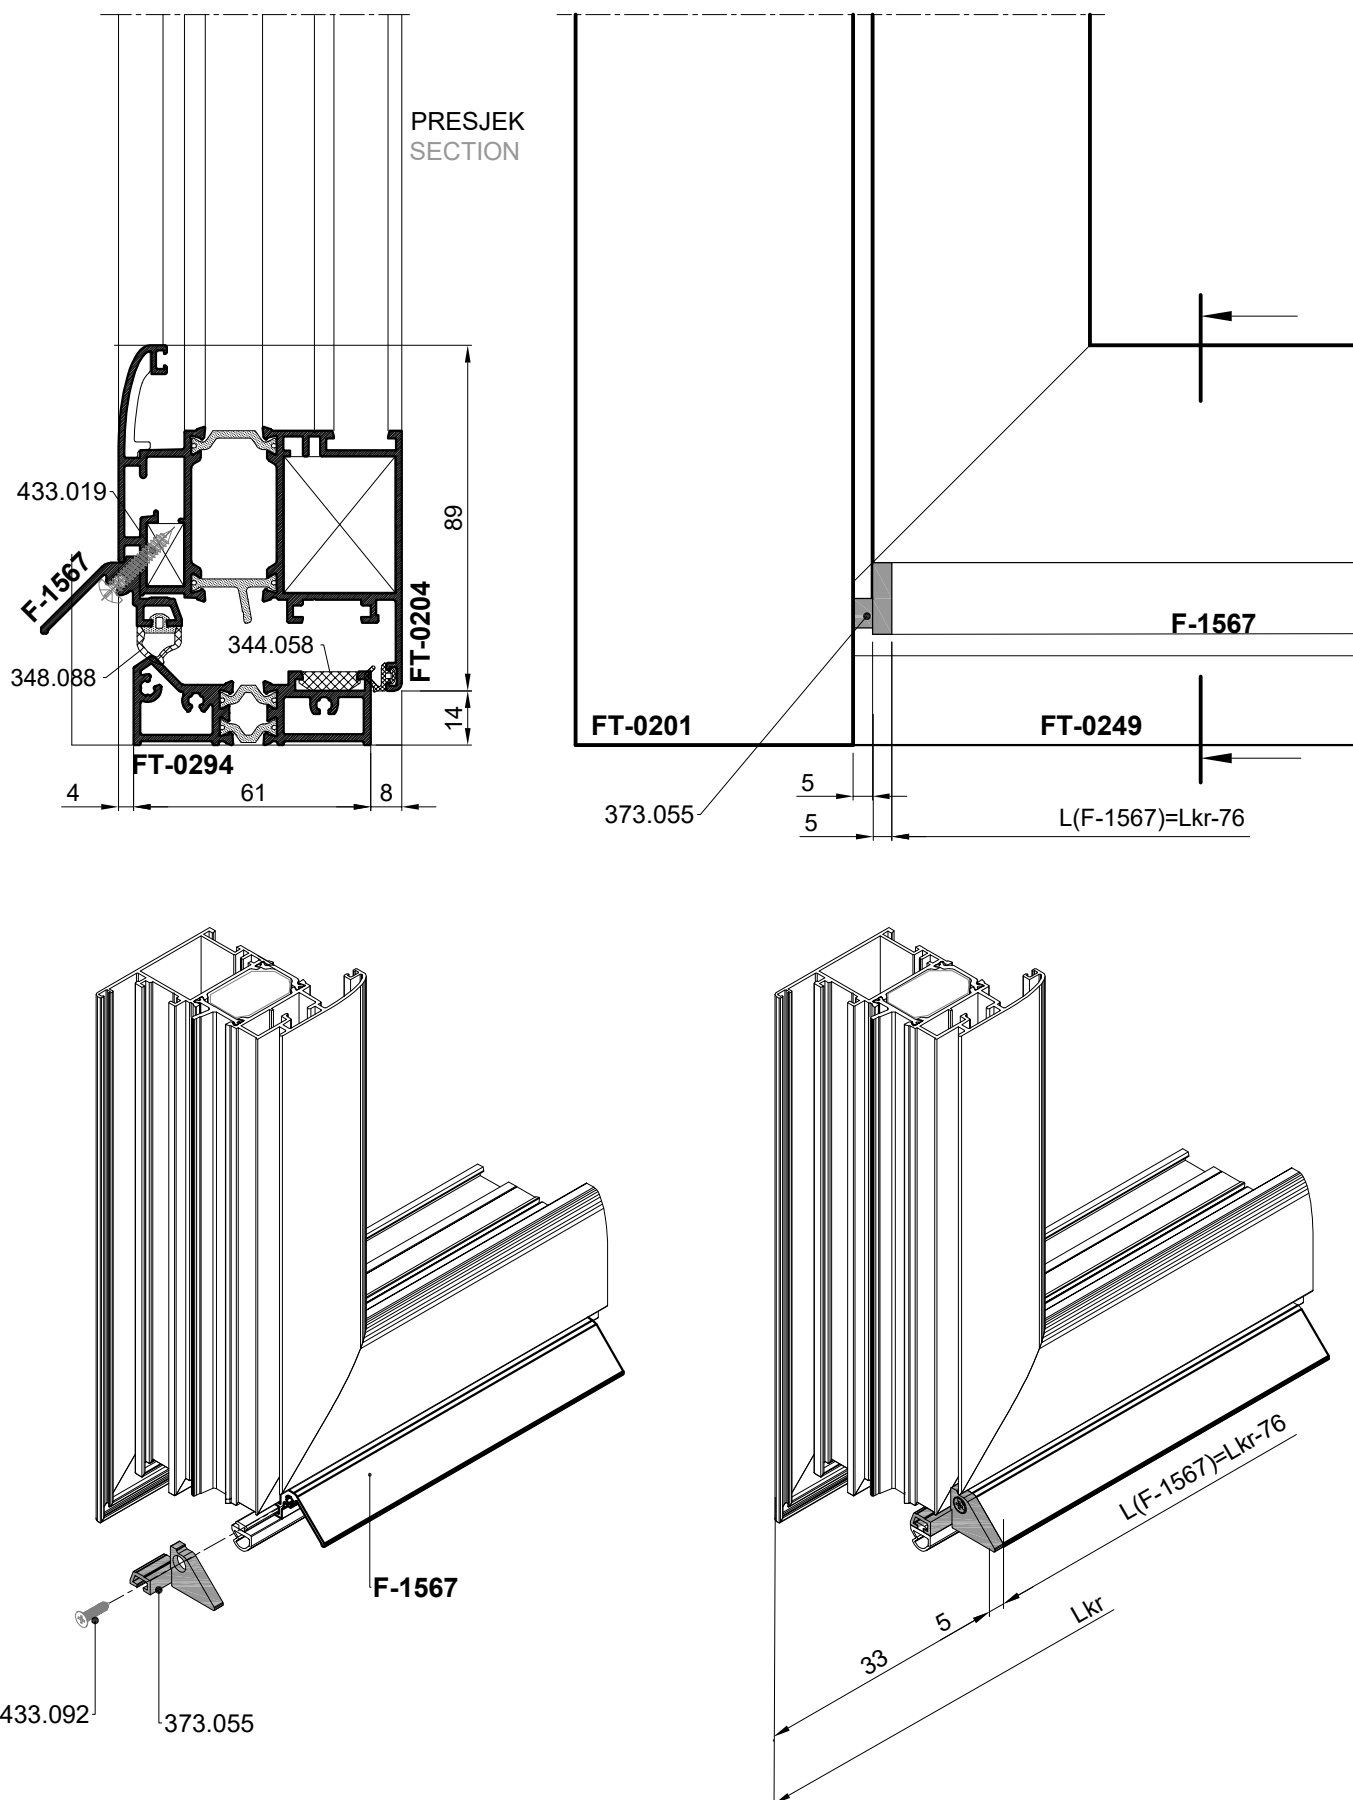


Napomena: Prikaz ugradnje primjenjiv je i na profile krila FT-0230, FT-0244 i FT-0246.


UGRADNJA PROFILA F-1567 U KRILO VRATA FT-0291 S UMETKOM 373.055 - otvaranje unutra
MOUNTING PROFILE F-1567 IN DOOR SASH FT-0291 WITH INSERT 373.055 - inward opening

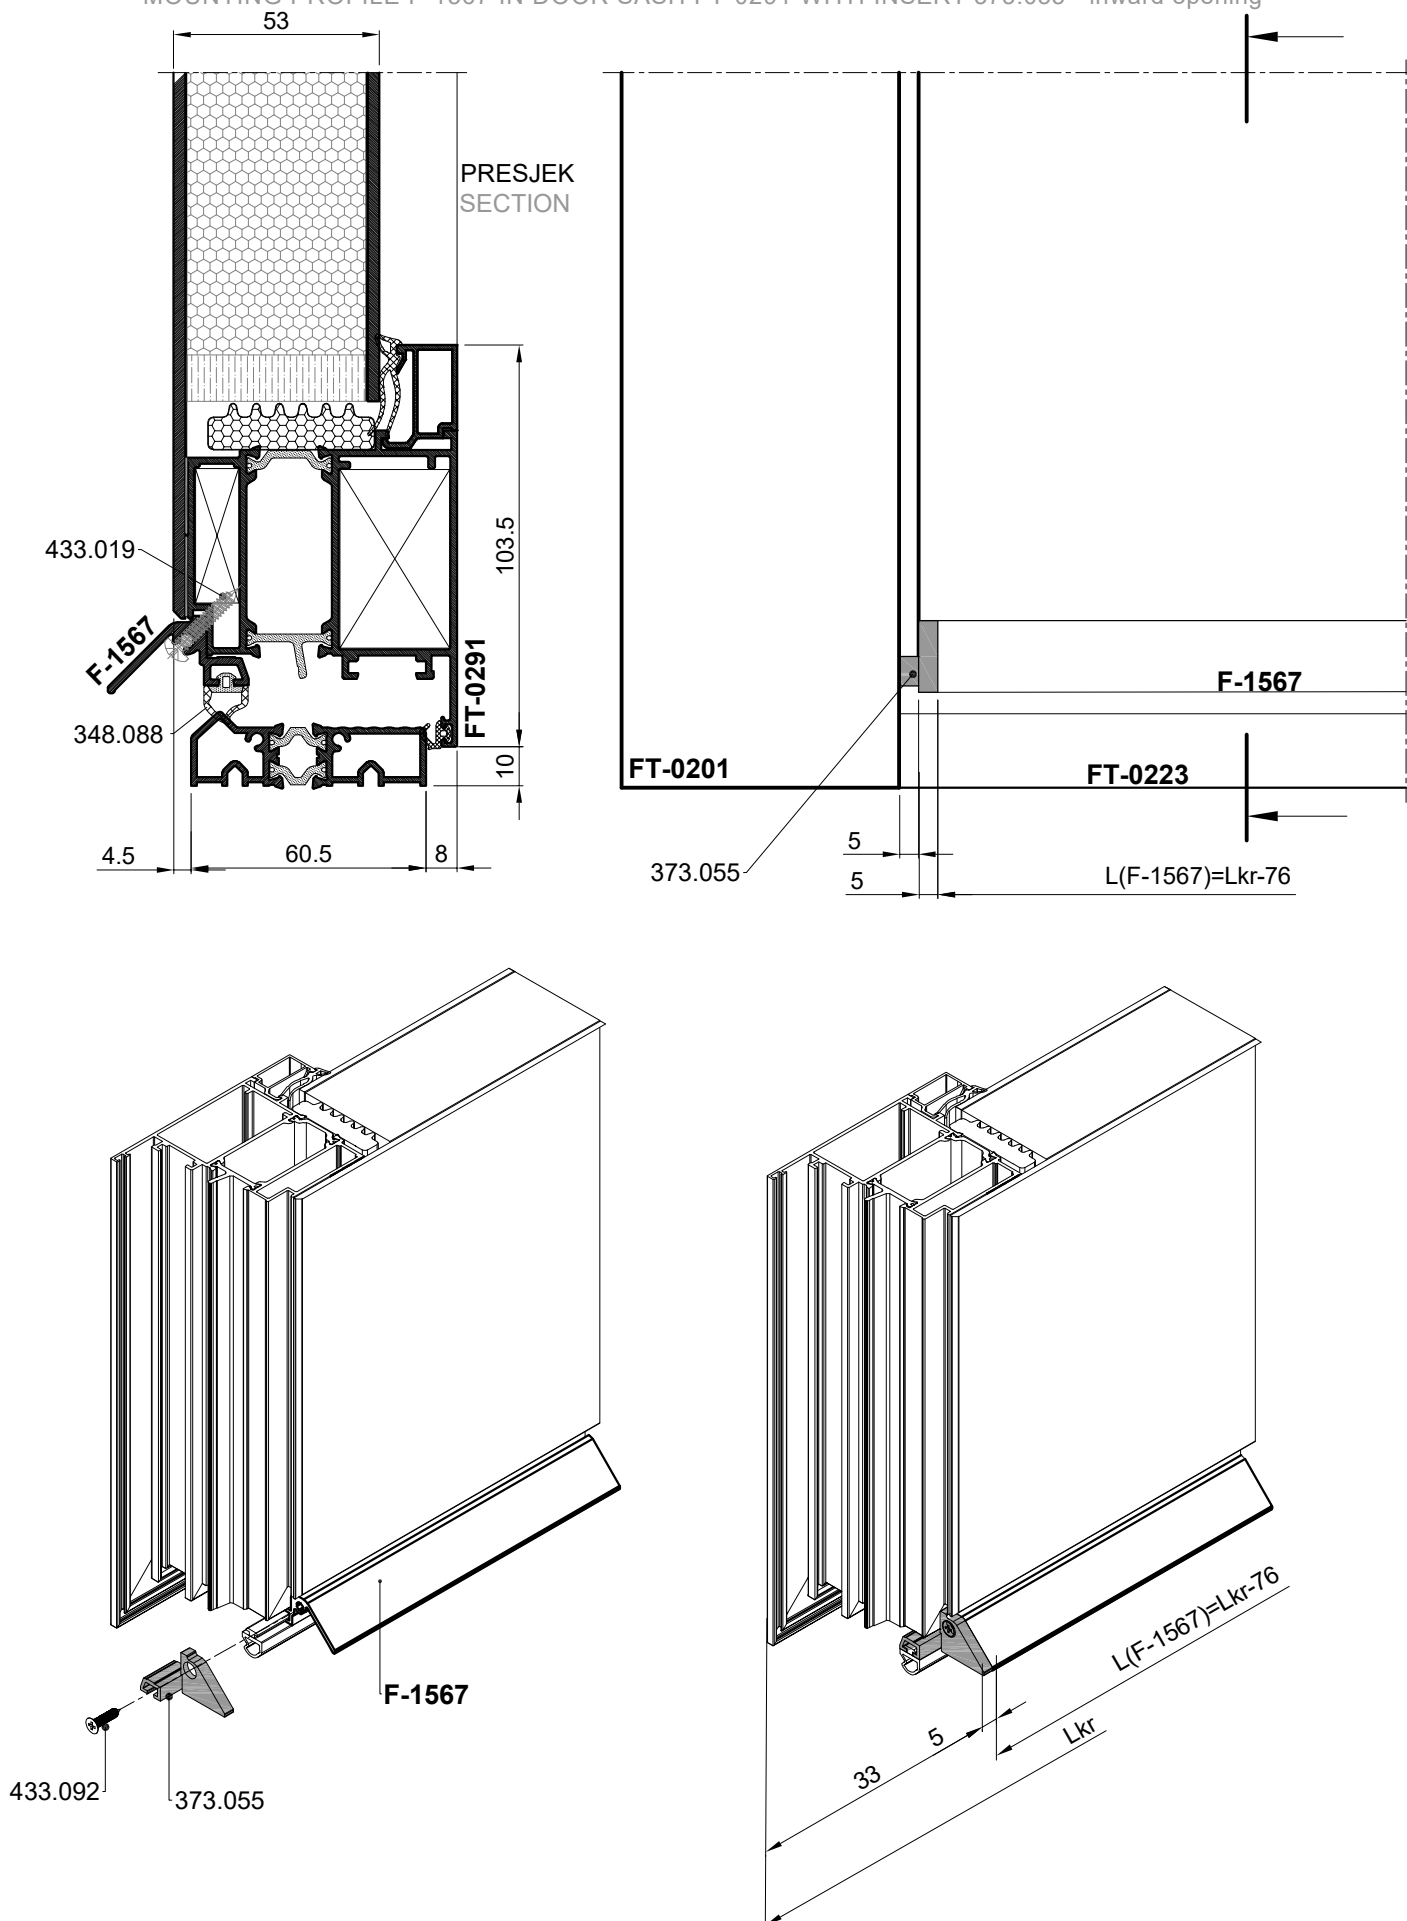


UGRADNJA PROFILA F-1661 U KRILO VRATA FT-0291 S UMETKOM 363.079 - otvaranje unutra
MOUNTING PROFILE F-1661 IN DOOR SASH FT-0291 WITH INSERT 363.079 - inward opening

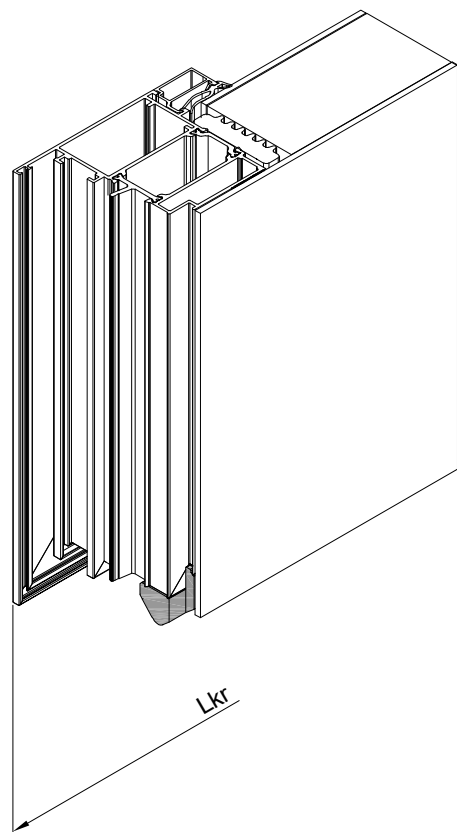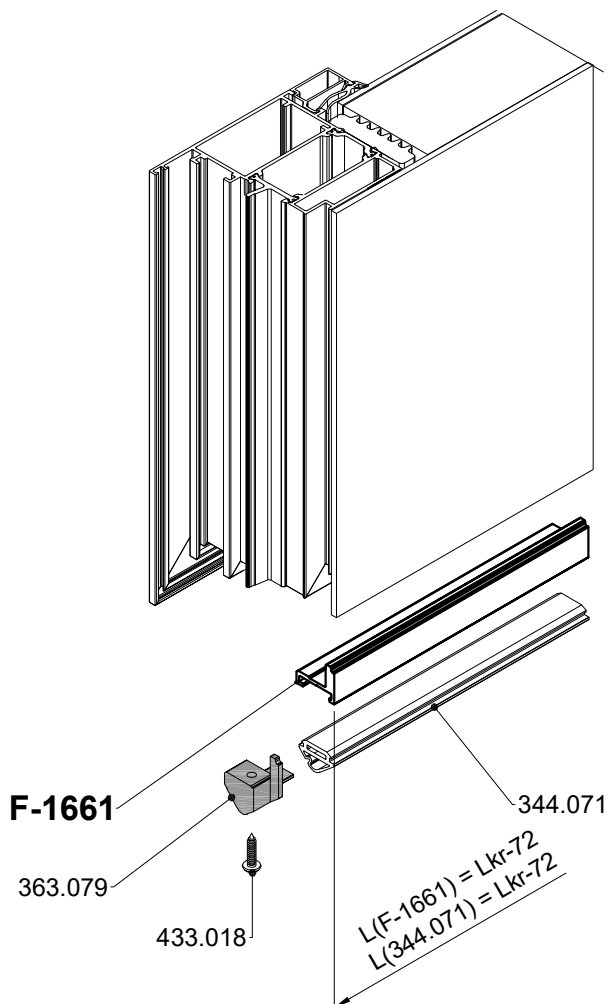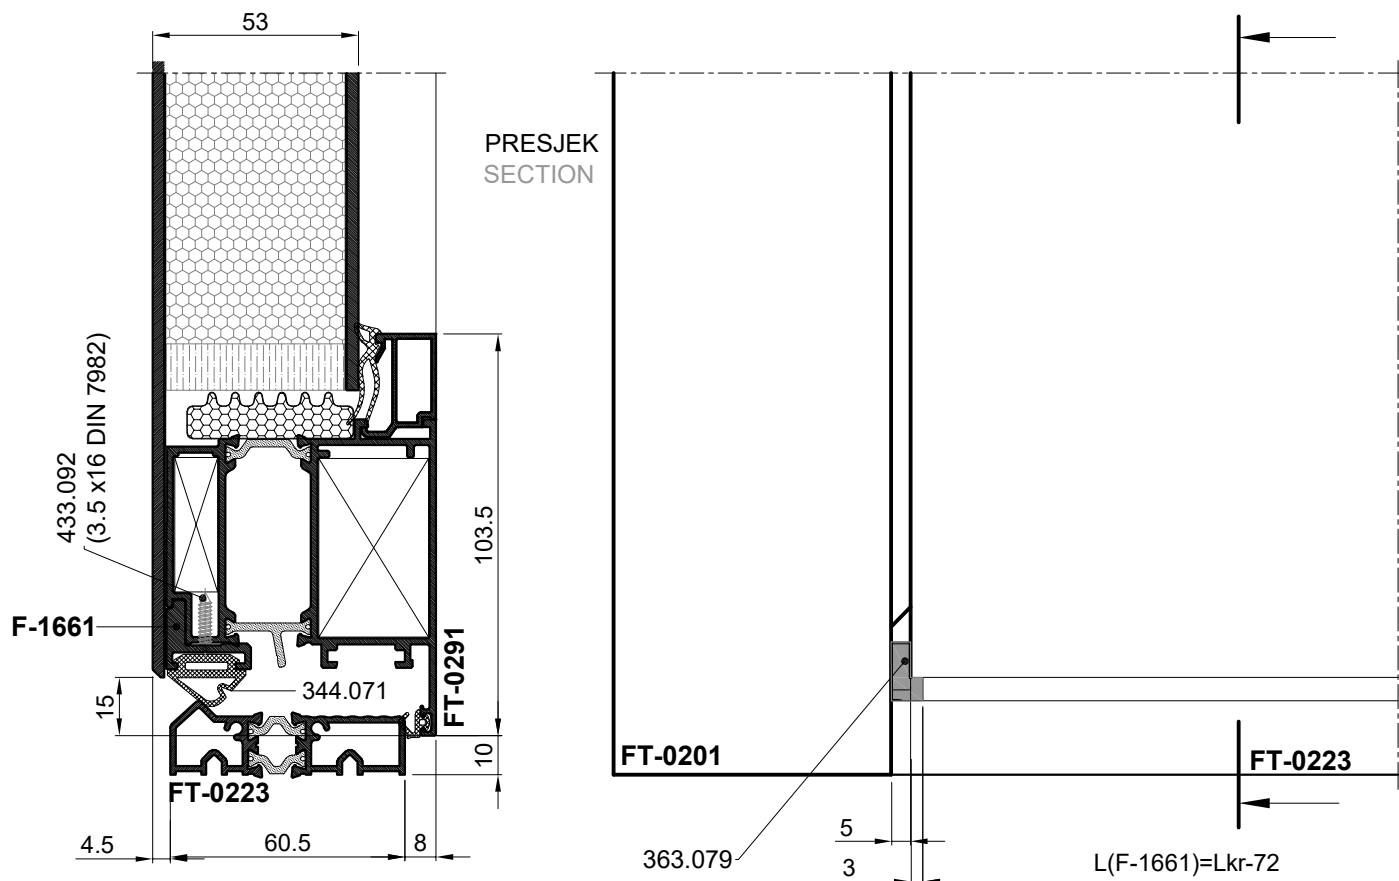


UGRADNJA PROFILA F-1483 U KRILO VRATA FT-0279 S UMETKOM 363.065 - otvaranje vani
MOUNTING PROFILE F-1483 IN DOOR SASH FT-0279 WITH INSERT 363.065 - outward opening

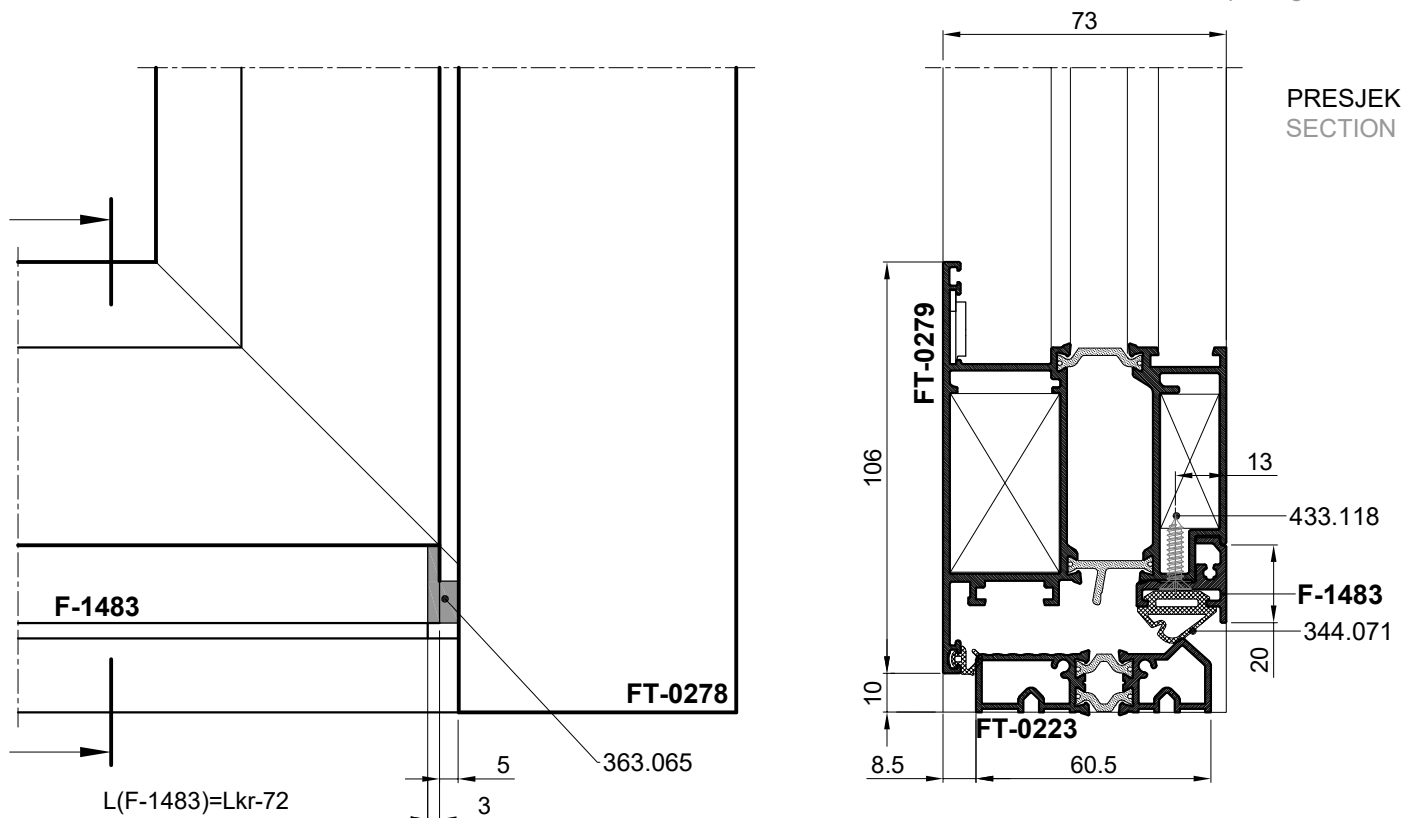


- Profil F-1483 se pila ravno
Mjera pilanja $L(F-1483) = Lkr-72$
- The profile F-1483 is cut straight
Cutting measure $L(F-1483) = Lkr-72$

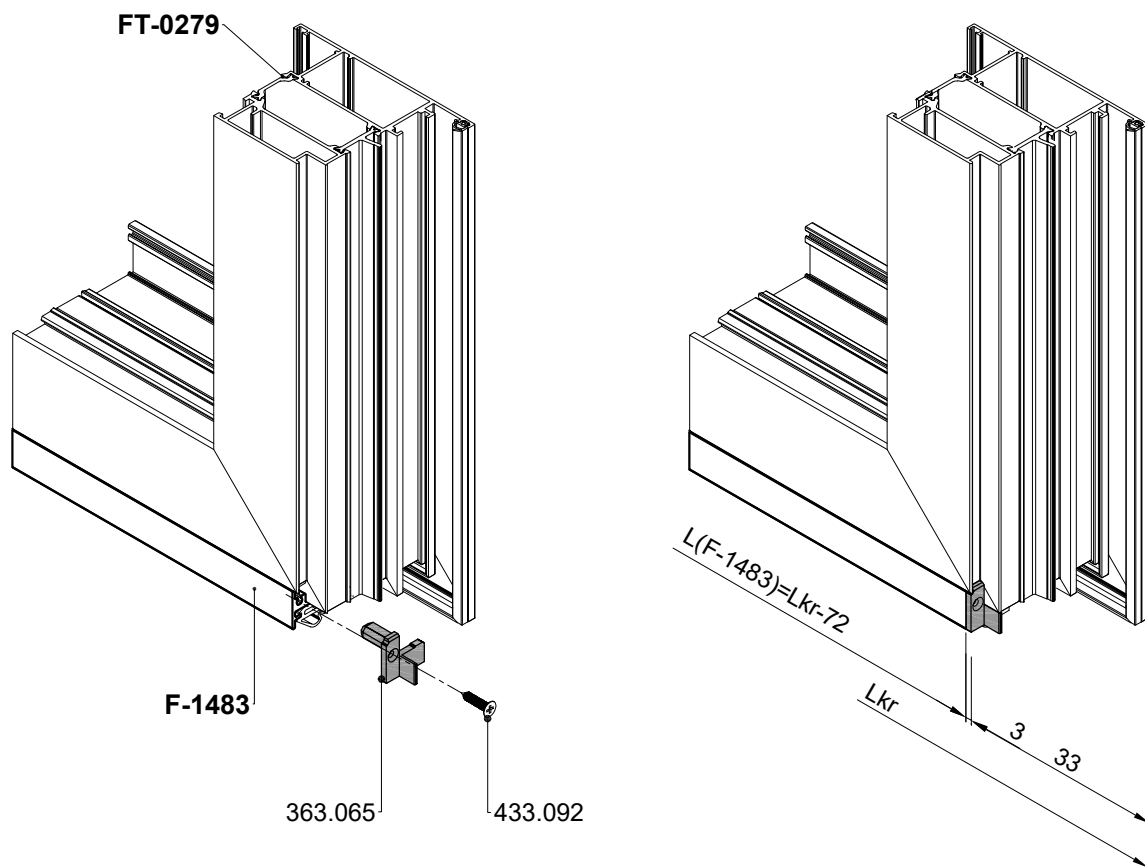


UGRADNJA PROFILA F-1483 U KRILO VRATA FT-0218 S UMETKOM 363.065 - otvaranje vani
MOUNTING PROFILE F-1483 IN DOOR SASH FT-0218 WITH INSERT 363.065 - outward opening

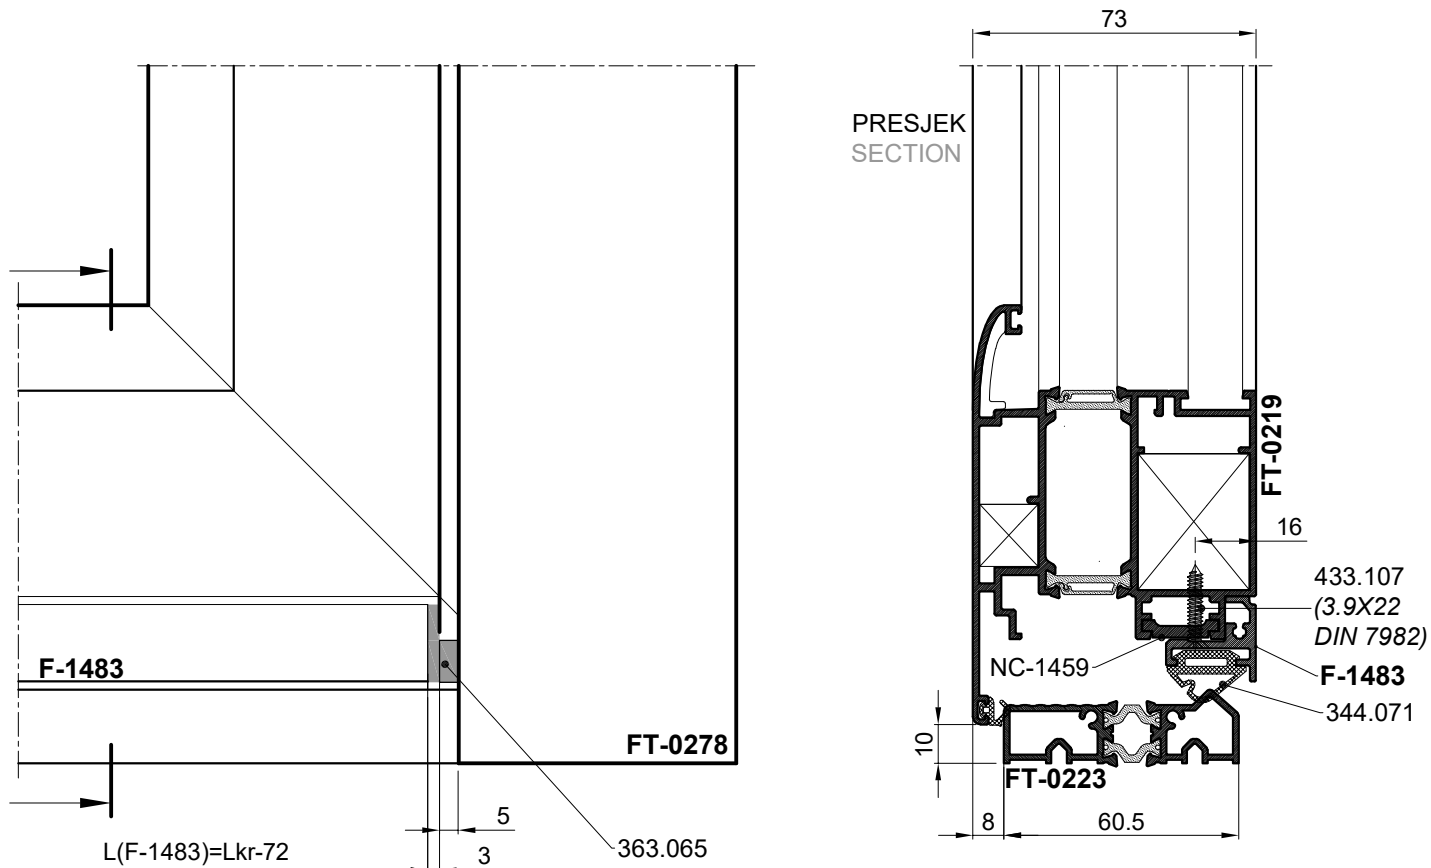



- Profil F-1483 se pila ravno
Mjera pilanja $L(F-1483) = Lkr-72$
- The profile F-1483 is cut straight
Cutting measure $L(F-1483) = Lkr-72$

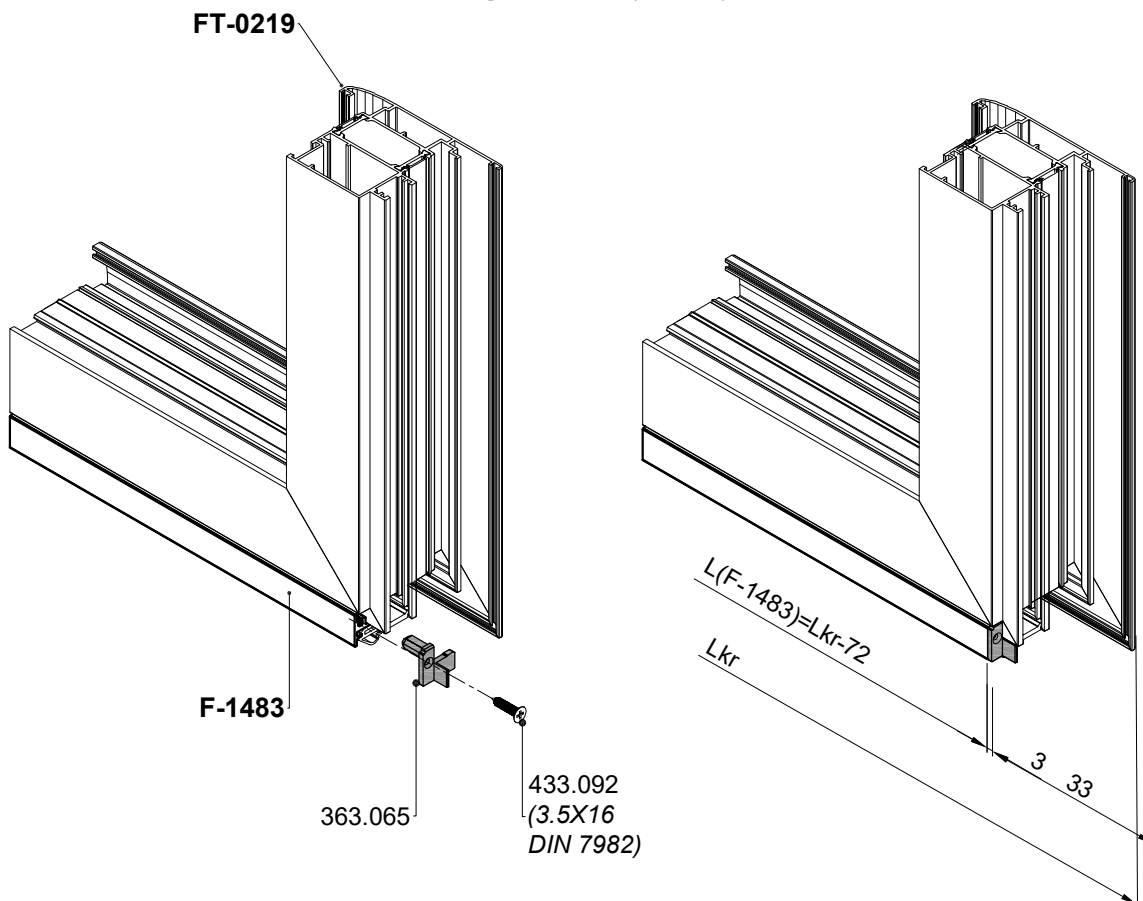


OBRADA PROZORSKOG PROFILA KRILA ZA UGRADNJU RUČKE PROCESSING OF WINDOW SASH PROFILE FOR HANDLE MONTAGE

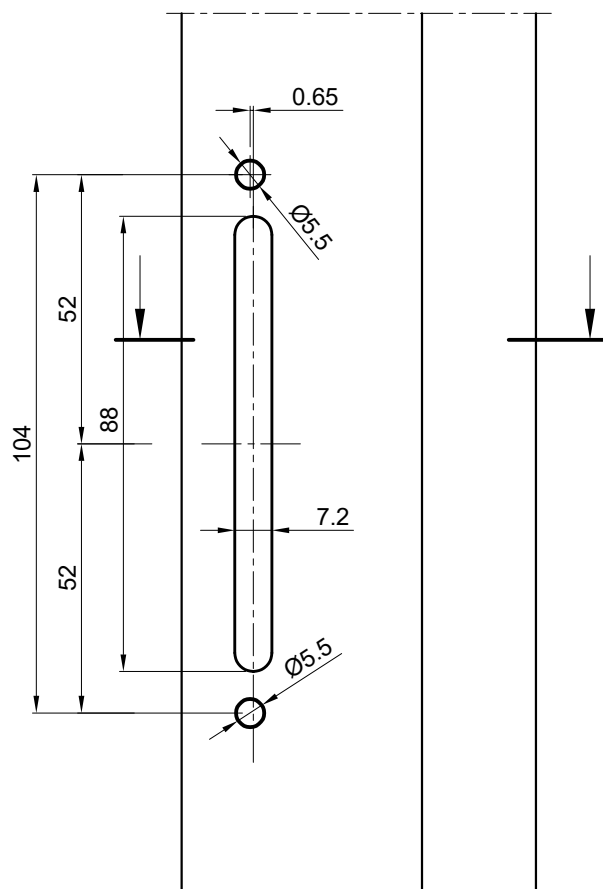


- Za zaokretno i otklopno-zaokretno otvaranje
- Obrada je ista za sve profile krila prozora
- For turn and tilt&turn opening
- Processing is the same for all sash window profiles

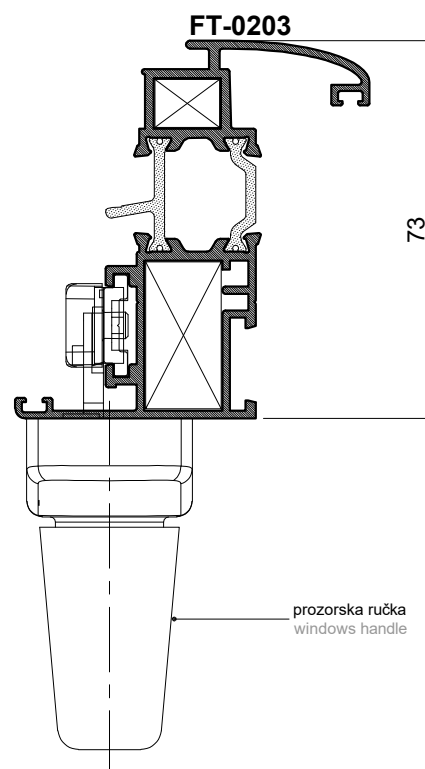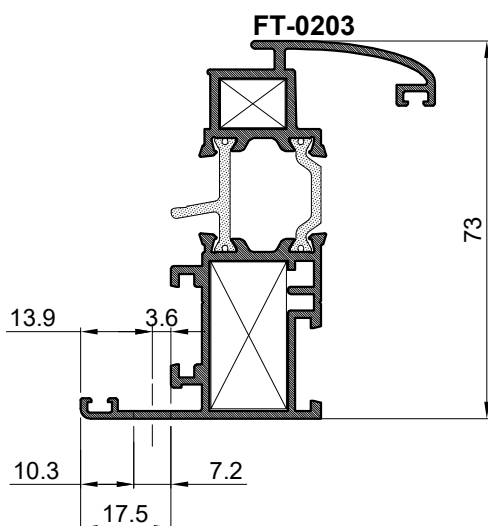



OBRADA PROFILA KRILA VRATA (otvaranje unutra) ZA BRAVU 124.001 I RUČKU PROCESSING OF DOOR SASH PROFILE (inward opening) FOR LOCK 124.001 AND HANDLE

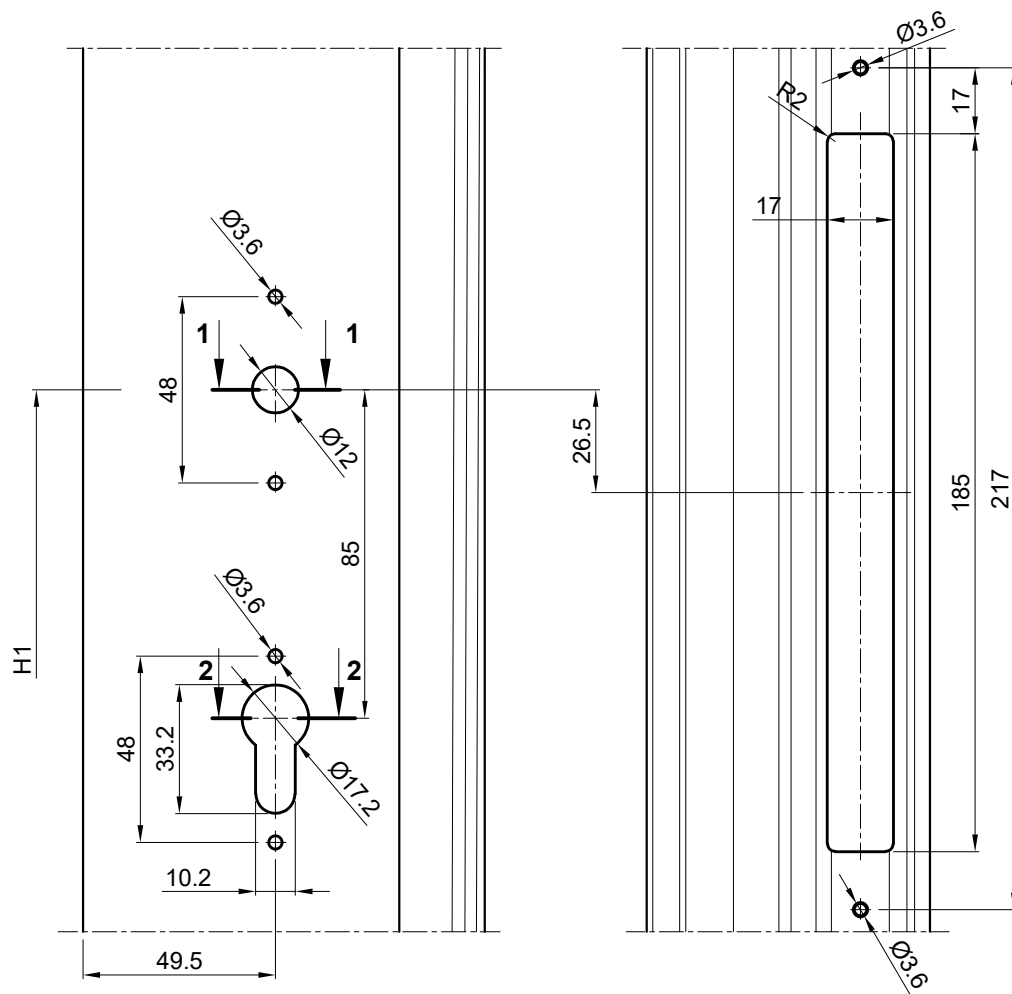

PRESJEK 1-1
CROSS-SECTION 1-1

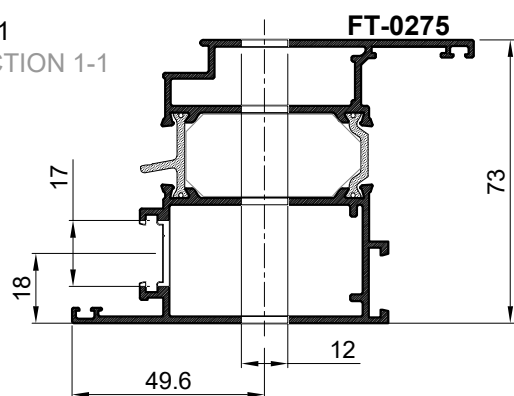

PRESJEK 2-2
CROSS-SECTION 2-2

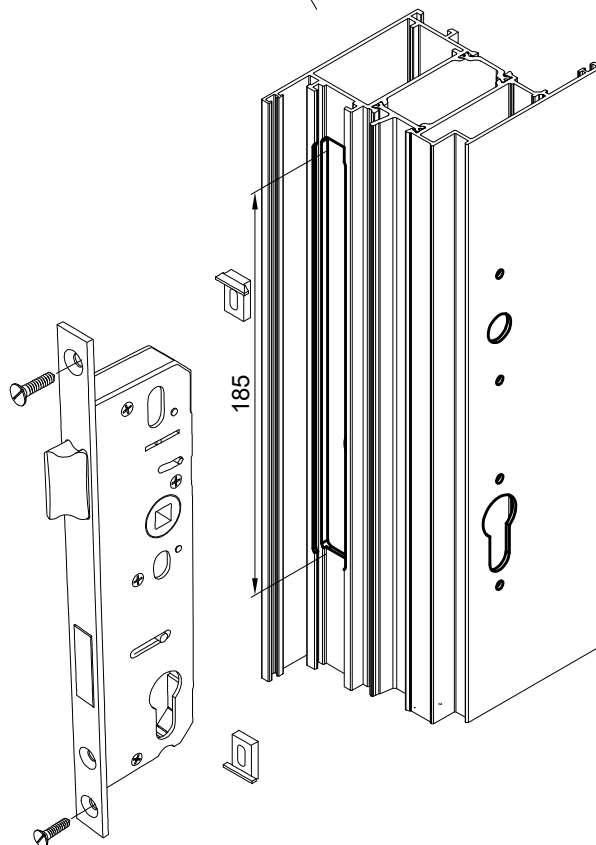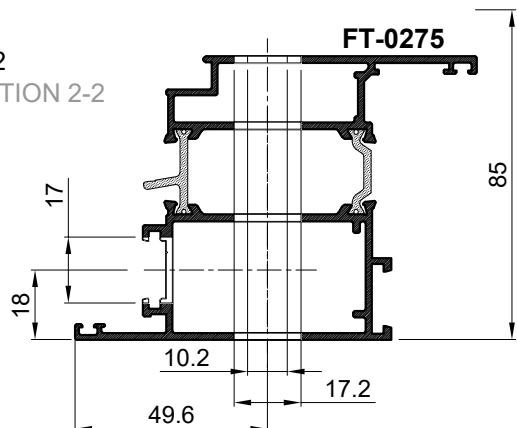

Technical drawing of a mechanical part, showing two views: a front view (top) and a side view (bottom).

Front View (Top):

- Overall width: 49.5
- Overall height: H1
- Central circular hole: $\varnothing 12$
- Two smaller circular holes: $\varnothing 3.6$
- Dimensions for the central hole: 48 (vertical distance from top edge), 85 (vertical distance from bottom edge), 10.2 (horizontal distance from center to right edge).
- Dimensions for the smaller holes: 17.2 (vertical distance from top edge), 17.2 (vertical distance from bottom edge), 10.2 (horizontal distance from center to right edge).

Side View (Bottom):

- Overall width: 49.5
- Overall height: H1
- Central rectangular cutout: 17 (width), 17 (height)
- Radius: R_2
- Dimensions for the cutout: 17 (width), 17 (height)
- Dimensions for the smaller holes: 17.2 (vertical distance from top edge), 17.2 (vertical distance from bottom edge), 10.2 (horizontal distance from center to right edge).

FT-0218

SECTION 2-2


17

18




10.2

17.2


49.6

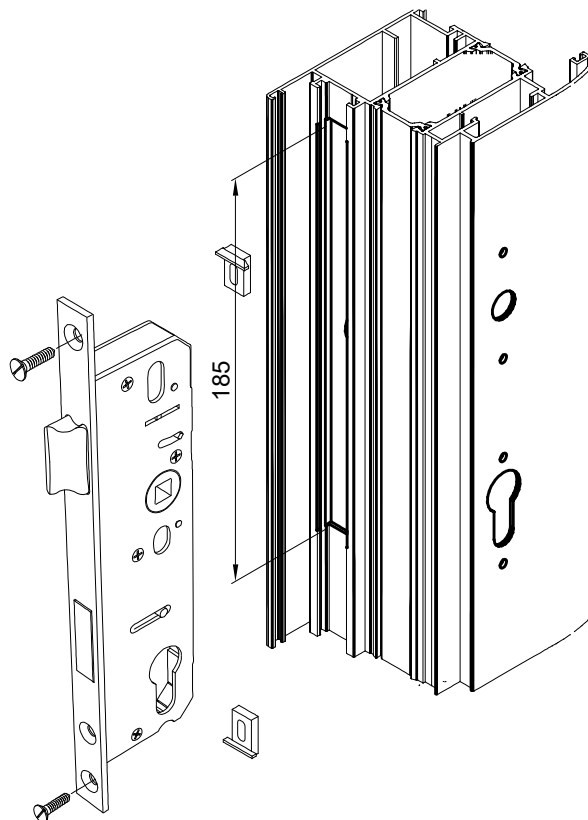


OBRADA PROFILA RAMA VRATA (otvaranje unutra) ZA PRIHVATNIK JEZIČKA BRAVE 124.003
PROCESSING OF DOOR FRAME PROFILE (inward opening) FOR LOCK LATCHBOLT ACCEPTOR 124.003

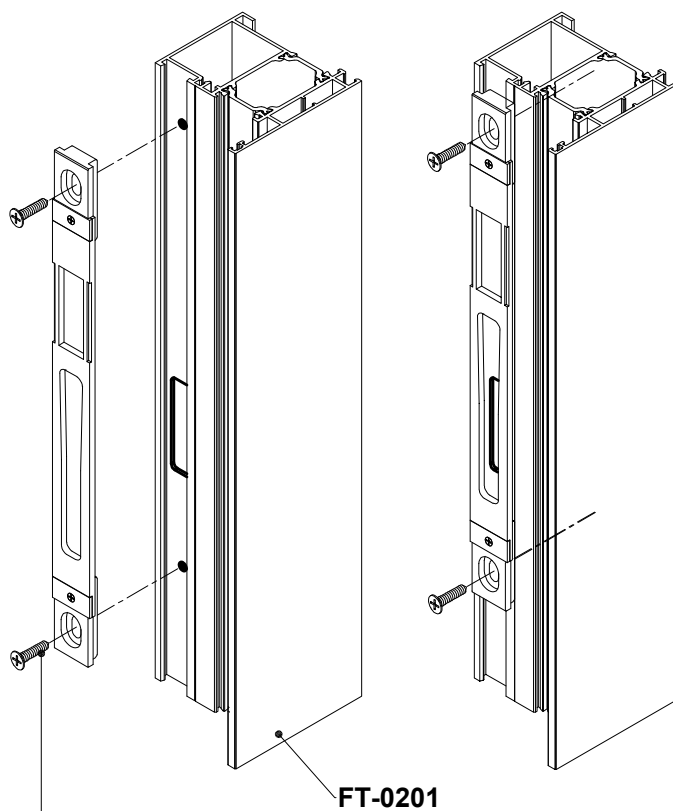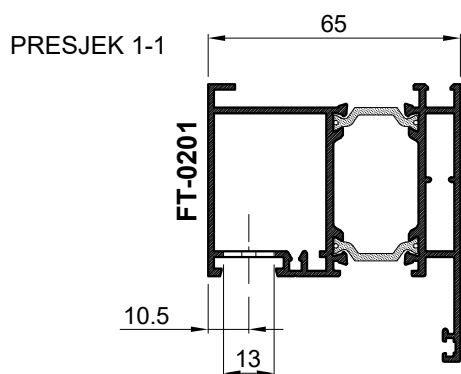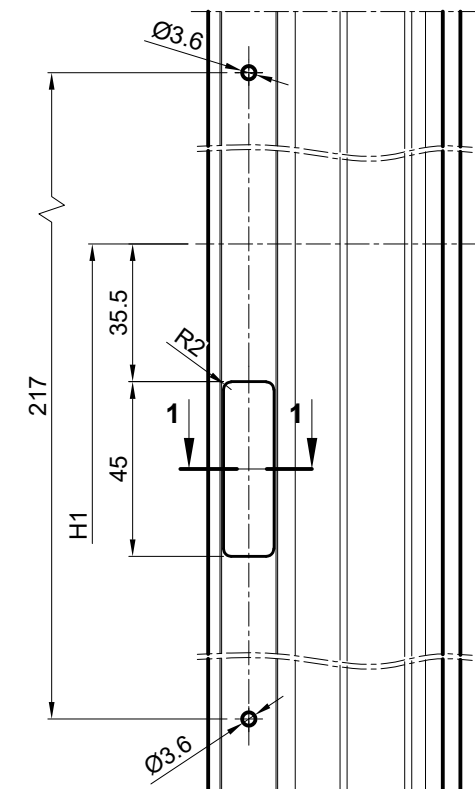


124.003
prihvatnik jezička brave
lock latchbolt acceptor

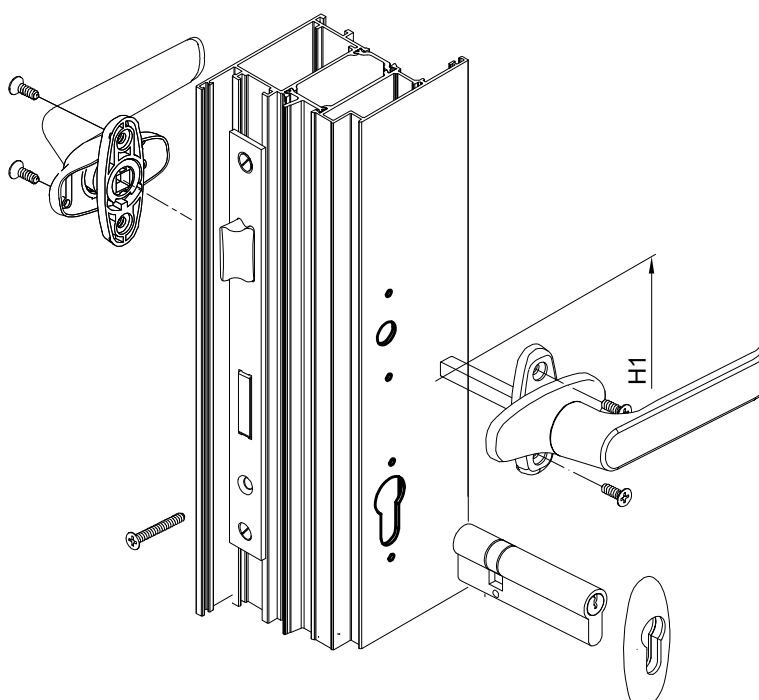



OBRADA PROFILA KRILA VRATA (otvaranje unutra) ZA BRAVU 124.042 I RUČKU 104.015
PROCESSING OF DOOR LEAF PROFILE (inward opening) FOR LOCK 124.042 AND HANDLE 104.015

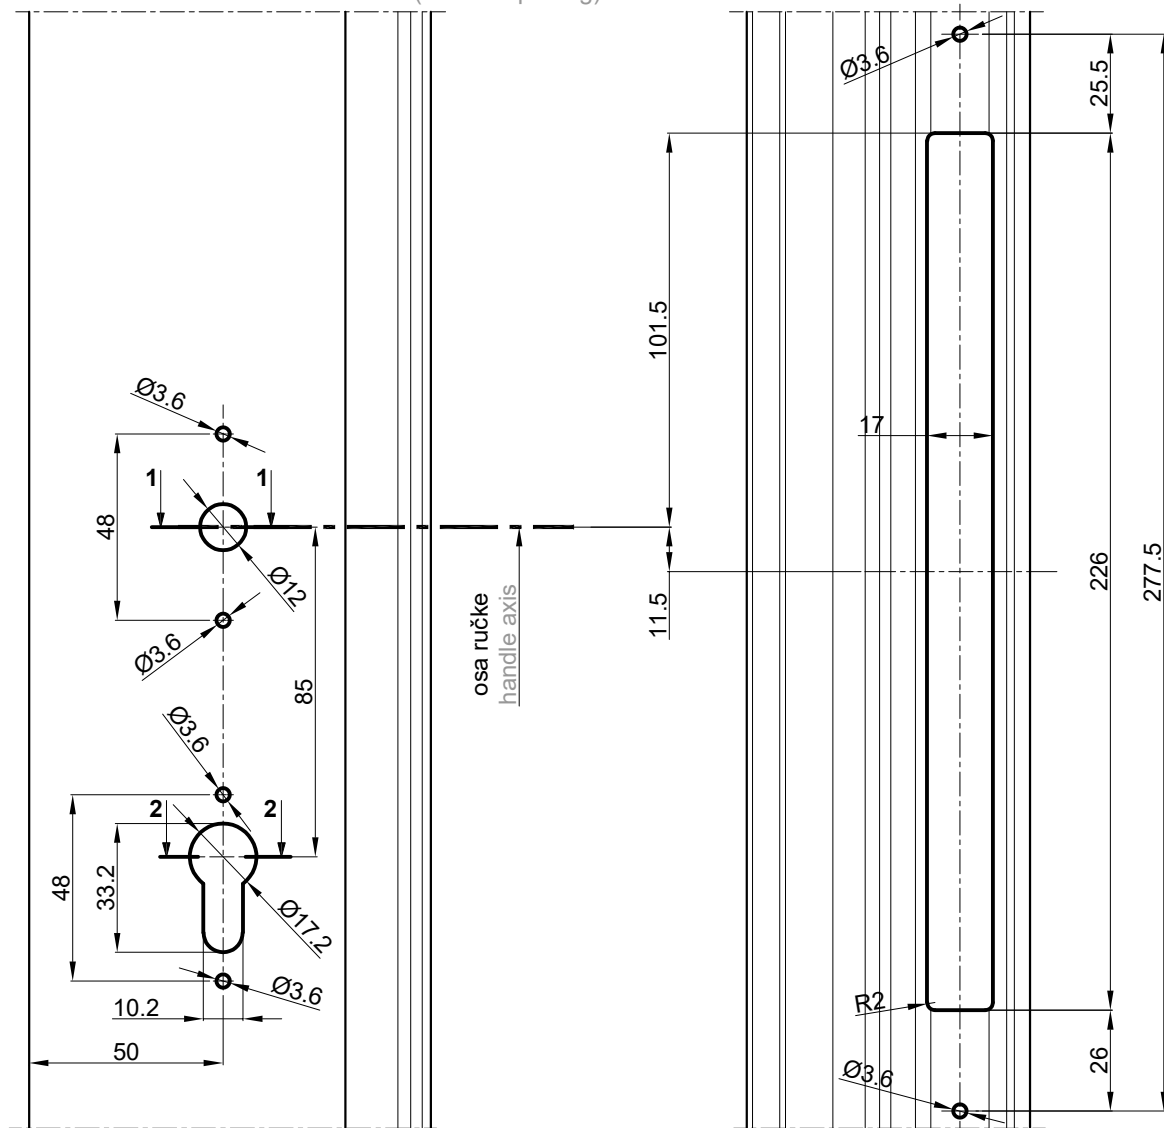




PRESJEK 1-1
CROSS SECTION 1-1

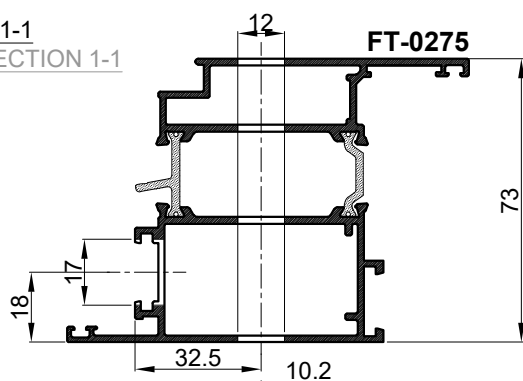



PRESJEK 2-2
CROSS SECTION 2-2

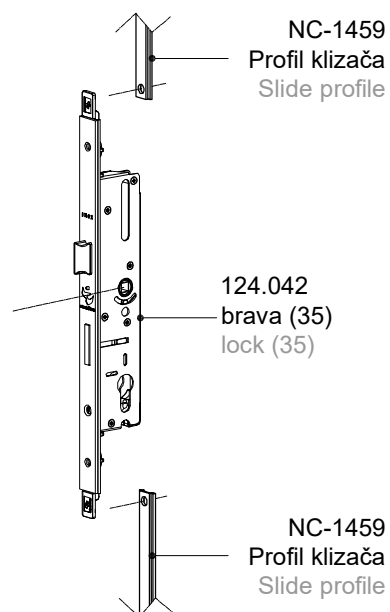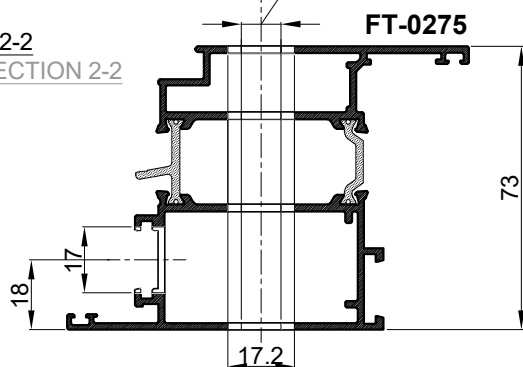


OBRADA PROFILA RAMA VRATA I PROFILA KOMBATUTE (otvaranje unutra) ZA PRIHVATNIK JEZIČKA BRAVE
124.003 (Stublina) - ZA BRAVU 124.042
PROCESSING OF DOOR FRAME AND FLYING MULLION PROFILE (inward opening) FOR LOCK LATCHBOLT
ACCEPTOR 124.003 (Stublina) - FOR LOCK 124.042

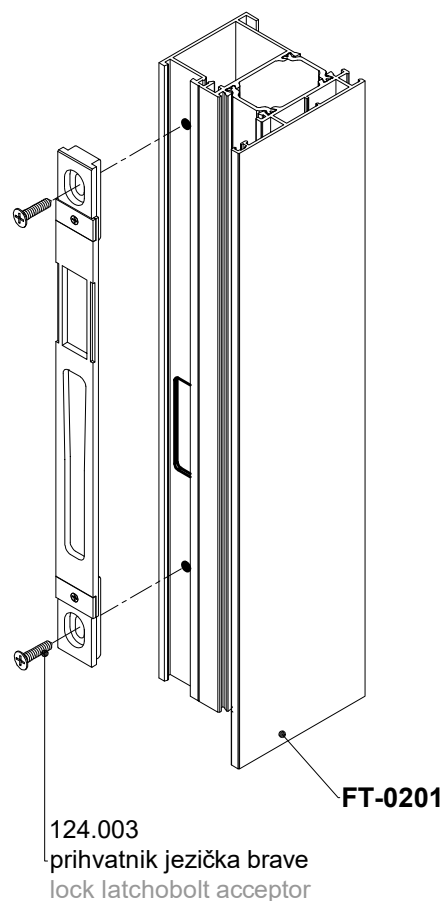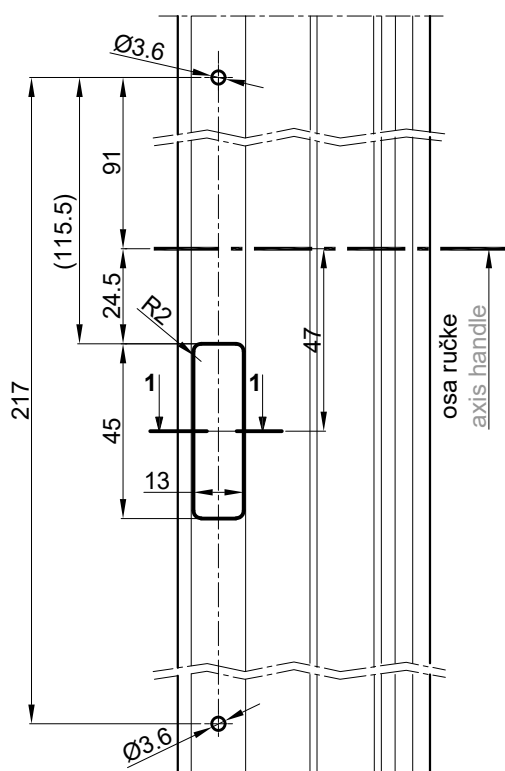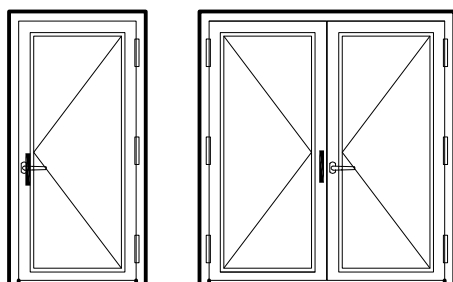


PRESJEK 1-1
CROSS SECTION 1-1

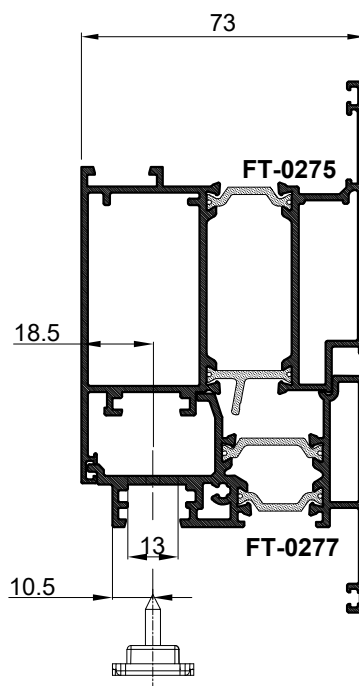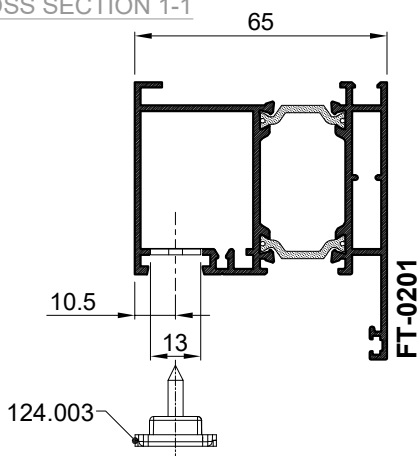




OBRADA PROFILA KRILA VRATA (otvaranje vani) ZA BRAVU 124.042 I RUČKU 104.015 (Stublina)
PROCESSING OF DOOR LEAF PROFILE (outward opening)
FOR LOCK 124.042 AND HANDLE 104.015 (Stublina)

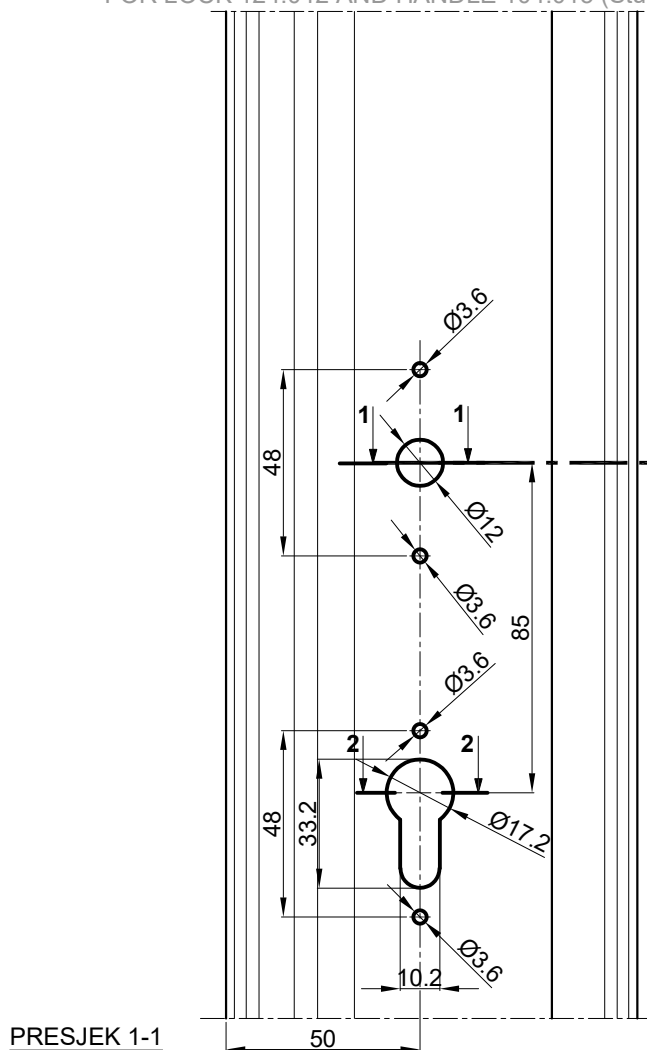

PRESJEK 1-1
CROSS SECTION 1-1



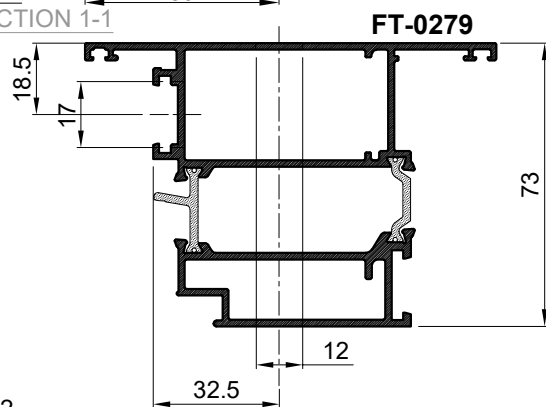


PRESJEK 2-2
CROSS SECTION 2-2

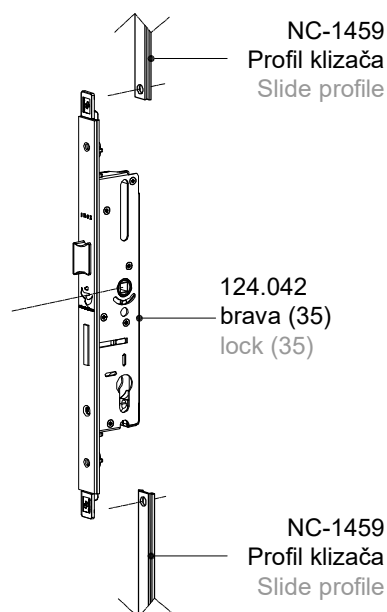
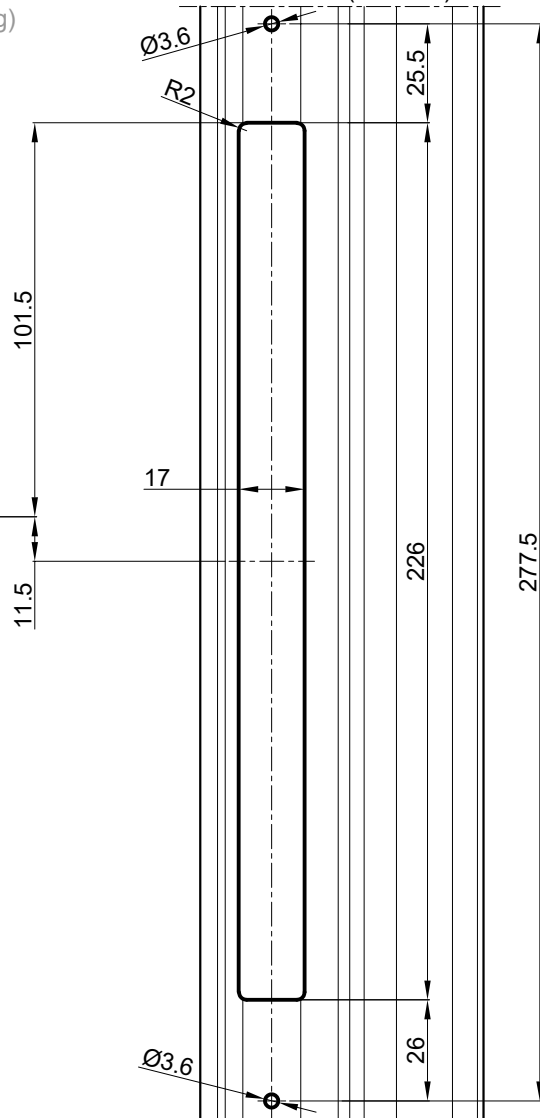
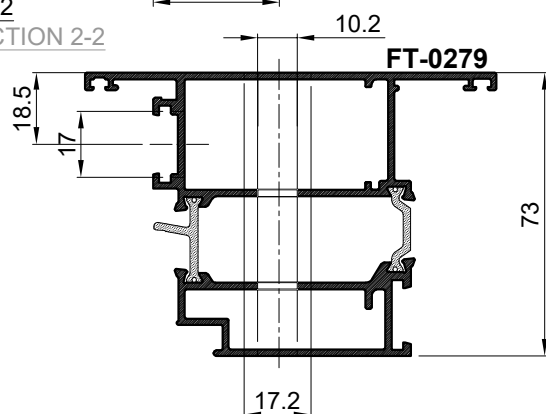


OBRADA PROFILA RAMA VRATA I PROFILA KOMBATUTE (otvaranje vani) ZA PRIHVATNIK JEZIČKA BRAVE
124.003 (Stublina) - ZA BRAVU 124.042


PROCESSING OF DOOR FRAME AND FLYING MULLION PROFILE (outward opening) FOR LOCK LATCHBOLT
ACCEPTOR 124.003 (Stublina) - FOR LOCK 124.042

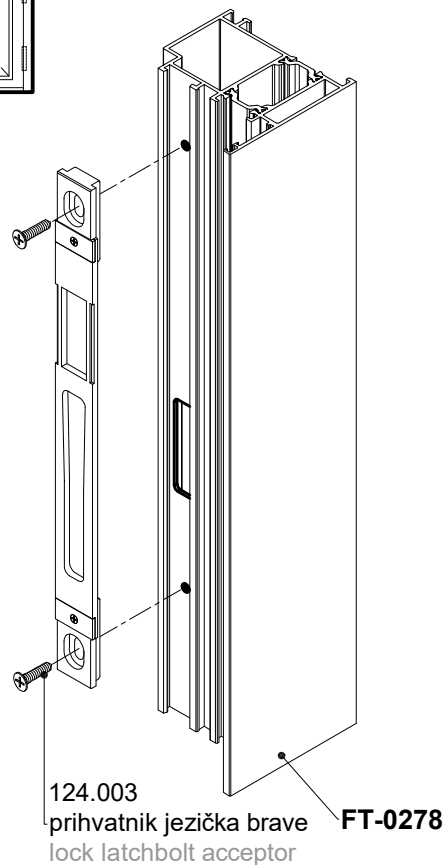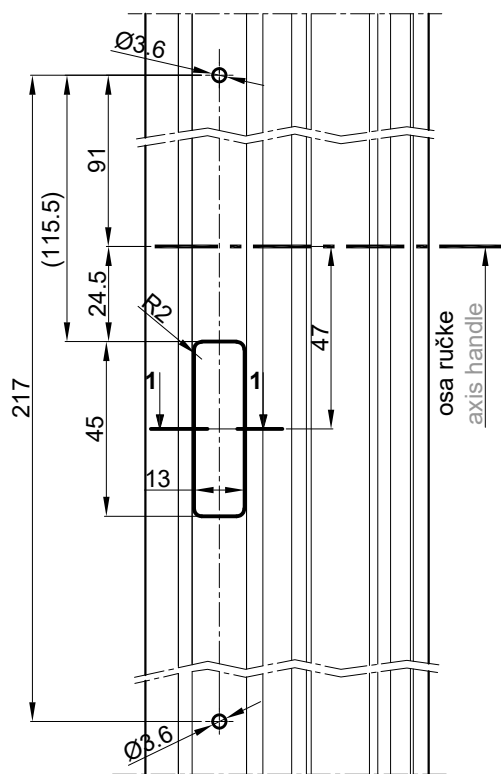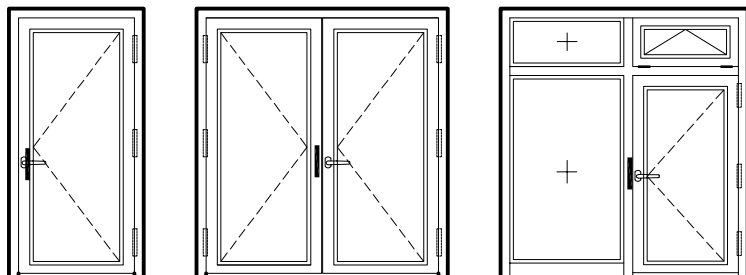


PRESJEK 1-1
CROSS SECTION 1-1

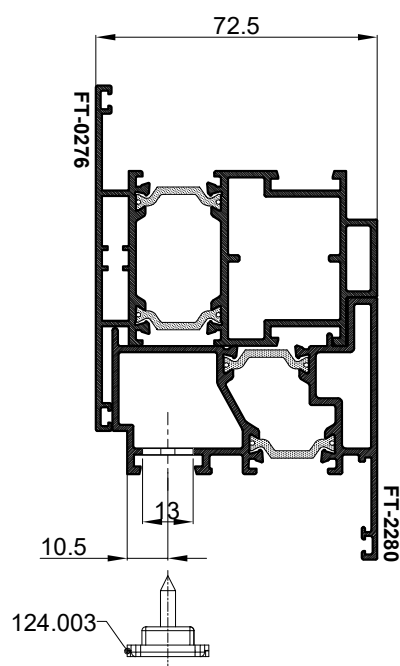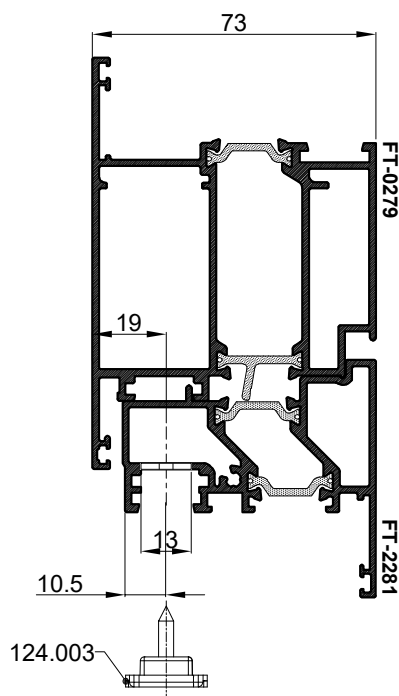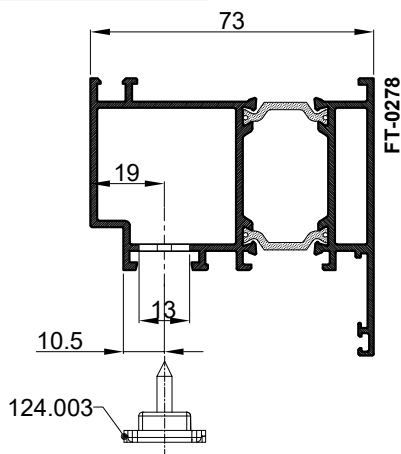



OBRADA PROFILA KRILA VRATA (otvaranje unutra) ZA BRAVU S JEZIČKOM 122.073 (GU-BKS) I RUČKU 102.027 (GU)
PROCESSING OF DOOR LEAF PROFILE (inward opening) FOR LOCK WITH LATCHBOLT 122.073 (GU-BKS) AND HANDLE 102.027 (GU)

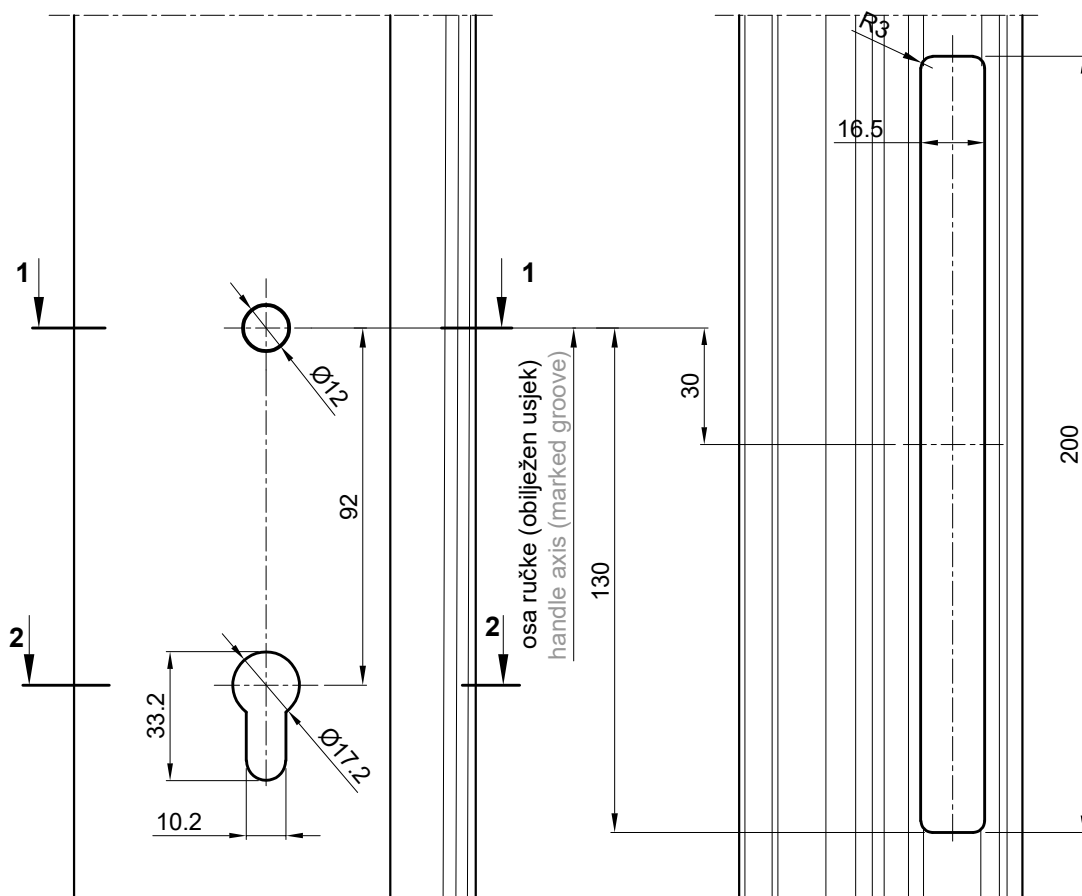





PRESJEK 1-1
CROSS-SECTION 1-1

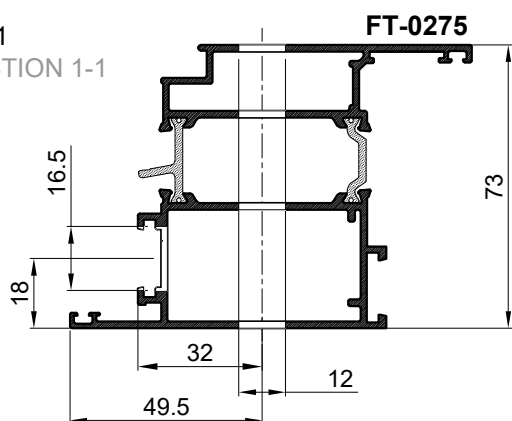


PRESJEK 2-2
CROSS-SECTION 2-2

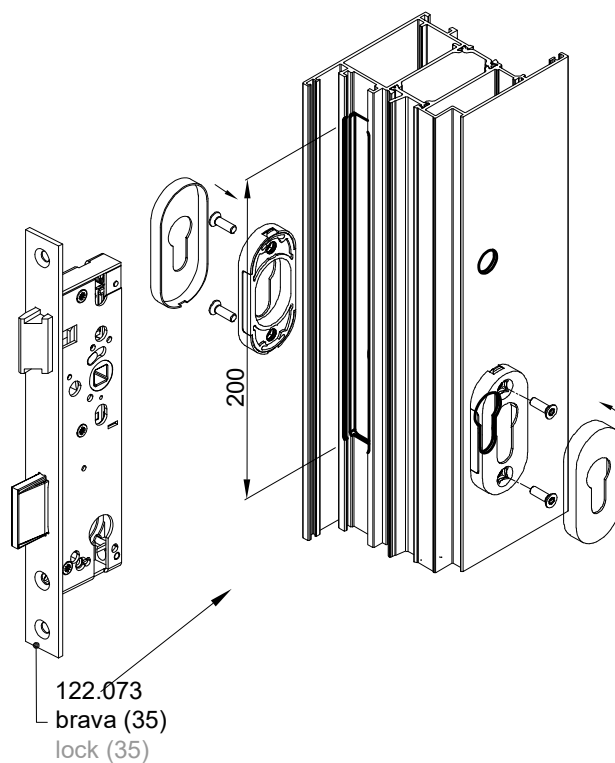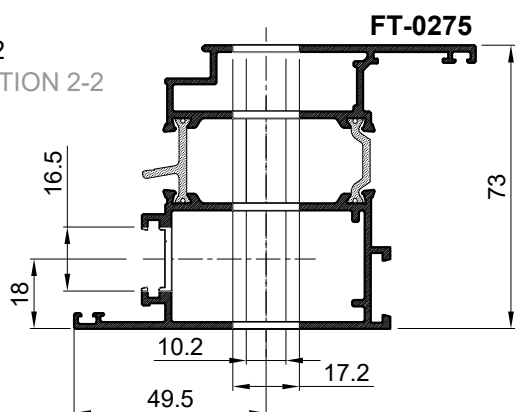



OBRADA PROFILA KRILA VRATA (otvaranje vani) ZA BRAVU S JEZIČKOM 122.073 (GU-BKS) I RUČKU 102.027 (GU)
PROCESSING OF DOOR LEAF PROFILE (outward opening) FOR LOCK WITH LATCHBOLT 122.073 (GU-BKS) AND HANDLE 102.027 (GU)

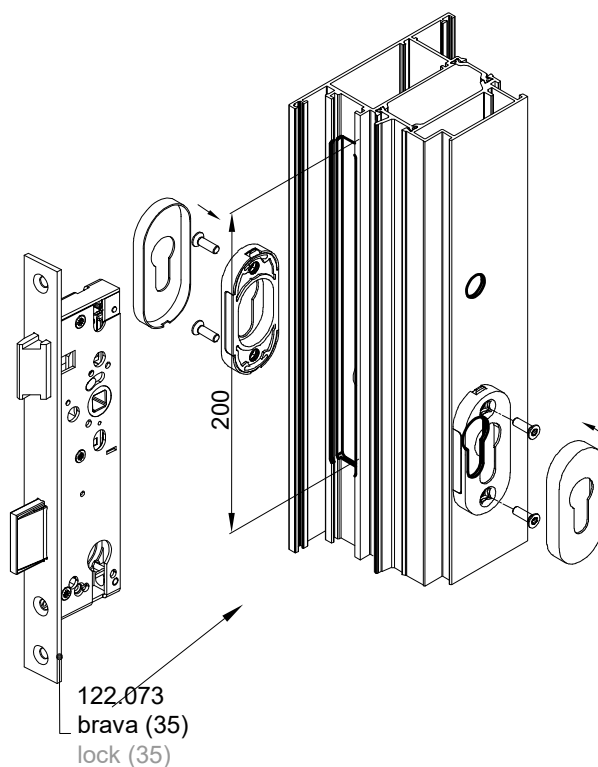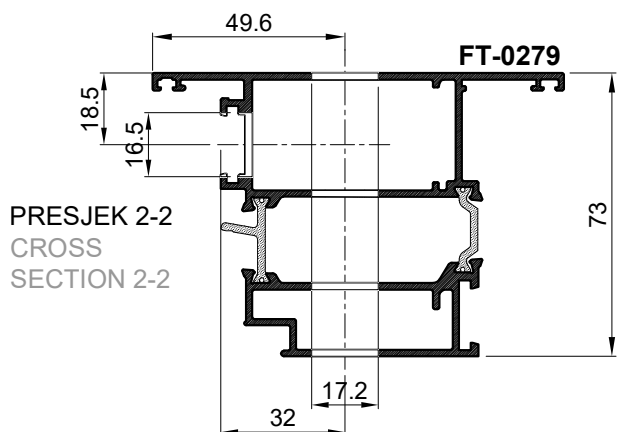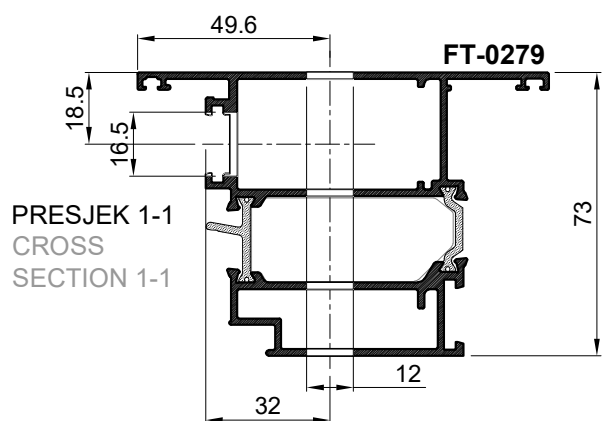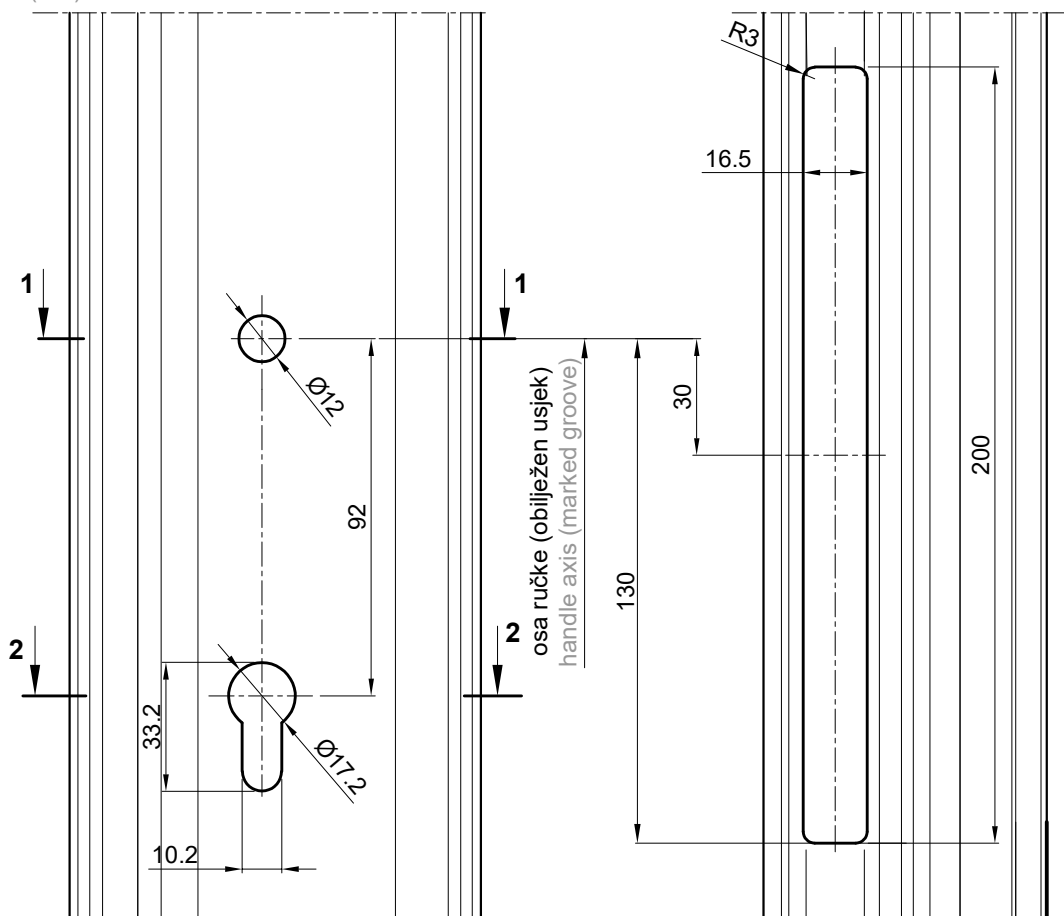



OBRADA PROFILA KRILA VRATA (otvaranje unutra) ZA BRAVU S VALJKOM 122.075 (GU-BKS)
PROCESSING OF DOOR LEAF PROFILE (inward opening) FOR ROLLER LATCH LOCK 122.075 (GU-BKS)

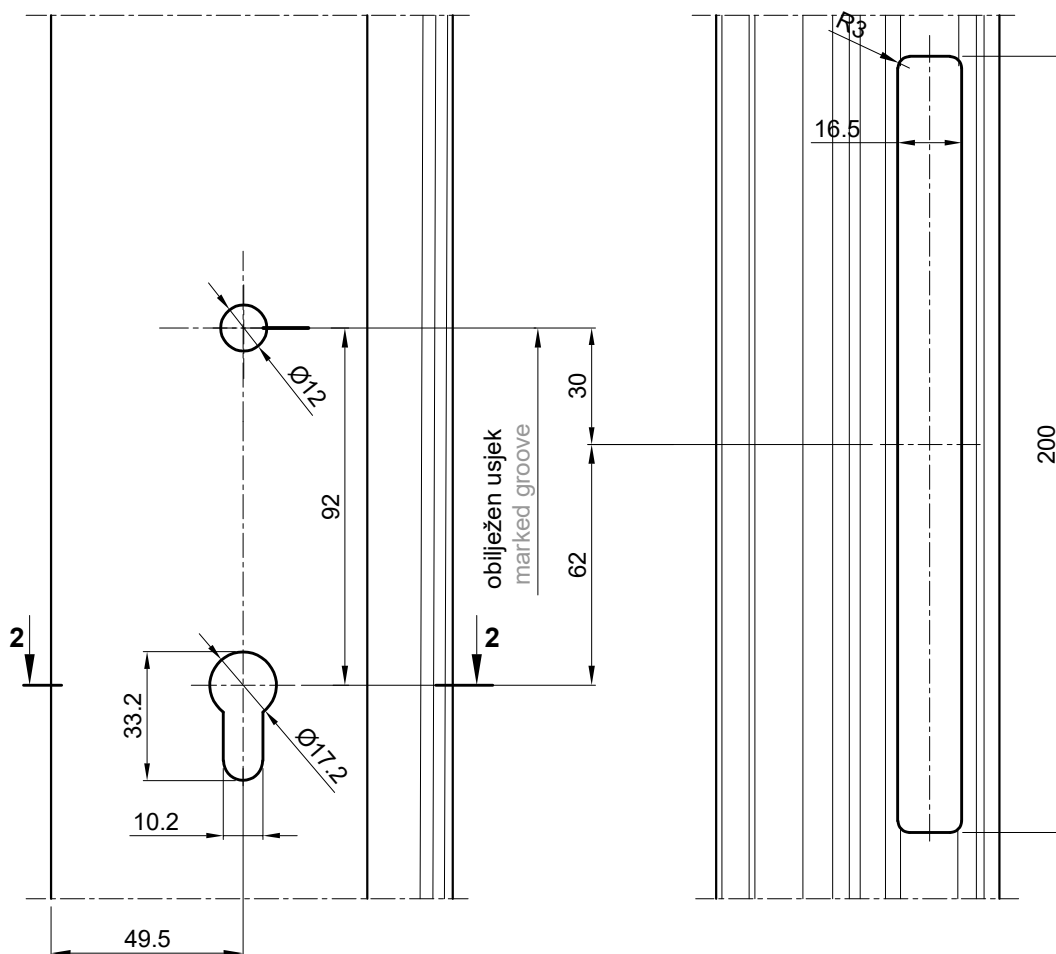


PRESJEK 2-2
CROSS-SECTION 2-2

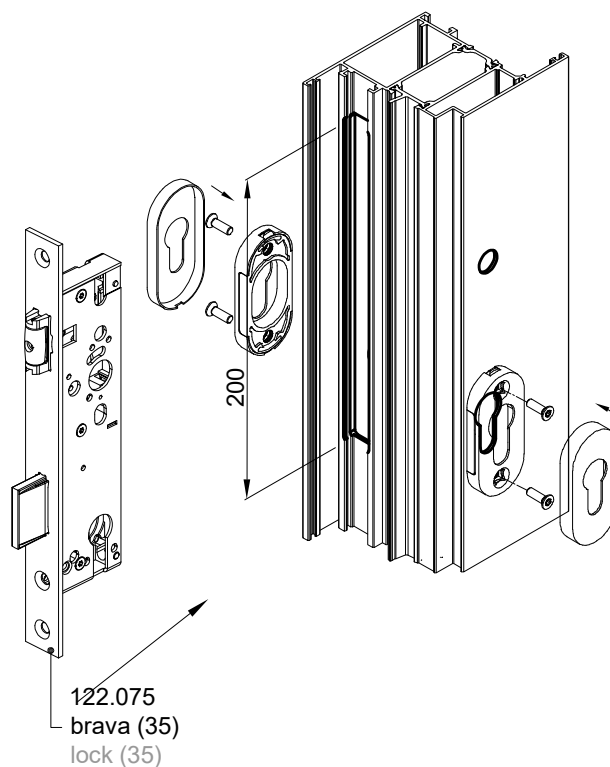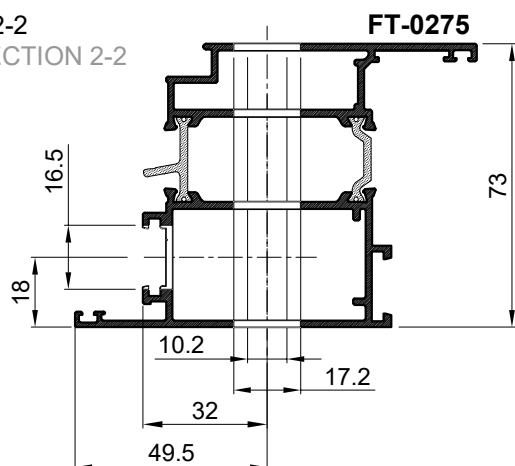


OBRADA PROFILA KRILA VRATA (otvaranje vani) ZA BRAVU S VALJKOM 122.075 (GU-BKS)
PROCESSING OF DOOR LEAF PROFILE (outward opening) FOR ROLLER LATCH LOCK 122.075 (GU-BKS)

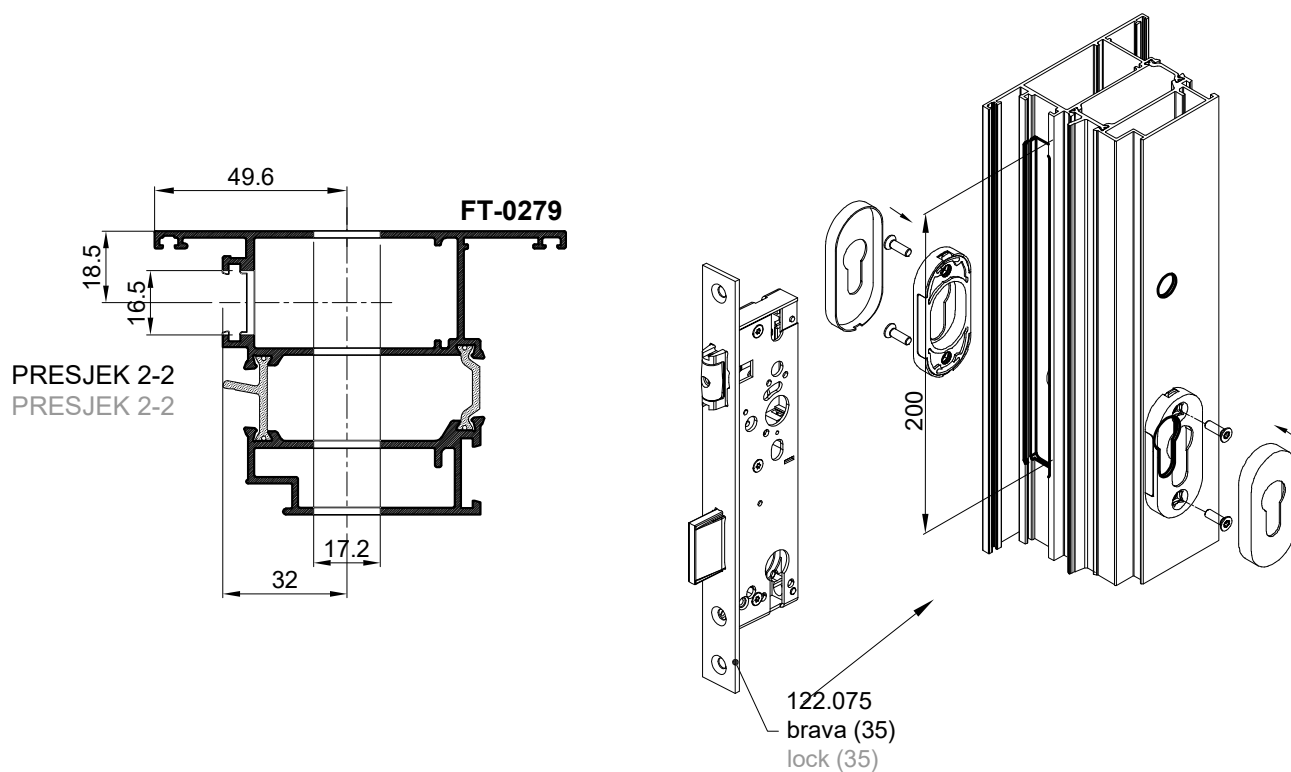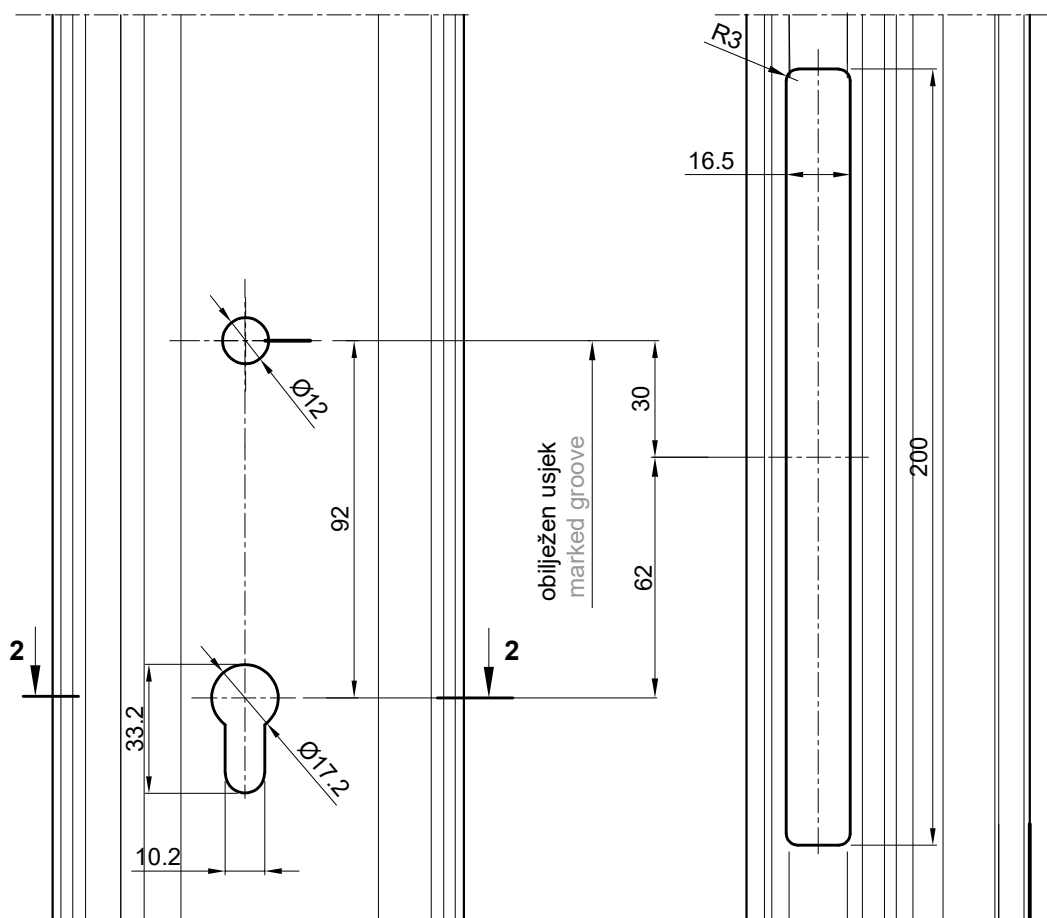



OBRADA PROFILA KRILA VRATA (otvaranje unutra) ZA KUTIJU BRAVE - 122.052 (GU Secury- MR2)
PROCESSING OF DOOR LEAF PROFILE (inward opening) FOR LOCK CASE - 122.052 (GU Secury- MR2)

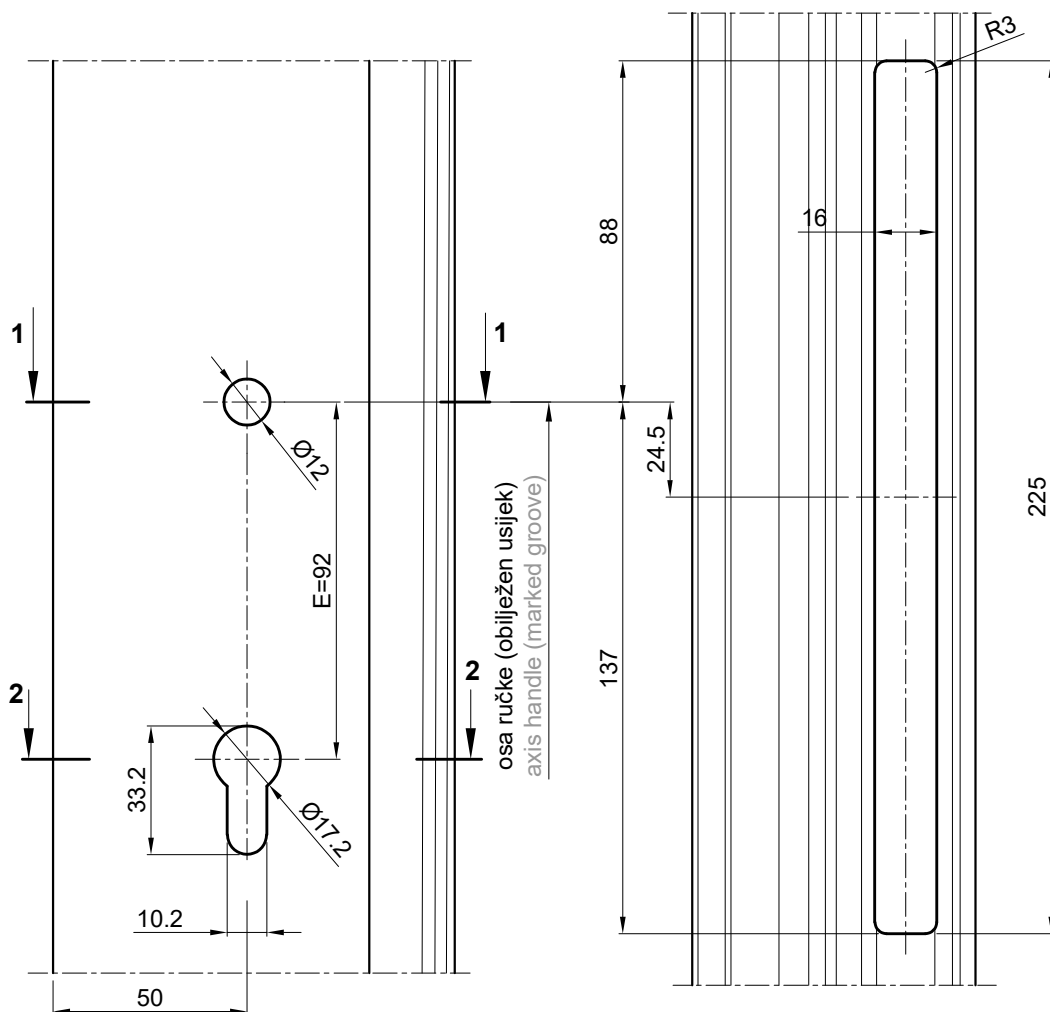


PRESJEK 1-1
CROSS-SECTION 1-1

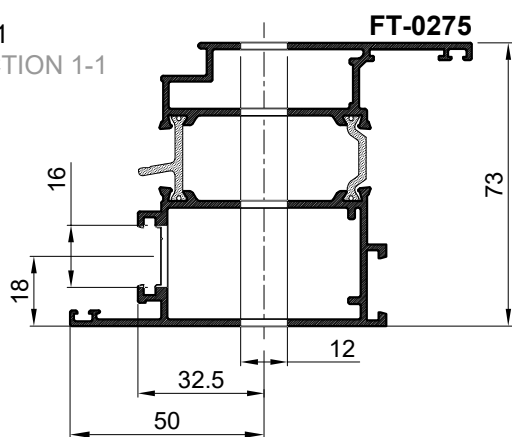


PRESJEK 2-2
CROSS-SECTION 2-2

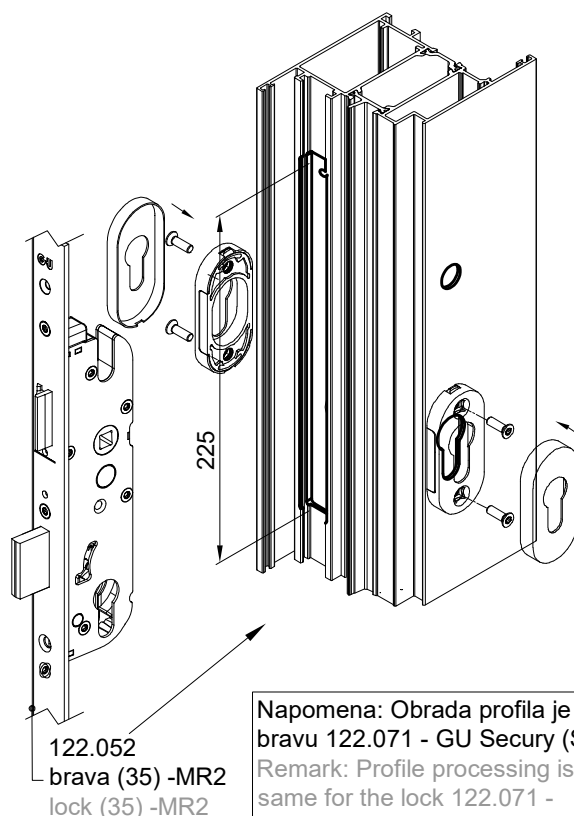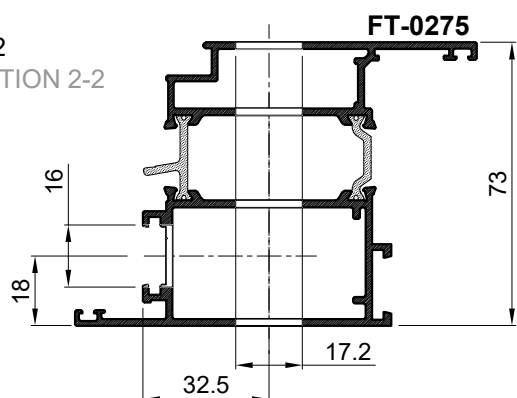


Napomena: Obrada profila je ista i za bravu 122.071 - GU Secury (SECA).
Remark: Profile processing is the same for the lock 122.071 - GU Secury (SECA).

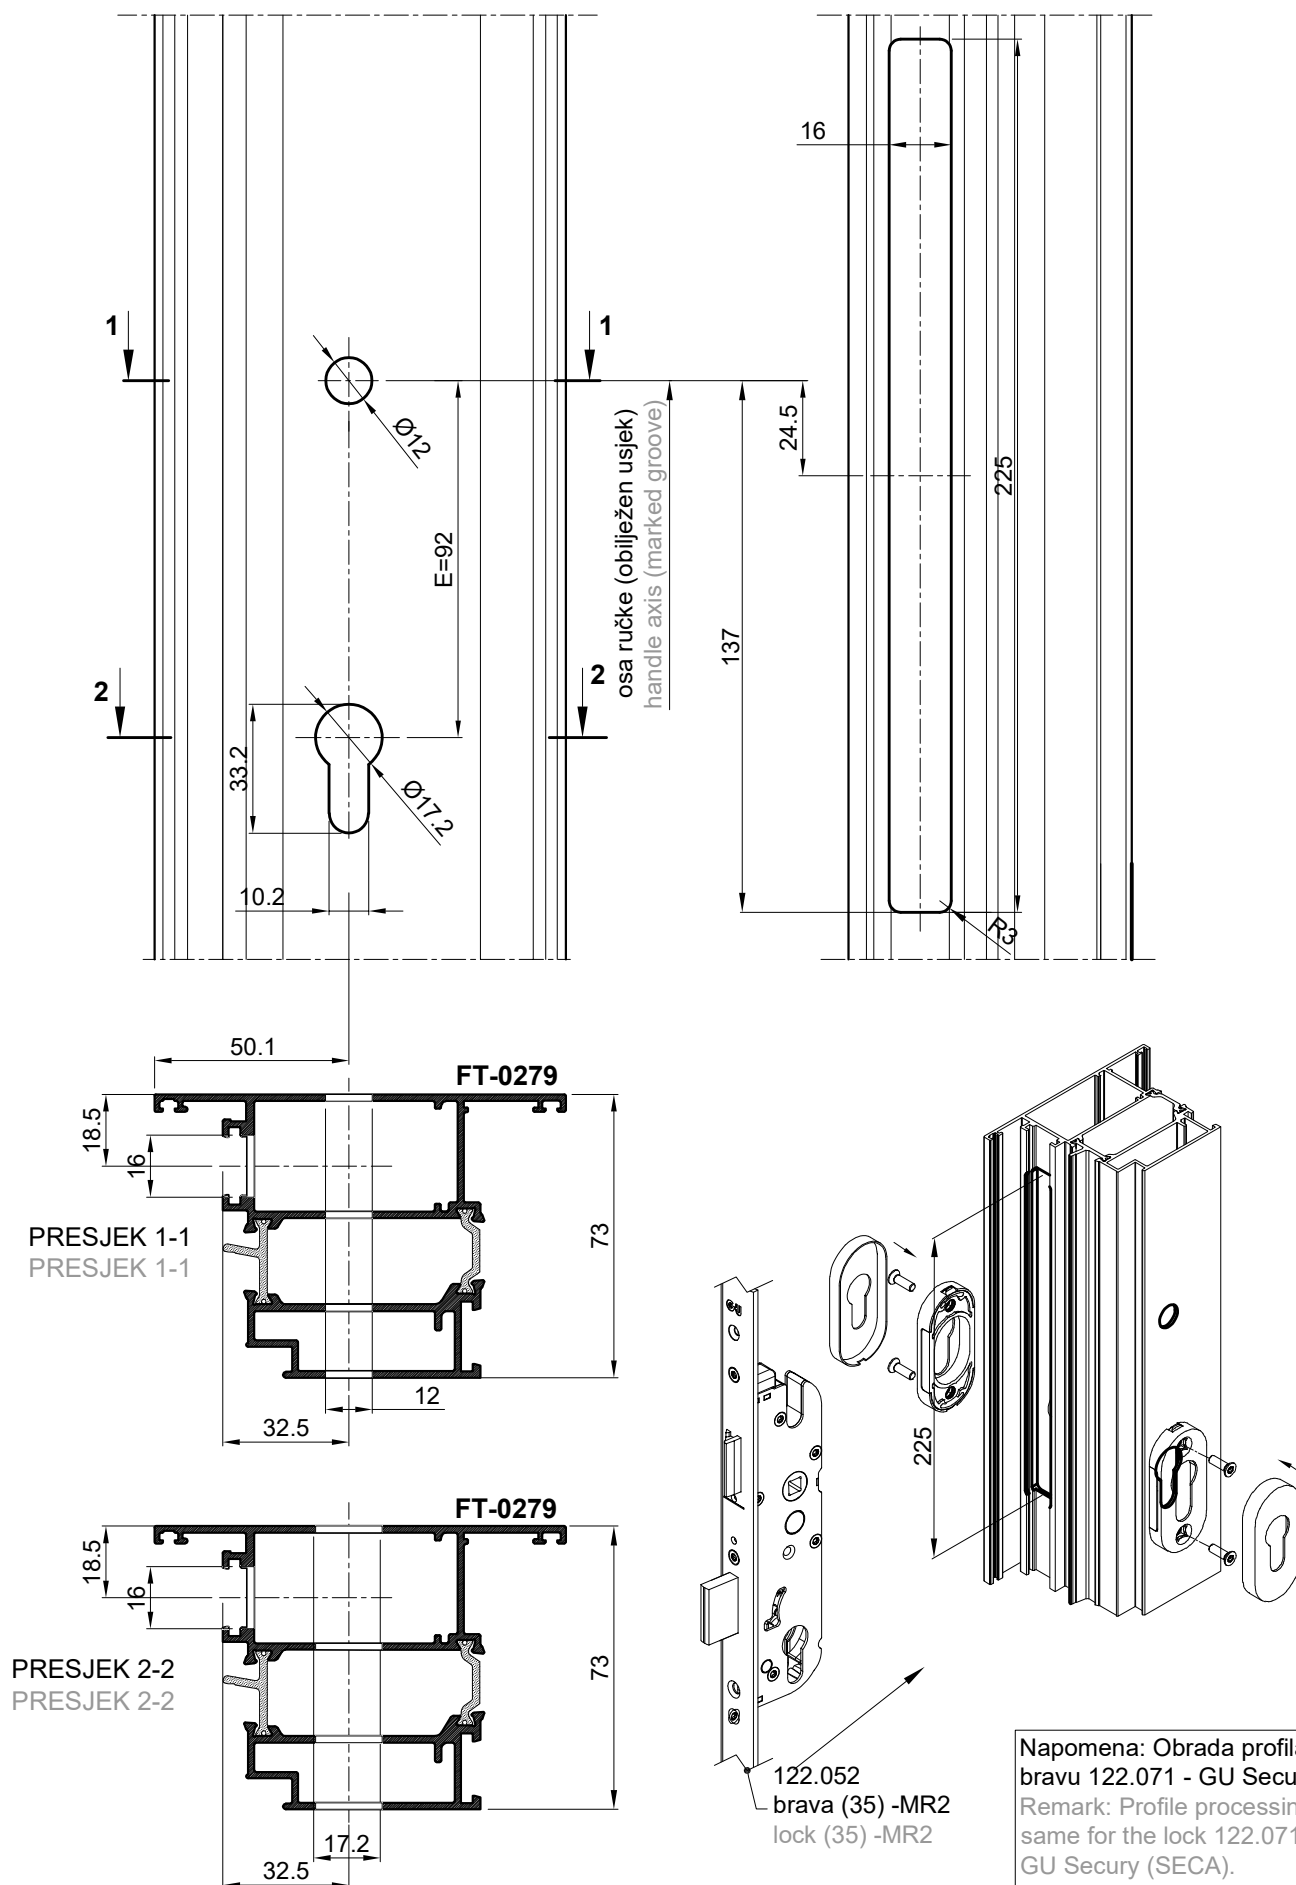OBRADA PROFILA KRILA VRATA (otvaranje vani) ZA KUTIJU BRAVE - 122.052 (GU Secury- MR2)
PROCESSING OF DOOR LEAF PROFILE (outward opening) FOR LOCK CASE - 122.052 (GU Secury- MR2)


OBRADA PROFILA KRILA VRATA (otvaranje unutra) ZA KUTIJU MASIVNOG ZASUNA - 122.052 (GU Secury- MR2)
PROCESSING OF DOOR LEAF PROFILE (inward opening) FOR MASSIVE BOLT CASE - 122.052 (GU Secury- MR2)

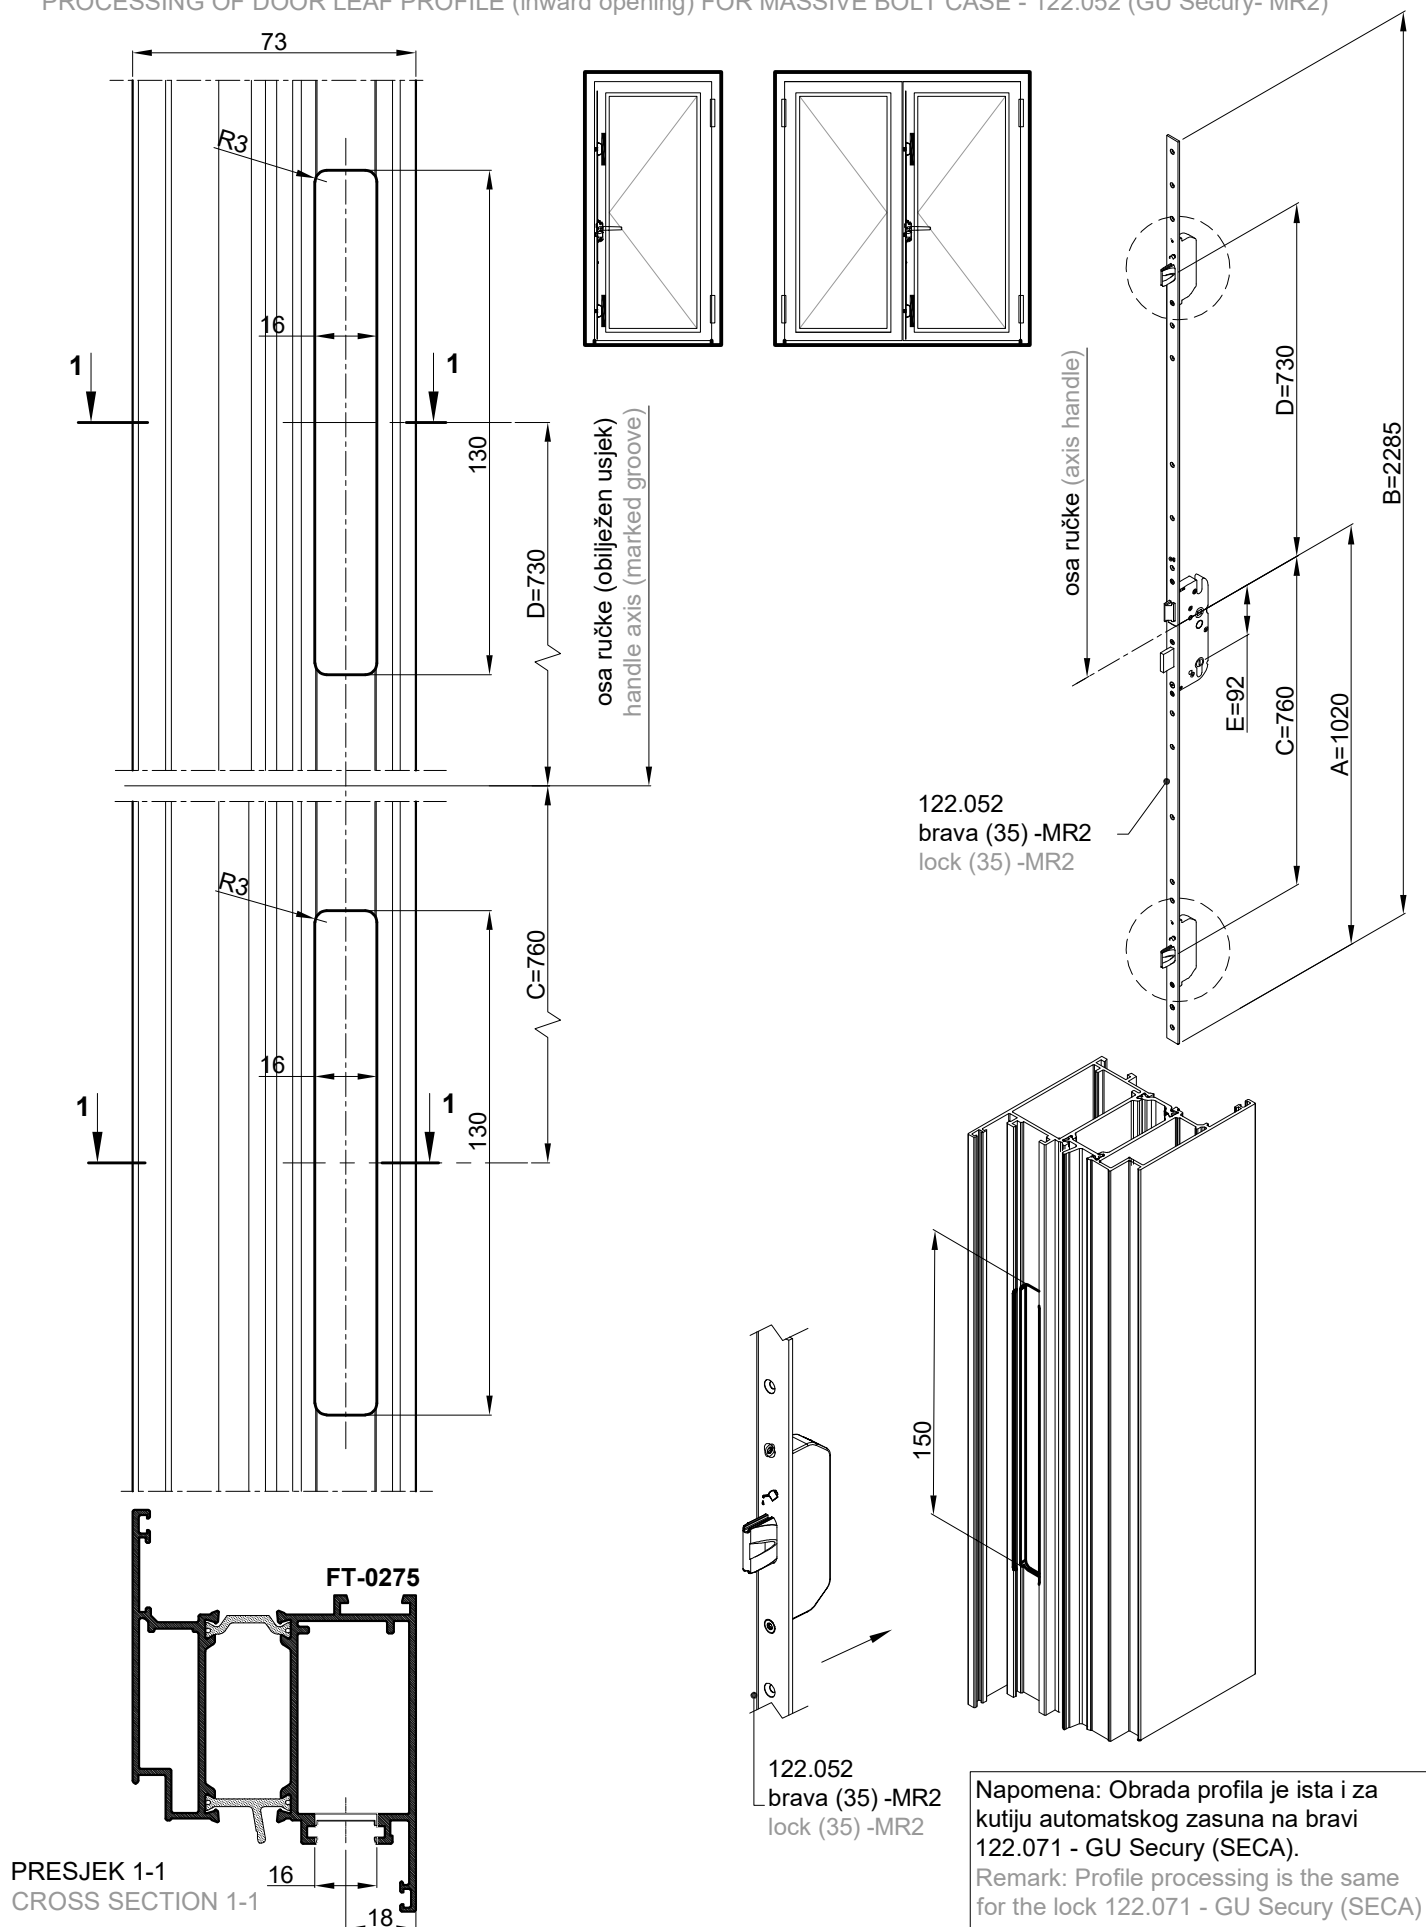


OBRADA PROFILA KRILA VRATA (otvaranje vani) ZA KUTIJU MASIVNOG ZASUNA - 122.052 (GU Secury- MR2)
PROCESSING OF DOOR LEAF PROFILE (outward opening) FOR MASSIVE BOLT CASE - 122.052 (GU Secury- MR2)

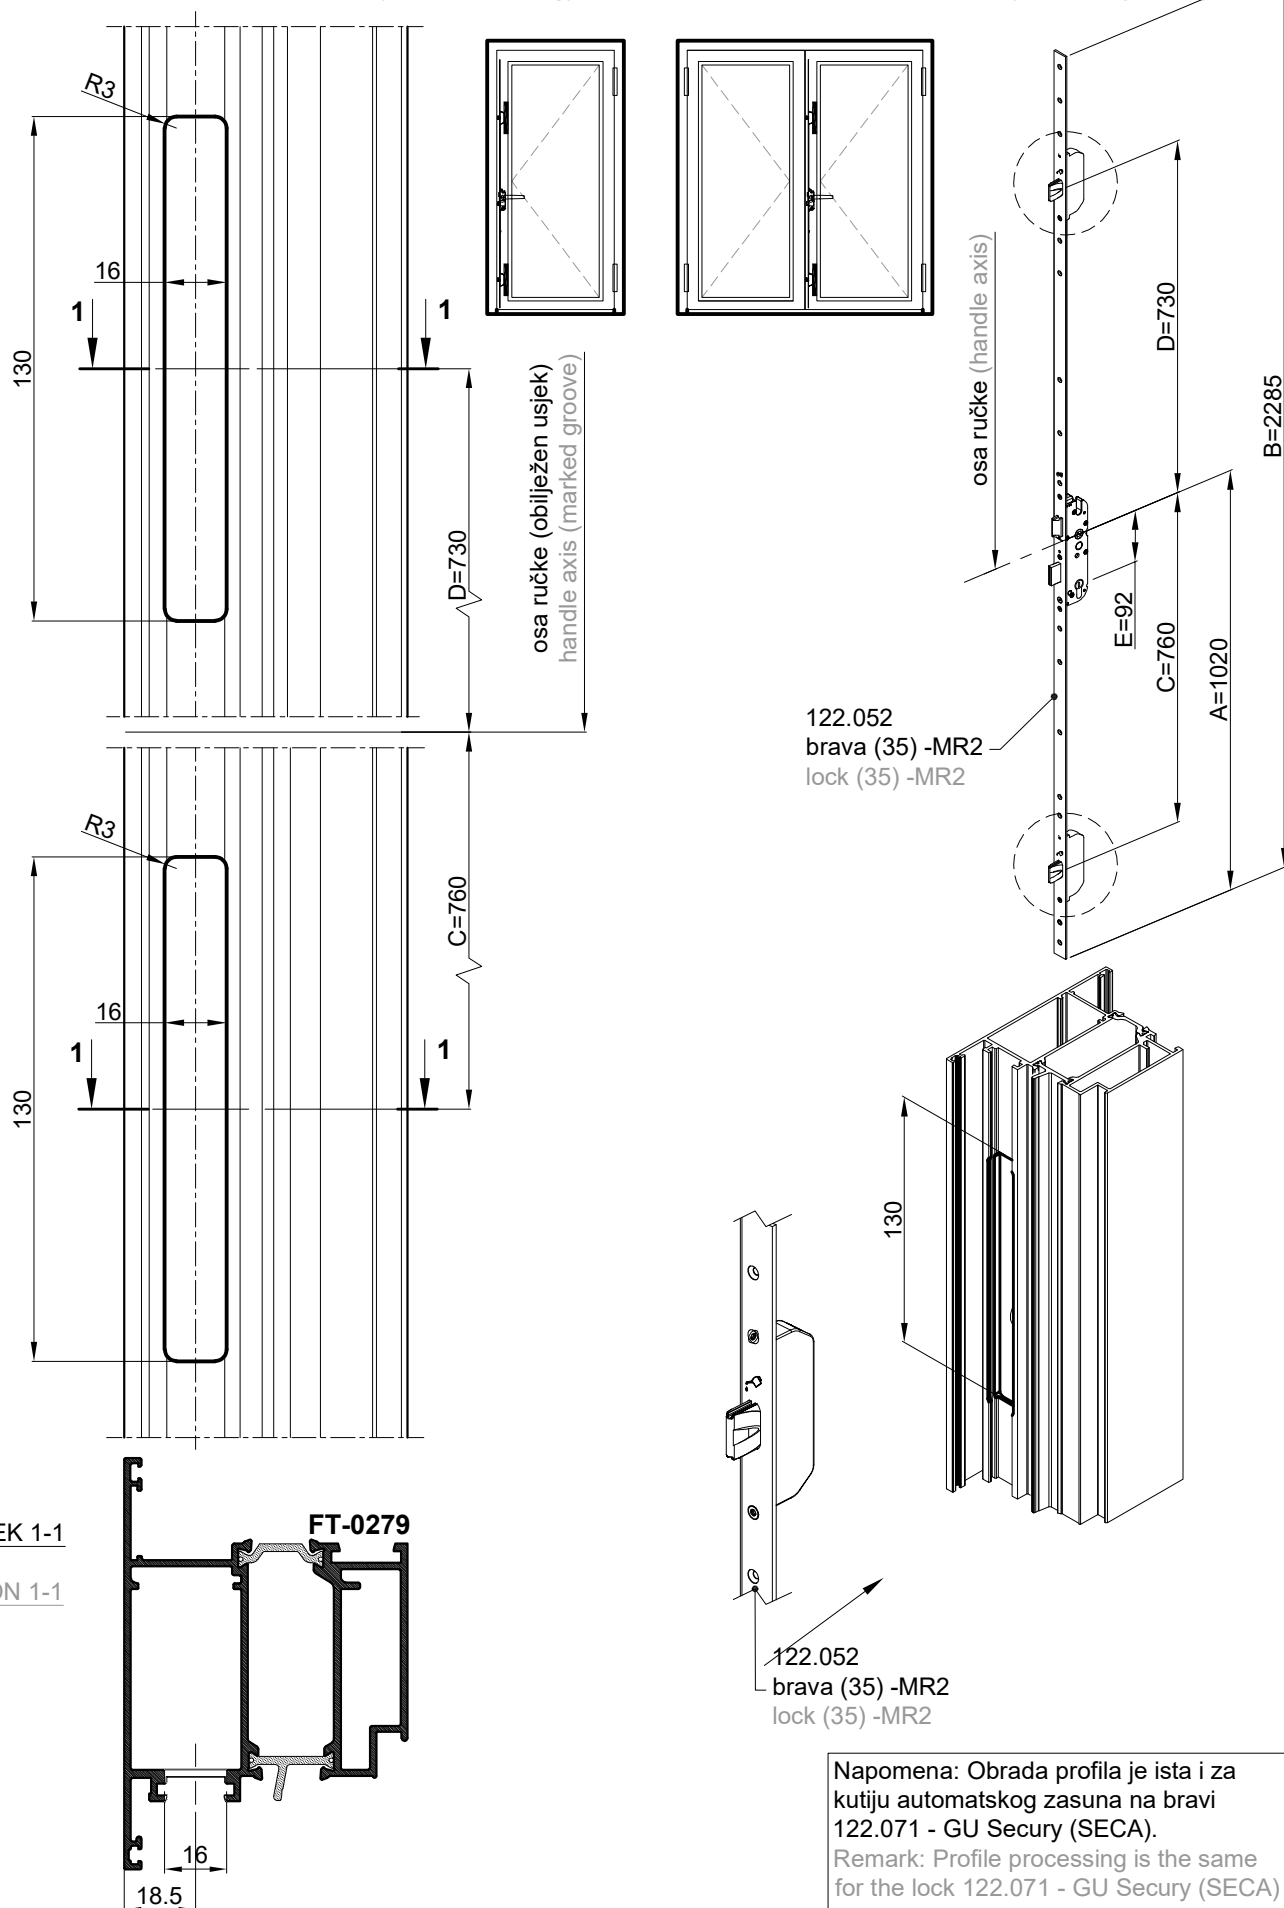





OBRADA PROFILA RAMA VRATA I PROFILA KOMBATUTE (otvaranje unutra i vani) ZA PRIHVATNU PLOČICU 122.053 (GU)
PROCESSING OF DOOR FRAME PROFILE AND FLYING MULLION PROFILE (inward and outward opening) FOR STRIKING PLATE 122.053 (GU)

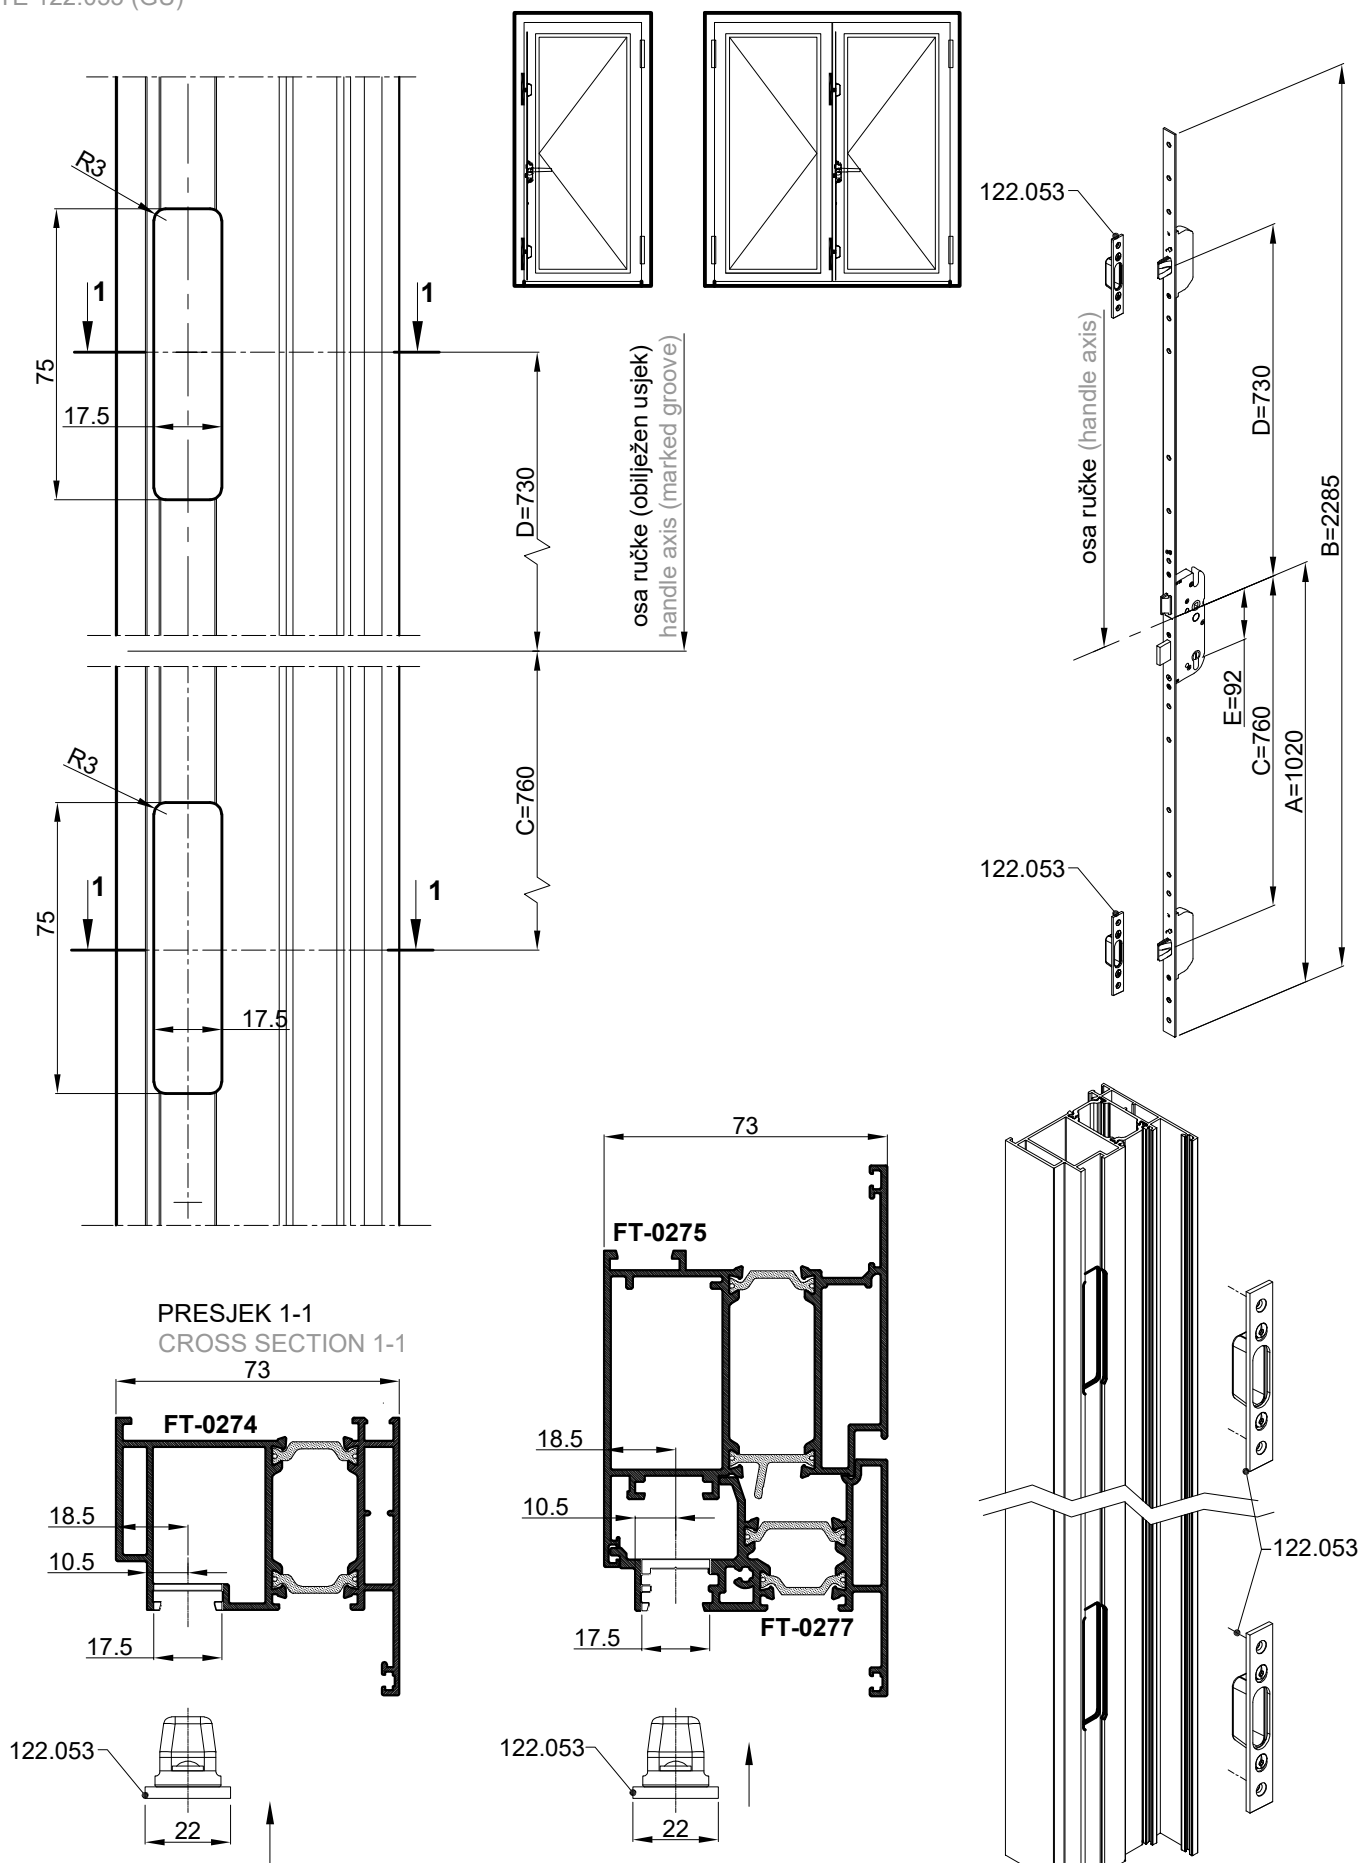

OBRADA PROFILA RAMA VRATA (otvaranje unutra i vani) ZA PRIHVATNI LIM 122.054 (GU)
PROCESSING OF DOOR FRAME PROFILE (inward and outward opening) FOR STRIKING PLATE 122.054 (GU)

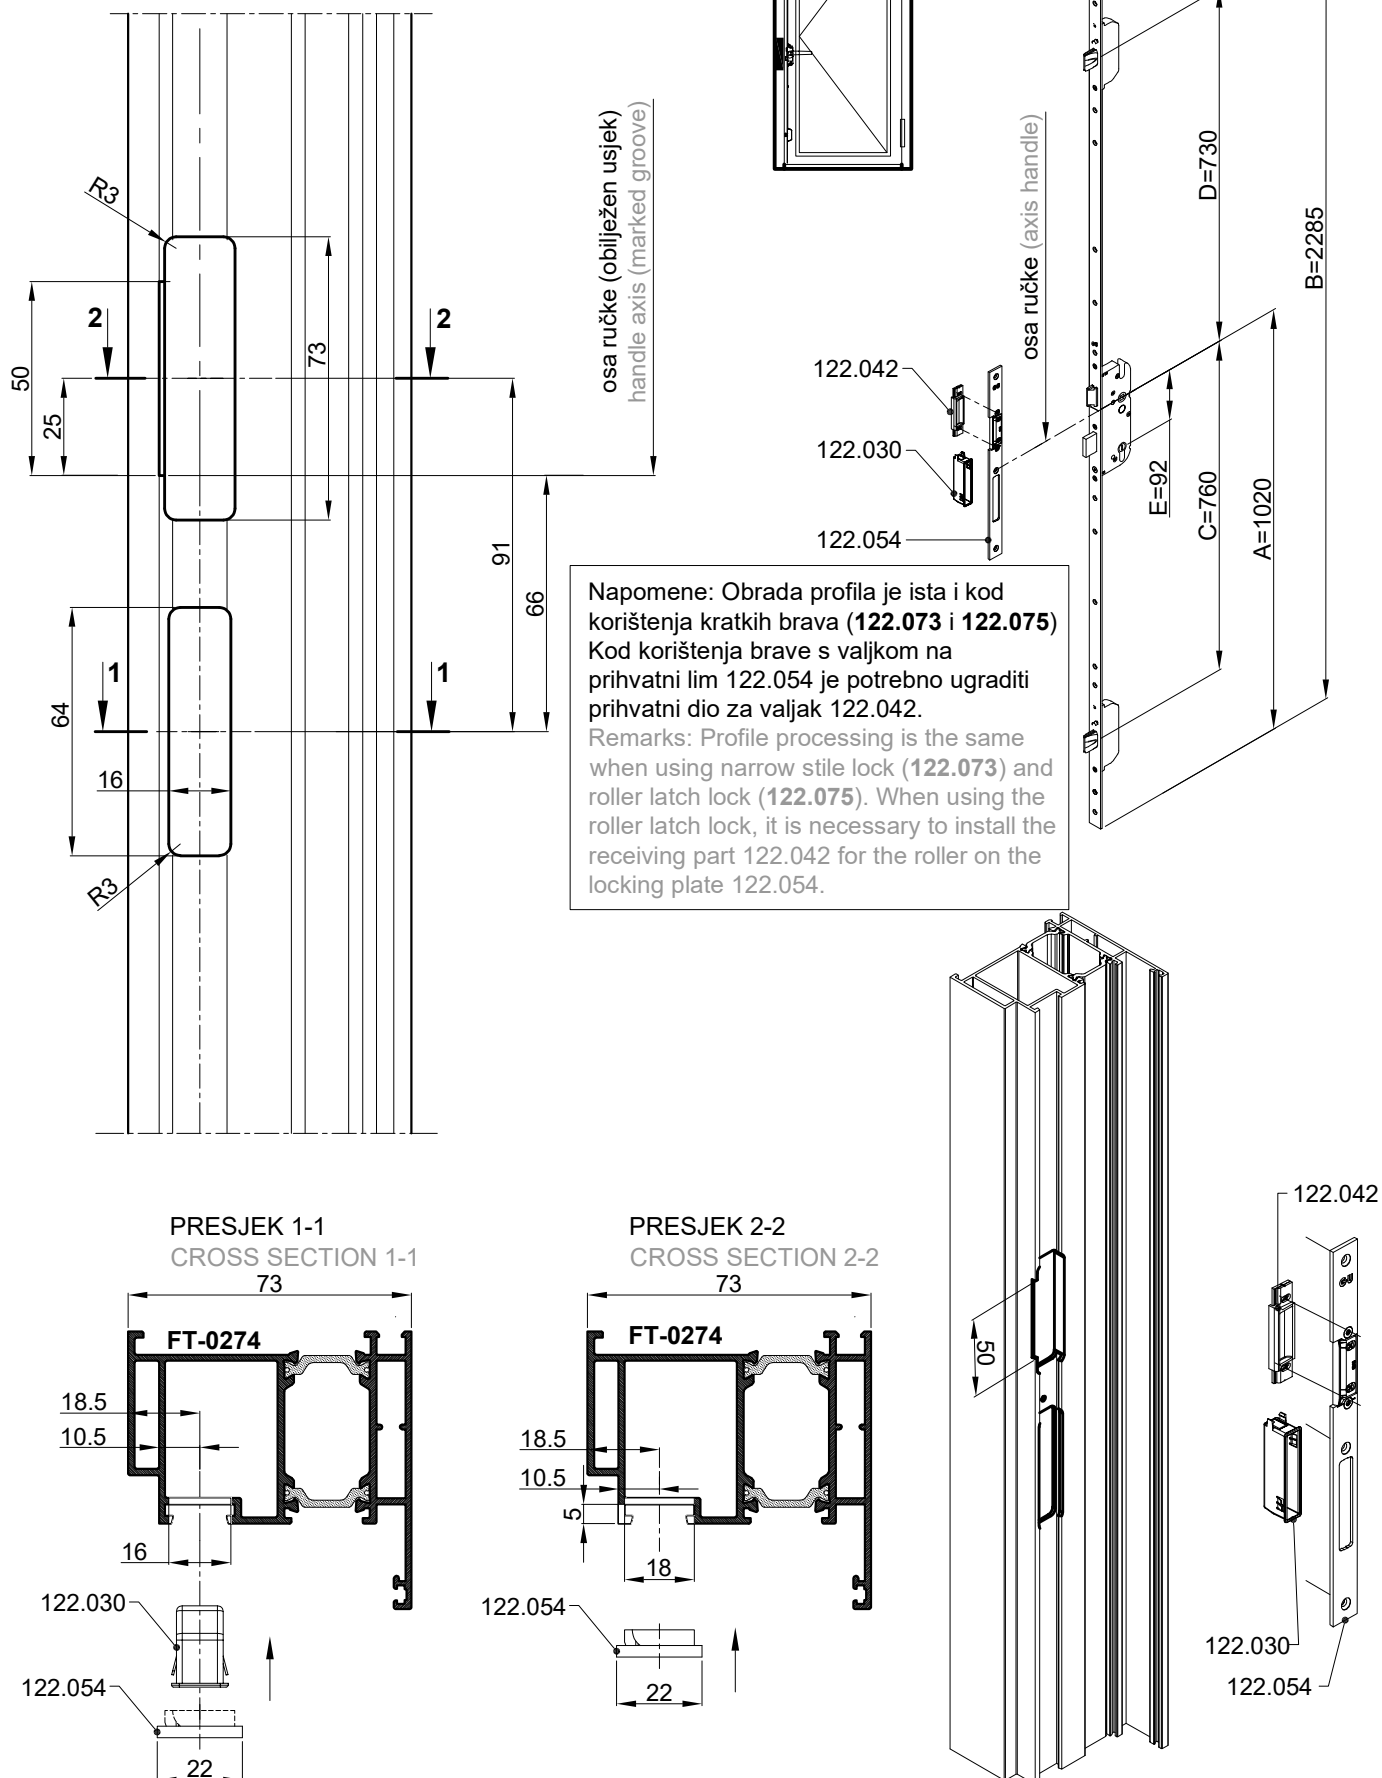


OBRADA PROFILA RAMA VRATA (otvaranje unutra i vani) ZA PRIHVATNI LIM 122.054 (GU) I ELEKTRO OTVARAČ 122.055 (GU)
PROCESSING OF DOOR FRAME PROFILE (inward and outward opening) FOR STRIKING PLATE 122.054 (GU)

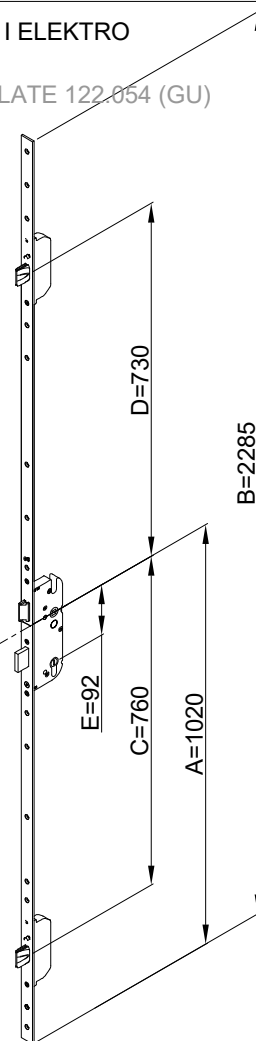

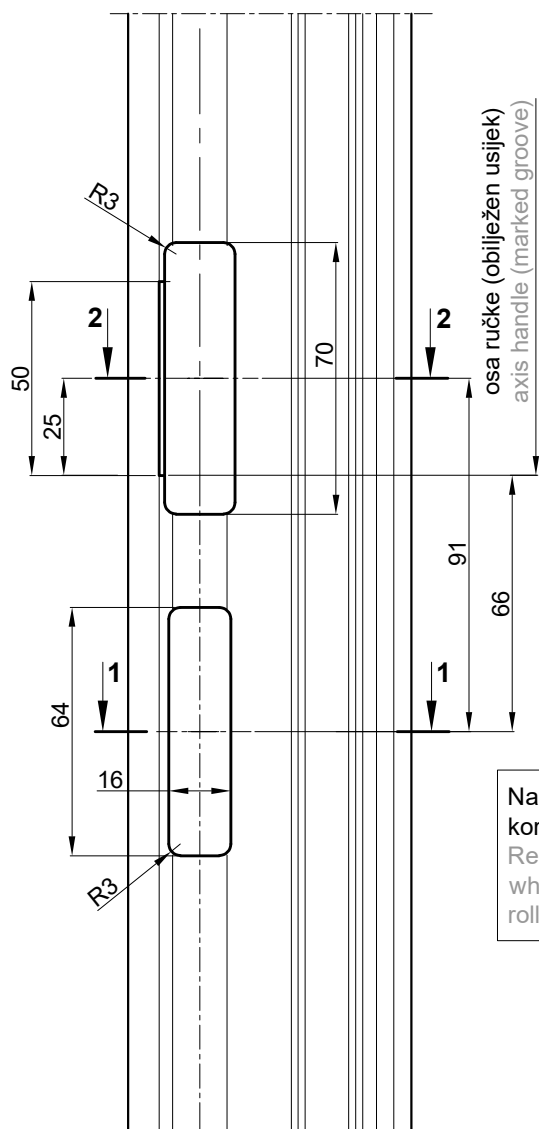


Napomene: Obrada profila je ista i kod korištenja kratkih brava (122.073 i 122.075).
Remark: Profile processing is the same when using narrow stile lock (122.073) and roller latch lock (122.075).


PRESJEK 1-1
CROSS SECTION 1-1

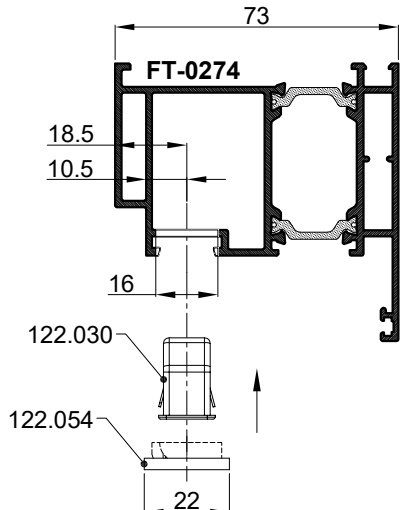


PRESJEK 2-2
CROSS SECTION 2-2

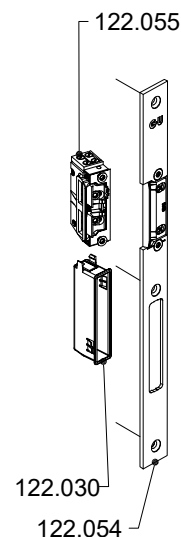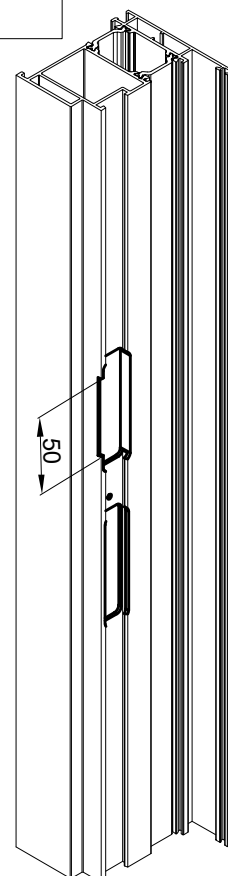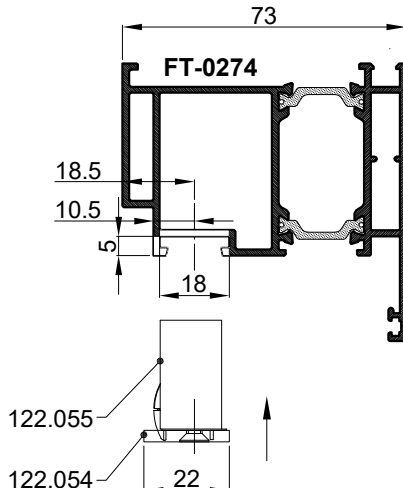



OBRADA PROFILA KOMBATUTE VRATA (otvaranje unutra i vani) ZA PRIHVATNI LIM 122.054 (GU)
PROCESSING OF DOOR FLYING MULLION PROFILE (inward and outward opening) FOR STRIKING PLATE 122.054 (GU)

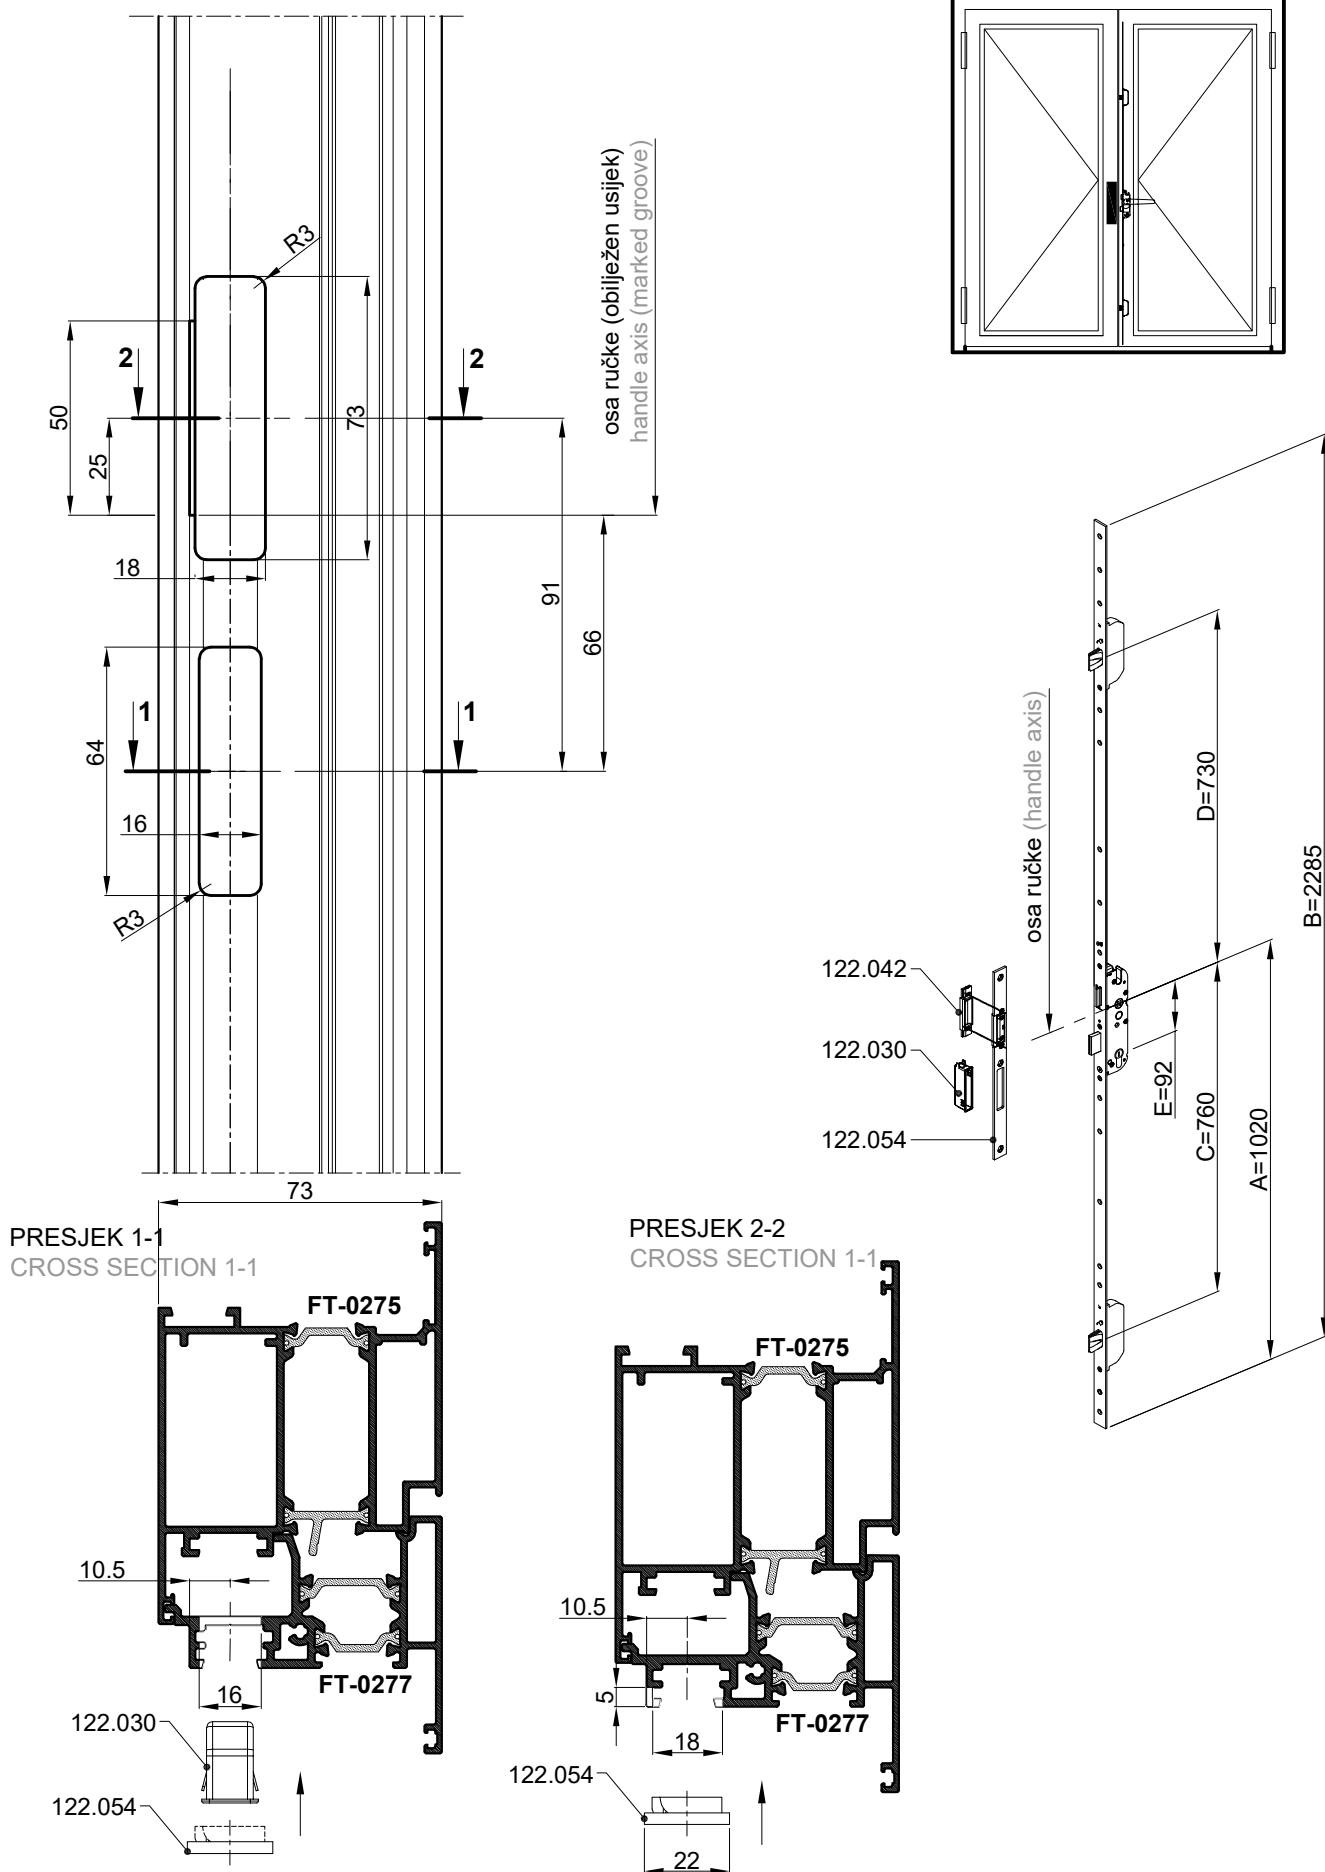


POSTUPAK UGRADNJE PRODUŽETKA NA BRAVE 122.052 (GU Secury -MR2) I 122.071 (GU Secury Automatic-SECA)
INSTALLATION PROCEDURE OF THE FACEPLATE EXTENSION WITH ADDITIONAL LOCK ON LOCKS 122.052 (GU Secury -MR2) AND 122.071 (Secury Automatic-SECA)

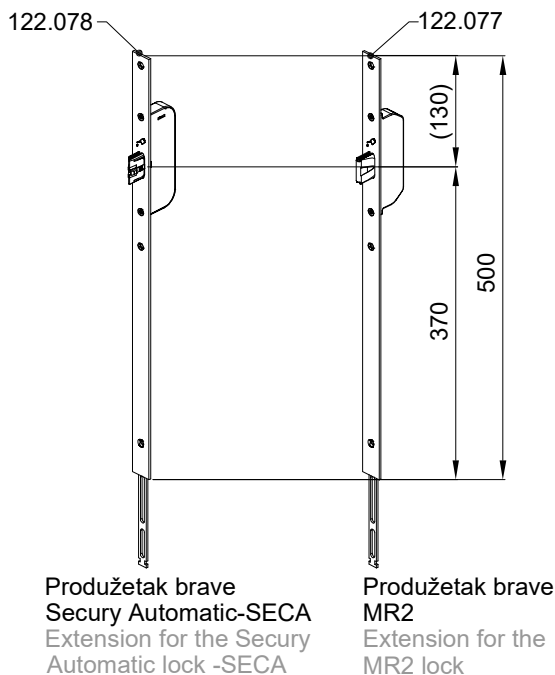


Postupak ugradnje je isti za oba produžetka.
The installation procedure is the same for both extensions.

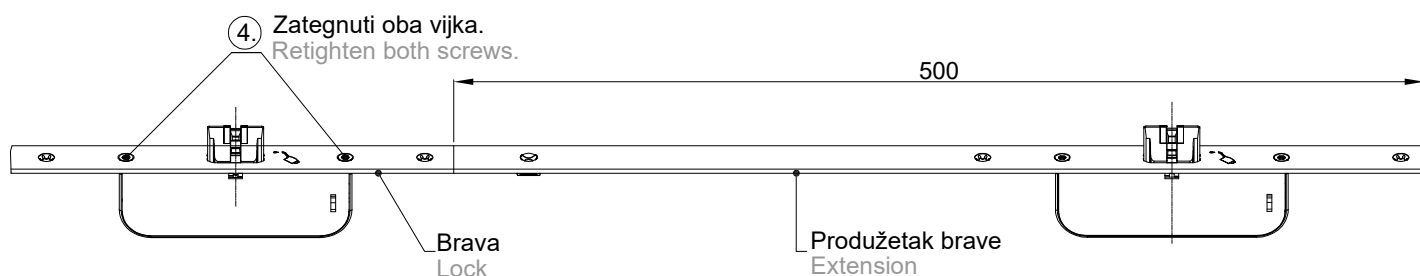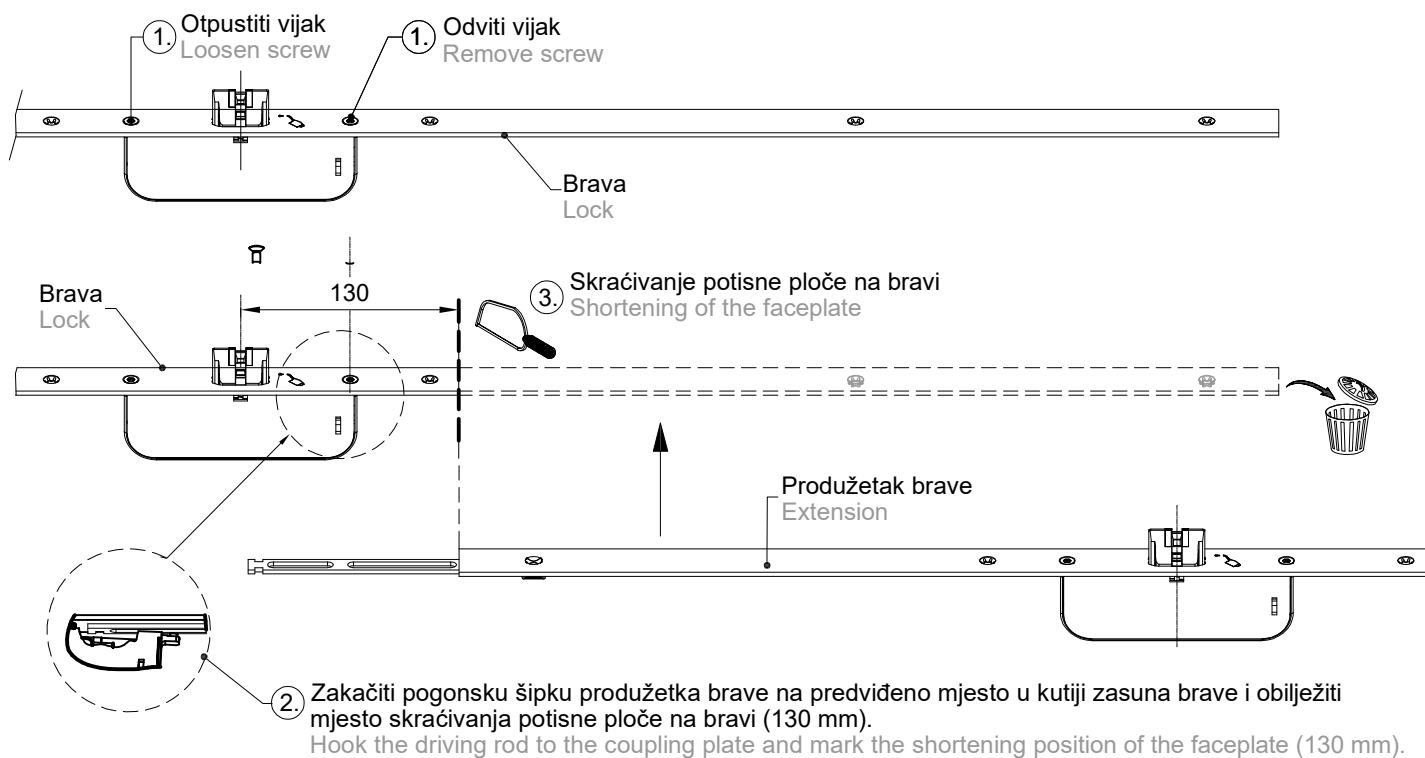

KLJUČANJE POMOĆNOG KRILA LOCKING OF AUXILIARY LEAF

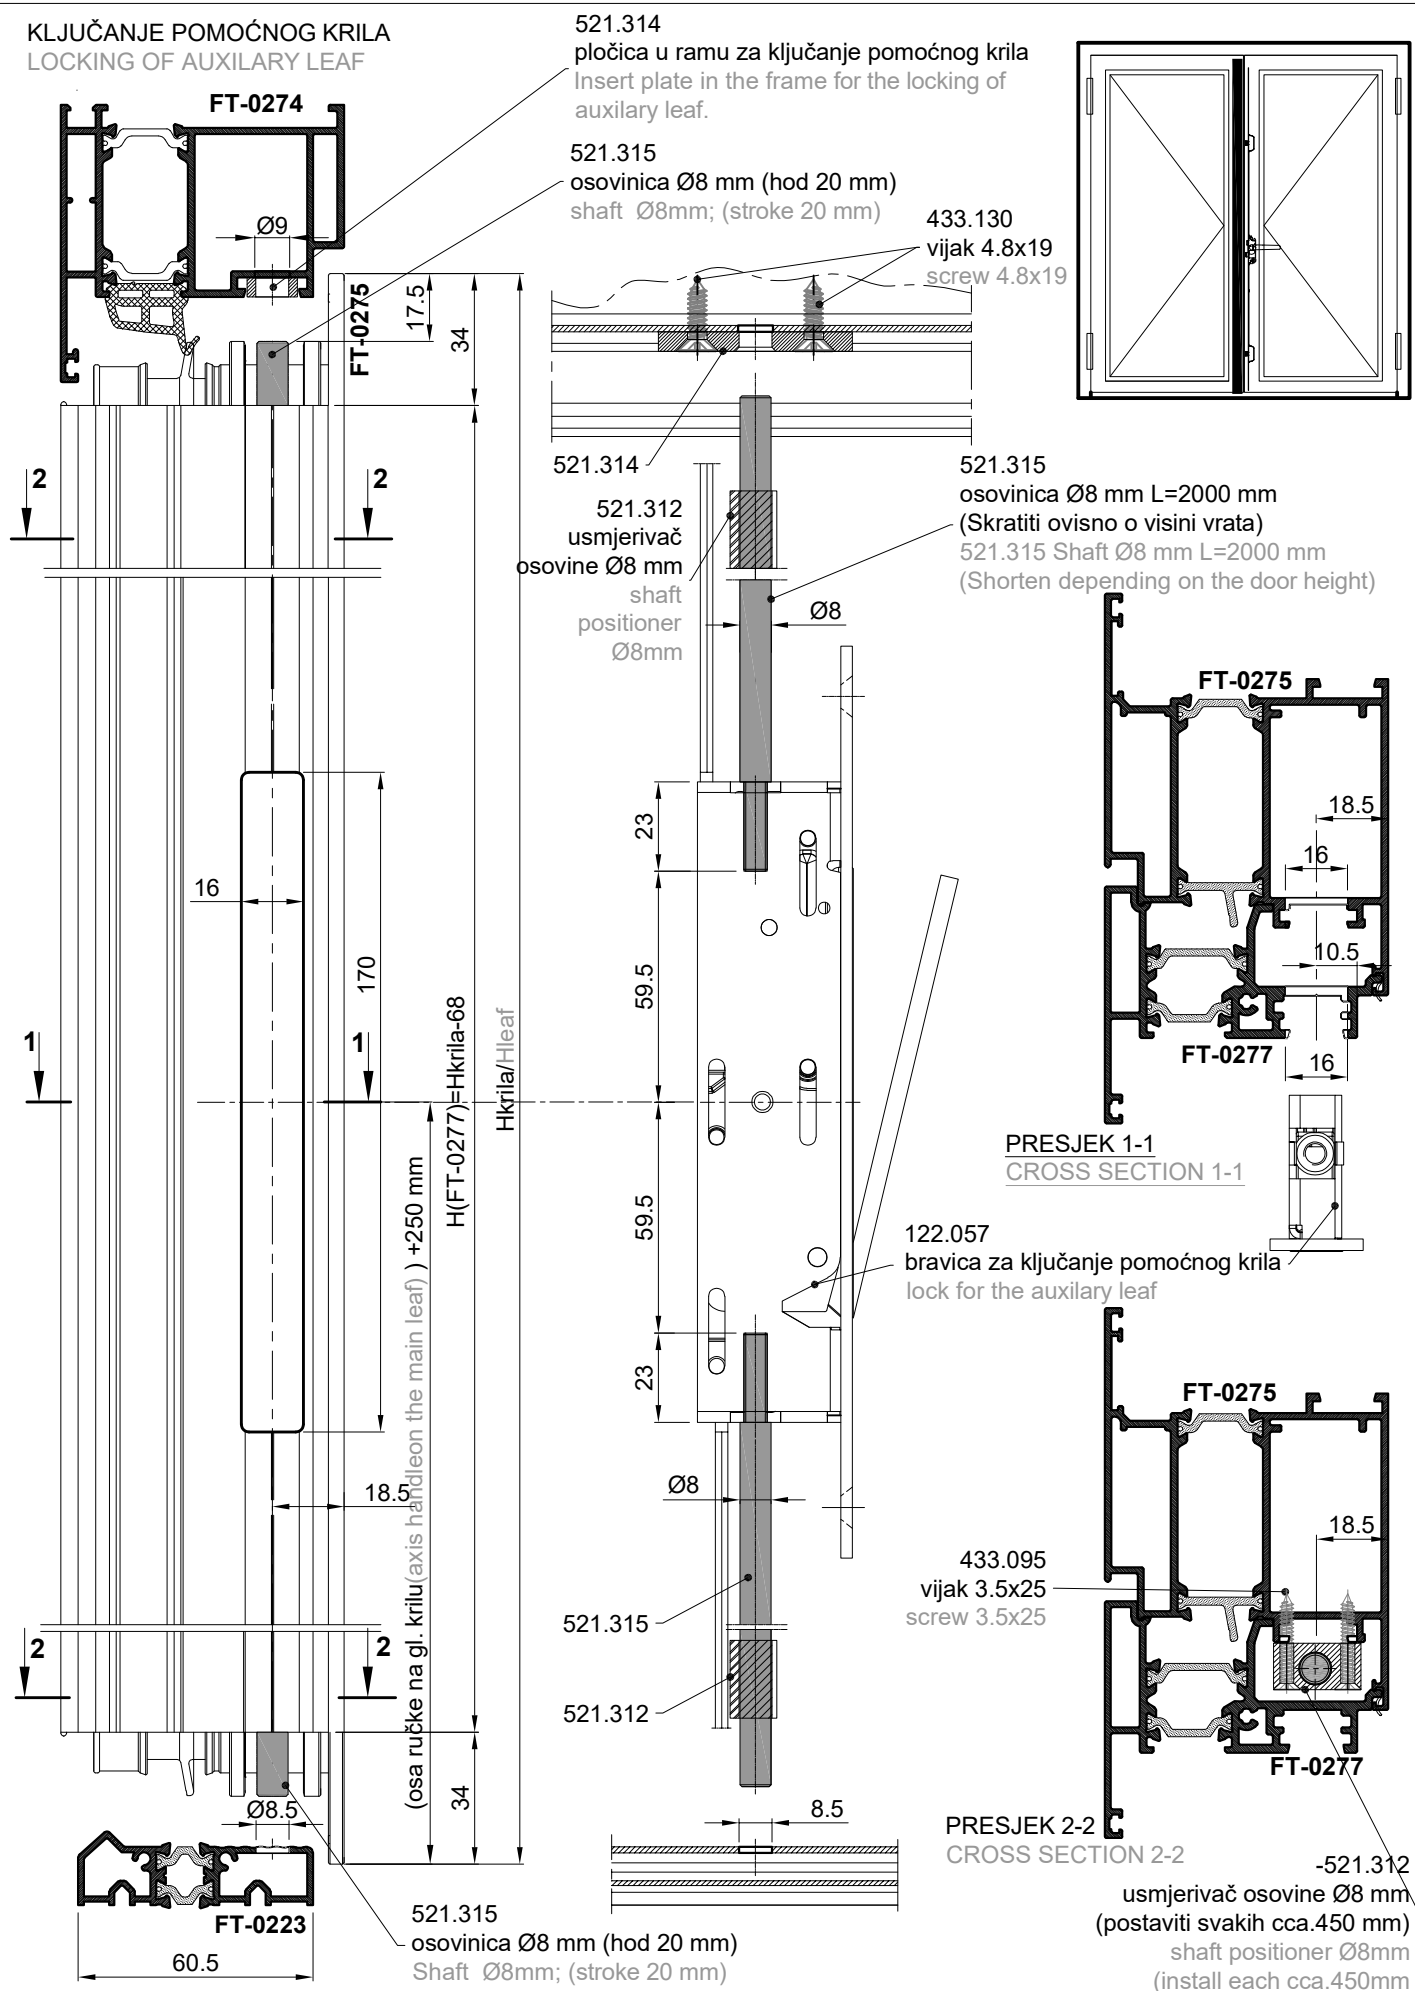


KLJUČANJE POMOĆNOG KRILA LOCKING OF AUXILIARY LEAF




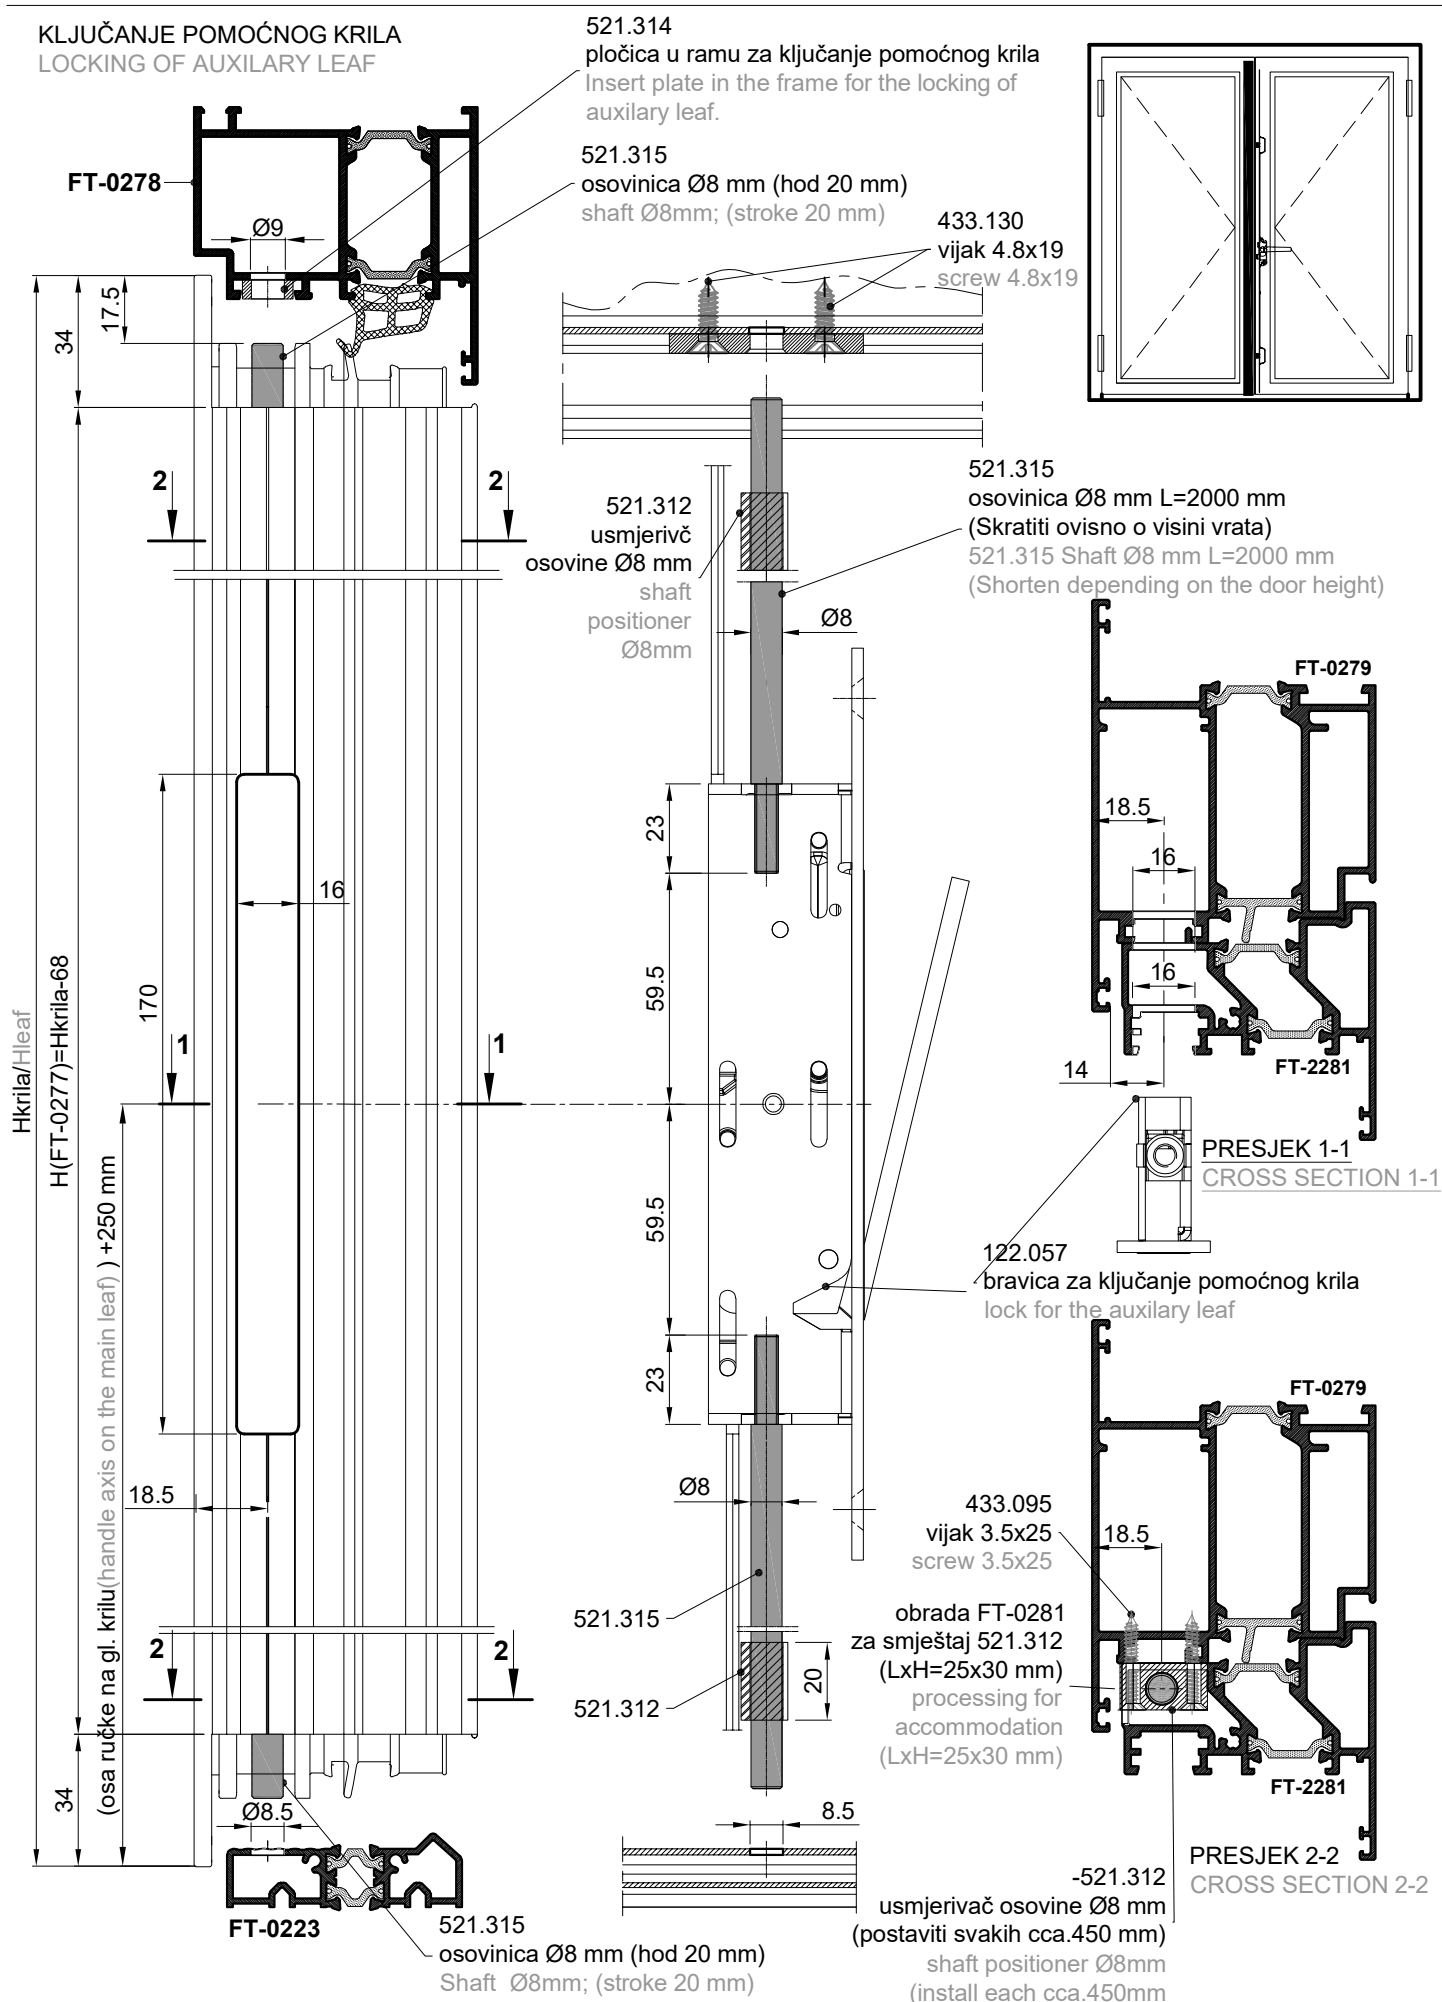


SET USADNIH BAGLAMA - OSNO 68 mm
UGRAĐUJE SE U KRILO VRATA FT-0275 (OTVARANJE UNUTRA)
SET OF SCREW-IN HINGES - AXIAL DISTANCE 68 mm
INSTALLATION IN THE DOOR LEAF FT-0275 (INWARD OPENING)


OBRADA PROCESSING

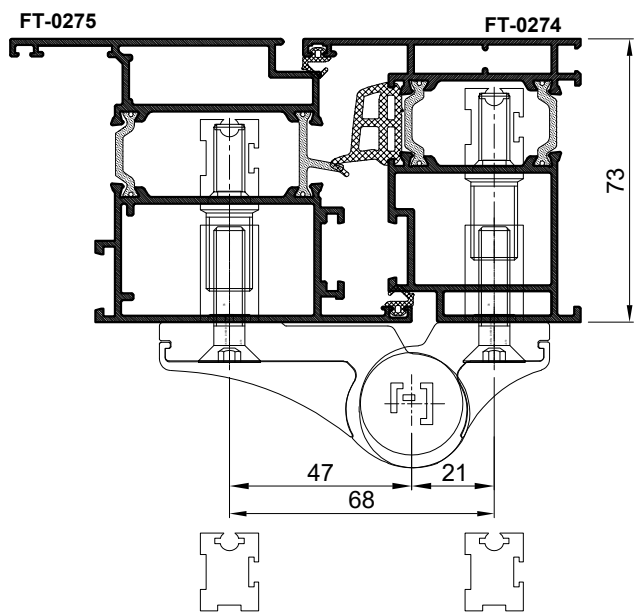



SET ZA TERMO 65
SET FOR TERMO 65

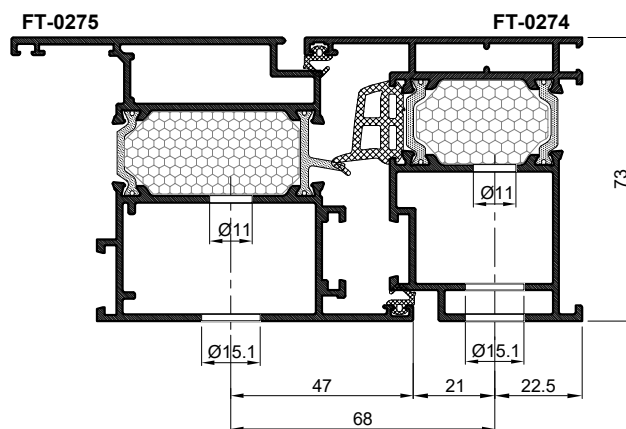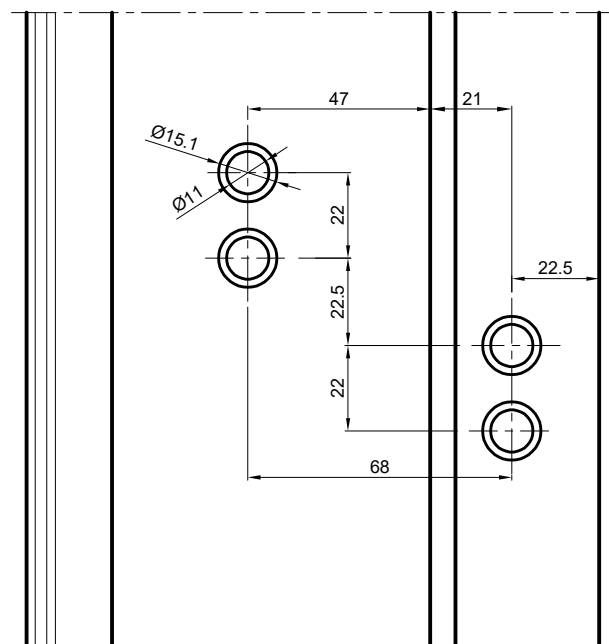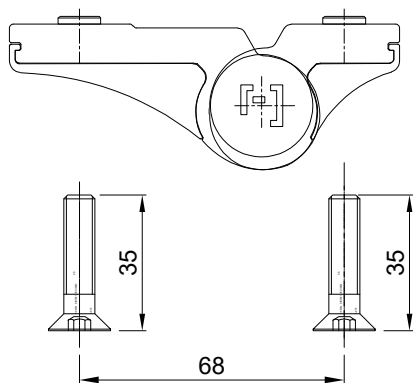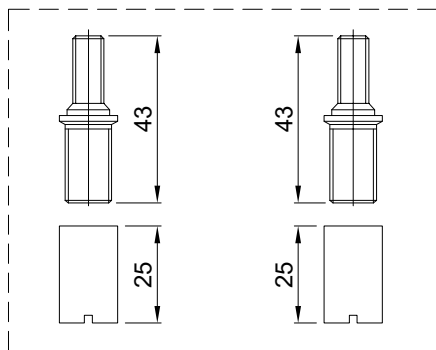



SET USADNIH BAGLAMA - OSNO 68 mm
UGRAĐUJE SE U KRILA VRATA FT-0218 (OTVARANJE UNUTRA)
SET OF SCREW-IN HINGES - AXIAL DISTANCE 68 mm
INSTALLATION IN THE DOOR LEAF FT-0218 (INWARD OPENING)

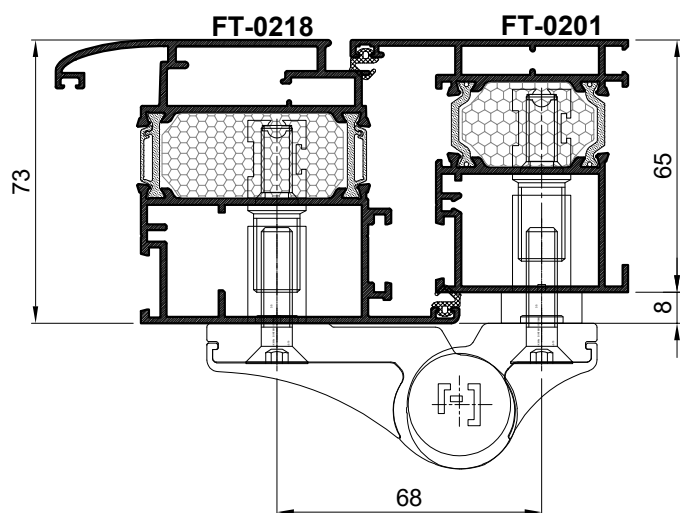


SET ZA TERMO 65
SET FOR TERMO 65

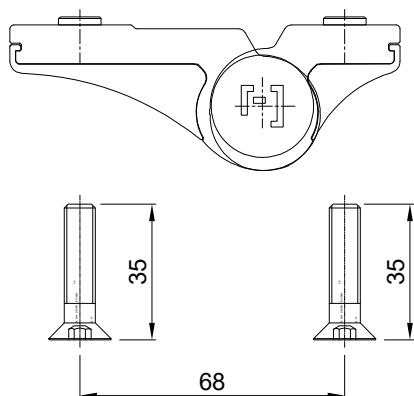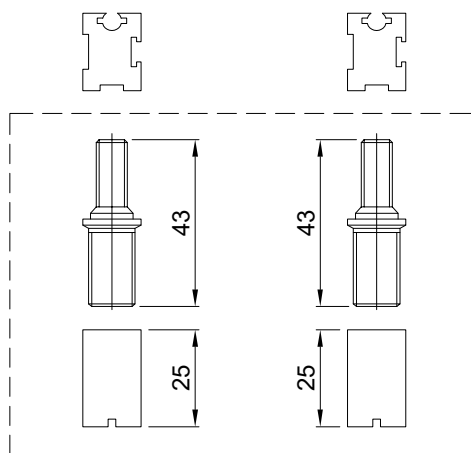



OBRADA
PROCESSING

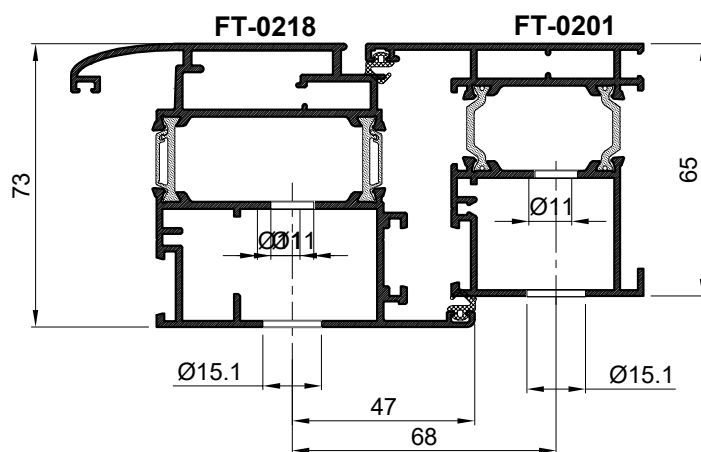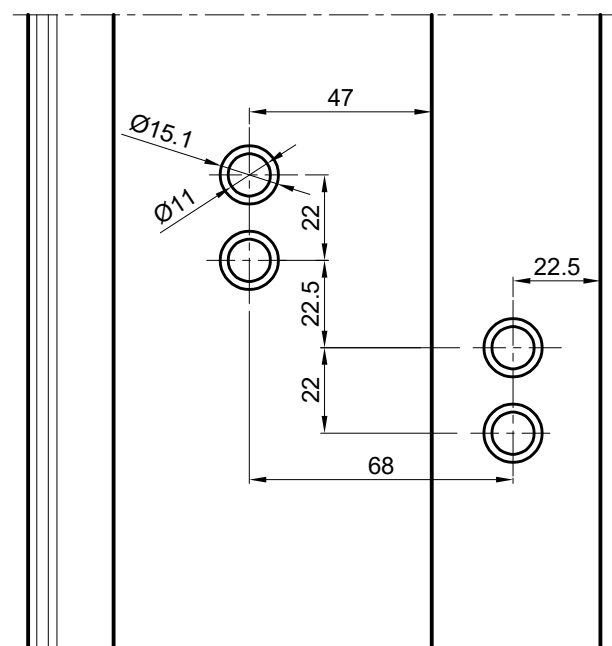


SET USADNIH BAGLAMA - OSNO 68 mm
UGRAĐUJE SE U KRILA VRATA FT-0279 (OTVARANJE VANI)
SET OF SCREW-IN HINGES - AXIAL DISTANCE 68 mm
INSTALLATION IN THE DOOR LEAF FT-0279 (OUTWARD OPENING)

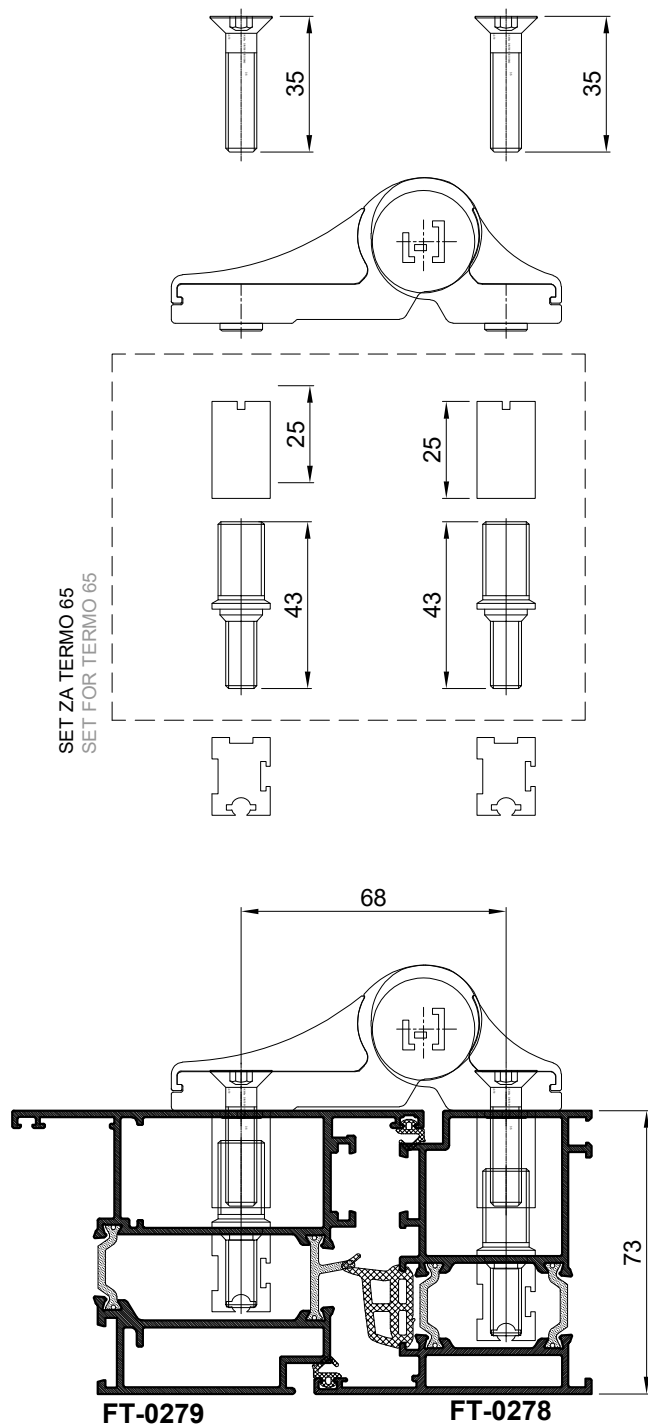





OBRADA
PROCESSING

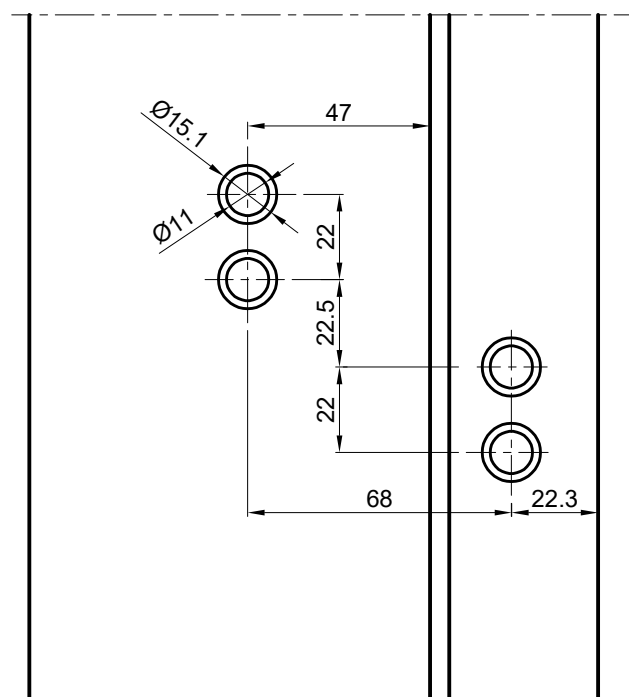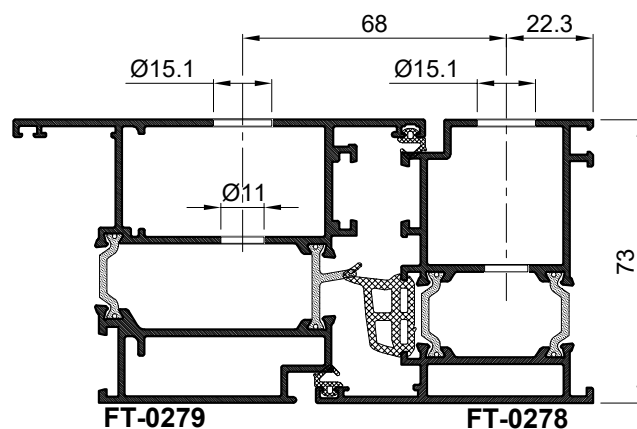


SET USADNIH BAGLAMA - OSNO 94 mm
UGRAĐUJE SE U KRILA VRATA, U AL.STIJENI (OTVARANJE VANI)
SET OF SCREW-IN HINGES - AXIAL DISTANCE 94 mm
INSTALLATION IN THE DOOR LEAF (OUTWARD OPENING)

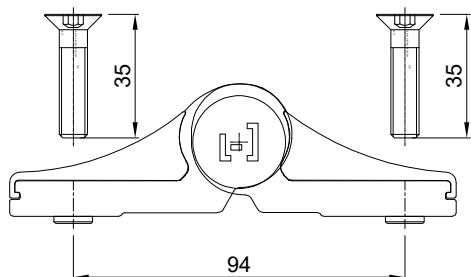

SET ZA TERMO 65
SET FOR TERMO 65

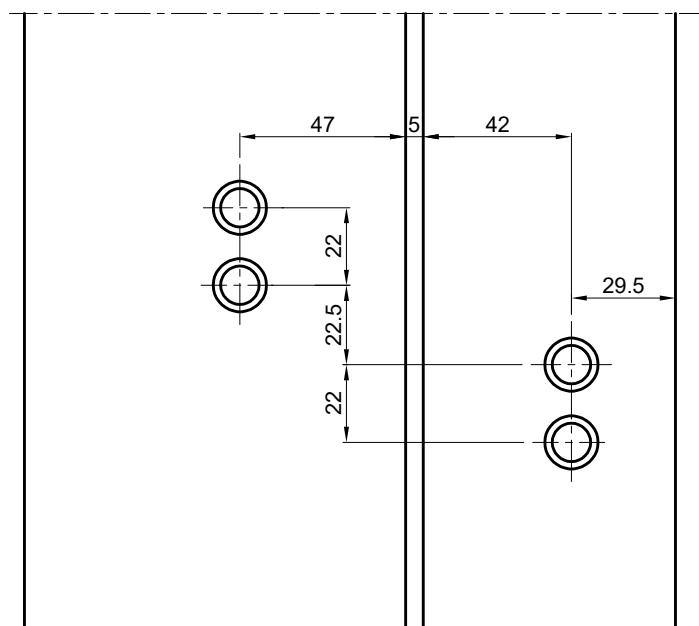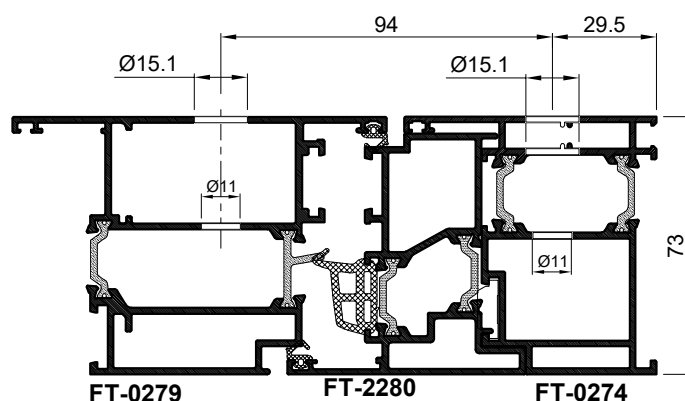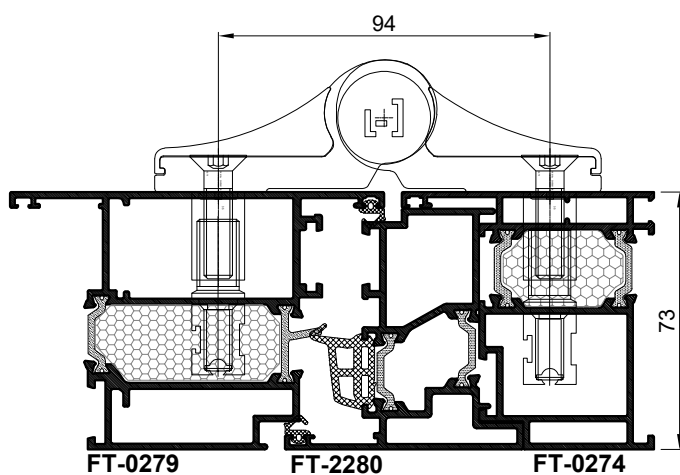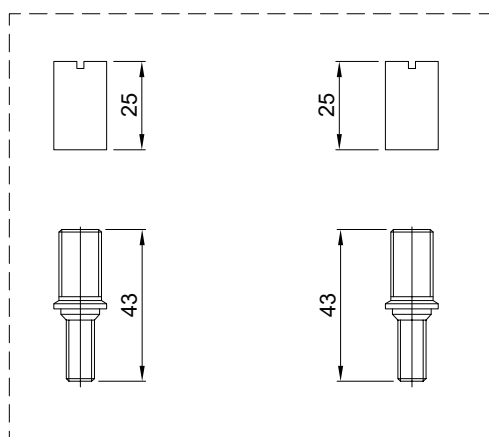


OBRADA ZA DVOPIJELNU ŠARKU TÜRBAND 4 AT 112.015.xx PROCESSING FOR TWO-PIECE HINGE TÜRBAND 4 AT 112.015.xx


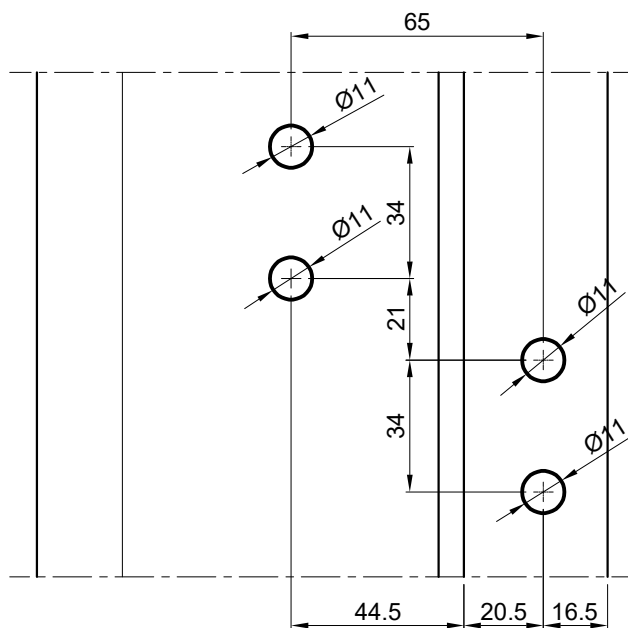


Napomena:
Obrada se vrši isključivo na
obradnom centru ili pomoću
namijenjenog šablona za obradu
(112.016).


Remark:
Processing is carried out exclusively
on the machining center or using the
intended drilling jig for processing
(112.016).



112.016

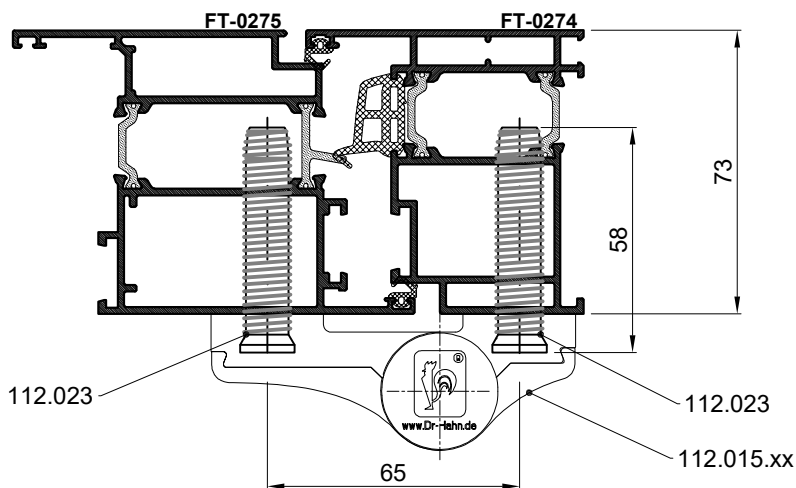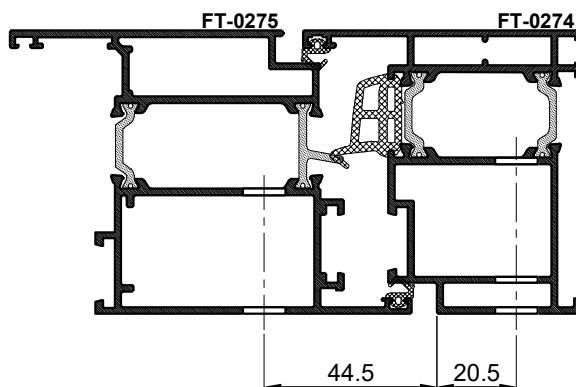


OBRADA ZA DVODIJELNU ŠARKU TÜRBAND 4 AT 112.021.xx PROCESSING FOR TWO-PIECE HINGE TÜRBAND 4 AT 112.021.xx


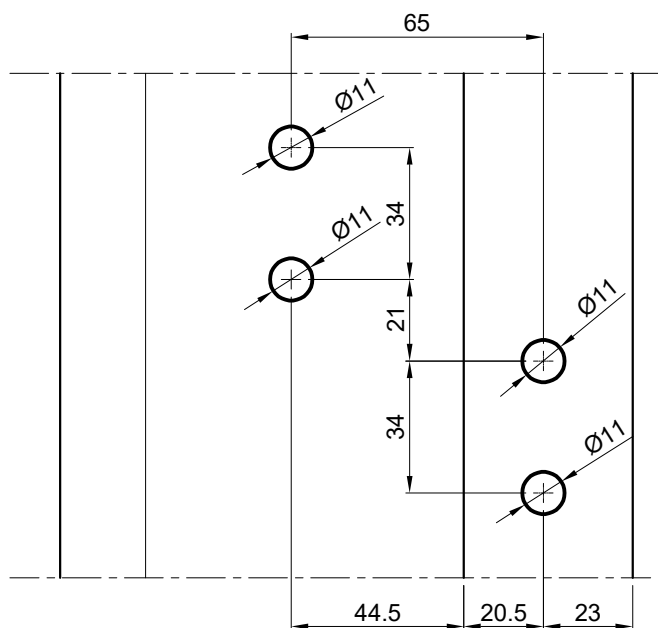


Napomena:
Obrada se vrši isključivo na obradnom centru ili pomoću namijenjenog šablona za obradu (112.022).




Remark:
Processing is carried out exclusively on the machining center or using the intended drilling jig for processing (112.022).



112.022

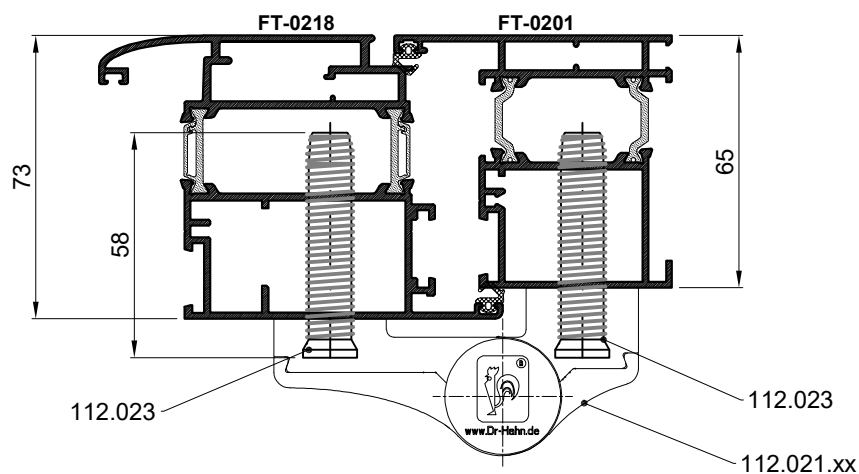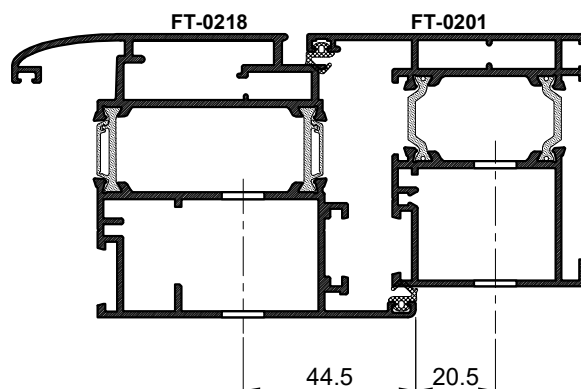


OBRADA ZA DVODIJELNU ŠARKU TÜRBAND 4 AT 112.015.xx PROCESSING FOR TWO-PIECE HINGE TÜRBAND 4 AT 112.015.xx

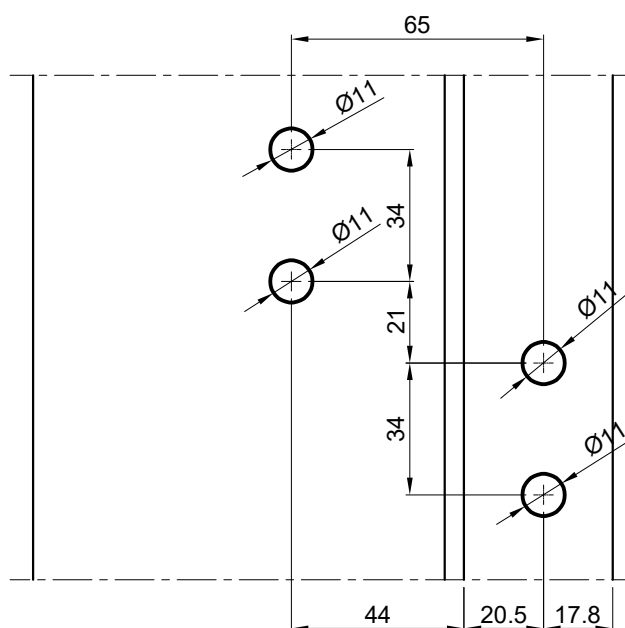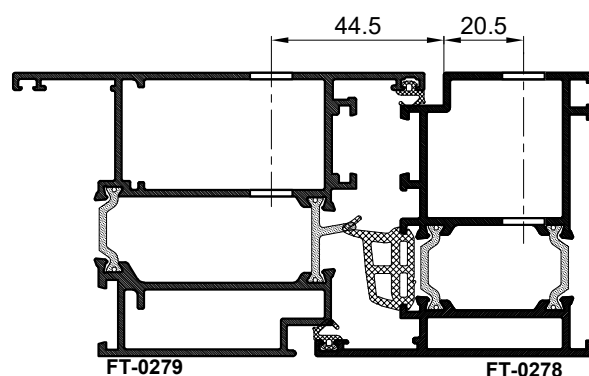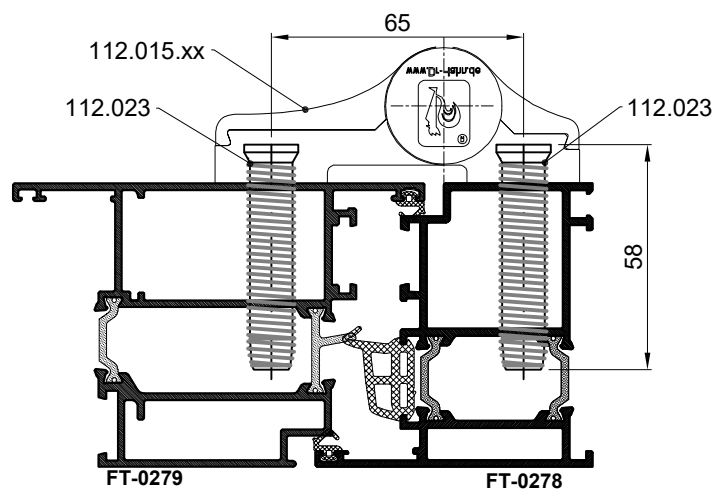




Napomena:
Obrada se vrši isključivo na
obradnom centru ili pomoću
namijenjenog šablona za obradu
(112.016).

Remark:
Processing is carried out exclusively
on the machining center or using the
intended drilling jig for processing
(112.016).





112.016

OBRADA ZA DVODIJELNU ŠARKU TÜRBAND 4 AT 112.019.xx PROCESSING FOR TWO-PIECE HINGE TÜRBAND 4 AT 112.019.xx

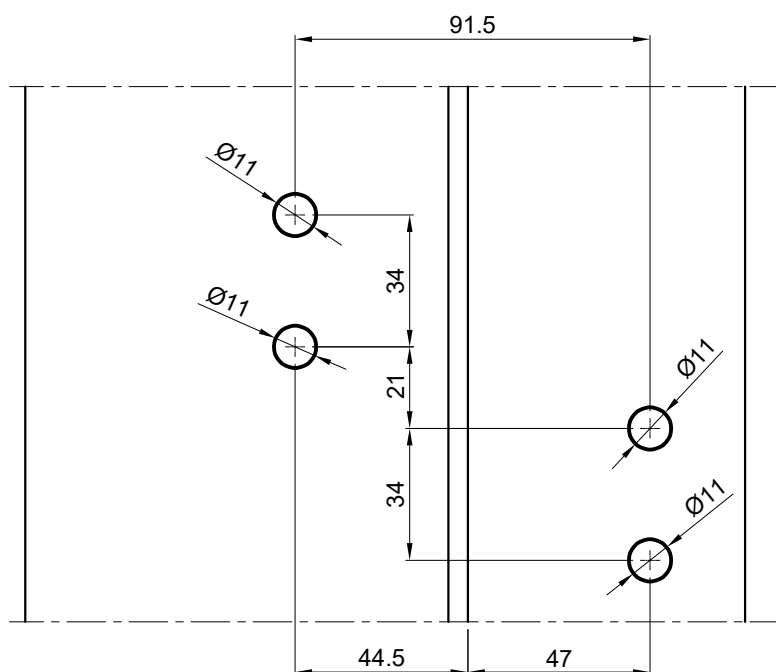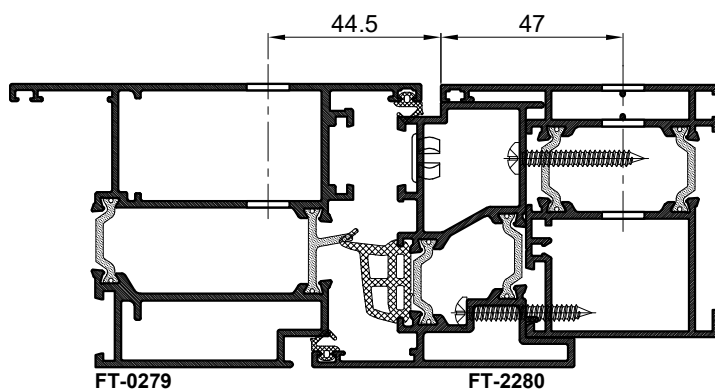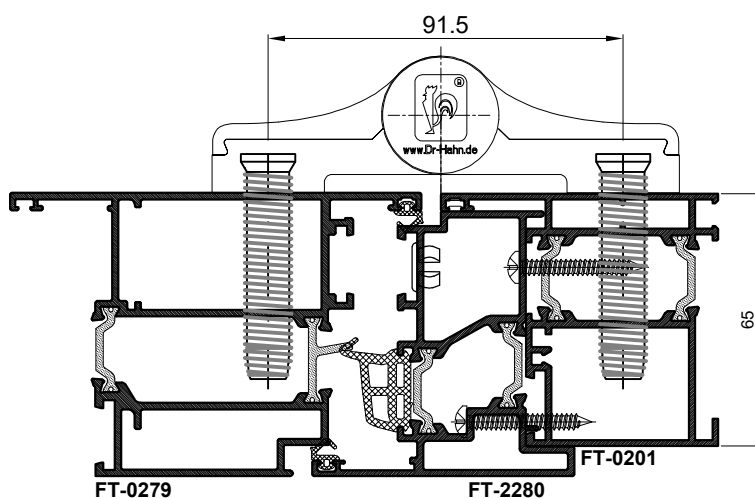

Napomena:
Obrada se vrši isključivo na obradnom centru ili pomoću namijenjenog šablona za obradu (112.020).
Remark:
Processing is carried out exclusively on the machining center or using the intended drilling jig for processing (112.020).



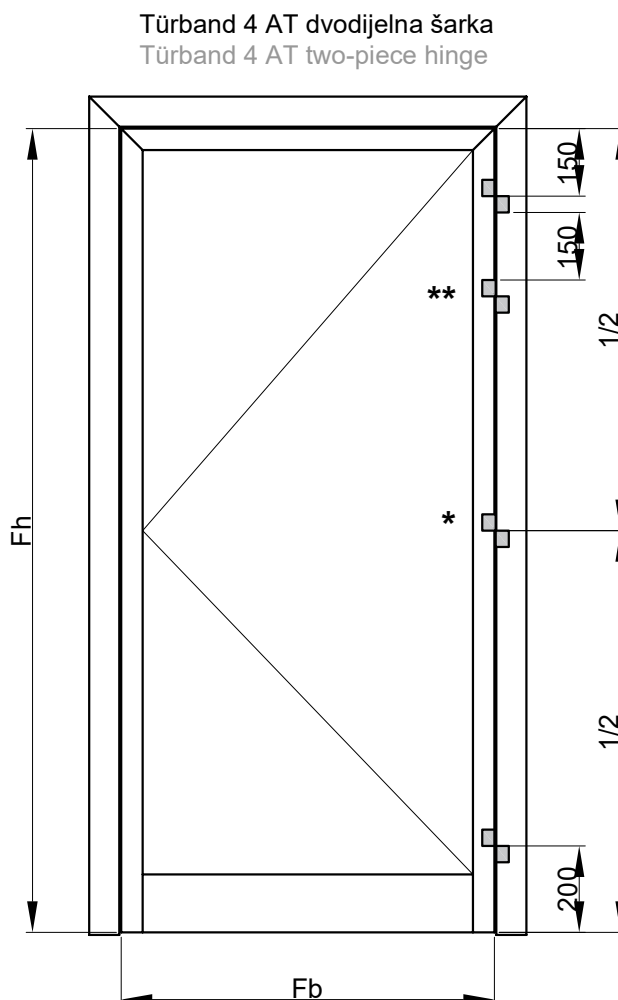PREPORUKE ZA UGRADNJU DR. HAHN TÜRBAND 4 AT ŠARKI
RECOMMENDATIONS FOR MONTAGE OF THE DR. HAHN TÜRBAND 4 AT HINGES

Napomena:

Ne podmazivati, čahure su napravljene od PVC-a koji ne zahtijeva održavanje!

Remark:

Bearing bushes made of maintenance-free PVC - do not lubricate!

Fh = Visina krila

Leaf height

Fb = Širina krila

Leaf width

* Dodatna šarka za bolje brtvljenje preporučuje se za visine krila iznad 2200 mm.

** Na vratima s ugrađenim zatvaračem kao i na vratima za javnu upotrebu potrebno je koristiti najmanje tri šarke.



* Additional door hinge for better sealing pressure is recommended for leaf height over 2200 mm.

** Doors fitted with door closers as well as doors for public use should use at least three hinges.


OBRADA PROFILA FT-0201 ZA SKRIVENU ŠARKU GIESSE 115.019 - OTVARANJE UNUTRA
PROCESSING OF THE PROFILE FT-0201 FOR THE CONCEALED HINGE GIESSE 115.019 -
INWARD OPENING

OBRADA JE ISTA I ZA PROFILE:
PROCESSING IS THE SAME FOR
PROFILES:


FT-0225, FT-0224, FT-0229,
FT-0249, FT-0214, FT-0231,
FT-0232, FT-0297

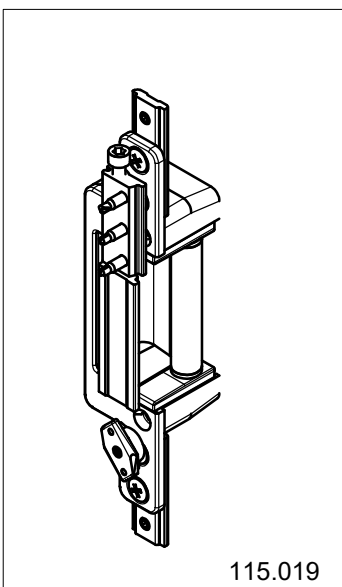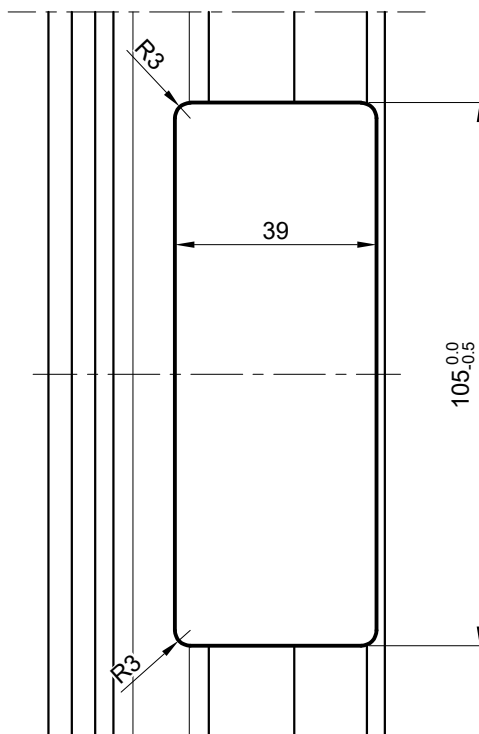

115.019

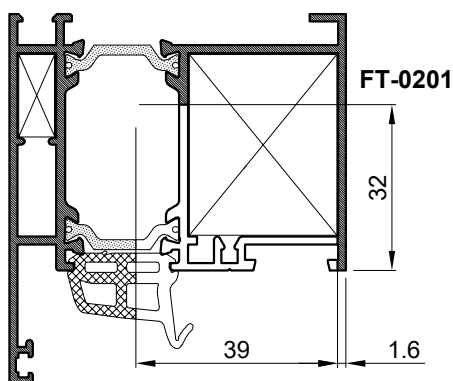

izrezati
cut off



Detaljne upute
Detailed instructions


NAPOMENA:

Skrivena šarka 115.019 se može koristiti samo u slučaju kad krilo i ram nisu u istoj ravni, odnosno kad su u preklopu.


REMARK:

Concealed hinges 115.019 can only be used when the leaf and frame are not in the same plane, i.e. when they overlap.

UPUTE ZA POZICIONIRANJE SKRIVENE ŠARKE GIESSE 115.019 - OTVARANJE UNUTRA INSTRUCTIONS FOR POSITIONING OF THE CONCEALED HINGE GIESSE 115.019 - INWARD OPENING

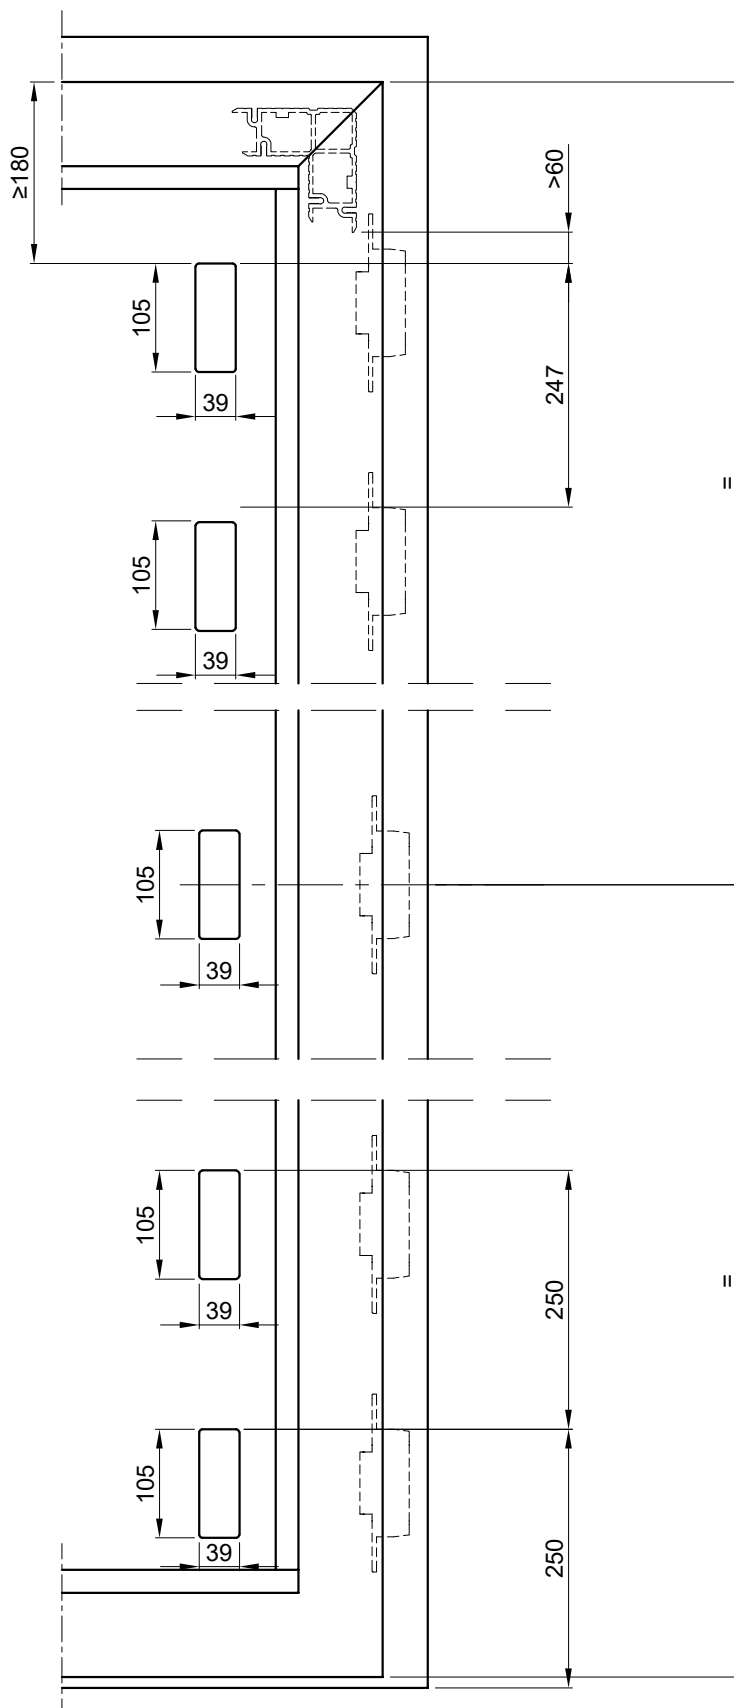

KUT OTVARANJA ZA GIESSE SKRIVENU ŠARKU 115.019
OPENING ANGLE FOR CONCEALED GIESSE HINGE 115.019

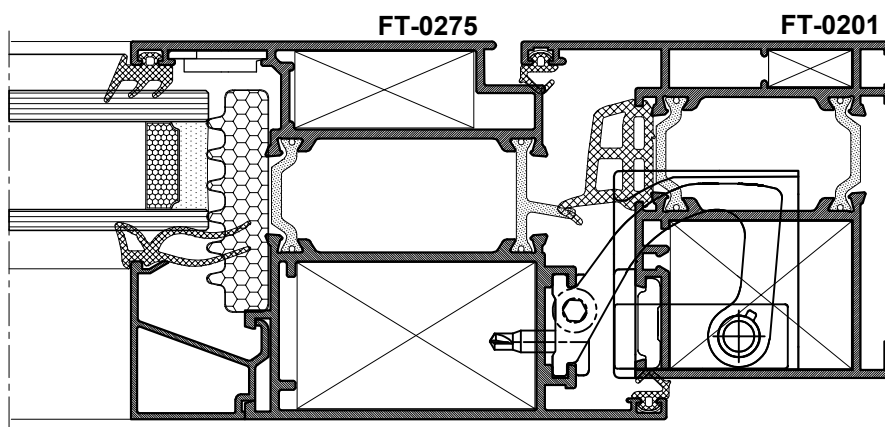


Maksimalni kut otvaranja
Max opening angle

Za vrata koja se otvaraju pod kutem većim od 90 ° preporučuje se koristiti graničnik otvaranja art.135.023

If the leaf can be opened over 90°, the use of an opening limiter arm is recommended art.135.023

102°

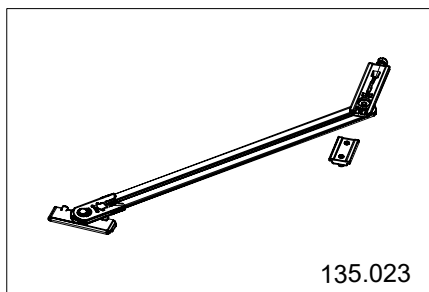

OTVARANJE OKO SREDIŠNJE OSE





Obrada profila rama FT-0201

- simetrična obrada okomica (otvaranje oko vodoravne ose)
- simetrična obrada vodoravnica (otvaranje oko okomite ose)

OPENING AROUND MIDDLE AXIS

Processing of frame profile FT-0201

- symmetrical processing of vertical crossbar (opening around horizontal axis)
- symmetrical processing of horizontal crossbar (opening around vertical axis)

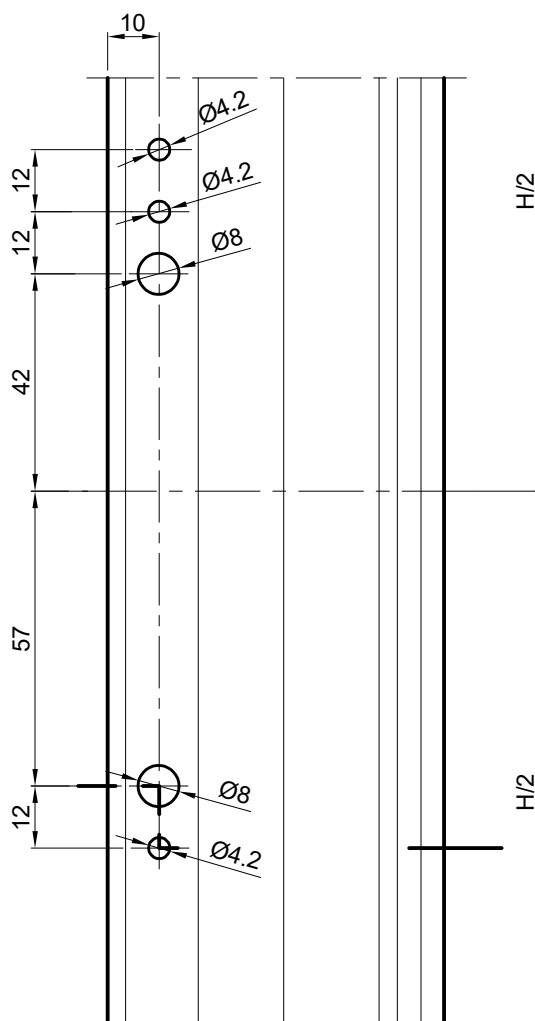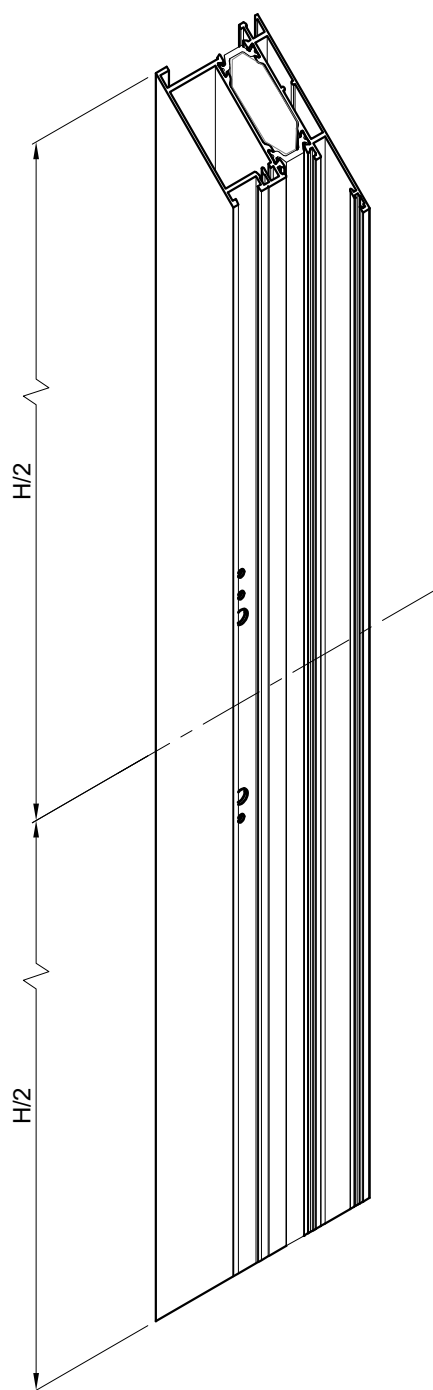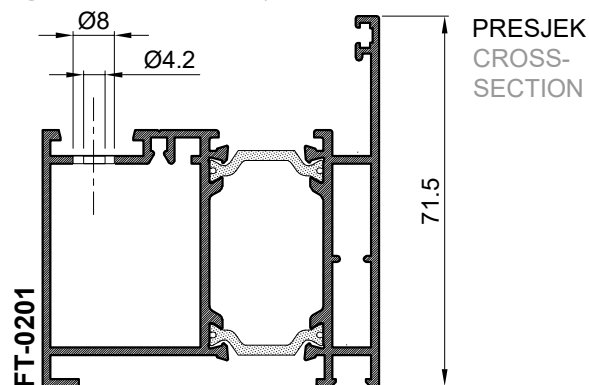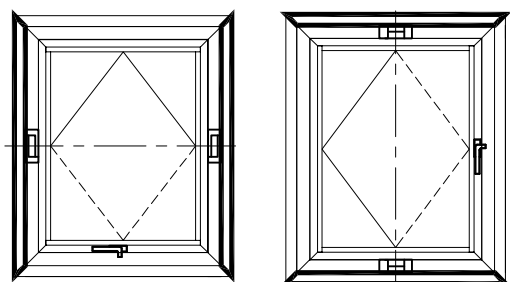

OTVARANJE OKO SREDIŠNJE OSE





Obrada profila krila FT-0210

- simetrična obrada okomica (otvaranje oko vodoravne ose)
- simetrična obrada vodoravnica (otvaranje oko okomite ose)

OPENING AROUND MIDDLE AXIS

Processing profile sash FT-0210

- symmetrical processing of vertical crossbar (opening around horizontal axis)
- symmetrical processing of horizontal crossbar (opening around vertical axis)

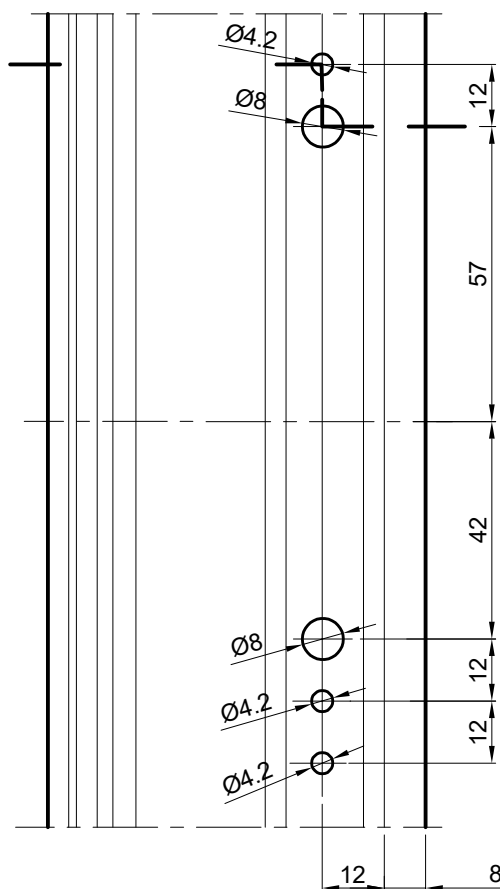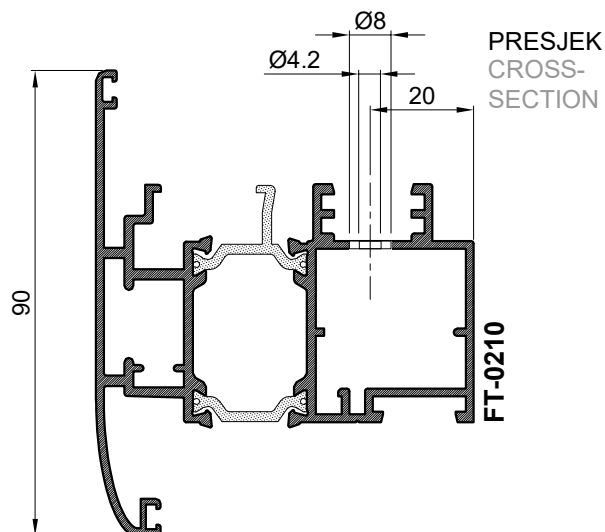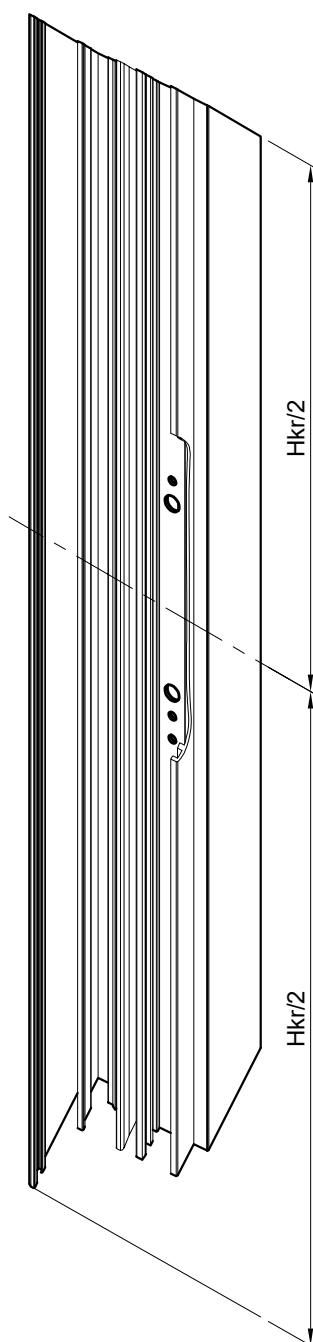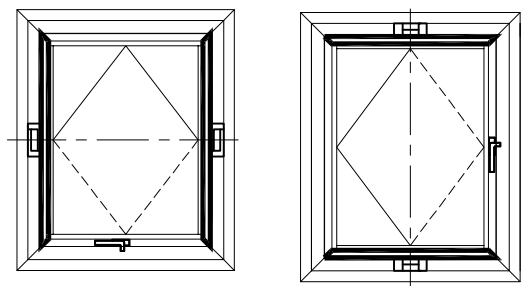

OTVARANJE OKO SREDIŠNJE OSE






Obrada profila FT-0213

- fiksira se za okvir krila prozora, gore lijevo (otvaranje oko vodoravne ose)
- fiksira se za okvir krila prozora, dolje lijevo (otvaranje oko okomite ose)

OPENING AROUND MIDDLE AXIS

Processing of profile FT-0213

- it is fixed for the sash frame of the window, top left
(opening around horizontal axis)
- it is fixed to the sash frame of the window, down left
(opening around vertical axis)

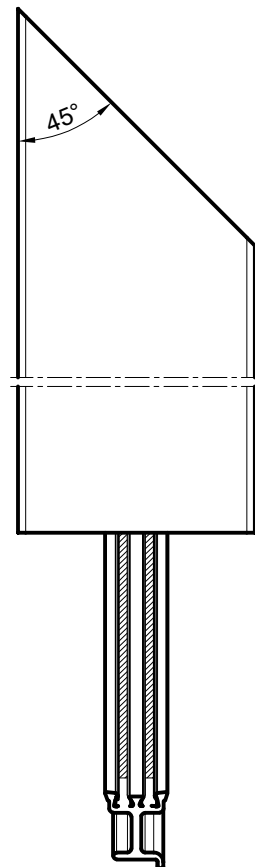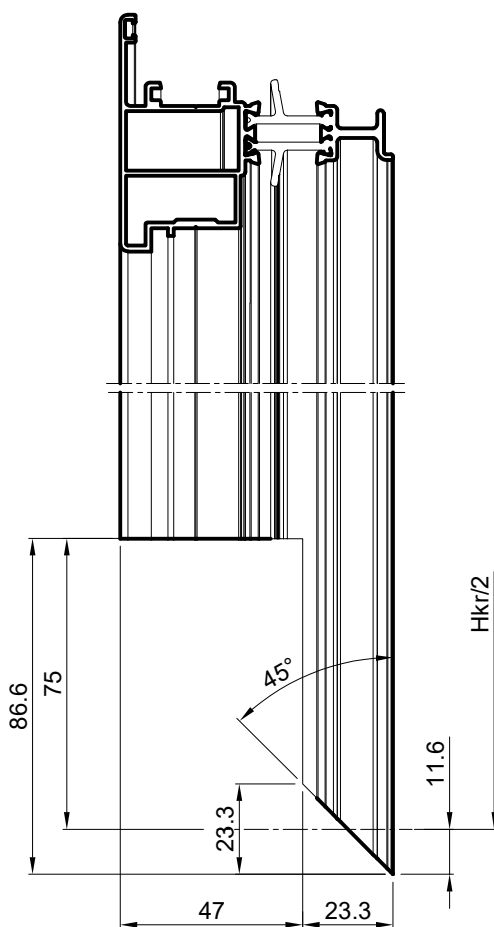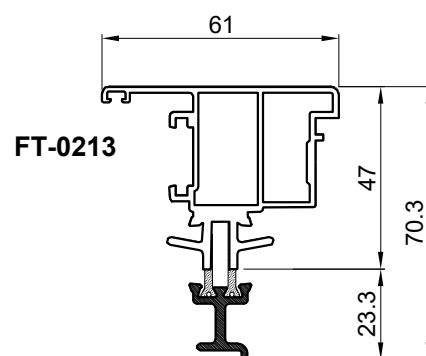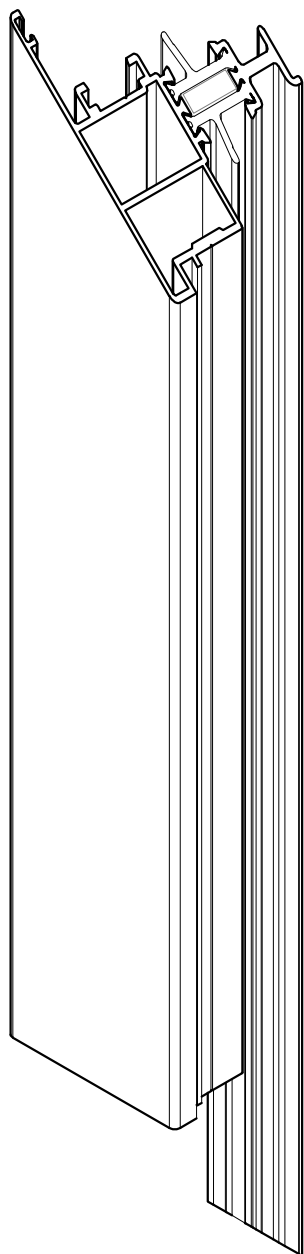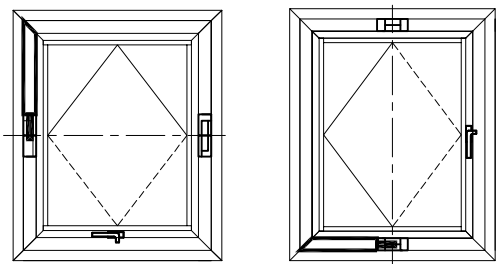

OTVARANJE OKO SREDIŠNJE OSE

Obrada profila FT-0213

-fiksira se za okvir rama prozora, dolje lijevo (otvaranje oko vodoravne ose)

-fiksira se za okvir rama prozora, dolje desno (otvaranje oko okomite ose)

OPENING AROUND MIDDLE AXIS



Processing of profile FT-0213

-it is fixed for the sash frame of the window, down left

(opening around horizontal axis)

-it is fixed to the sash frame of the window, down right

(opening around vertical axis)

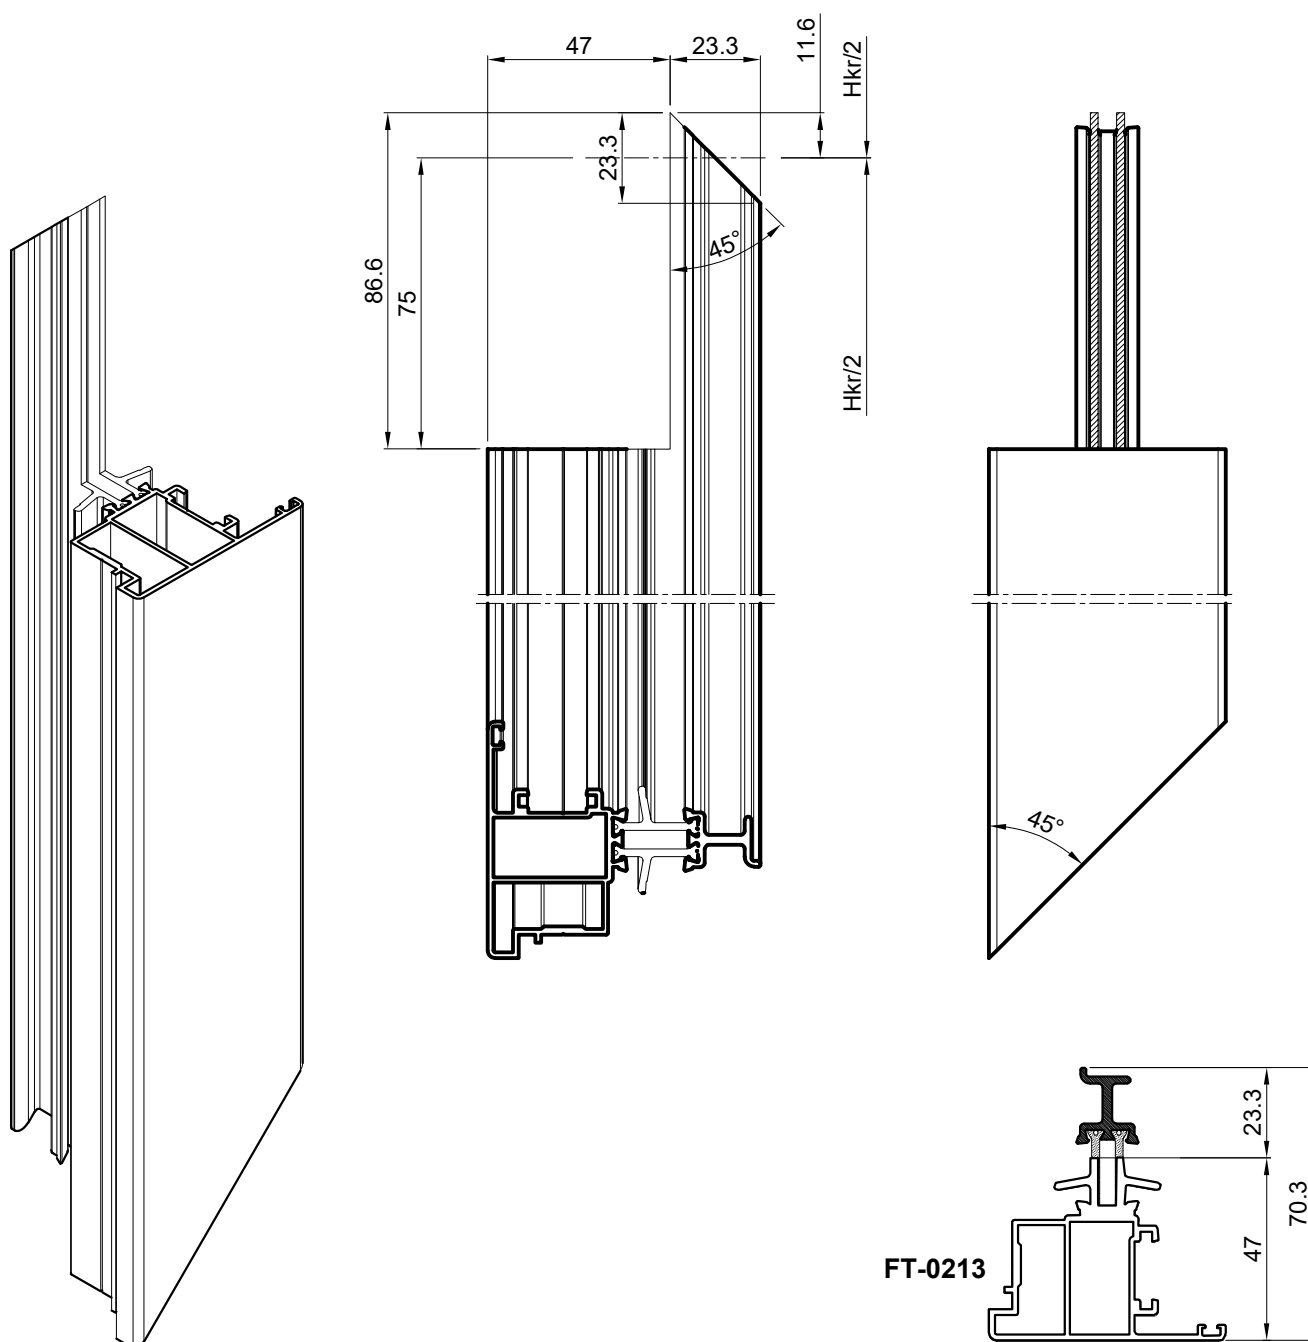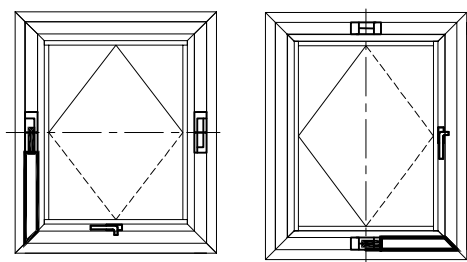

OTVARANJE OKO SREDIŠNJE OSE

Obrada profila FT-0213

-fiksira se za okvir rama prozora, gore desno (otvaranje oko vodoravne ose)

-fiksira se za okvir rama prozora, gore lijevo (otvaranje oko okomite ose)

OPENING AROUND MIDDLE AXIS






Processing of profile FT-0213

-it is fixed for the sash frame of the window, top right

(opening around horizontal axis)

-it is fixed to the sash frame of the window, top left

(opening around vertical axis)

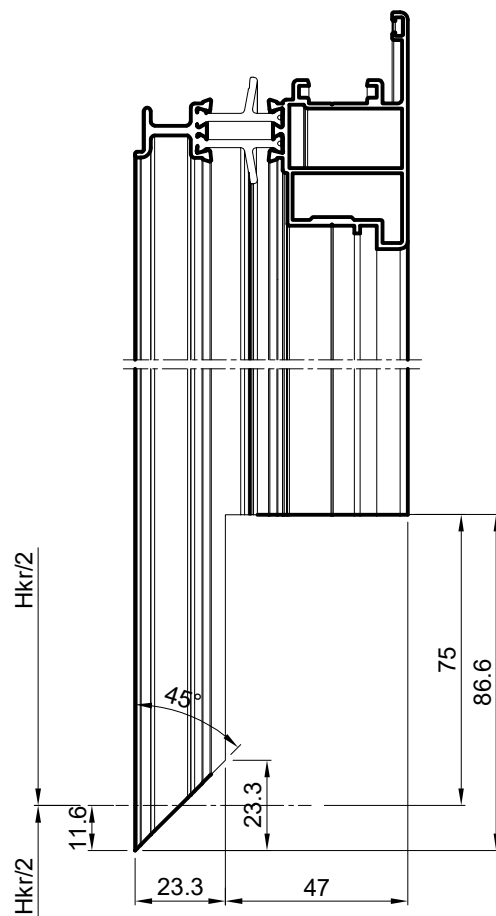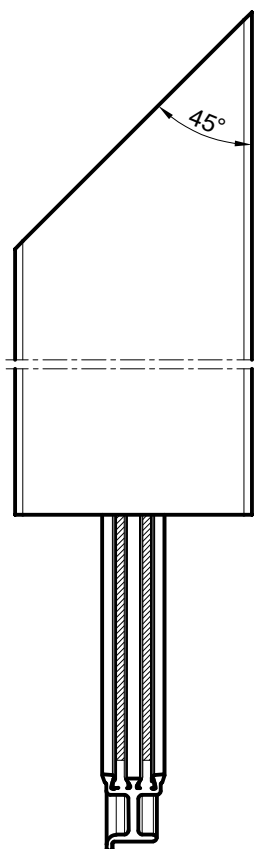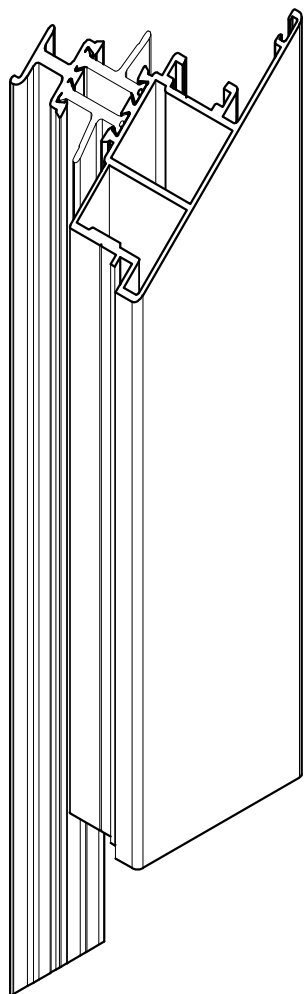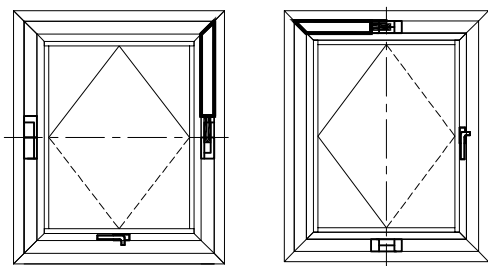

FT-0213

OTVARANJE OKO SREDIŠNJE OSE





Obrada profila FT-0213

- fiksira se za okvir rama prozora, dolje desno (otvaranje oko vodoravne ose)
- fiksira se za okvir rama prozora, gore desno (otvaranje oko okomite ose)


OPENING AROUND MIDDLE AXIS


Processing of profile FT-0213

- it is fixed for the sash frame of the window, down right (opening around horizontal axis)
- it is fixed to the sash frame of the window, top right (opening around vertical axis)

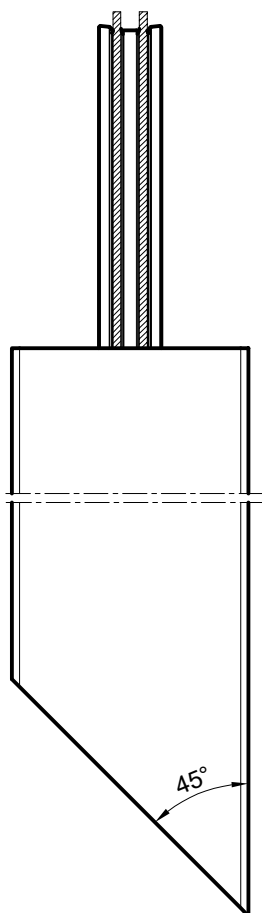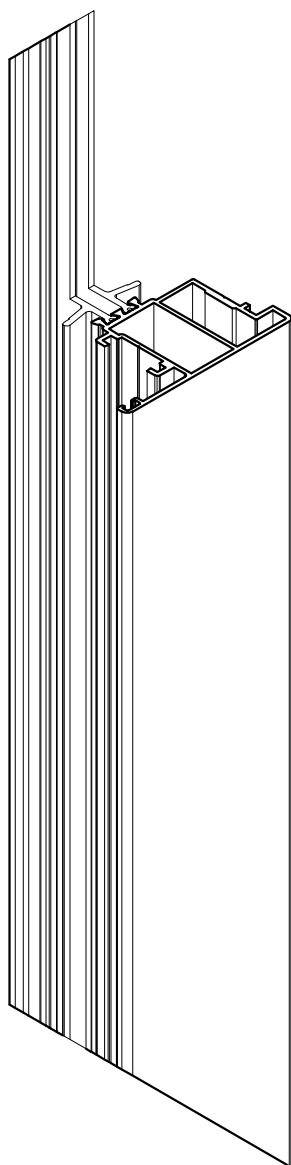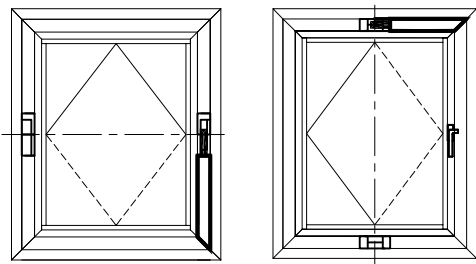

FT-0213

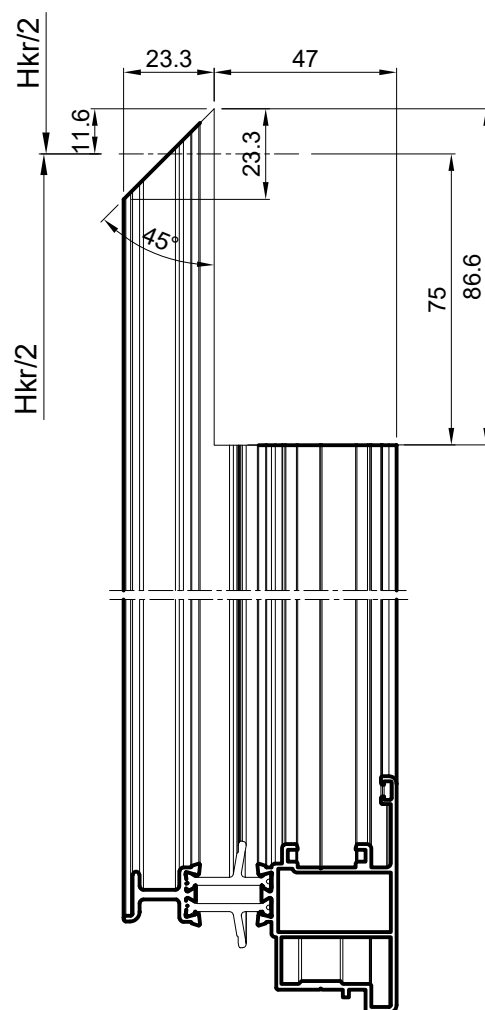

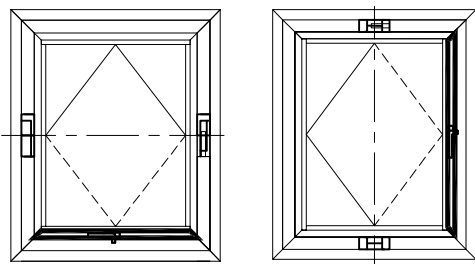

OTVARANJE OKO SREDIŠNJE OSE





Obrada profila krila FT-0210

-za ugradnju pogonskog mehanizma i ručke
u art.142.011 i 142.042


OPENING AROUND MIDDLE AXIS

Processing of sash profile FT-0210



-for installation of driving mechanism and handle
in art.142.011 and 142.042

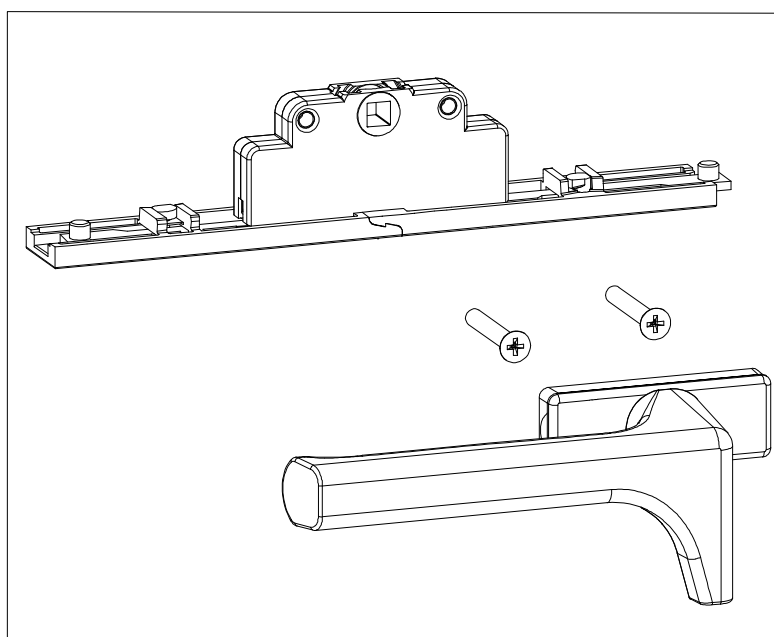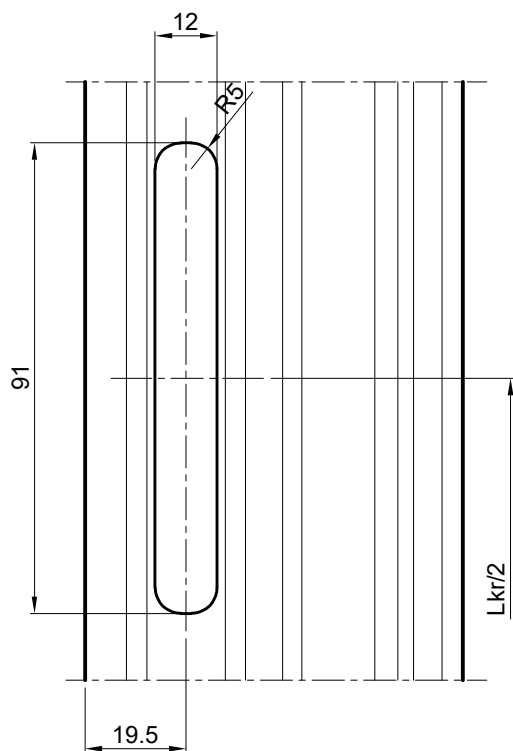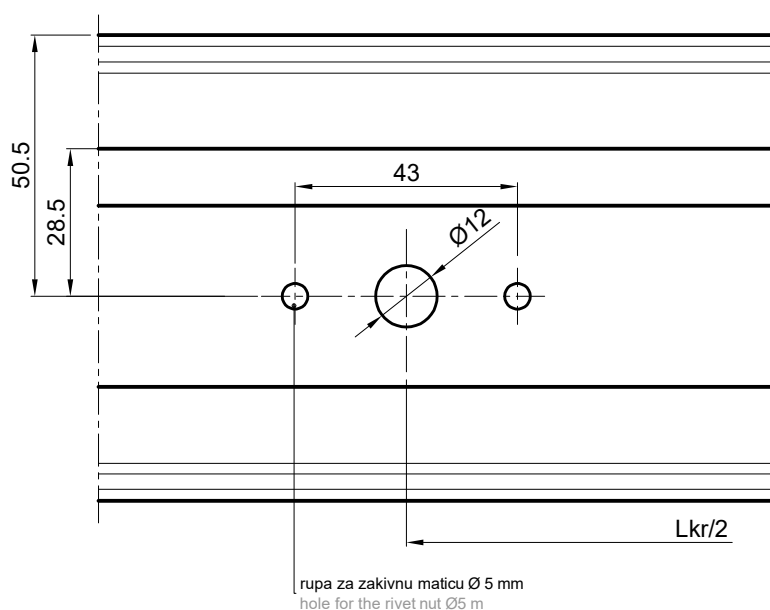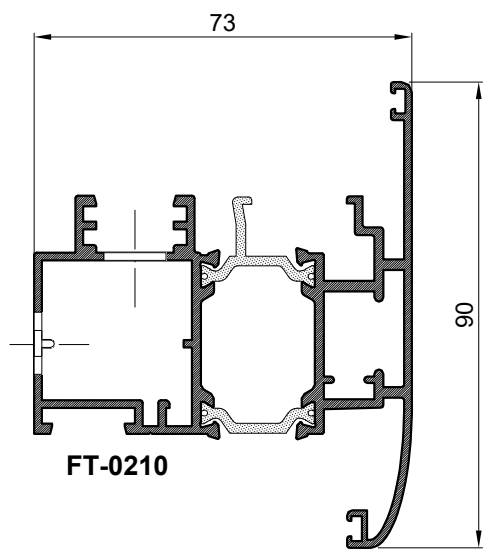


OTVARANJE OKO SREDIŠNJE OSE ODVOD KAPLJEVINA IZ PROZORA OPENING AROUND MIDDLE AXIS DRAINAGE FROM THE WINDOW

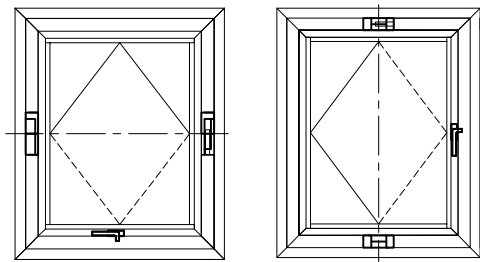


Obrada profila krila FT-0210
-za ugradnju monodrain cjevčice 360.009
-rupa Ø10, svakih 400 mm (dva po krilu), 100 mm od kraja
Processing of sash profile FT-0210
-for installation of monodrain tubular art.360.009
-hole Ø10, every 400 mm (two on sash), 100 mm from end

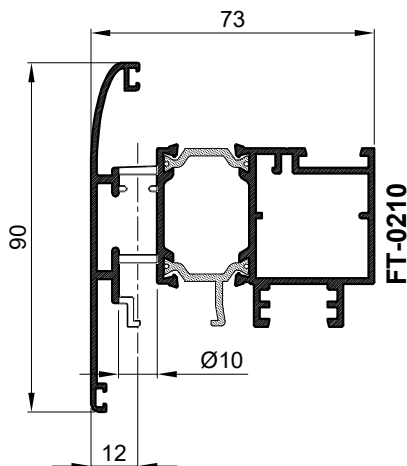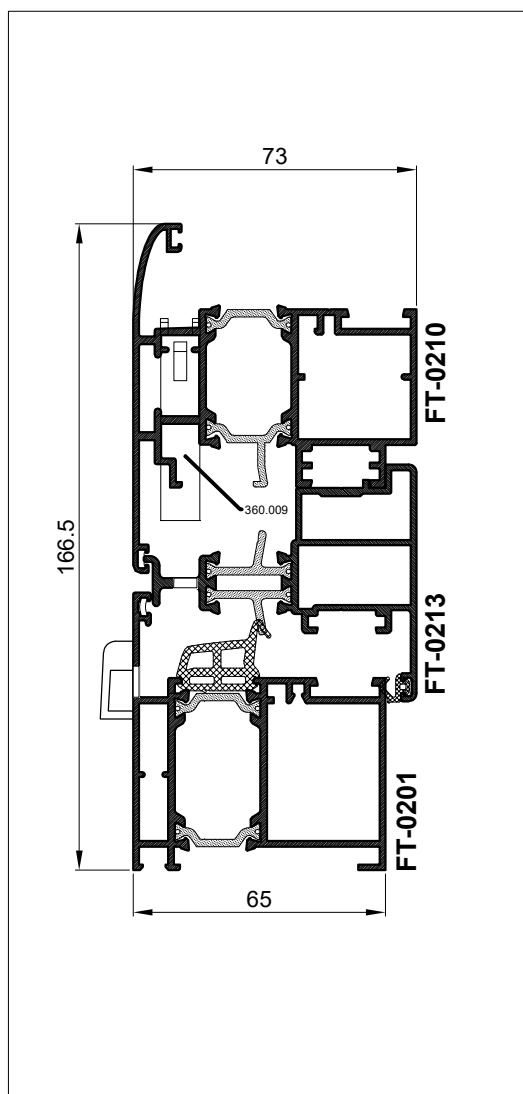


art.360.009




Obrada profila FT-0213
-obrada svakih 400 mm, 100 mm od kraja
Processing profile FT-0213
-punch every 400 mm, 100 mm from end




pogled
view




Obrada profila FT-0201
-obrada svakih 400 mm, 100 mm od kraja
-obrada (1) - prema katalogu
Processing profile FT-0201
-punch every 400 mm, 100 mm from end
-punch (1) - as per catalog

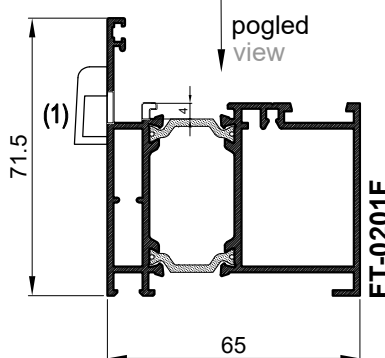






pogled
view

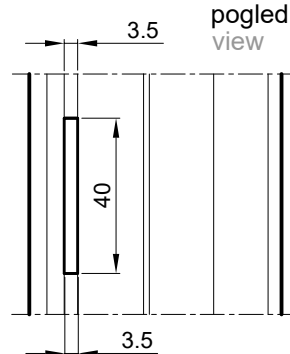

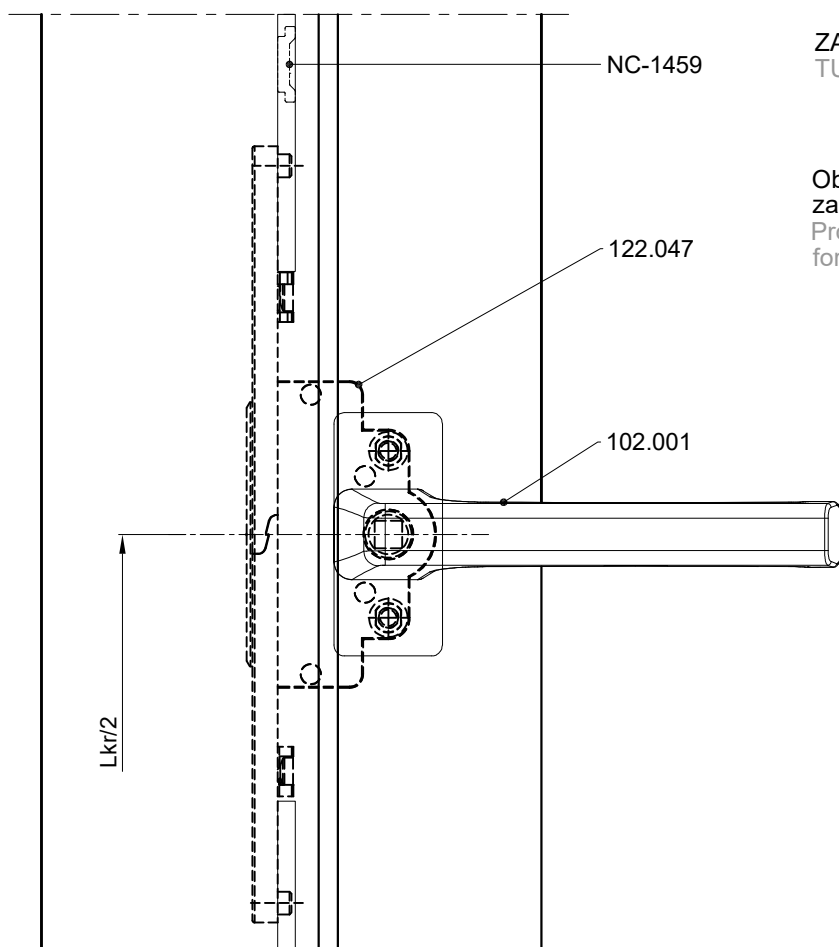


ZAOKRETNI PROZOR, OTVARANJE VANI
TURN WINDOW, OUTWARD OPENING

Obrada profila FT-0283
za ručku i pogonski mehanizam
Profile processing FT-0283
for handle and drive mechanism

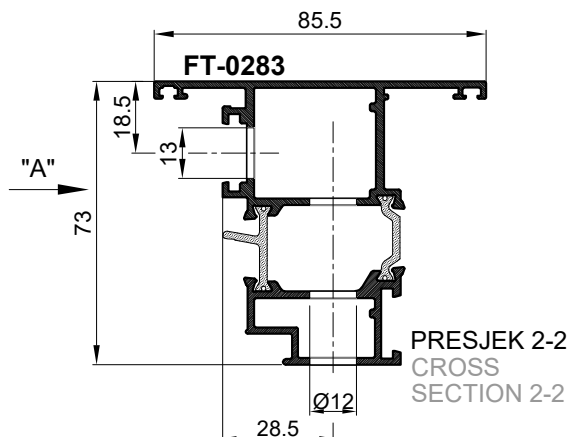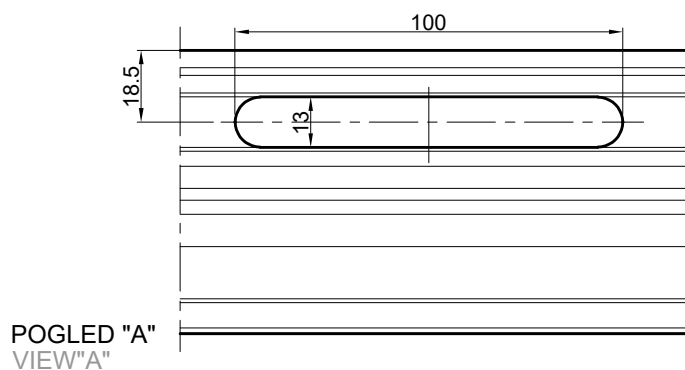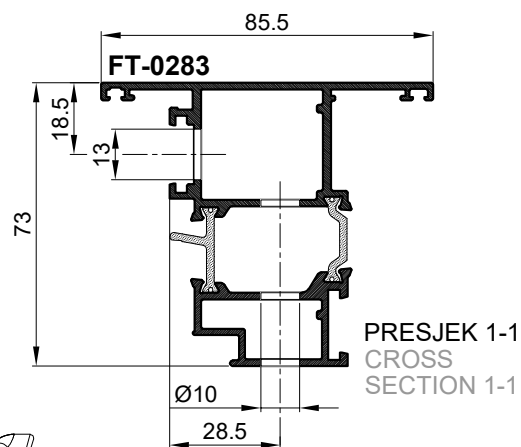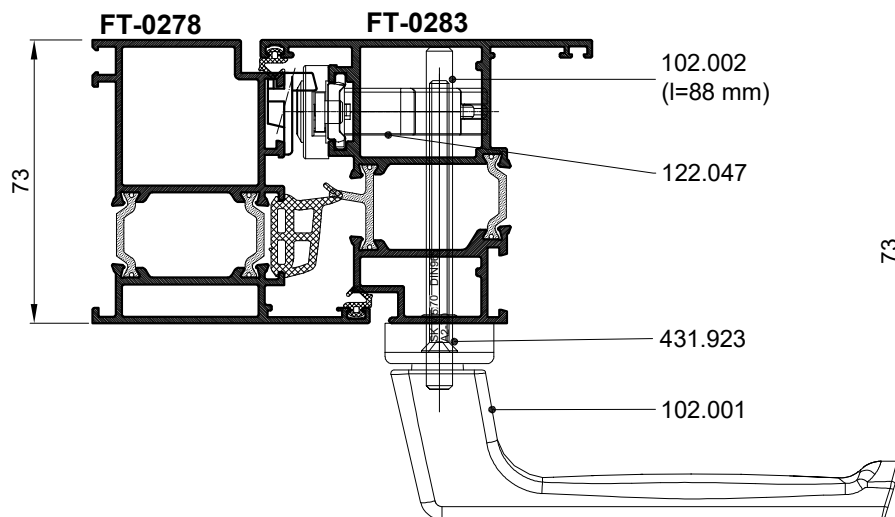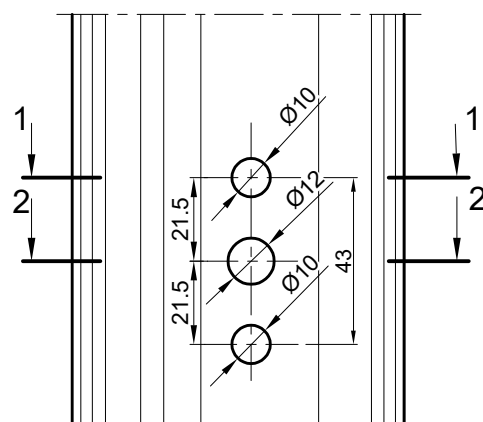

MONTAŽA FRANCUSKOG BALKONA, staklo 88.4 FRENCH BALCONY INSTALLATION, glass 88.4

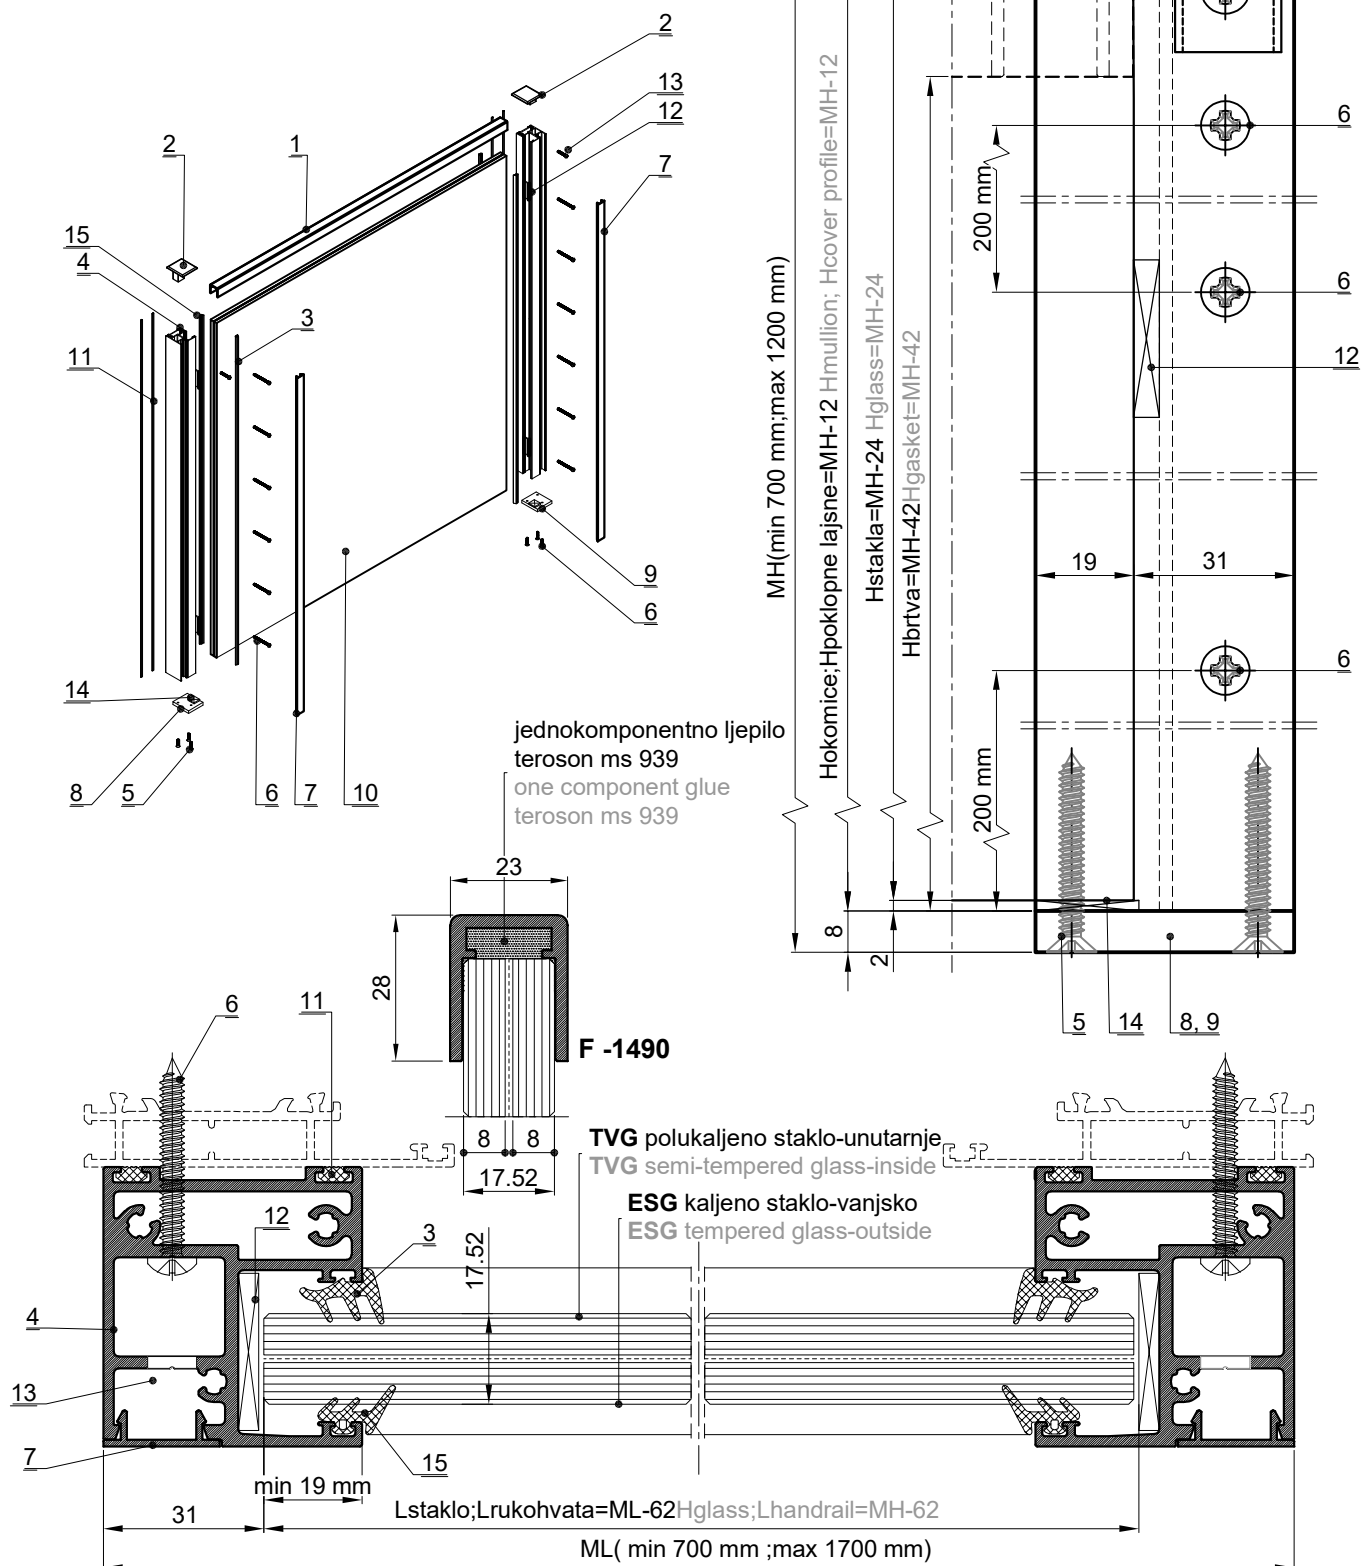


- 1 - profil rukohvata F-1490
- 1 - handrail profile F-1490
- 2 - PVC čep 373.054
- 2 - PVC cover cap 373.054
- 3 - brtva 318.003
- 3 - gasket 318.003
- 4 - profil okomice F-1569
- 4 - french balcony profile F-1569

- 5 - 433.134 (6 komada)
- 5 - 433.134 (6 pieces)
- 6 - 433.048 (svakih 200 mm)
- 6 - 433.048 (every 200 mm)
- 7 - poklopna lajsna F-0826
- 7 - cover profile F-0826
- 8 - nosiva pločica lijeva 391.148
- 8 - glass support left 391.148

- 9 - nosiva pločica desna 391.149
- 9 - glass support right 391.149
- 10 - staklo 88.4 Kaljeno lamistal
- 10 - glass 88.2 toughened laminated
- 11 - brtva 340.055
- 11 - gasket 340.055
- 12 - PVC distancer 100x30x4 mm*
- 12 - PVC packer 100x30x4 mm*

- 13 - 433.046 (za PVC čep)
- 13 - 433.046 (for PVC cover cap)
- 14 - PVC distancer 20x20x2 mm*
- 14 - PVC packer 20x20x2 mm*
- 15 - brtva 328.002
- 15 - gasket 328.002
- * - ne prodaje FEAL
- * - not sold by FEAL

MONTAŽA FRANCUSKOG BALKONA, staklo 1010.4 FRENCH BALCONY INSTALLATION, glass 1010.4

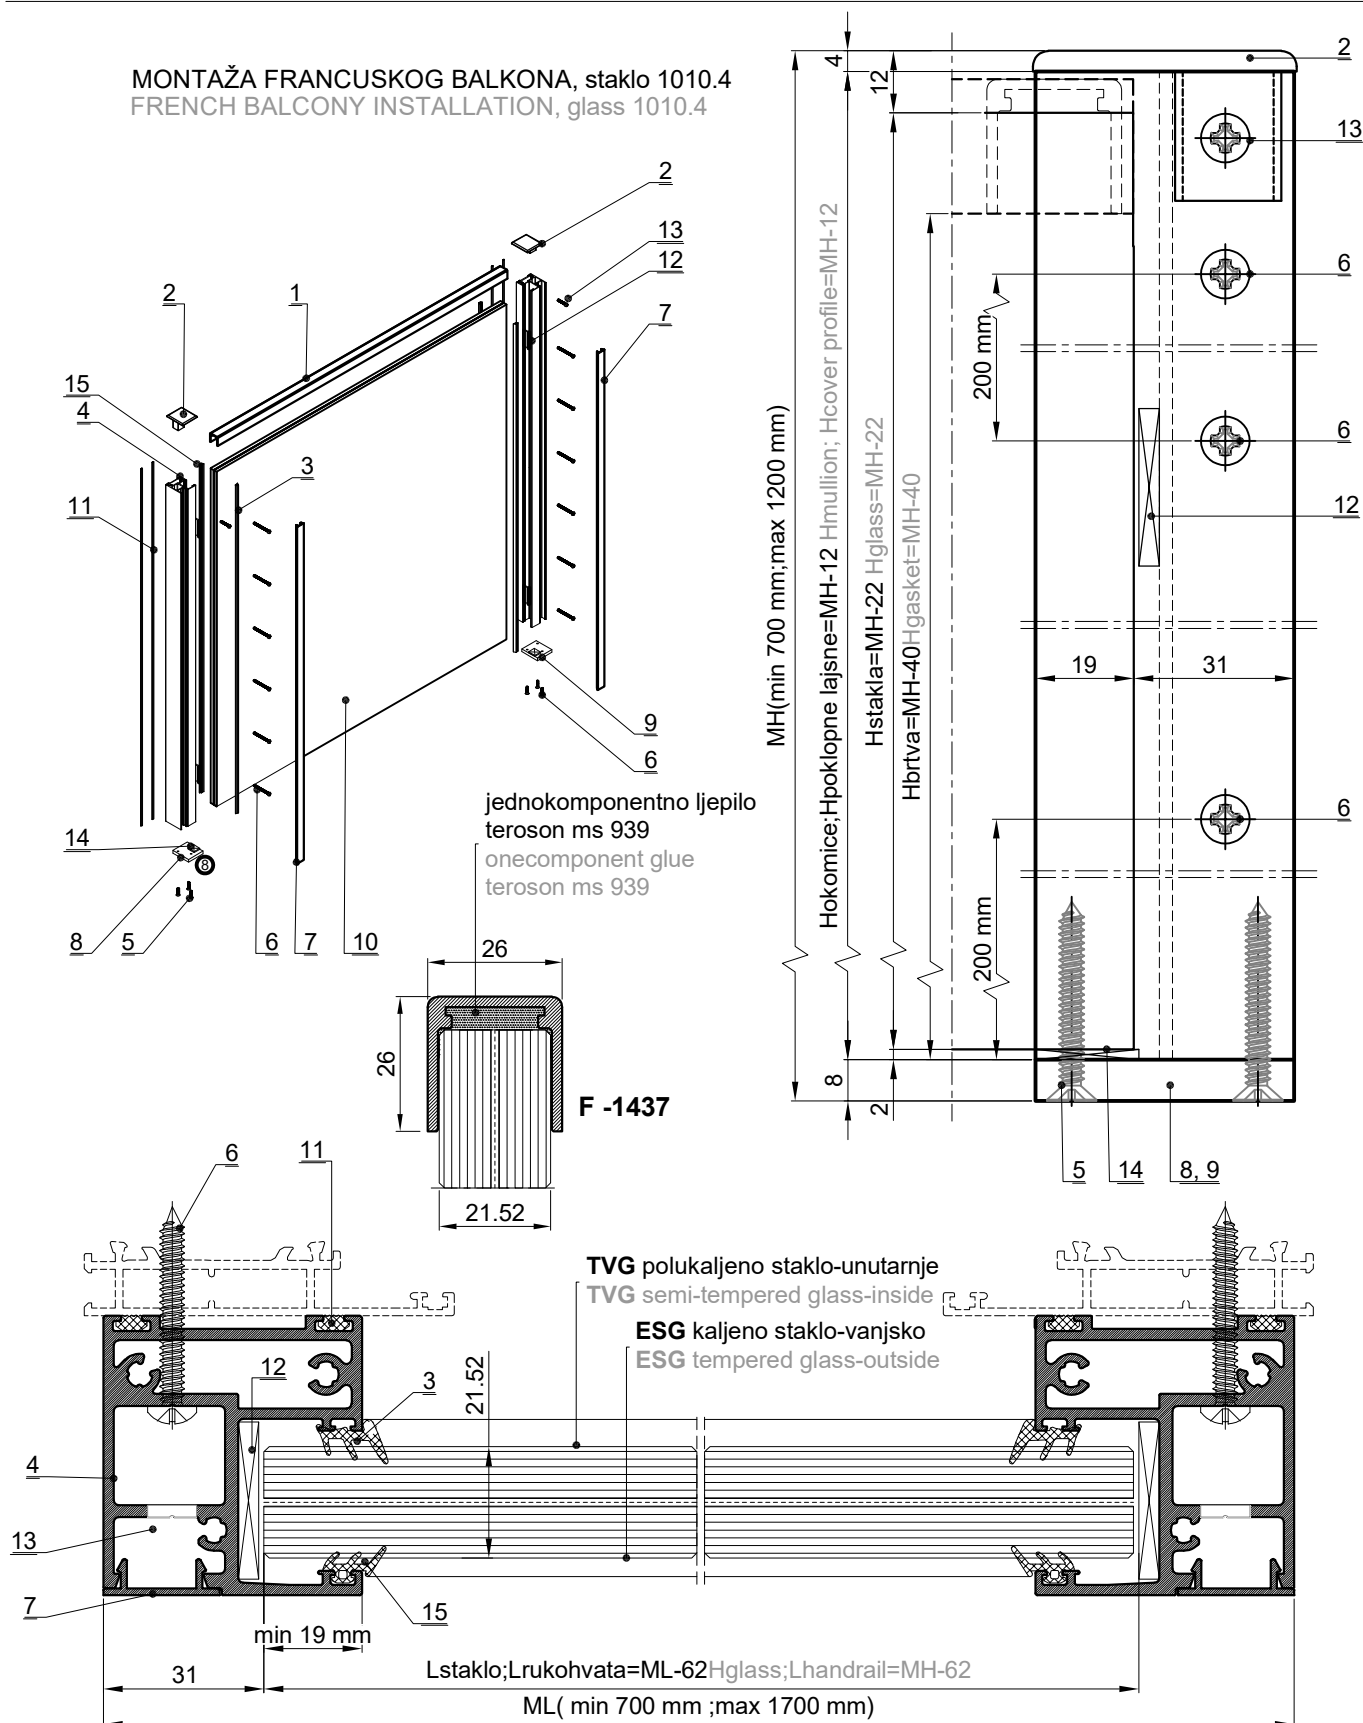



- 1 - profil rukohvata F-1490
- 1 - handrail profile F-1490
- 2 - PVC čep 373.054
- 2 - PVC cover cap 373.054
- 3 - brtva 318.015
- 3 - gasket 318.015
- 4 - profil okomice F-1569
- 4 - french balcony profile F-1569

- 5 - 433.134 (6 komada)
- 5 - 433.134 (6 pieces)
- 6 - 433.048 (svakih 200 mm)
- 6 - 433.048 (every 200 mm)
- 7 - poklopna lajsna F-0826
- 7 - cover profile F-0826
- 8 - nosiva pločica lijeva 391.148
- 8 - glass support left 391.148


- 9 - nosiva pločica desna 391.149
- 9 - glass support right 391.149
- 10 - staklo 1010.4 Kaljeno lamistal
- 10 - glass 88.2 toughened laminated
- 11 - brtva 340.055
- 11 - gasket 340.055
- 12 - PVC distancer 100x30x4 mm*
- 12 - PVC packer 100x30x5 mm*

- 13 - 433.046 (za PVC čep)
- 13 - 433.046 (for PVC cover cap)
- 14 - PVC distancer 20x20x2 mm*
- 14 - PVC packer 20x20x2 mm*
- 15 - brtva 328.007
- 15 - gasket 328.007


* - ne prodaje FEAL
* - not sold by FEAL

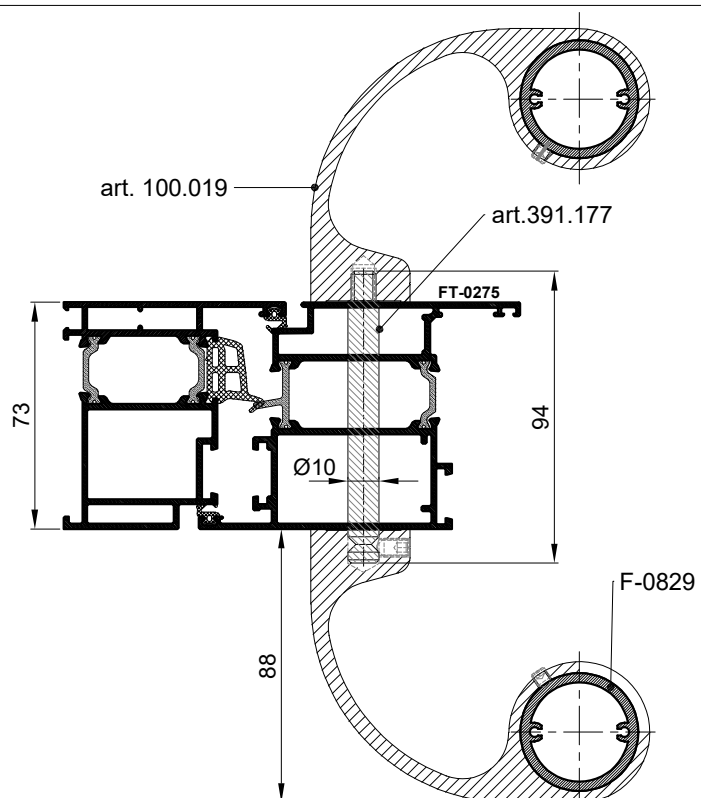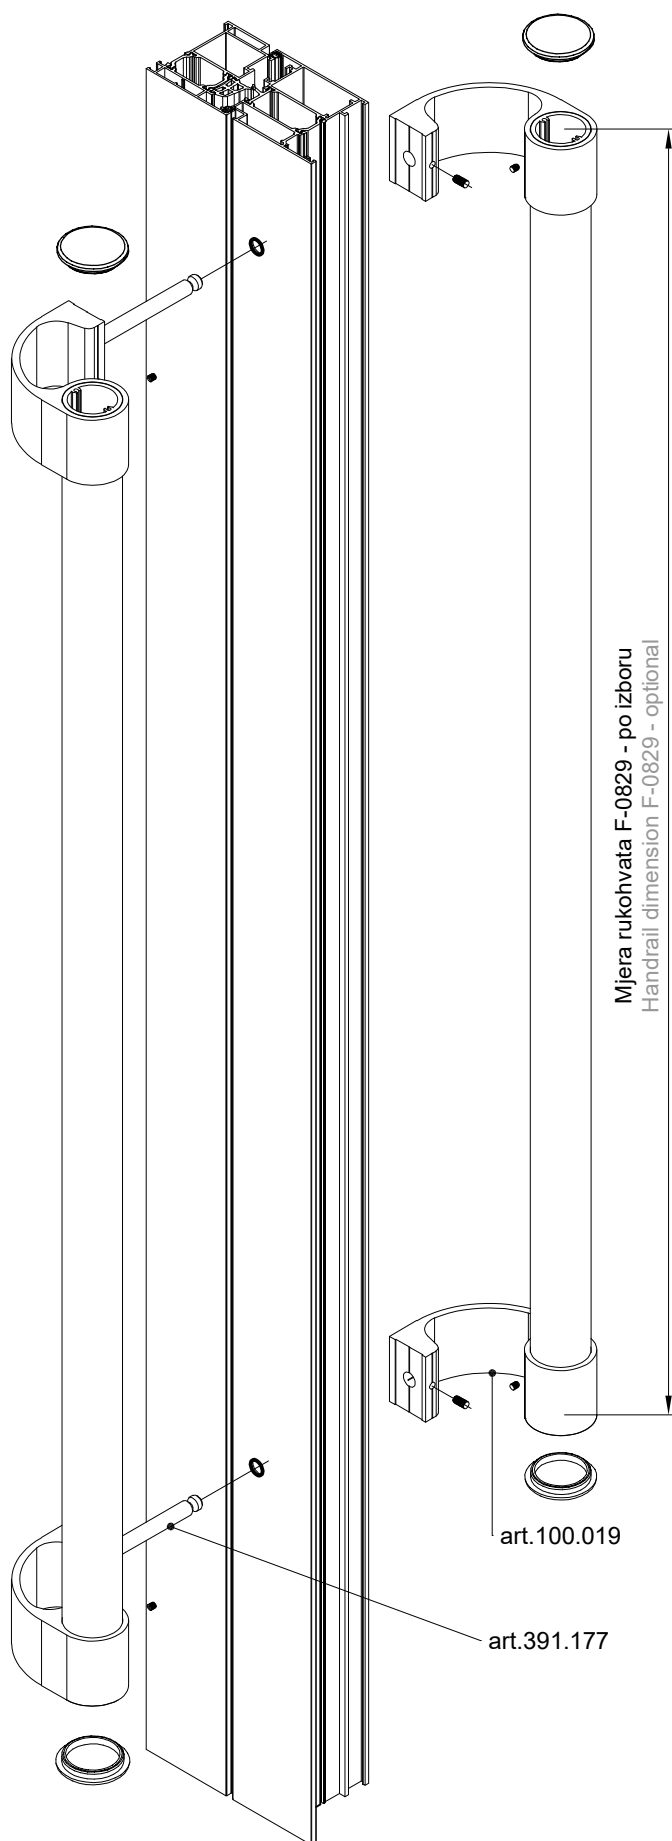


OBRADA PROFILA KRILA SASH PROFILE PROCESSING

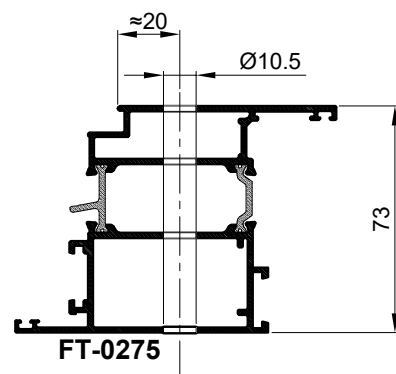

art. 391.177















art. 100.019

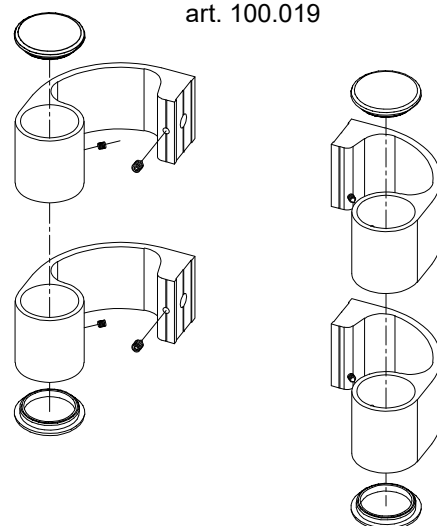










PRIKAZ KUTNIKA U PROFILIMA DISPLAY OF CORNER BRACKETS IN PROFILES

FT-0287			⑤	730.008	FT-0224		①	730.009
				710.450				710.059
				710.458				710.072
				731.001				710.454
				710.503				710.459
				730.002				730.002
FT-0298			⑤	730.008	FT-0229		①	730.009
				710.450				710.059
				710.458				710.072
				731.001				710.454
				710.503				710.459
				730.002				730.002
FT-0201			①	730.009	FT-0249		①	730.009
				710.059				710.059
				710.072				710.072
				710.452				710.454
				730.002				710.459
				730.002				730.002
FT-0274			①	730.009	FT-0233		⑤	730.008
				710.059				710.450
				710.072				710.458
				710.452				731.001
				730.002				710.452
				730.002				730.002
FT-0214			①	730.009	FT-0234		⑤	730.008
				710.059				710.450
				710.072				710.458
				710.452				731.001
				730.002				710.454
				730.002				710.459
FT-0225			①	730.009	FT-0231		①	730.009
				710.059				710.059
				710.072				710.072
				710.452				710.452
				730.002				730.002
				730.001				730.002







PRIKAZ KUTNIKA U PROFILIMA DISPLAY OF CORNER BRACKETS IN PROFILES

FT-0232			FT-0204	730.009	FT-0204	730.009
				710.059		710.059
				710.072		710.072
				710.452		710.453
				730.002		730.005
				730.001		730.001
FT-0261			FT-0230	710.469	FT-0230	730.009
				710.452		710.059
				730.002		710.072
						710.453
FT-0293			FT-0218	710.436	FT-0218	710.059
				725.104		710.072
				730.001		710.452
						730.005
FT-0203			FT-0247	730.008	FT-0247	710.059
				710.450		710.072
				710.458		710.452
				731.001		730.005
				710.443		730.001
				730.005		730.001
FT-0221			FT-0275	730.008	FT-0275	710.062
				710.450		710.133
				710.458		710.172
				731.001		731.010
				710.443		730.001
				730.005		730.001
FT-0295			FT-0291	730.008	FT-0291	710.062
				710.450		710.133
				710.458		710.425
				731.001		730.001
				710.443		
				730.001		


PRIKAZ KUTNIKA U PROFILIMA DISPLAY OF CORNER BRACKETS IN PROFILES

FT-0278		21	710.214	FT-0283		12	710.215
		5	710.189			13	710.216
		6	731.010			6	731.010
		9	730.001			9	730.001
FT-0220		1	710.059	FT-0210		5	730.008
			710.072				710.450
		4	710.454			10	710.458
			710.459			7	710.453
		9	730.001			9	730.005
FT-0290		18	725.705	FT-0219		13	710.059
		19	725.711				710.099
			725.712			4	710.454
		6	731.010				710.459
						7	730.005
FT-0202		1	710.059			9	730.001
			710.072				
		4	710.454				
			710.459				
FT-0215		1	710.059				
			710.072				
		4	710.454				
			710.459				
FT-0279		15	710.062				
			710.133				
		11	710.172				
		6	731.010				
		9	730.001				



PRIKAZ KUTNIKA U PROFILIMA DISPLAY OF CORNER BRACKETS IN PROFILES

FT-0236		12	710.461		
		8	710.443		
		7	730.005		
		9	730.001		
FT-0239		20	710.461		
		8	710.443		
		7	730.005		
		9	730.001		
FT-0296		20	710.461		
		8	710.443		
		9	730.001		
		6	731.010		
FT-0244		13	710.059		
			710.099		
		10	710.453		
		7	730.005		
		9	730.001		
FT-0246		13	710.059		
			710.099		
		10	710.453		
		7	730.005		
		9	730.001		
FT-1610		13	710.059		
			710.099		
		10	710.453		
		9	730.001		


SPAJANJE PROFILA FT-0274 KUTNIM SPOJNICAMA 730.009, 710.452 PROFILE CONNECTION FT-0274 WITH CORNER BRACKETS 730.009, 710.452

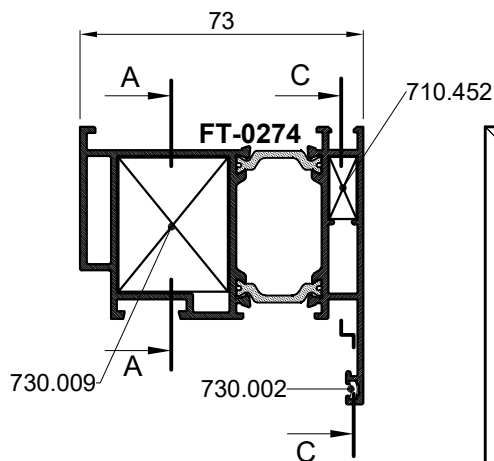

PRESJEK B-B
CROSS-SECTION B-B

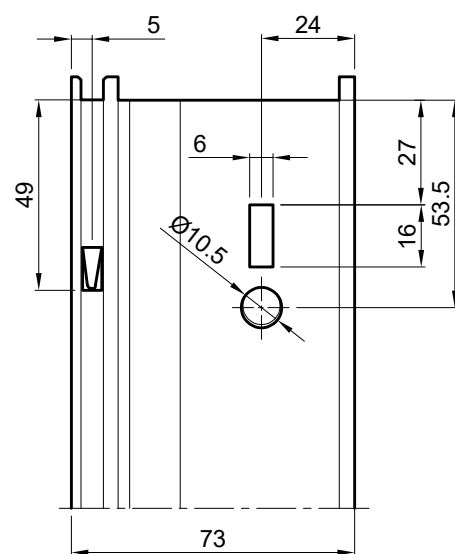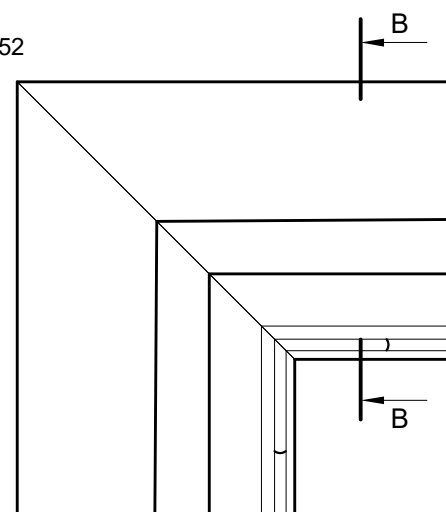


Spajanje kutnom spojnicom 730.009 s
predobradom štancanja -(štanca S1)
Connection with corner bracket 730.009
with punching preprocessing -(punch S1)

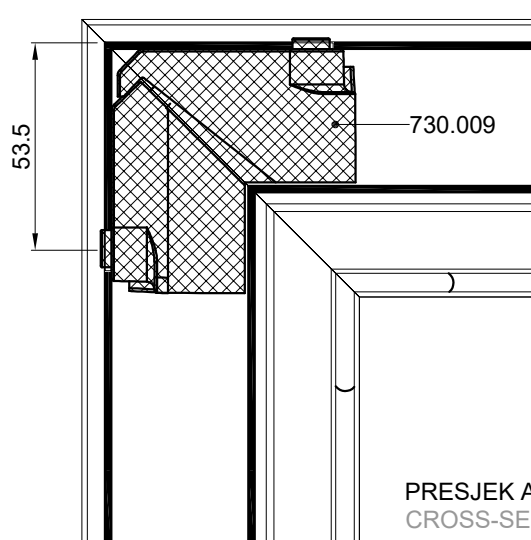


PRESJEK A-A
CROSS-SECTION A-A


Spajanje kutnom spojnicom
710.452 uprešavanjem stijenke
profila prema kutnoj spojnici
Corn. brac. connection 710.452
aluminium profile corner
crimping

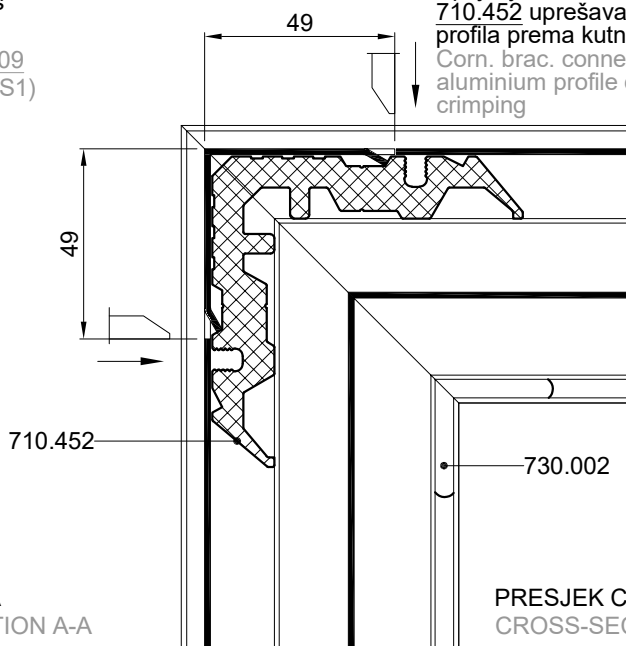


PRESJEK C-C
CROSS-SECTION C-C

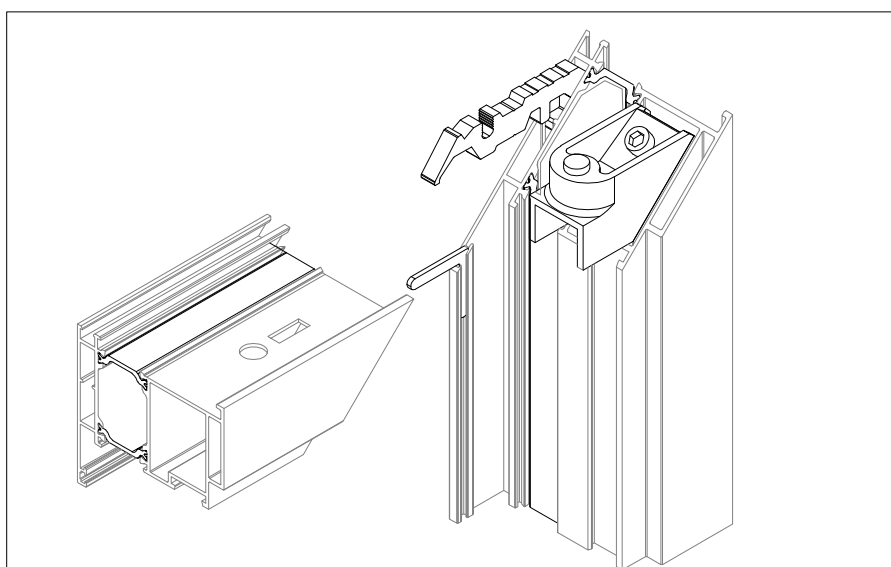



SPAJANJE PROFILA **FT-0274** KUTNIM SPOJNICAMA 710.072, 710.452
CONNECTION OF PROFILE **FT-0274** WITH CORNER BRACKETS 710.072, 710.452

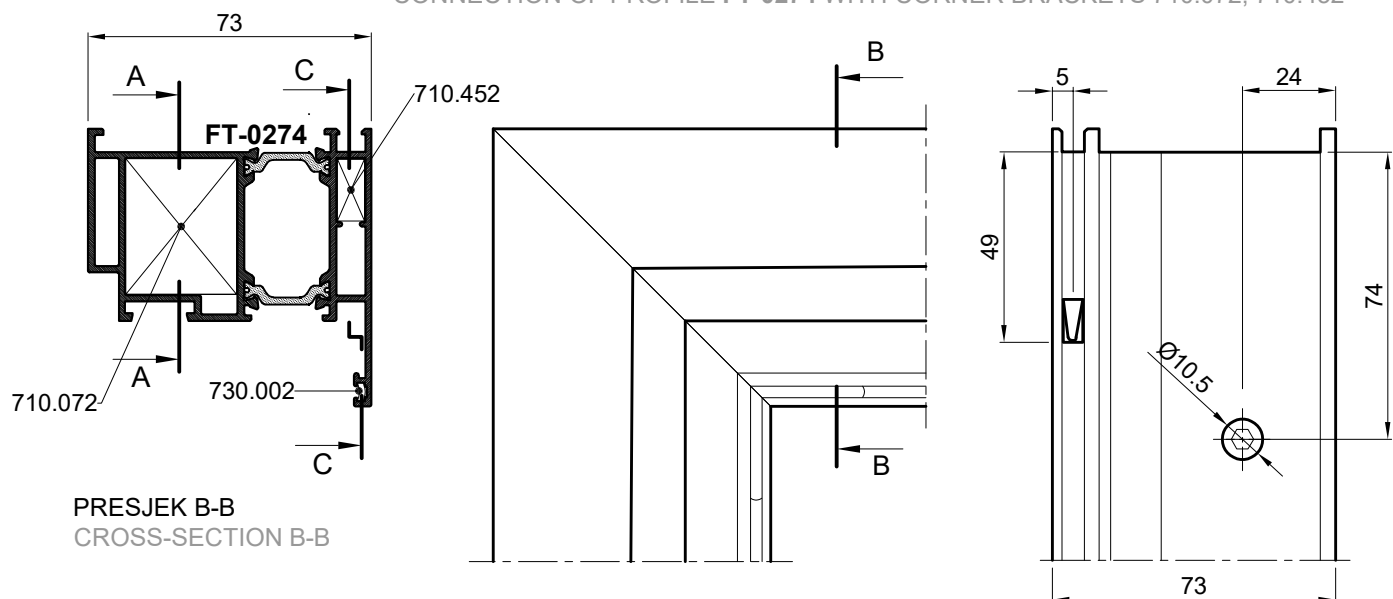


Spajanje kutnom spojnicom 710.072
vijcima M8x13 -tip Feal -(štanca S1)
Corner bracket connection 710.072
screws M8x13 -type Feal -(punch S1)

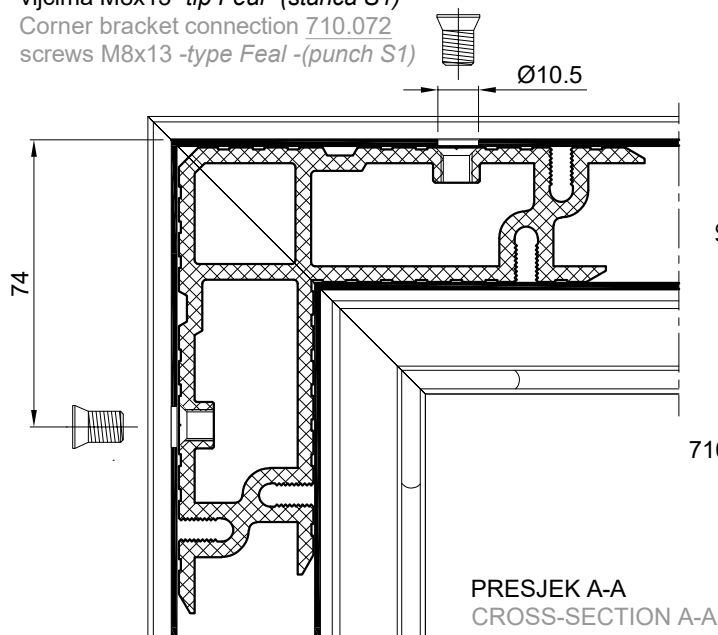



Spajanje kutnom spojnicom
710.452 uprešavanjem stijenke
profila prema kutnoj spojnici
Corn. brac. connection 710.452
aluminium profile corner
crimping

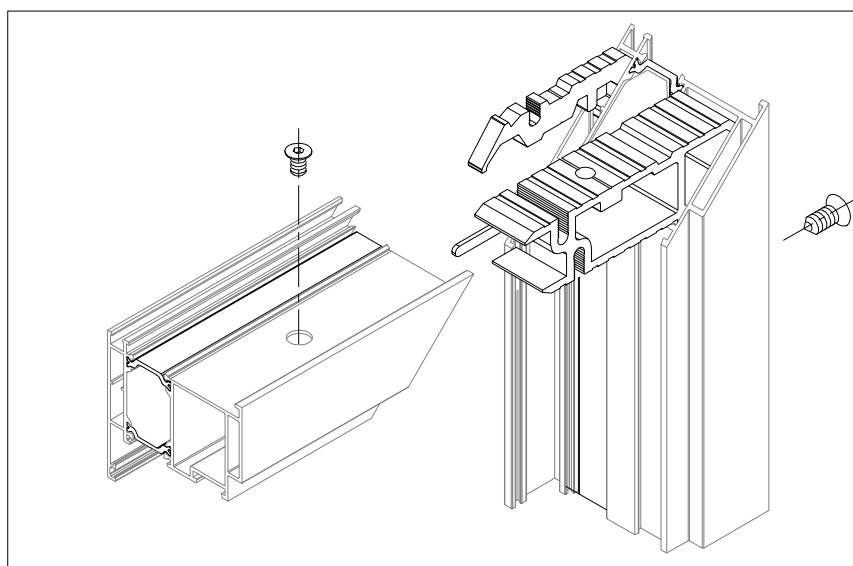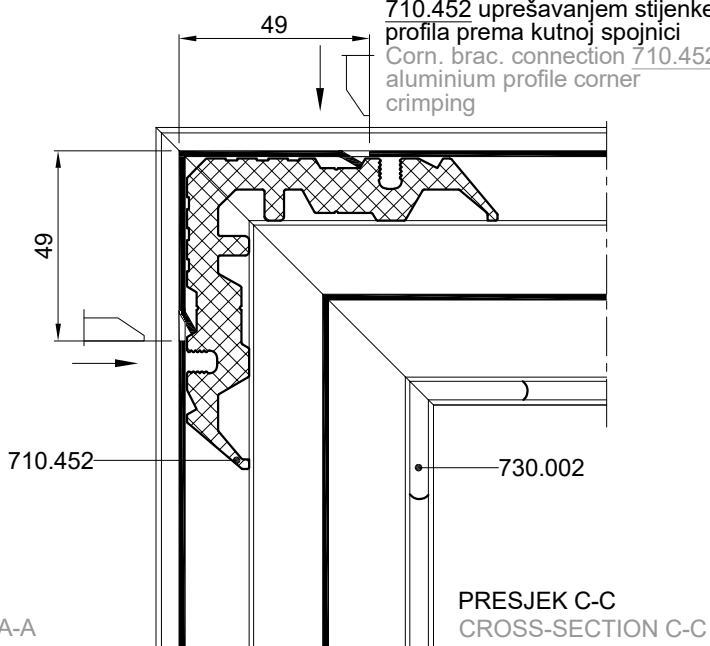


SPAJANJE PROFILA FT-0274 KUTNIM SPOJNICAMA 710.059, 710.452 CONNECTION OF PROFILE FT-0274 WITH CORNER BRACKETS 710.059, 710.452

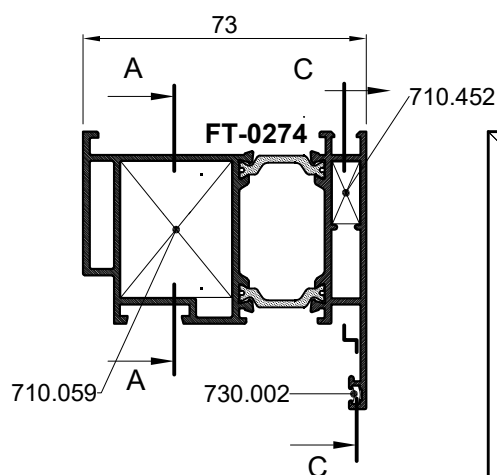

PRESJEK B-B
CROSS-SECTION B-B

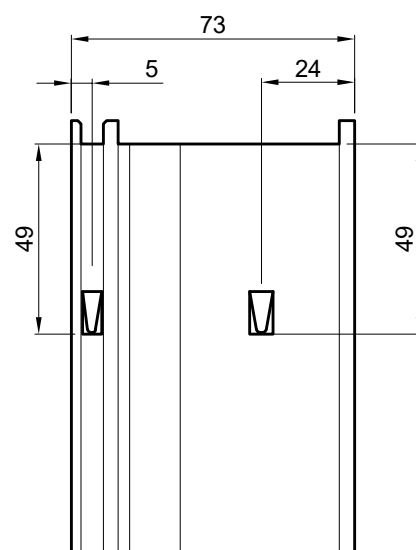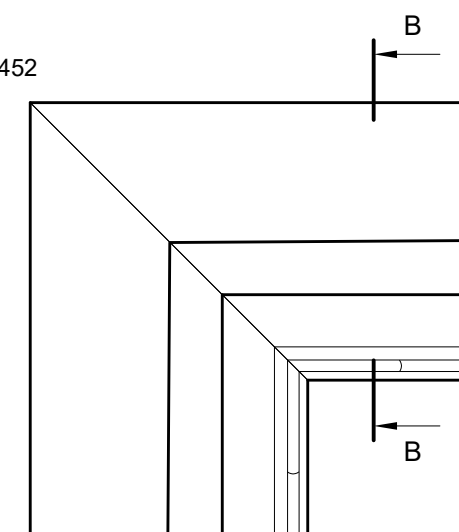


Spajanje kutnom spojnicom 710.059
uprešavanjem stijenke profila
prema kutnoj spojnici
Corn. brac. connection 710.059
aluminium profile corner crimping

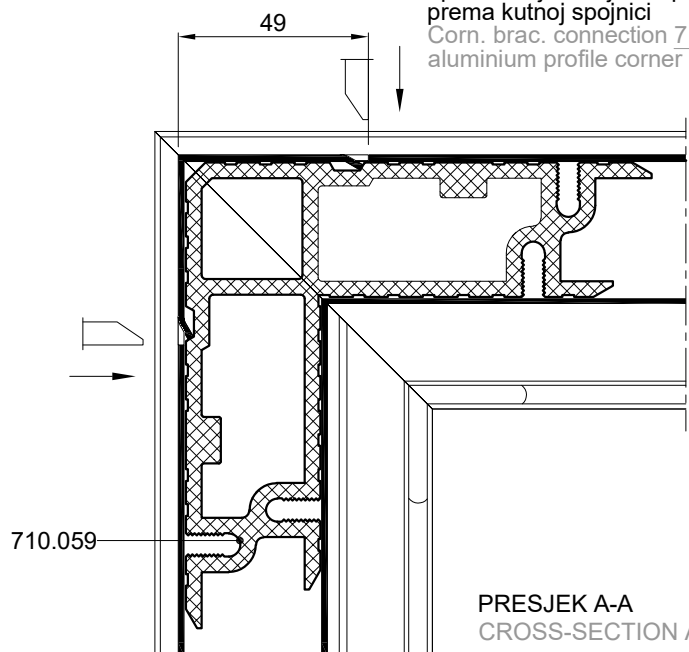


PRESJEK A-A
CROSS-SECTION A-A

Spajanje kutnom spojnicom
710.452 uprešavanjem stijenke
profila prema kutnoj spojnici
Corn. brac. connection 710.452
aluminium profile corner
crimping

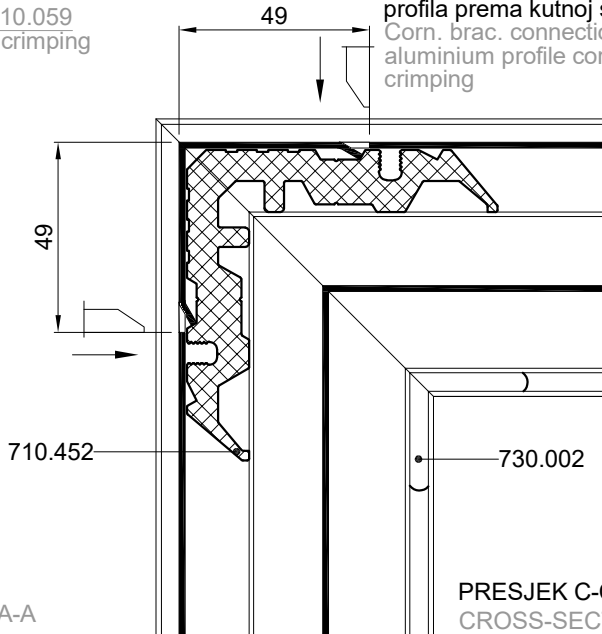


PRESJEK C-C
CROSS-SECTION C-C

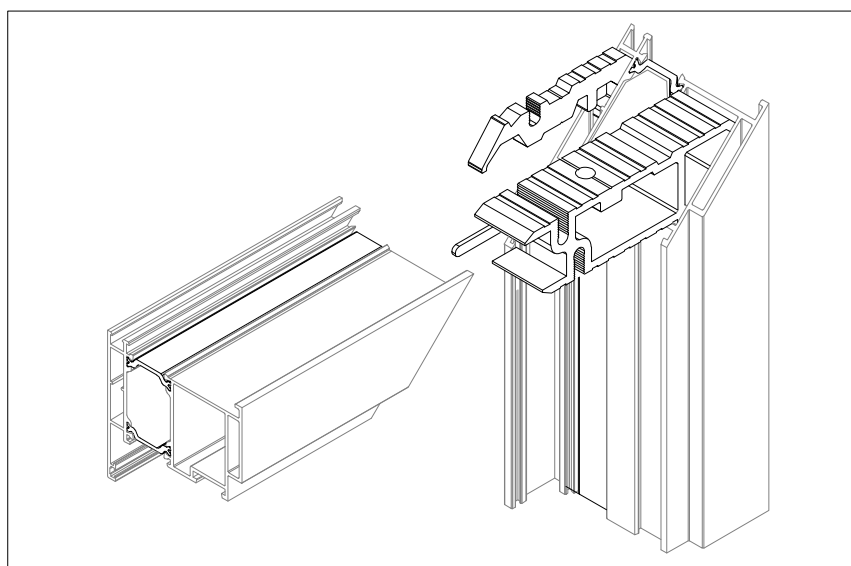

SPAJANJE PROFILA FT-0201; KUTNIM SPOJNICAMA; 730.009, 710.452

CONNECTION OF PROFILE FT-0201; WITH CORNER BRACKETS; 730.009, 710.452


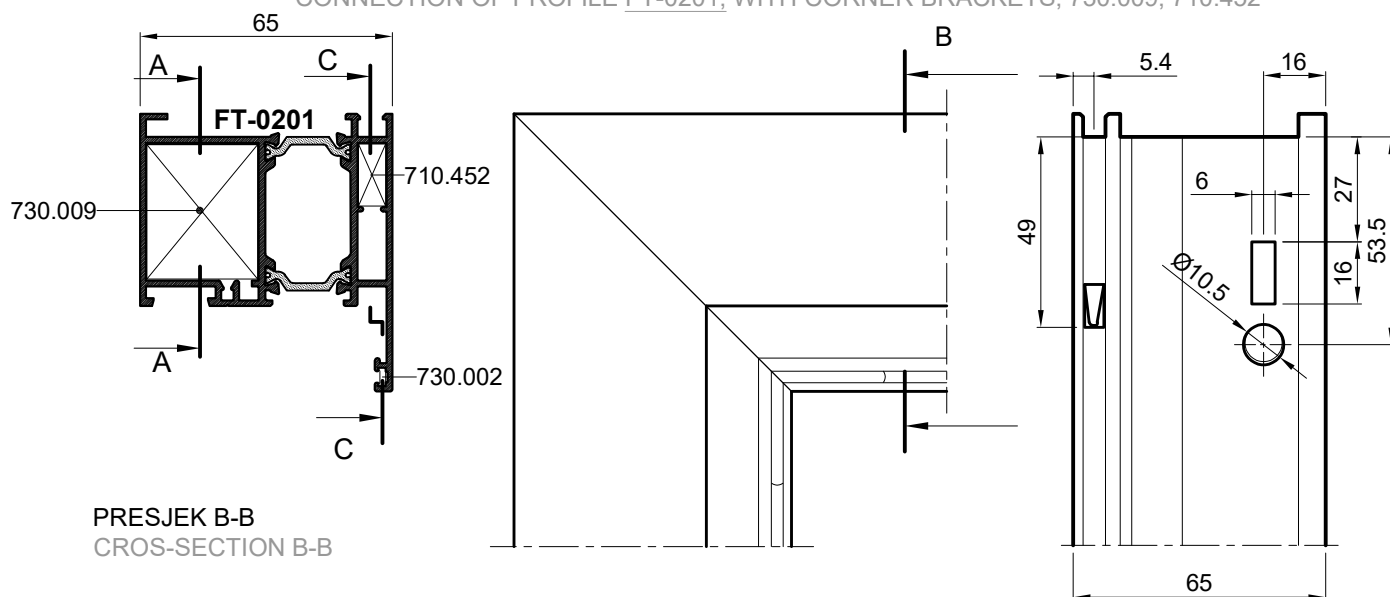


Spajanje kutnom spojnicom 730.009 s predobradom štancanja - (štanca S1)
Connection with corner bracket 730.009 with punching preprocessing - (punch S1)

Spajanje kutnom spojnicom 710.452 uprešavanjem stijenke profila prema kutnoj spojnici
Corn. brac. connection 710.452 aluminium profile corner crimping


OVAJ RASPORED I NAČIN SPAJANJA KUTNIM SPOJNICAMA PRIMJENJIV JE I NA PROFILE RAMA: FT-0214, FT-0225, FT-0231, i FT-0232

THIS ARRANGEMENT AND BINDING METHOD WITH CORNER BRACKETS IS ALSO APPLICABLE FOR FRAME PROFILES FT-0214, FT-0225, FT-0231, AND FT-0232

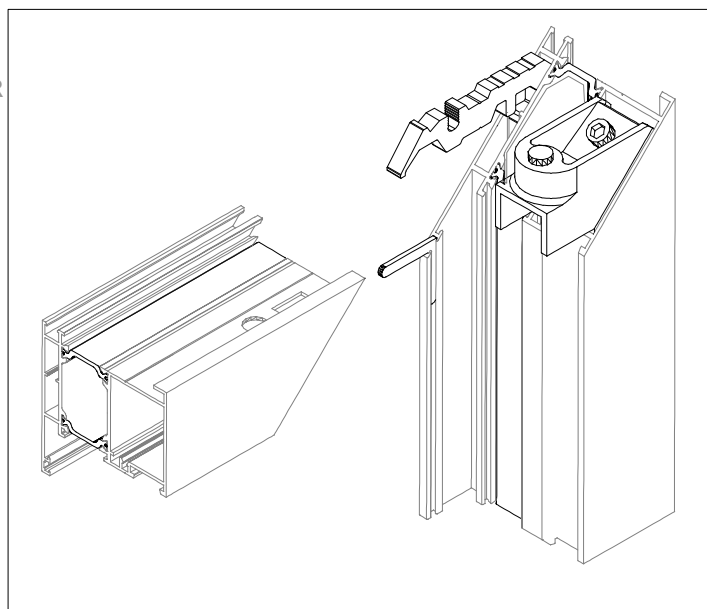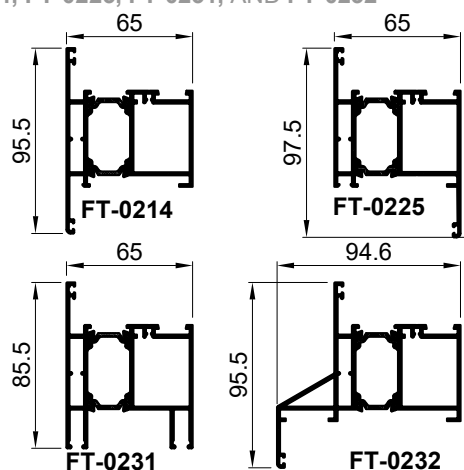



SPAJANJE PROFILA FT-0201; KUTNIM SPOJNICAMA; 710.059, 710.452

CONNECTION OF PROFILE FT-0201; WITH CORNER BRACKETS; 710.059, 710.452

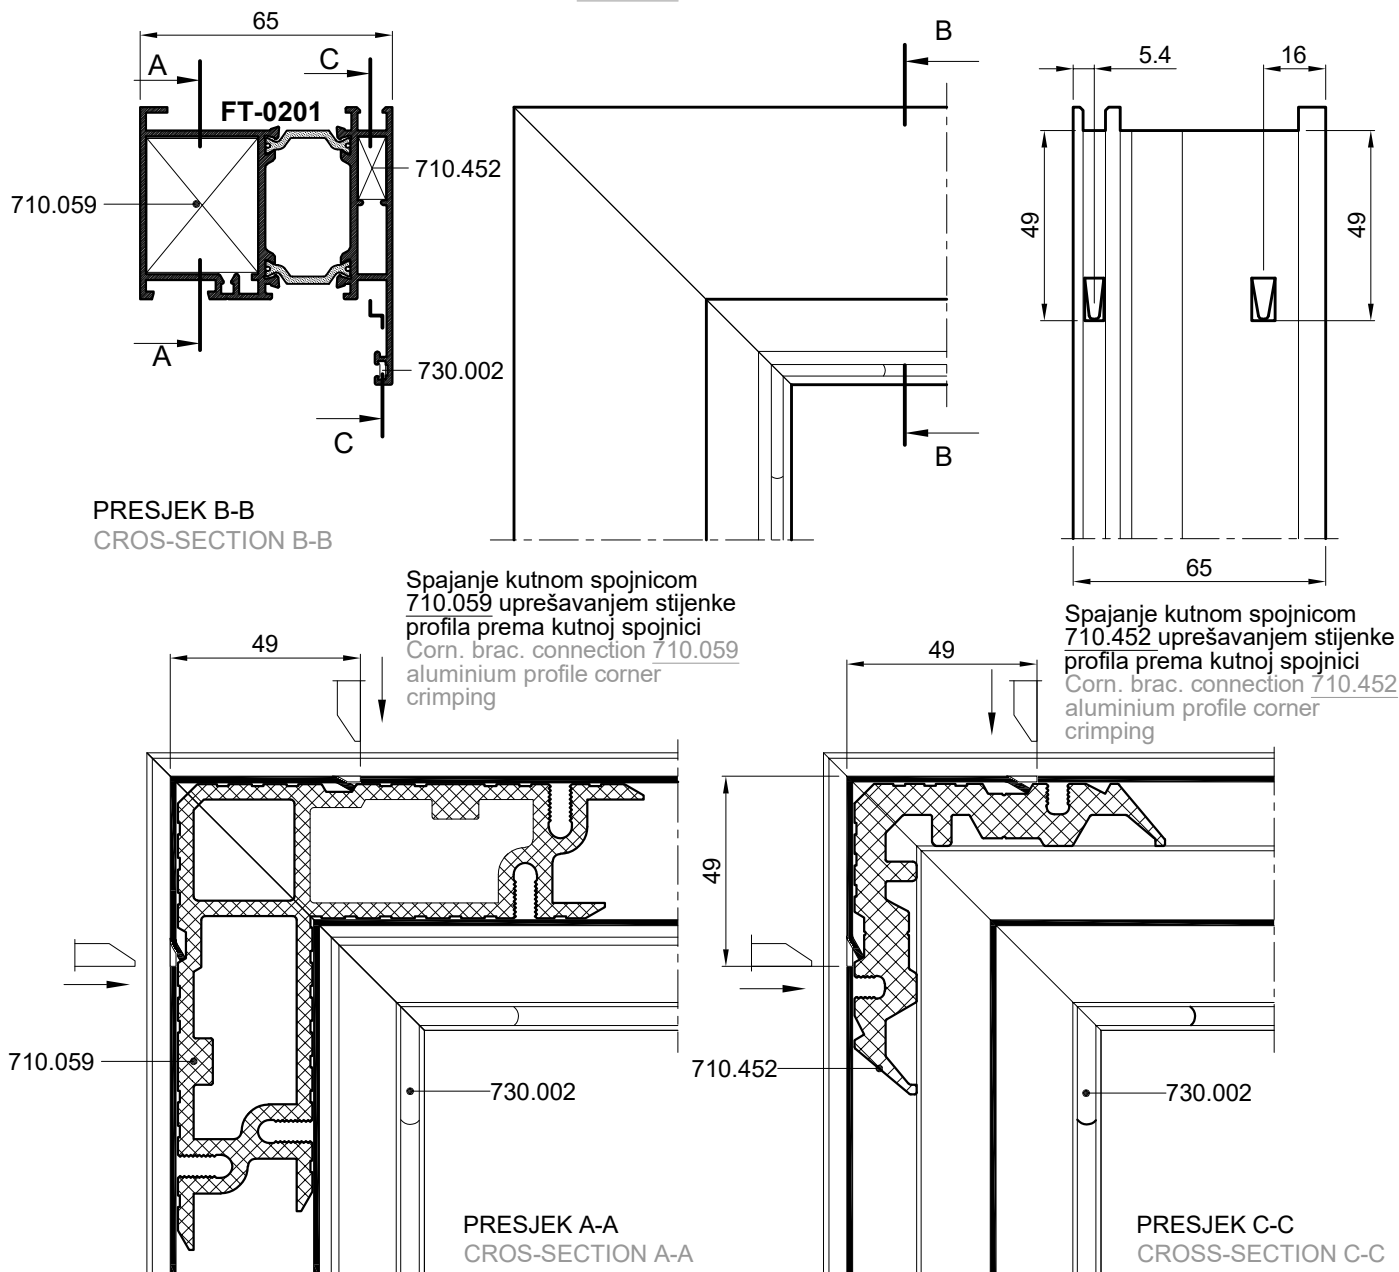


OVAJ RASPORED I NAČIN SPAJANJA KUTNIM SPOJNICAMA PRIMJENJIV JE I NA PROFILE RAMA: FT-0214, FT-0225, FT-0231, i FT-0232

THIS ARRANGEMENT AND BIDDING METHOD WITH CORNER BRACKETS IS ALSO APPLICABLE FOR FRAME PROFILES FT-0214, FT-0225, FT-0231, AND FT-0232

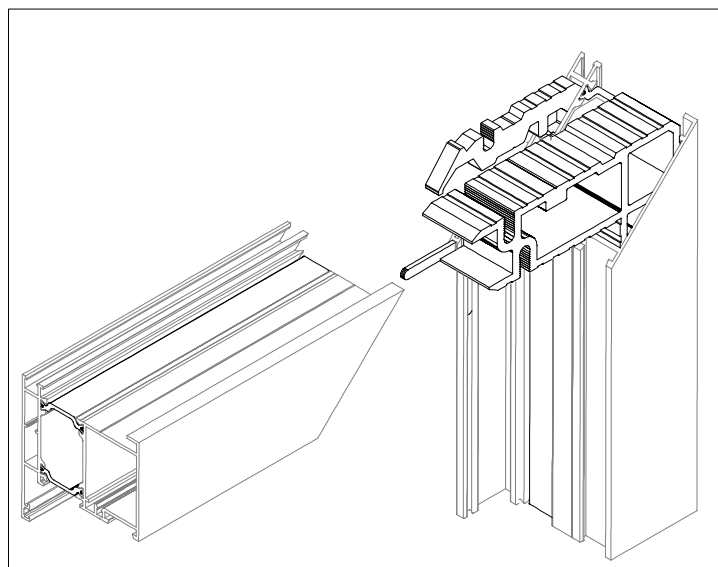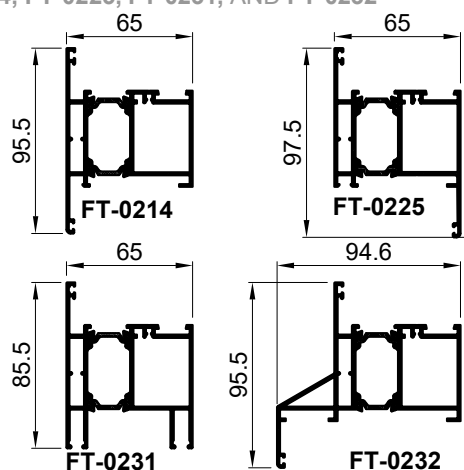


SPAJANJE PROFILA FT-0201; KUTNIM SPOJNICAMA; 710.072, 710.452

CONNECTION OF PROFILE FT-0201; WITH CORNER BRACKETS; 710.072, 710.452

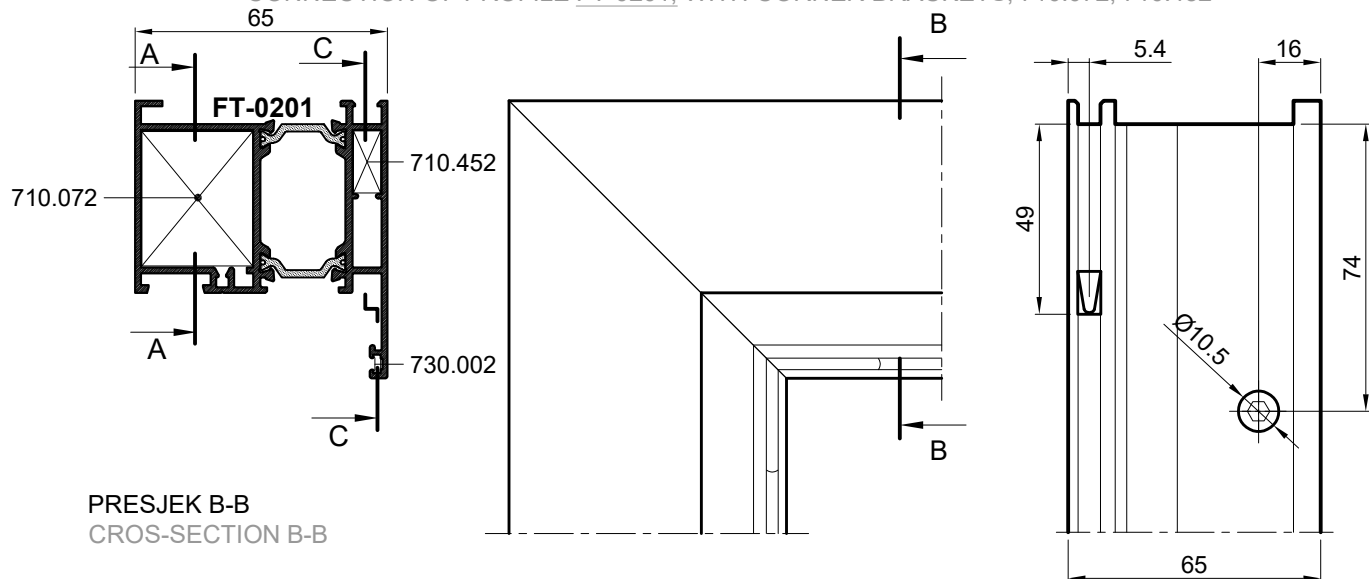


Spajanje kutnom spojnicom 710.072
vijcima M8x13 -tip Feal-(štanca S1)

Corner bracket connection 710.072
screws M8x13 -type Feal-(punch S1)

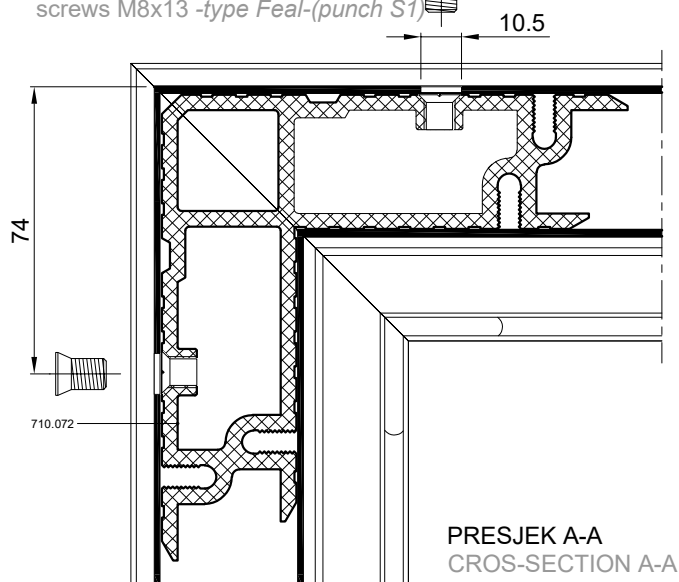



Spajanje kutnom spojnicom 710.452 uprešavanjem stijenke
profila prema kutnoj spojnici

Corn. brac. connection 710.452
aluminium profile corner
crimping

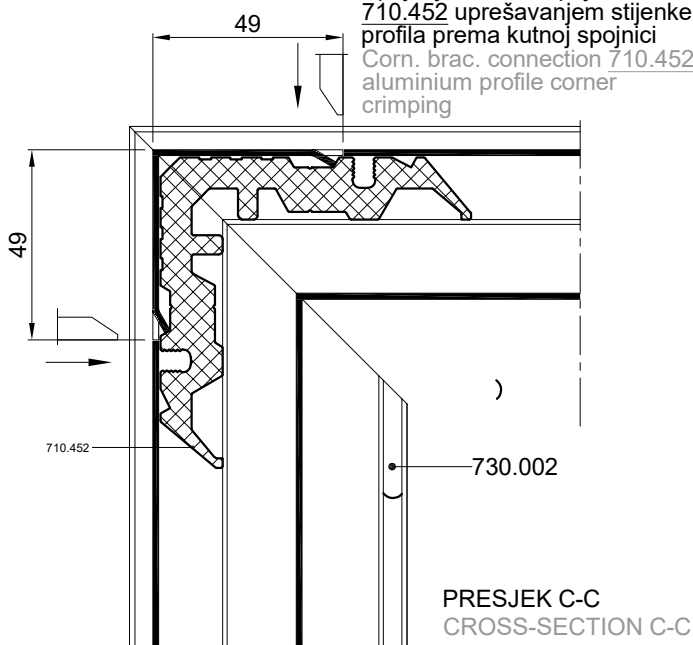


OVAJ RASPORED I NAČIN SPAJANJA KUTNIM SPOJNICAMA
PRIMJENJIV JE I NA PROFILE RAMA: FT-0214, FT-0225,
FT-0231, i FT-0232

THIS ARRANGEMENT AND BINDING METHOD WITH CORNER
BRACKETS IS ALSO APPLICABLE FOR FRAME PROFILES
FT-0214, FT-0225, FT-0231 AND FT-0232

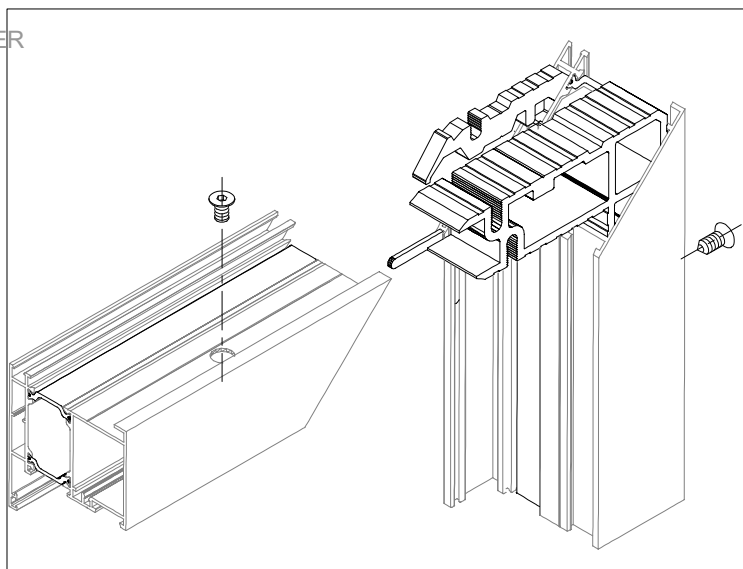
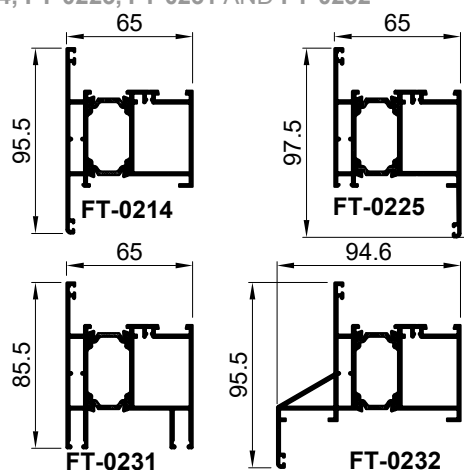


SPAJANJE PROFILA FT-0224 KUTNIM SPOJNICAMA; 730.009, 710.454 CONNECTION OF PROFILE FT-0224 WITH CORNER BRACKETS; 730.009, 710.454

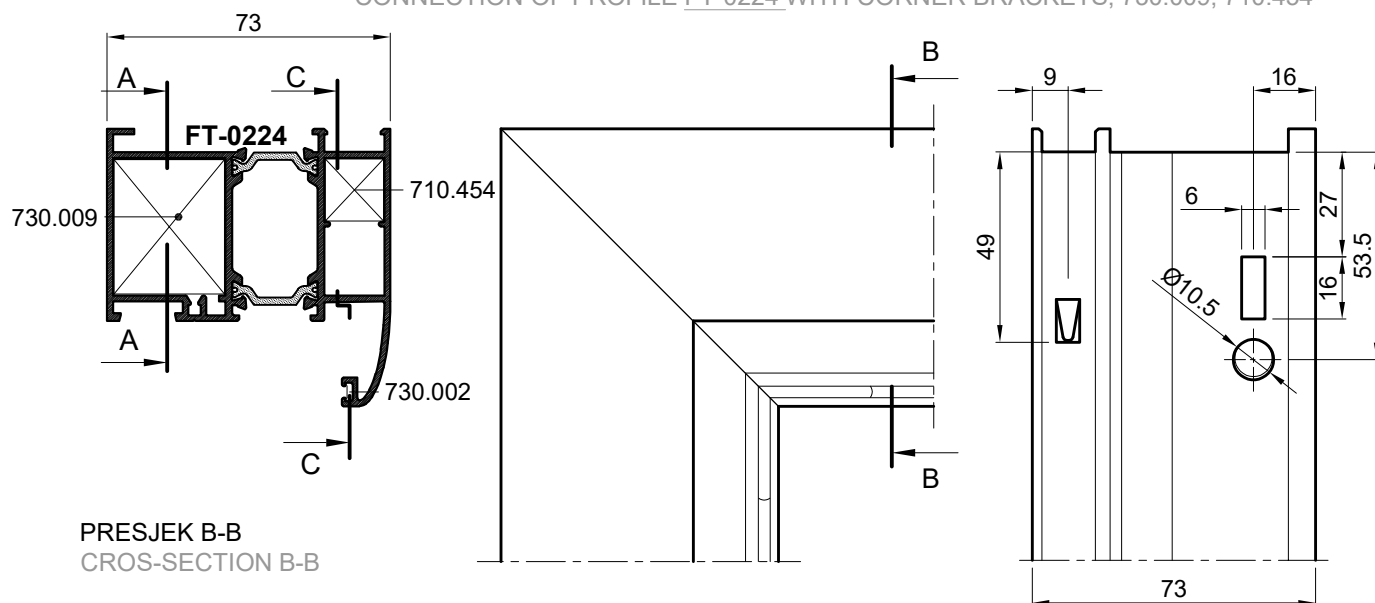



Spajanje kutnom spojnicom 730.009 s predobradom štancanja-(štanca S1)
Connection with corner bracket 730.009 with punching preprocessing-(punch S1)

Spajanje kutnom spojnicom 710.454 uprešavanjem stijenke profila prema kutnoj spojnici
Corn. brac. connection 710.454 aluminium profile corner crimping

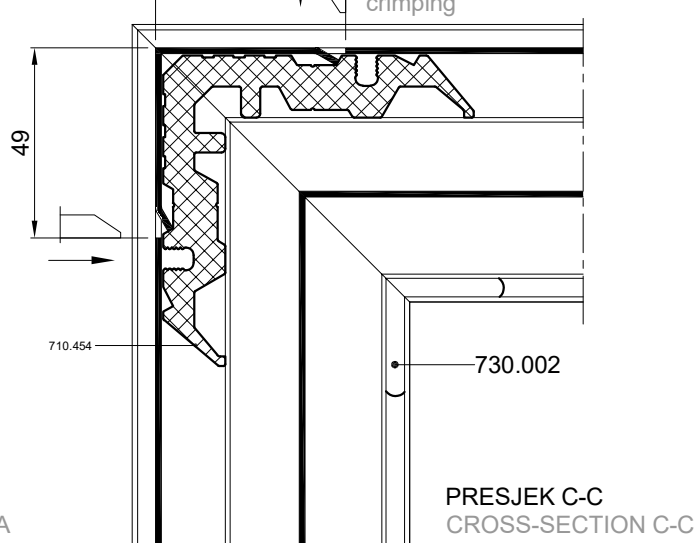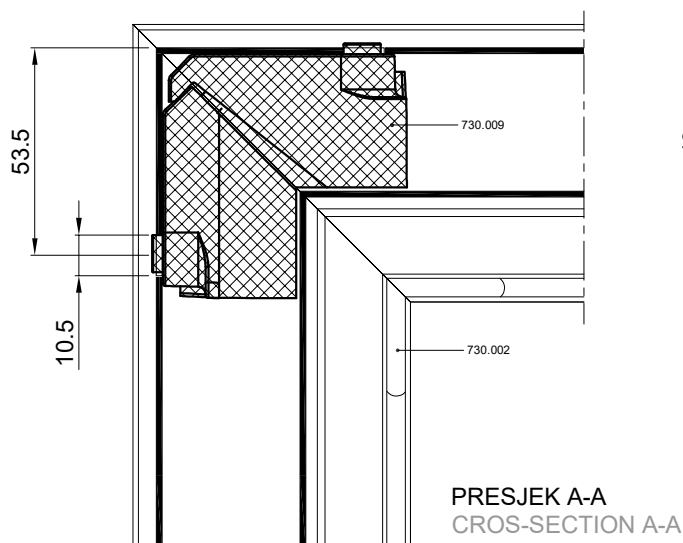


OVAJ RASPORED I NAČIN SPAJANJA KUTNIM SPOJNICAMA PRIMJENJIV JE I NA PROFILE RAMA FT-0229 i FT-0249

THIS ARRANGEMENT AND BIDDING METHOD WITH CORNER BRACKETS IS ALSO APPLICABLE FOR FRAME PROFILE FT-0229 AND FT-0249

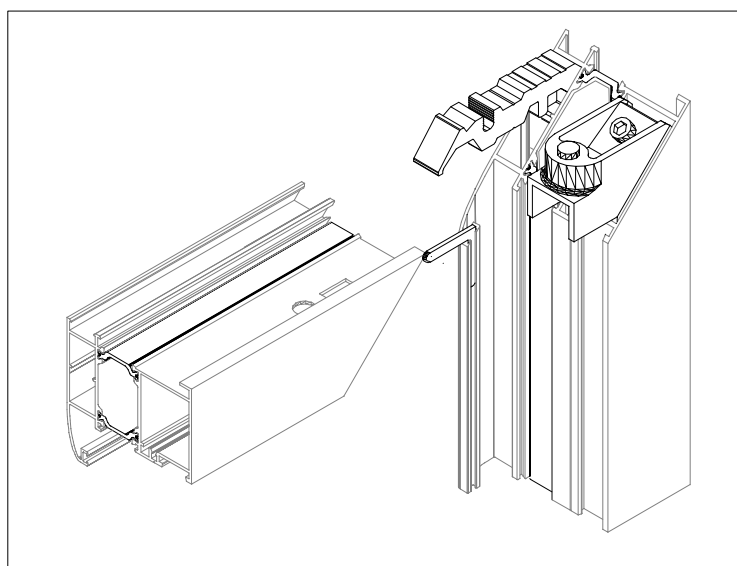
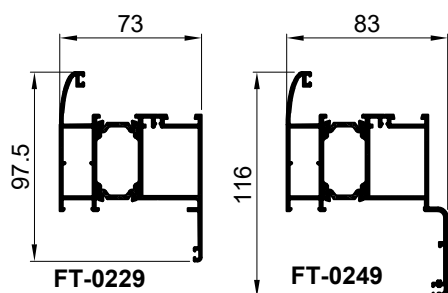


SPAJANJE PROFILA FT-0224 KUTNIM SPOJNICAMA; 710.059, 710.454 CONNECTION OF PROFILE FT-0224 WITH CORNER BRACKETS; 710.059, 710.454

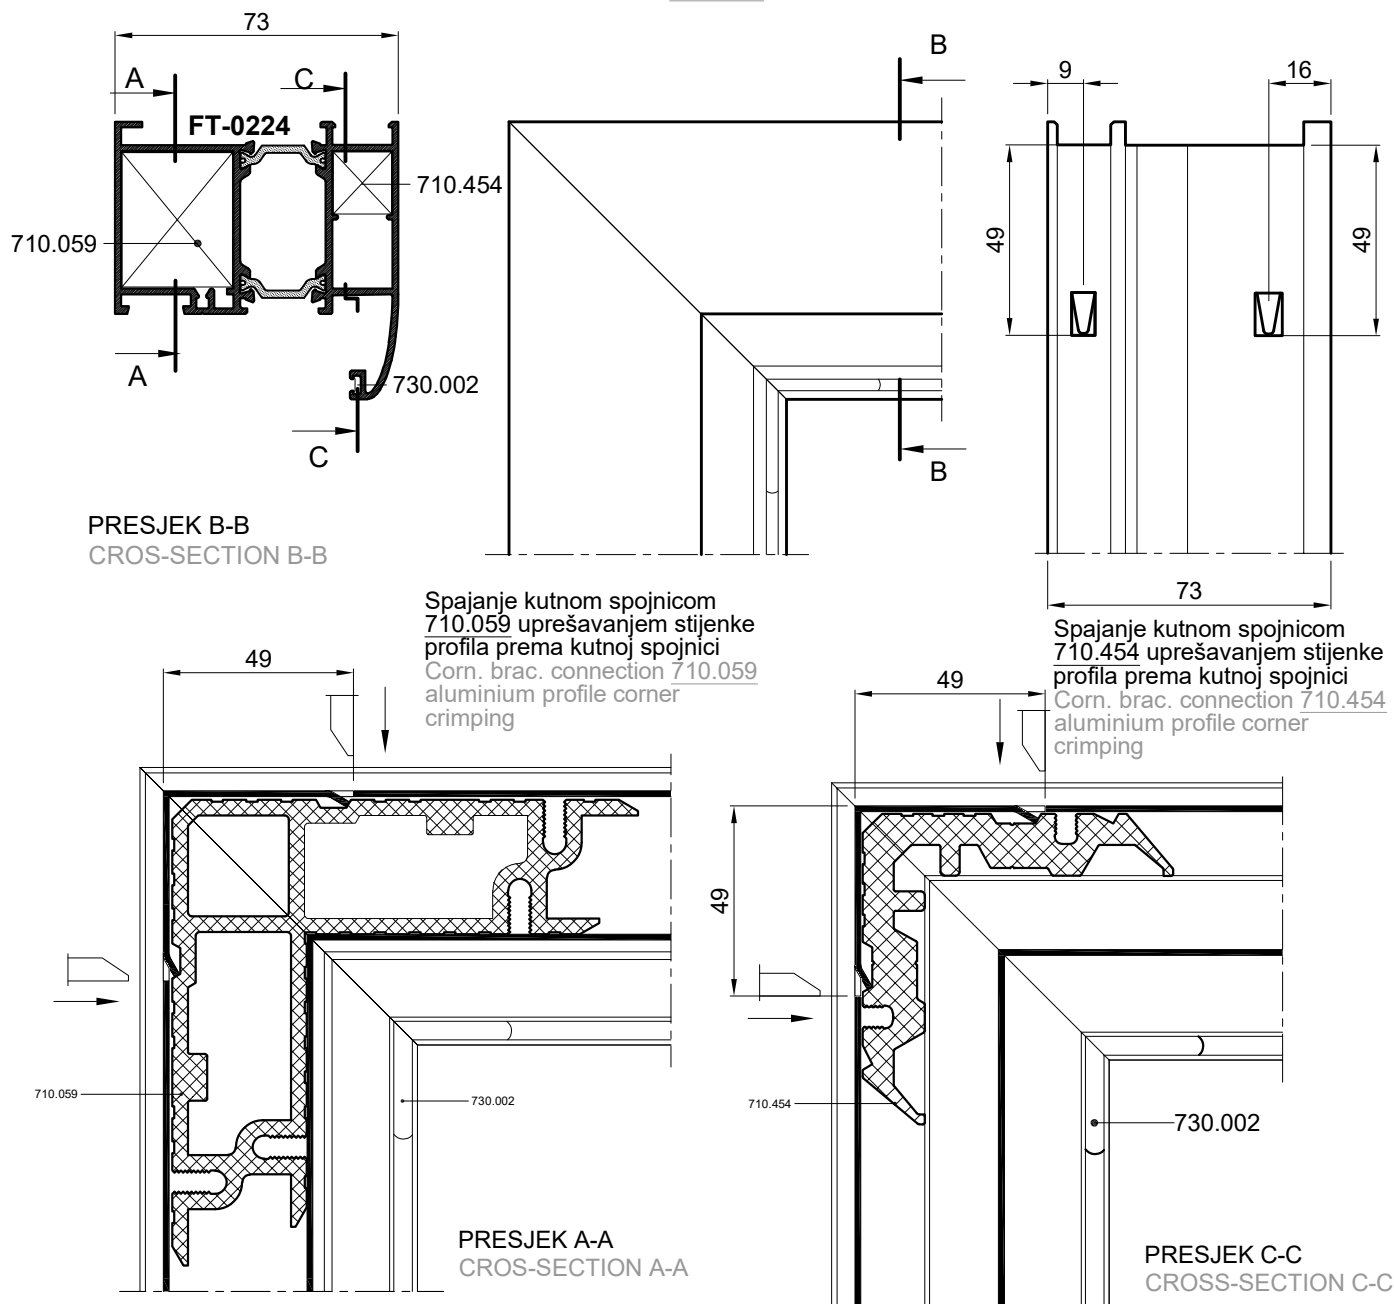


OVAJ RASPORED I NAČIN SPAJANJA KUTNIM SPOJNICAMA PRIMJENJIV JE I NA PROFILE RAMA FT-0229 i FT-0249

THIS ARRANGEMENT AND BIDDING METHOD WITH CORNER BRACKETS IS ALSO APPLICABLE FOR FRAME PROFILE FT-0229 AND FT-0249

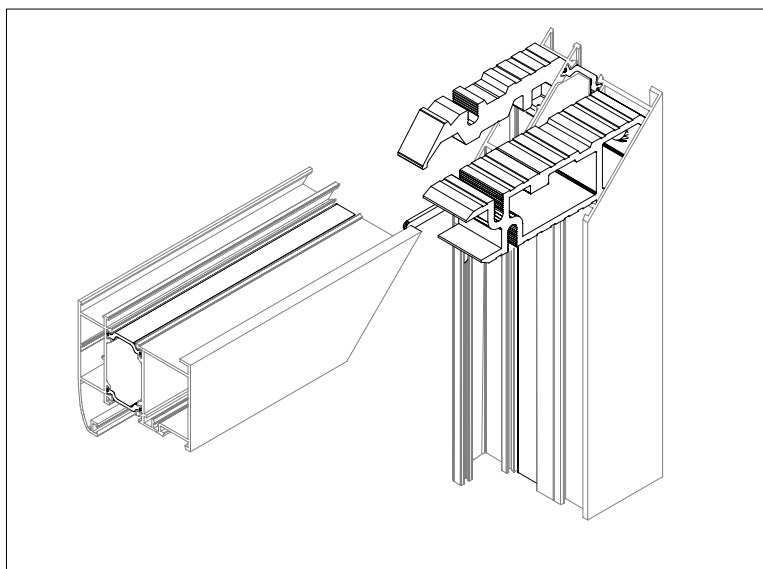
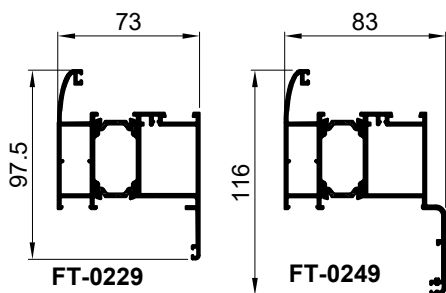


SPAJANJE PROFILA FT-0224 KUTNIM SPOJNICAMA; 710.072, 710.454 CONNECTION OF PROFILE FT-0224 WITH CORNER BRACKETS; 710.072, 710.454

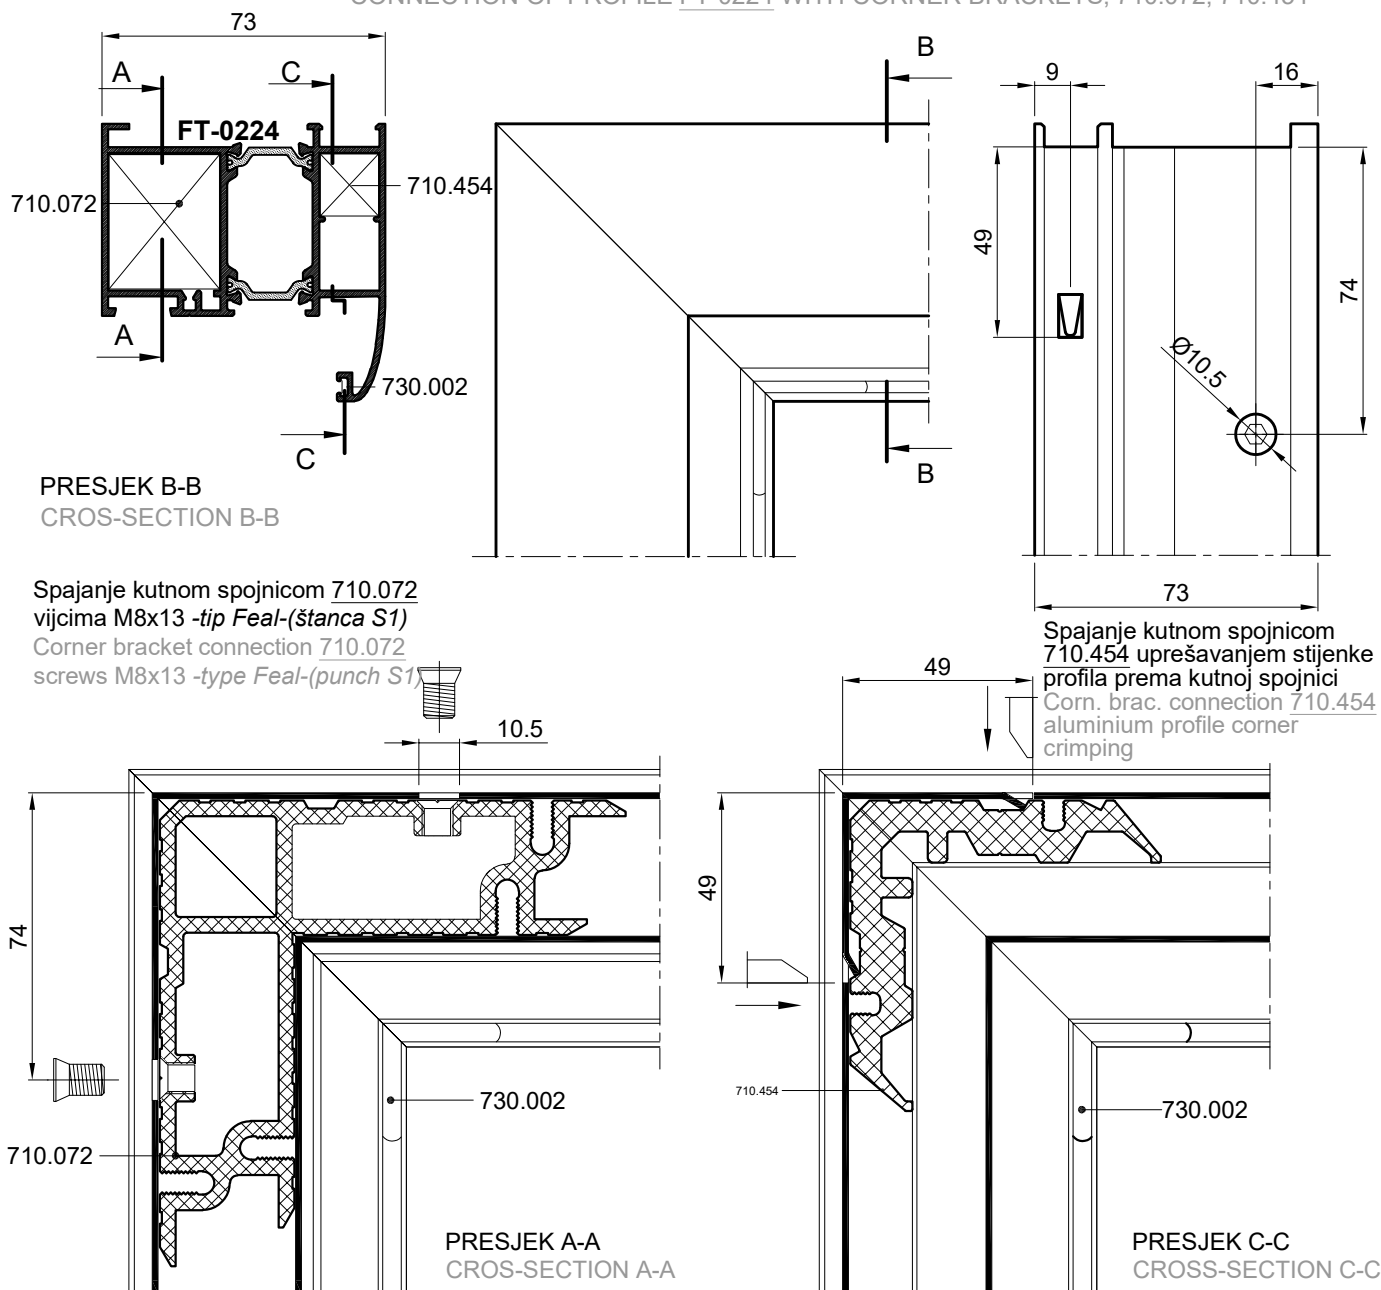


OVAJ RASPORED I NAČIN SPAJANJA KUTNIM SPOJNICAMA PRIMJENJIV JE I NA PROFILE RAMA FT-0229 i FT-0249


THIS ARRANGEMENT AND BIDDING METHOD WITH CORNER BRACKETS IS ALSO APPLICABLE FOR FRAME PROFILE FT-0229 AND FT-0249

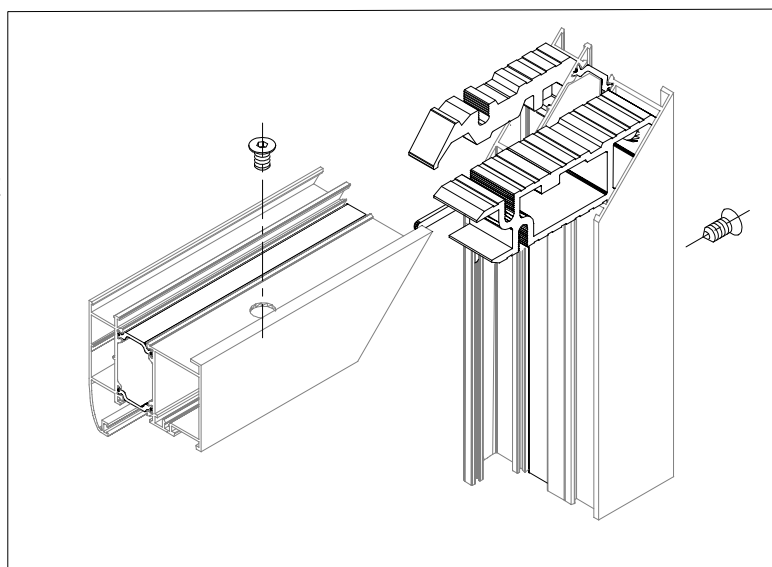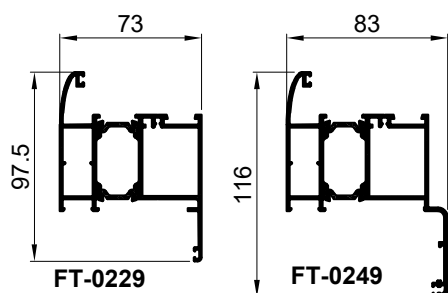


SPAJANJE PROFILA FT-0224 KUTNIM SPOJNICAMA; 710.072, 710.459 CONNECTION OF PROFILE FT-0224 WITH CORNER BRACKETS; 710.072, 710.459

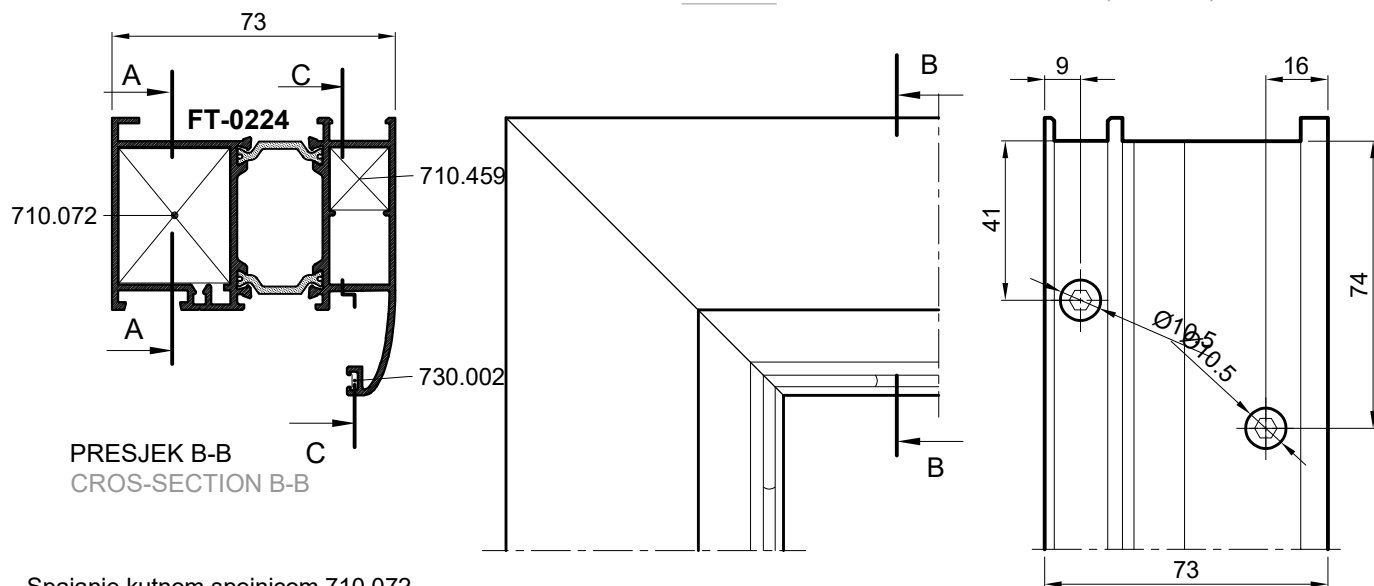

Spajanje kutnom spojnicom 710.072
vjcima M8x13 -tip Feal-(štanca S1)
Corner bracket connection 710.072
screws M8x13 -type Feal-(punch S1)


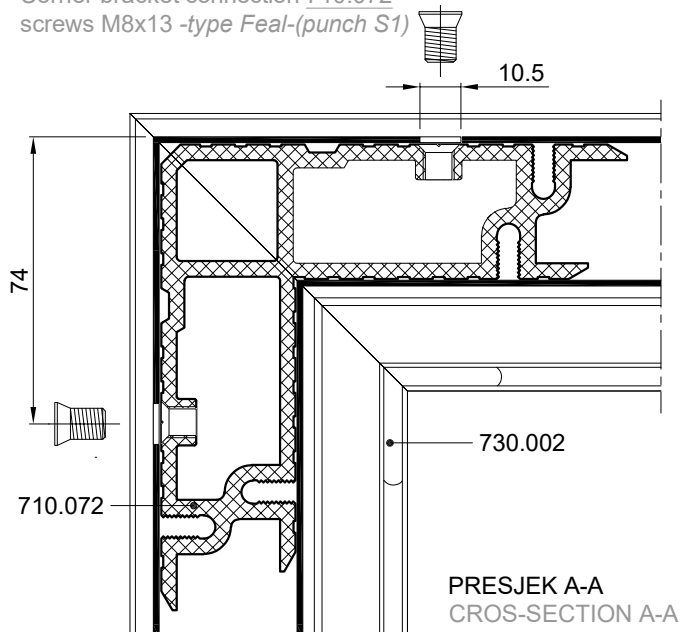


Spajanje kutnom spojnicom 710.459
vjcima M8x13 -tip Feal
Corner bracket connection 710.459
screws M8x13 -type Feal

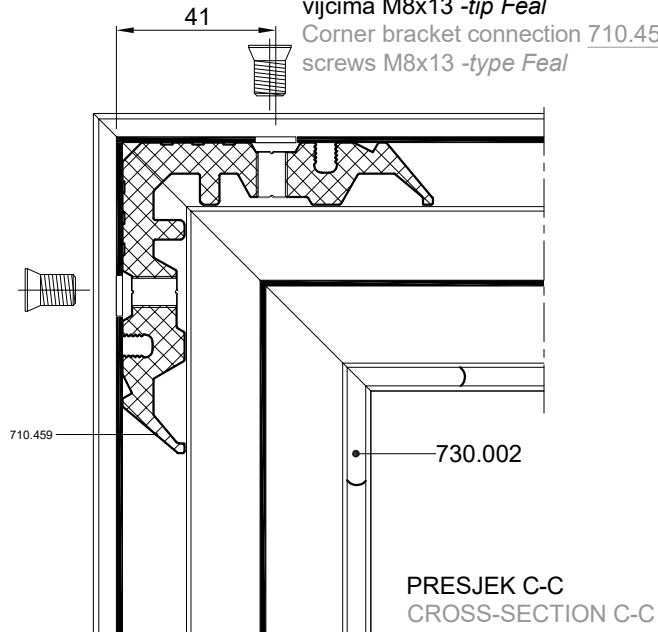


OVAJ RASPORED I NAČIN SPAJANJA KUTNIM
SPOJNICAMA PRIMJENJIV JE I NA PROFILE
RAMA FT-0229 i FT-0249

THIS ARRANGEMENT AND BIDDING METHOD
WITH CORNER BRACKETS IS ALSO APPLICABLE
FOR FRAME PROFILE FT-0229 AND FT-0249

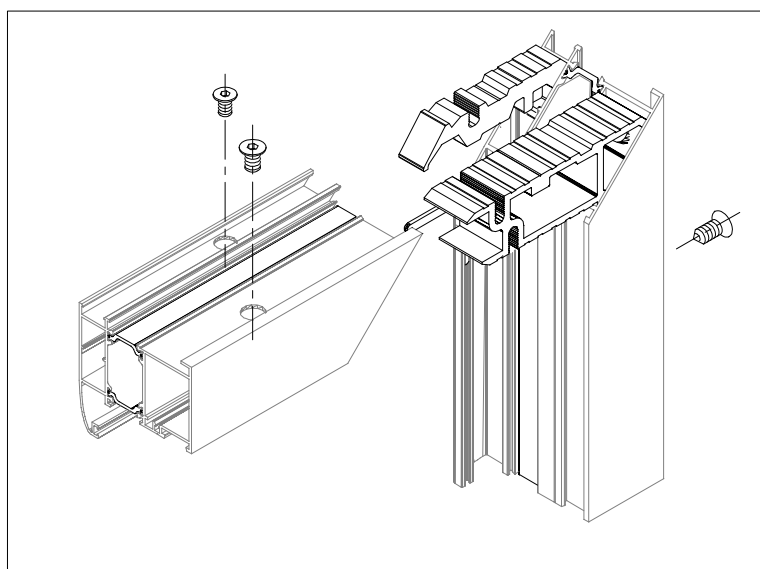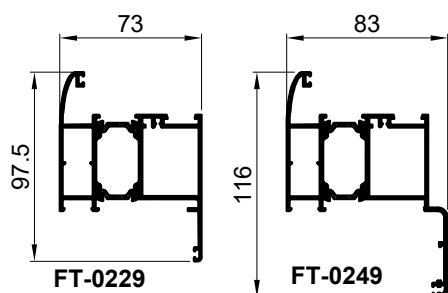

SPAJANJE PROFILA FT-0233 KUTNIM SPOJNICAMA; 730.008, 710.452


CONNECTION OF PROFILE FT-0233 WITH CORNER BRACKETS; 730.008, 710.452

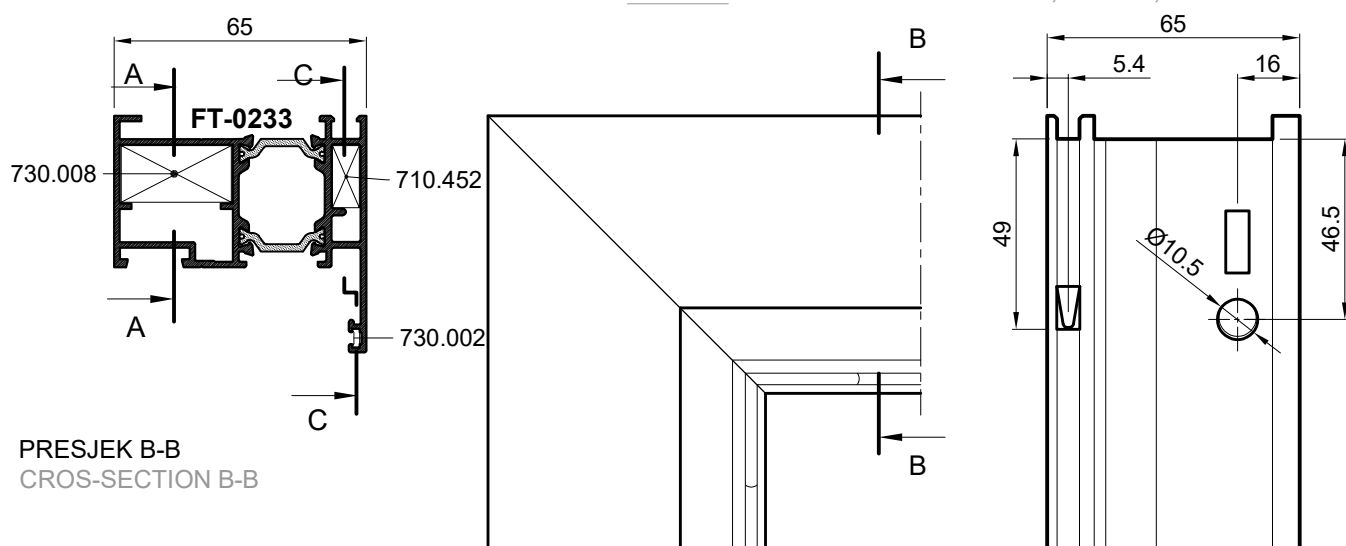


PRESJEK B-B
CROS-SECTION B-B

Spajanje kutnom spojnicom 730.008 s
predobradom štancaja-(štanca S1)
Connectin with corner bracket 730.008
with punching preprocessing-(punch S1)


Spajanje kutnom spojnicom 710.452 uprešavanjem
stijenke profila prema kutnoj spojnici
Corn. brac. connection 710.452 aluminium profile
corner crimping

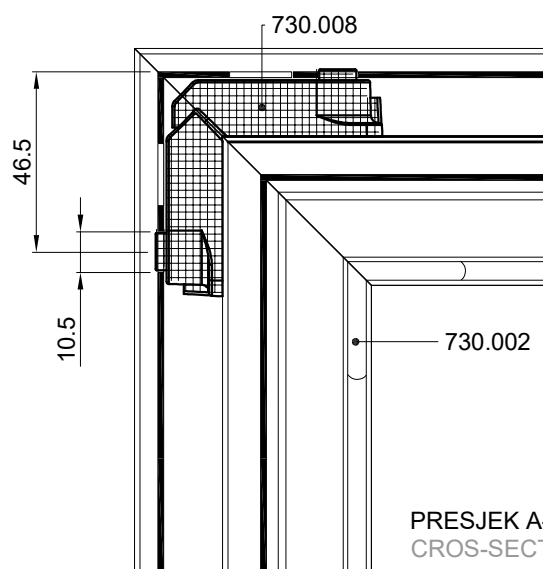

PRESJEK A-A
CROS-SECTION A-A


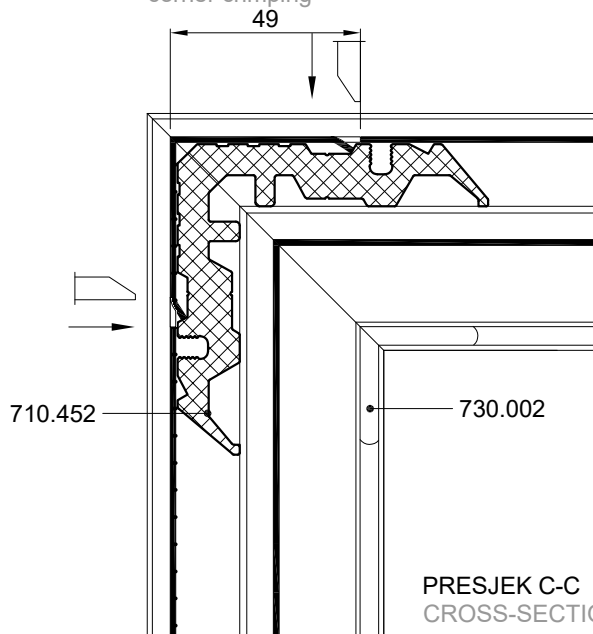


PRESJEK C-C
CROSS-SECTION C-C

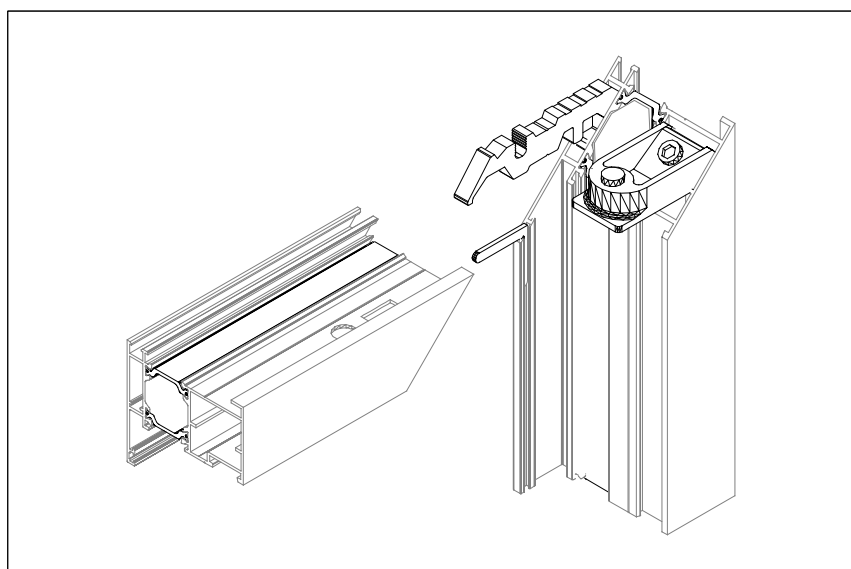





SPAJANJE PROFILA FT-0233 KUTNIM SPOJNICAMA; 710.450, 710.452

CONNECTION OF PROFILE FT-0233 WITH CORNER BRACKETS; 710.450, 710.452

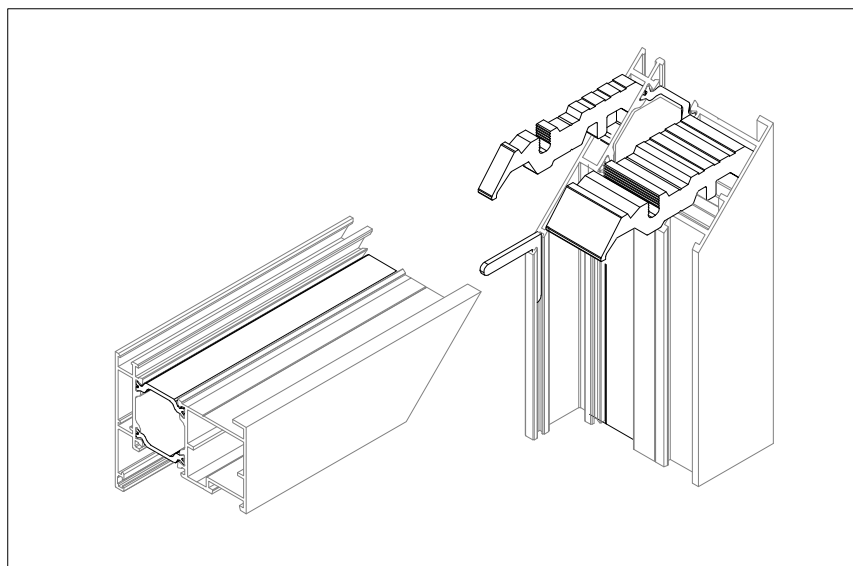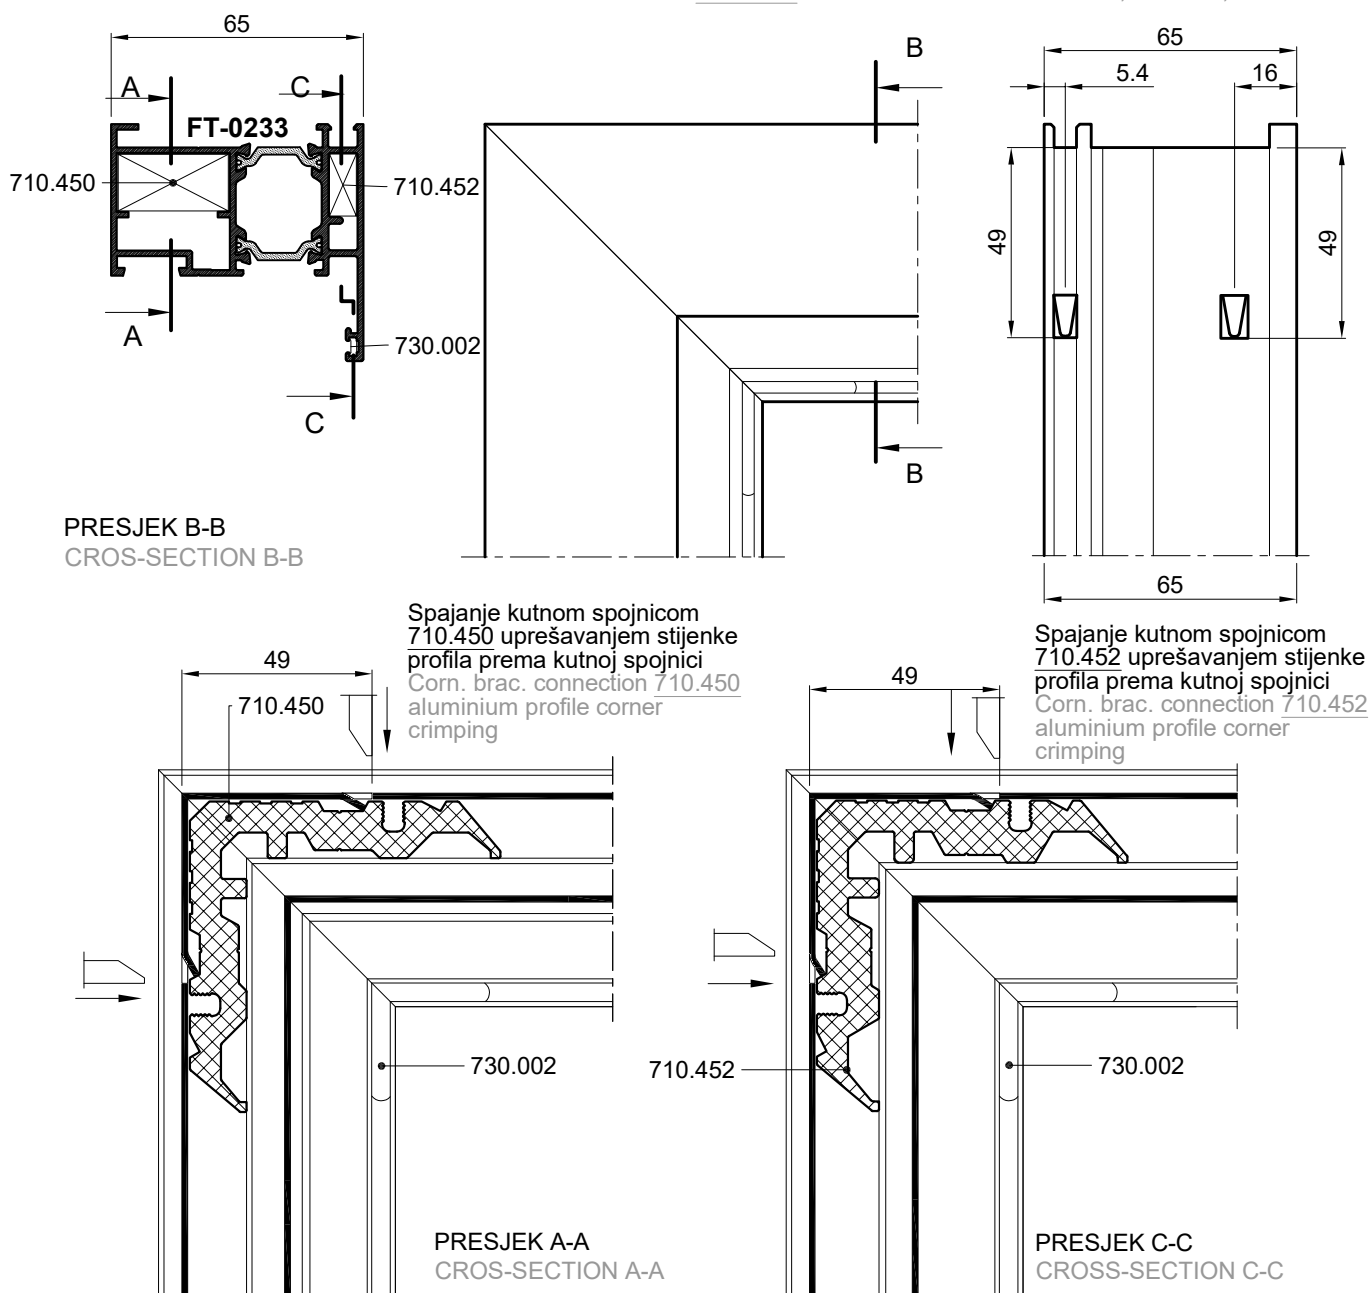



SPAJANJE PROFILA FT-0233 KUTNIM SPOJNICAMA; 710.458, 710.452

CONNECTION OF PROFILE FT-0233 WITH CORNER BRACETS; 710.458, 710.452

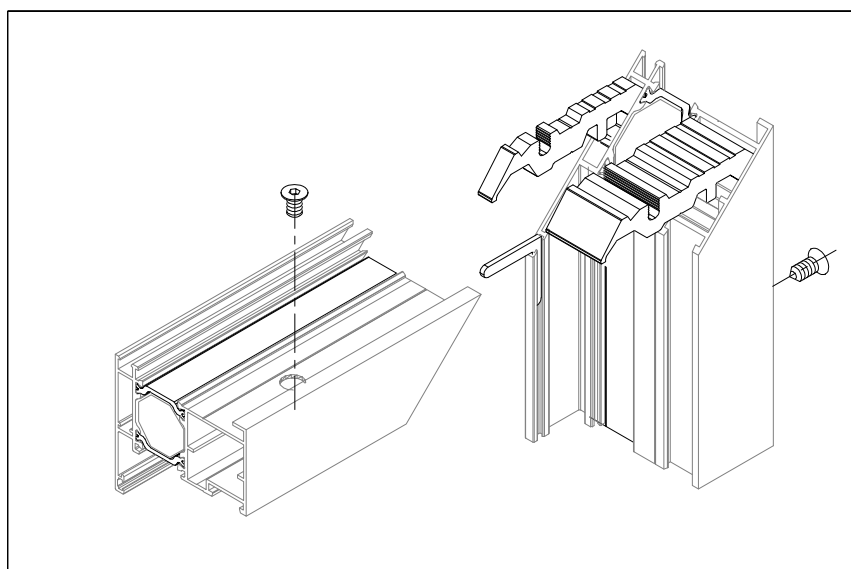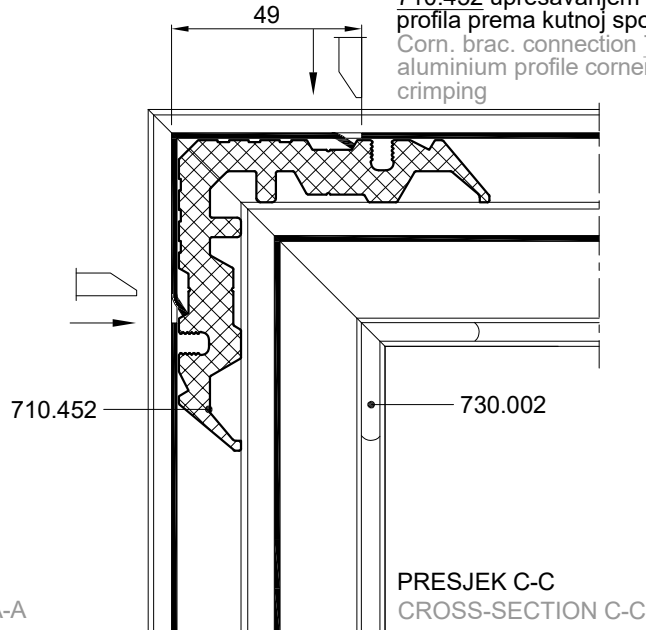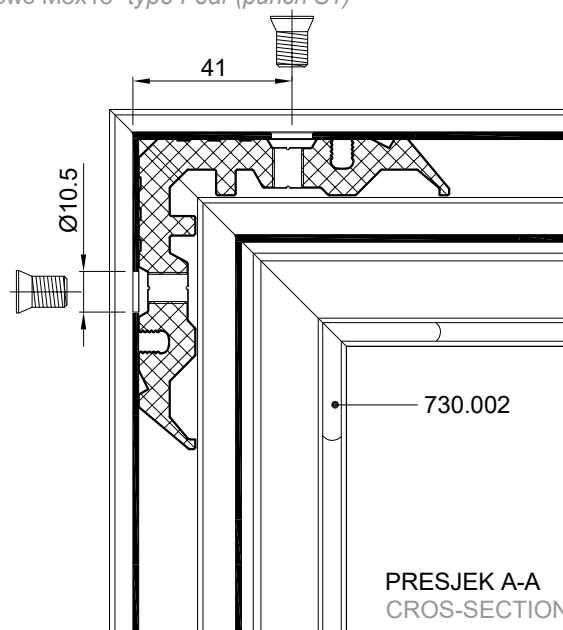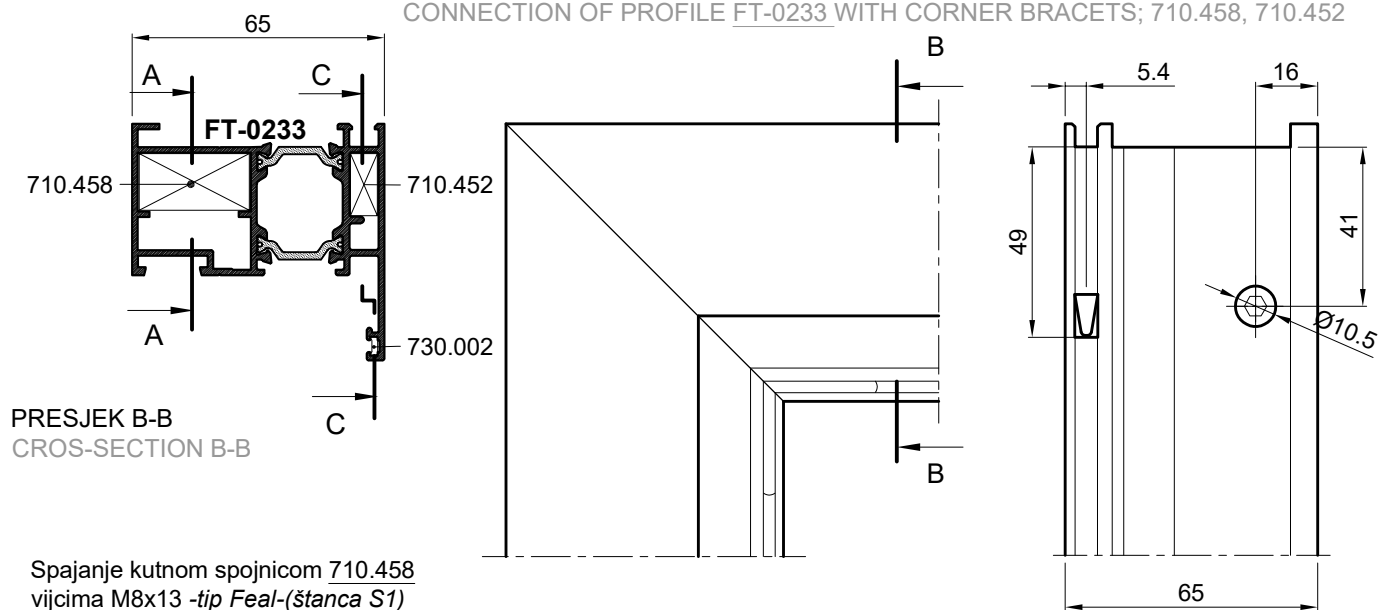


SPAJANJE PROFILA FT-0234 KUTNIM SPOJNICAMA; 730.008, 710.454

CONNECTION OF PROFILE FT-0234 WITH CORNER BRACKETS ; 730.008, 710.454

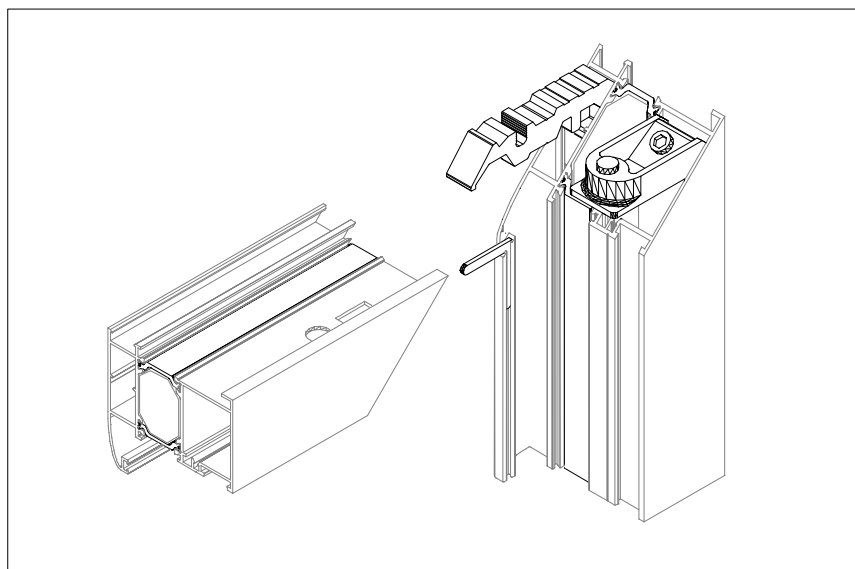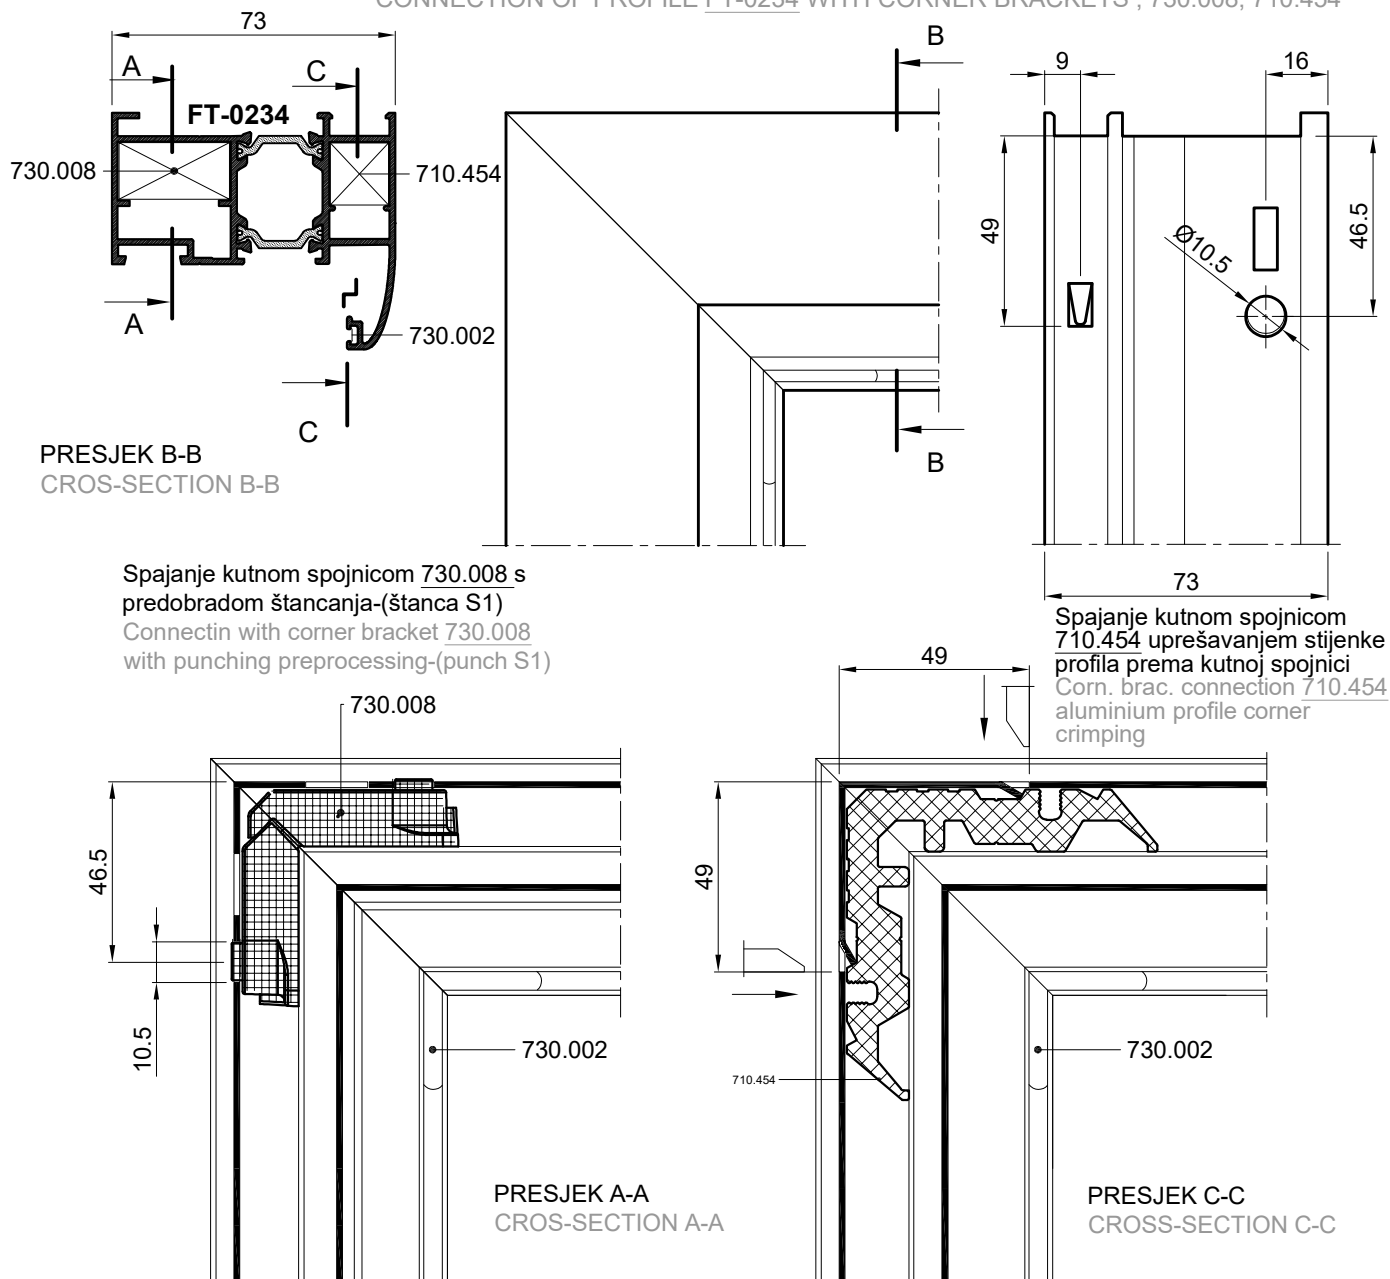


SPAJANJE PROFILA FT-0234 KUTNIM SPOJNICAMA; 710.450, 710.454 CONNECTION OF PROFILE FT-0234 WITH CORNER BRACKETS; 710.450, 710.454

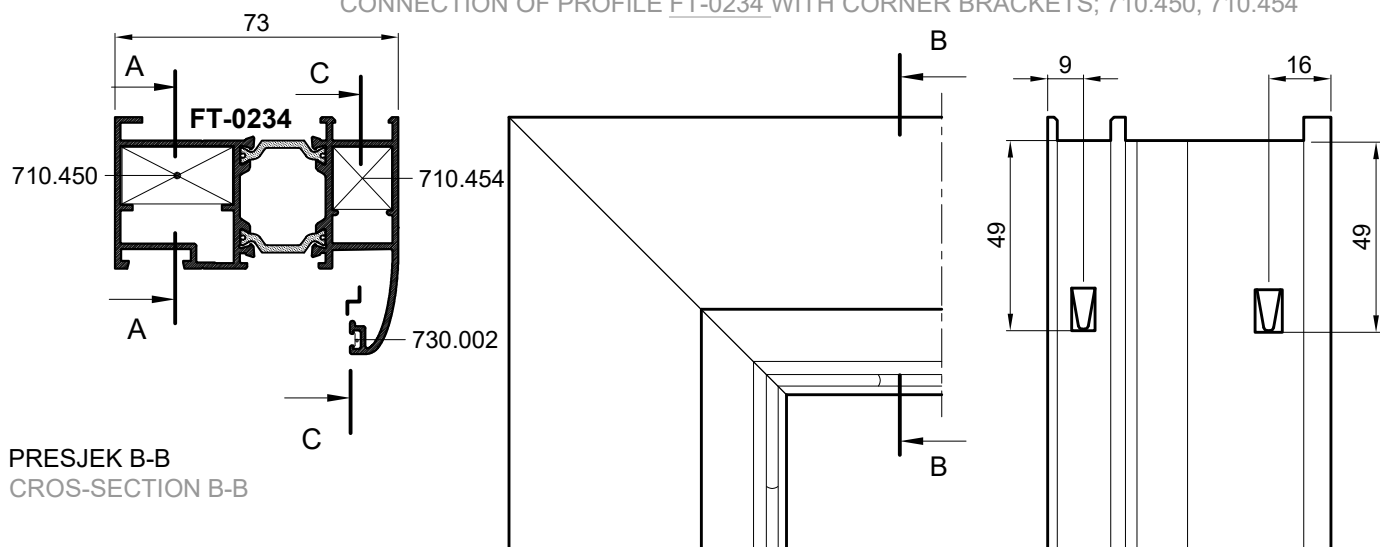


PRESJEK B-B
CROS-SECTION B-B

Spajanje kutnom spojnicom 710.450 uprešavanjem
stijenke profila prema kutnoj spojnici
Corn. brac. connection 710.450
aluminium profile corner crimping

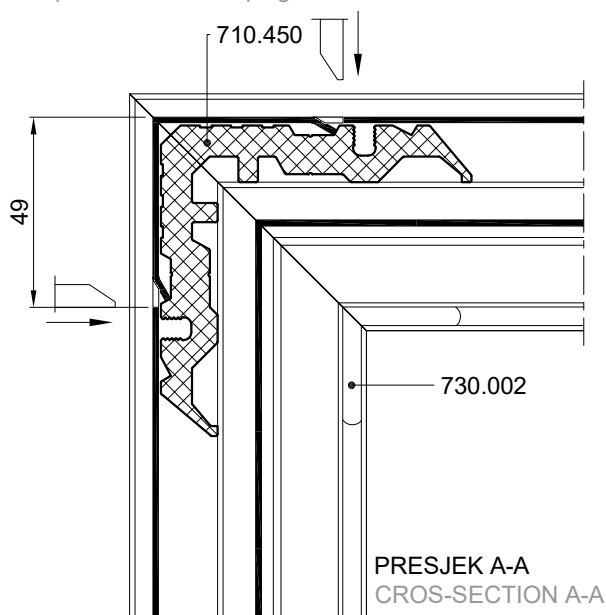


PRESJEK A-A
CROS-SECTION A-A

Spajanje kutnom spojnicom 710.454 uprešavanjem stijenke
profila prema kutnoj spojnici
Corn. brac. connection 710.454
aluminium profile corner crimping




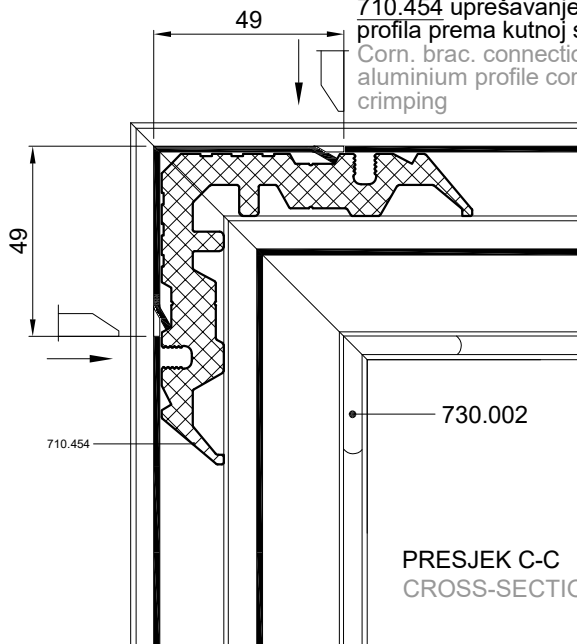


PRESJEK C-C
CROS-SECTION C-C

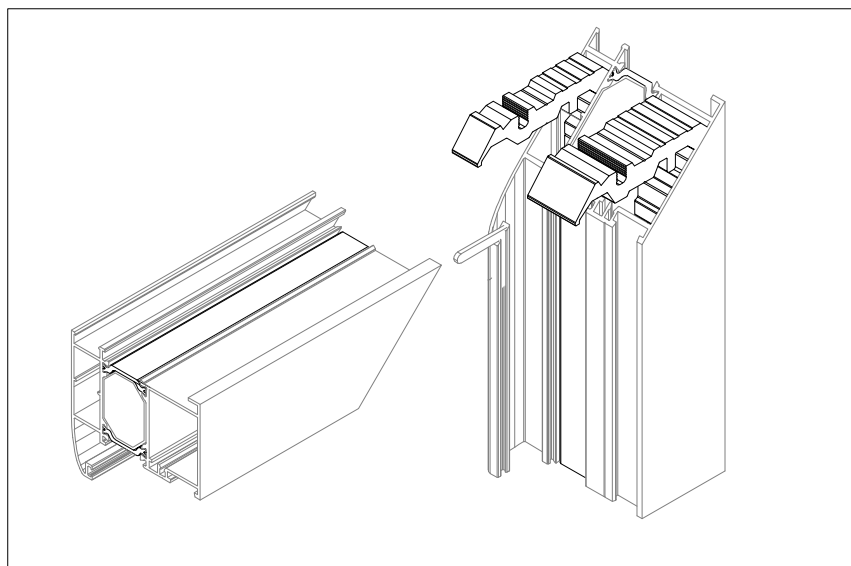




SPAJANJE PROFILA FT-0234 KUTNIM SPOJNICAMA; 710.458, 710.454

CONNECTION OF PROFILE FT-0234 WITH CORNER BRACKETS; 710.458, 710.454

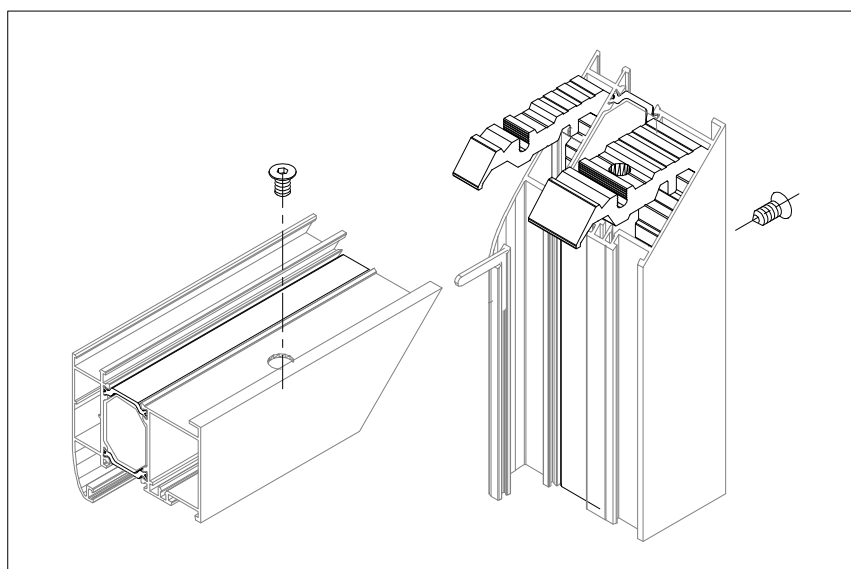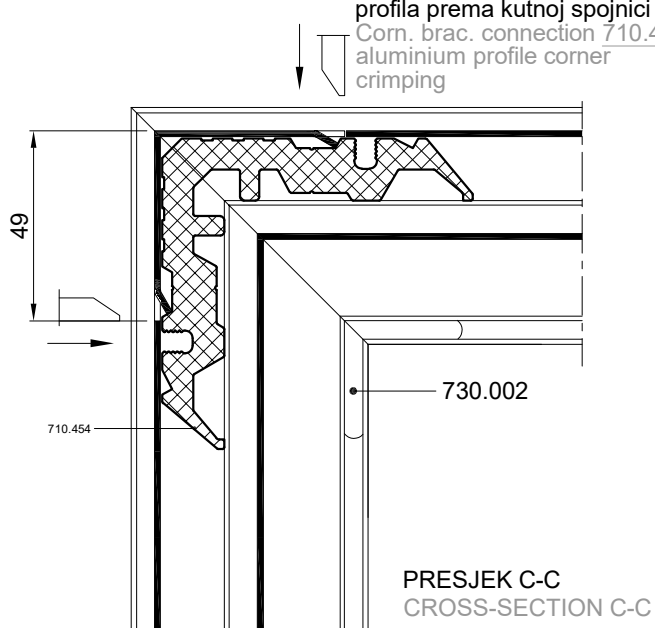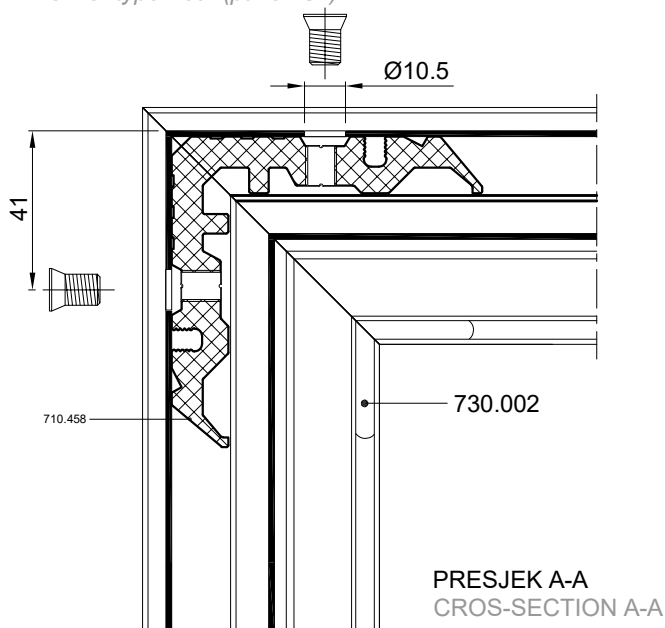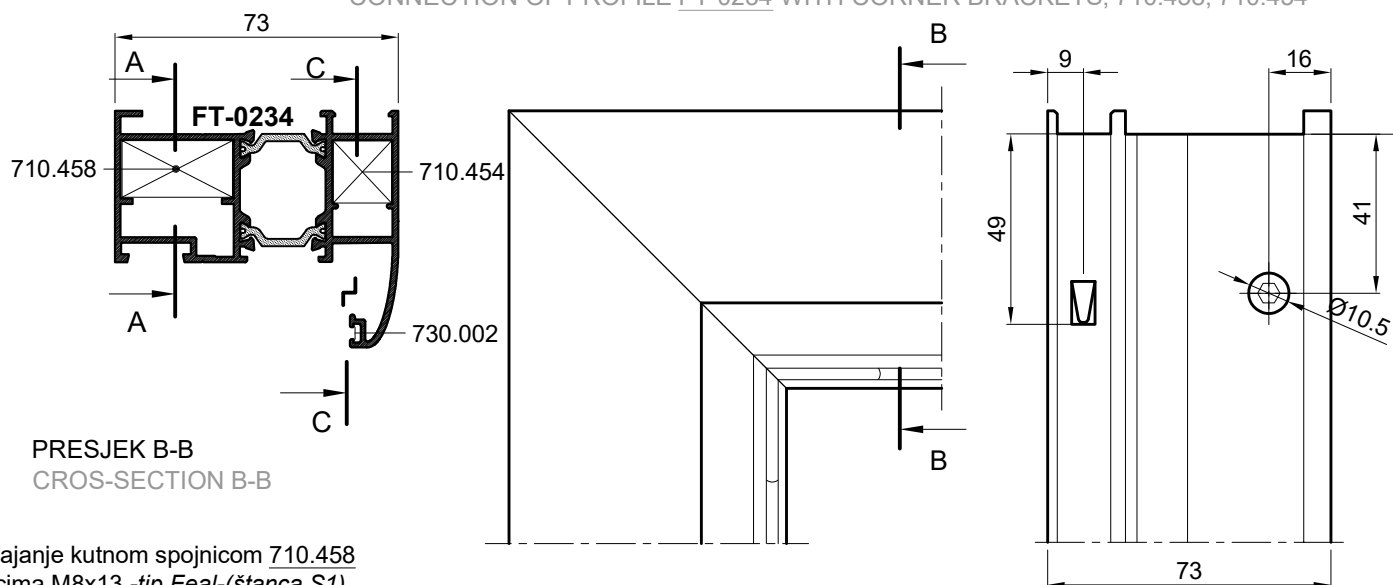




SPAJANJE PROFILA FT-0234 KUTNIM SPOJNICAMA; 710.458, 710.459

CONNECTION OF PROFILE FT-0234 WITH CORNER BRACKETS; 710.458, 710.459

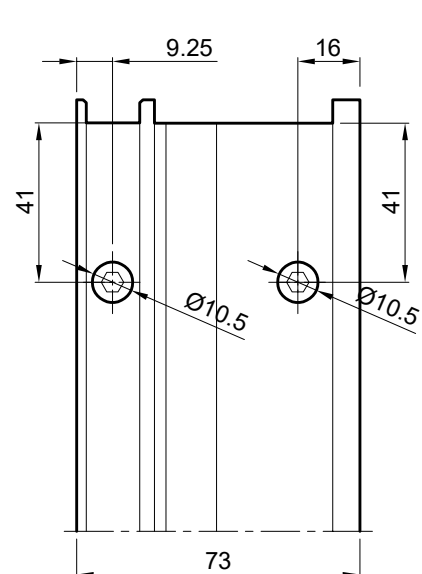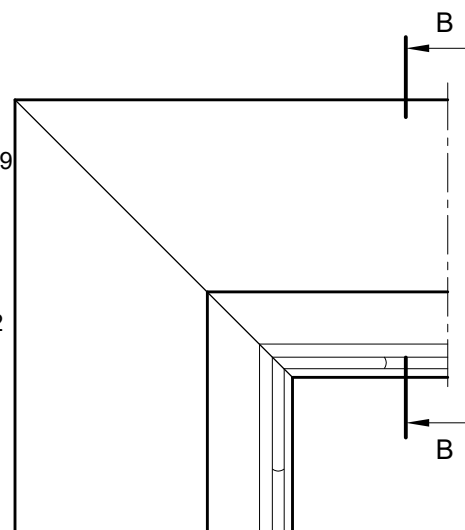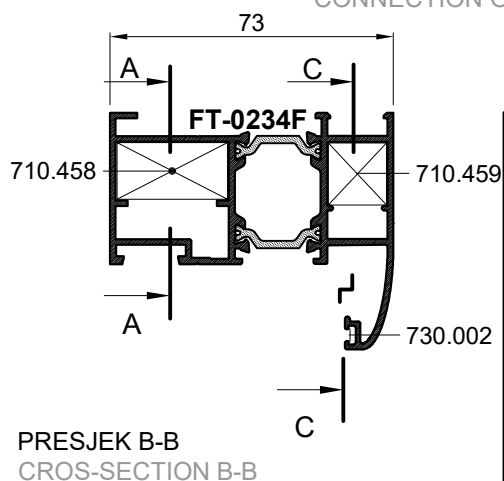


Spajanje kutnom spojnicom 710.458
vijcima M8x13 -tip Feal-(štancaS1)
Corner bracket connection 710.458
screws M8x13 -type Feal-(punch S1)

Spajanje kutnom spojnicom 710.459
vijcima M8x13 -tip Feal
Corner bracket connection 710.459
screws M8x13 -type Feal

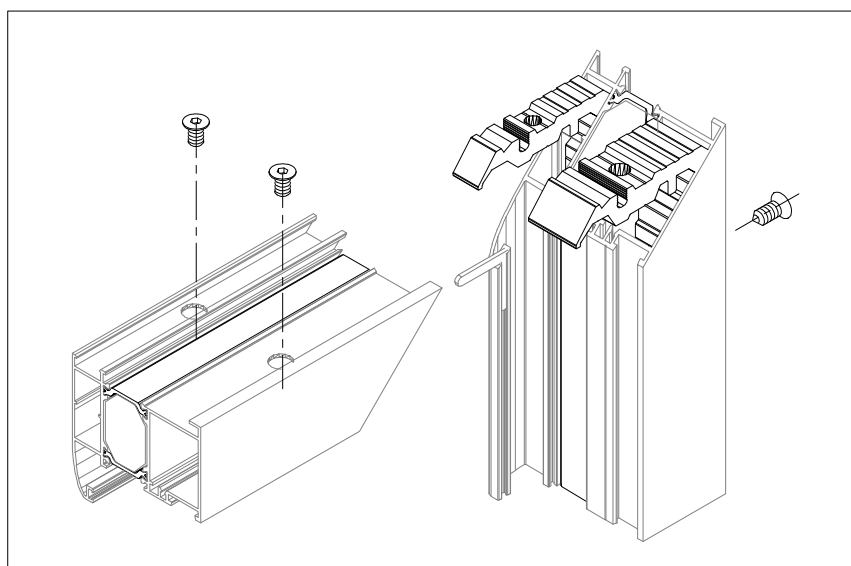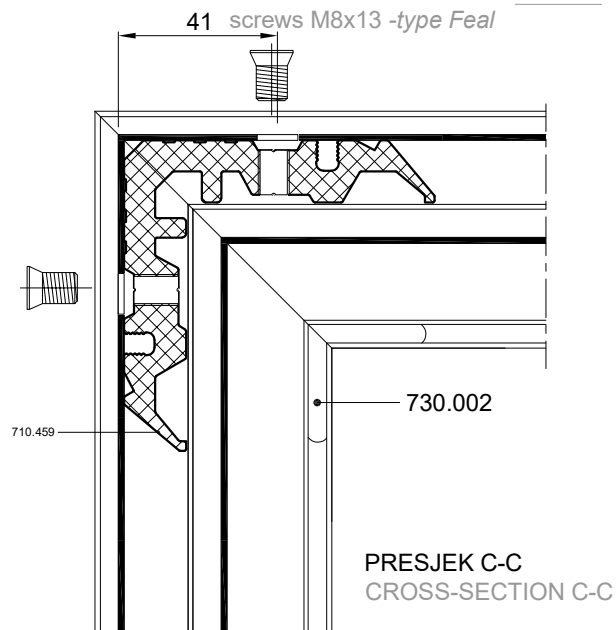
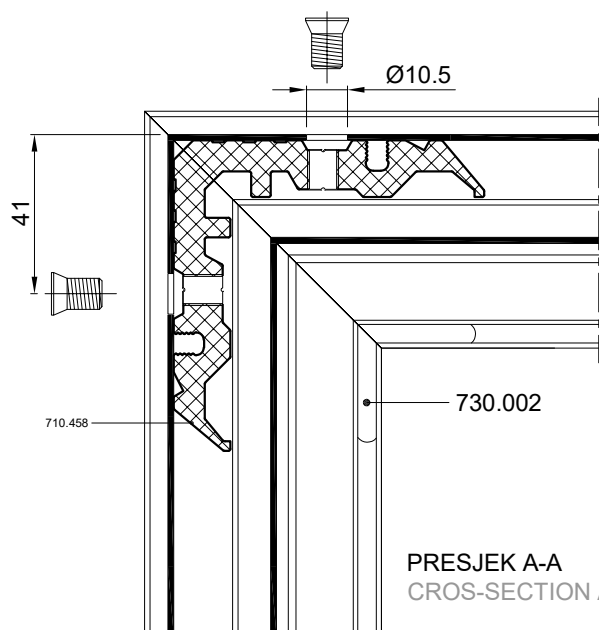


SPAJANJE PROFILA FT-0287 KUTNIM SPOJNICAMA; 710.458, 710.503

CONNECTION OF PROFILE FT-0287 WITH CORNER BRACKETS; 710.458, 710.503

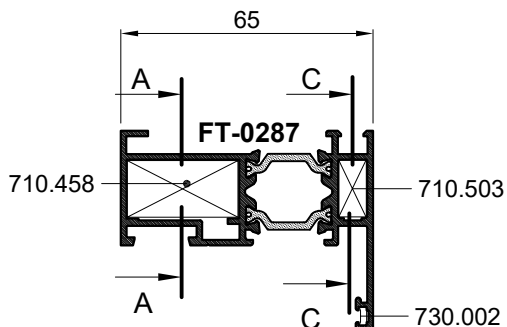

PRESJEK B-B
CROSECTION B-B

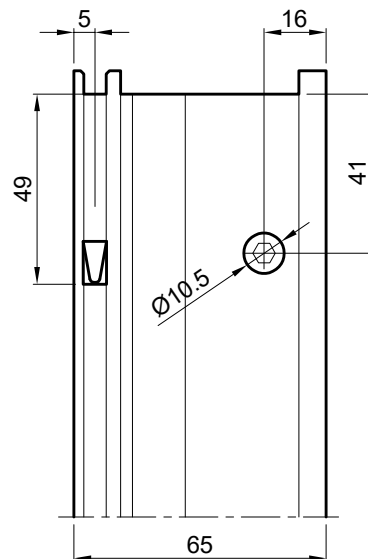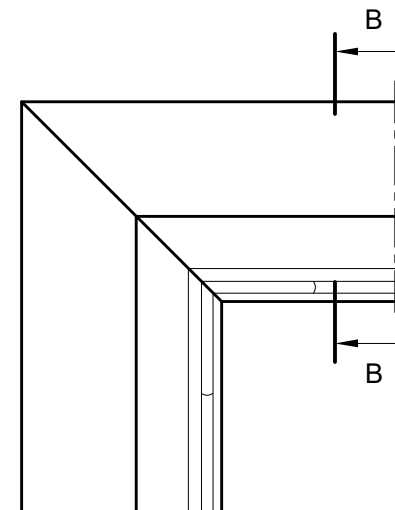

Spajanje kutnom spojnicom 710.458

vijcima M8x13 -tip Feal-(štanca S1)

Corner bracket connection 710.458

screws M8x13 -type Feal-(punch S1)


Spajanje kutnom spojnicom 710.503 uprešavanjem stijenke

profila prema kutnoj spojnici


Corn. brac. connection 710.503

aluminium profile corner

crimping

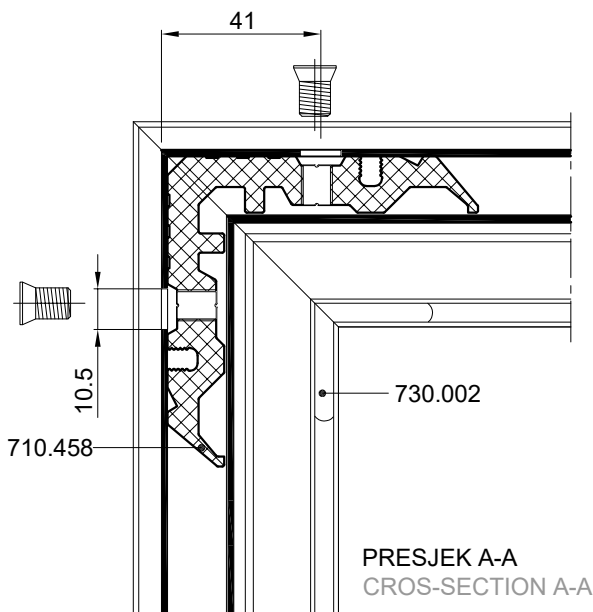


PRESJEK A-A
CROSECTION A-A

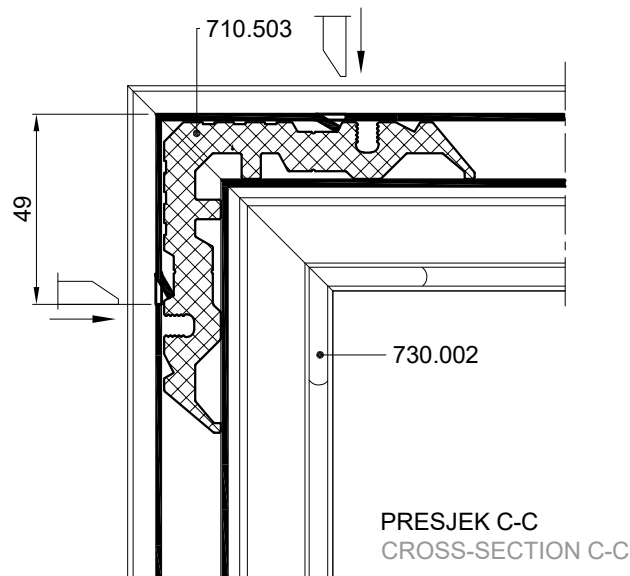


PRESJEK C-C
CROSECTION C-C

OVAJ RASPORED I NAČIN SPAJANJA KUTNIM SPOJNICAMA PRIMJENJIV JE I NA PROFIL RAMA FT-0298



THIS ARRANGEMENT AND BINDING METHOD WITH CORNER BRACKETS IS ALSO APPLICABLE FOR
FRAME PROFILES FT-0298




SPAJANJE PROFILA FT-0261 KUTNIM SPOJNICAMA; 710.469, 710.452 CONNECTION OF PROFILE FT-0261 WITH CORNER BRACKETS; 710.469, 710.452

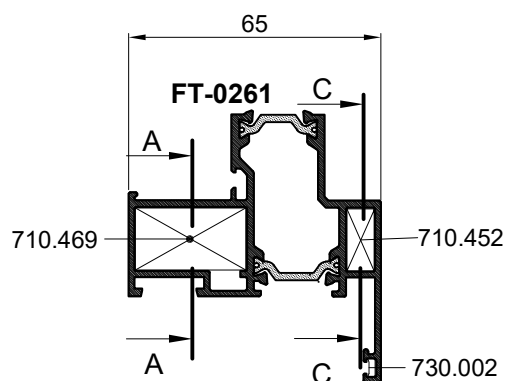

PRESJEK B-B
CROSS-SECTION B-B

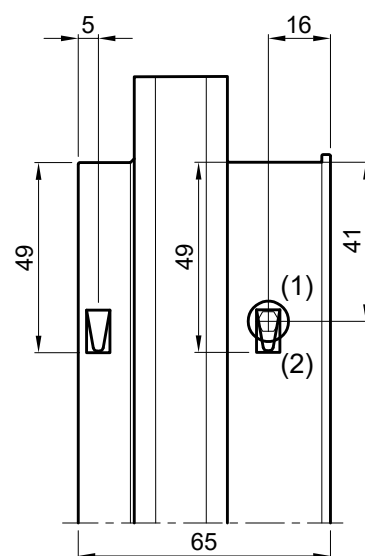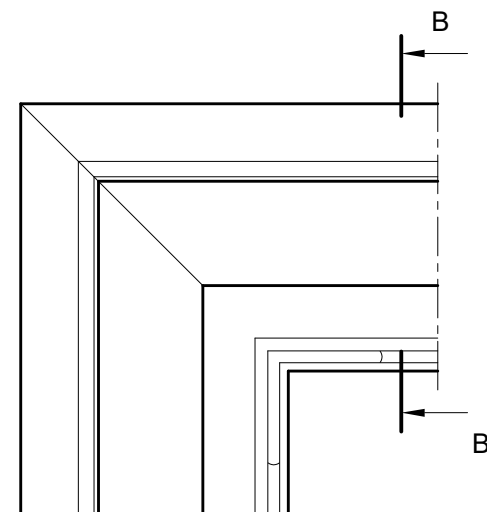


Spajanje kutnom spojnicom 710.469 uprešavanjem
stijenke profila prema kutnoj spojnici
Corn. brac. connection 710.469
aluminium profile corner crimping

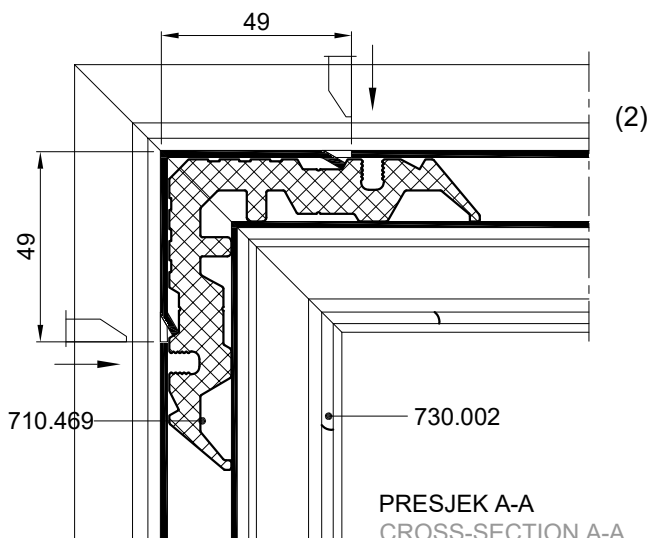


PRESJEK A-A
CROSS-SECTION A-A

Spajanje kutnom spojnicom 710.452 uprešavanjem
stijenke profila prema kutnoj spojnici
Corn. brac. connection 710.452
aluminium profile corner crimping

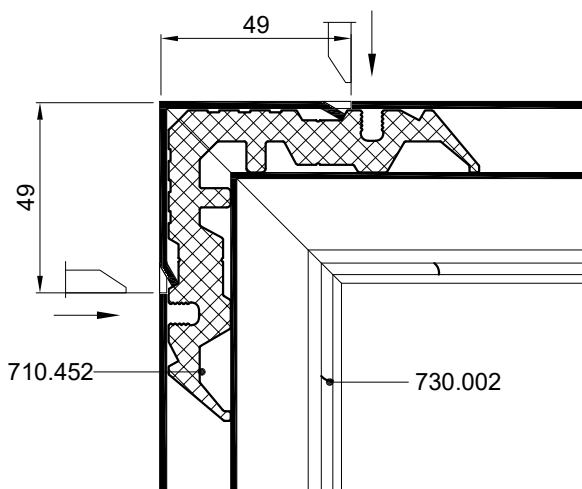

PRESJEK C-C
CROSS-SECTION C-C

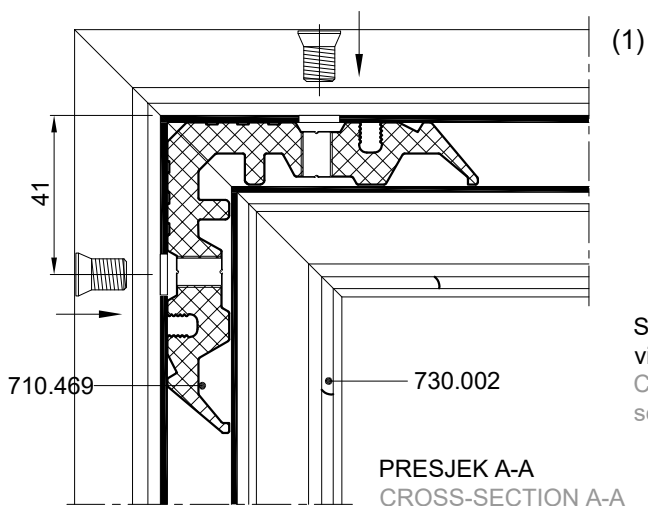


PRESJEK A-A
CROSS-SECTION A-A

Spajanje kutnom spojnicom 710.469
vijkima M8x13(431.266)-tip Feal
Corner bracket connection 710.469
screws M8x13(431.266) -type Feal


SPAJANJE PROFILA FT-0297 KUTNIM SPOJNICAMA; 710.514, 710.515, 710.516 i 731.010

CONNECTION OF PROFILES FT-0297 WITH CORNER BRACKETS; 710.514, 710.515, 710.516 and 731.010

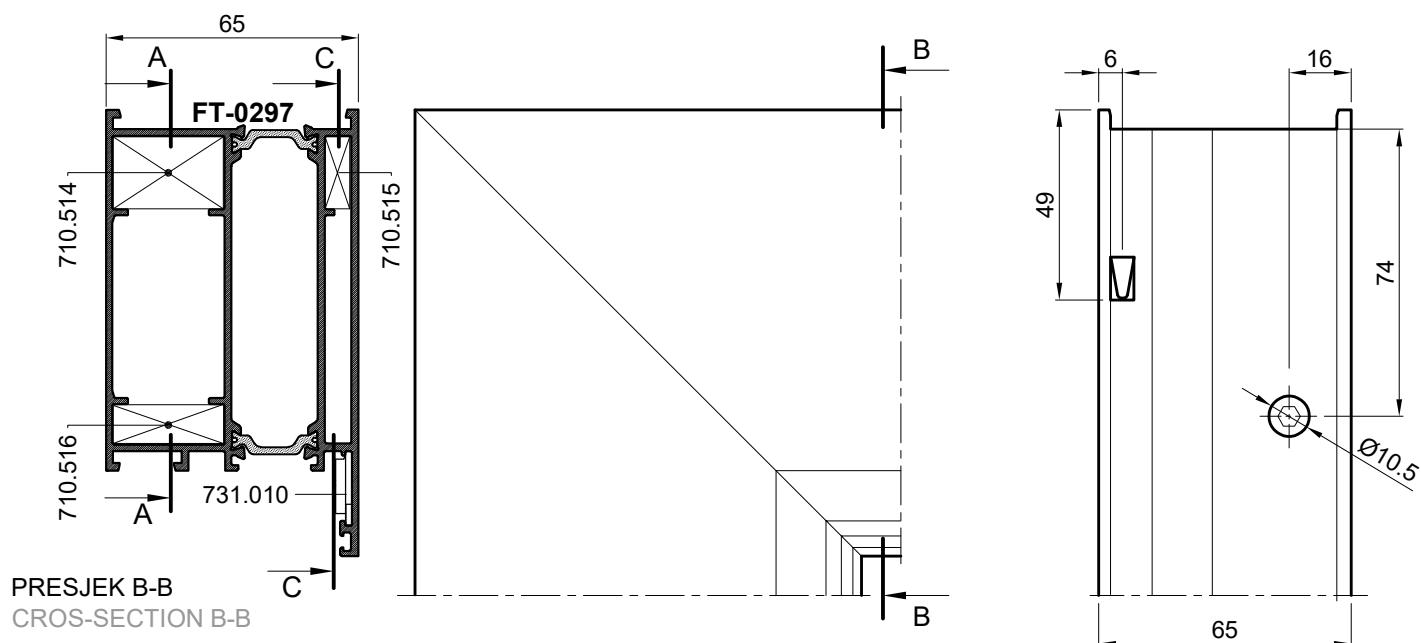


Spajanje kutnom spojnicom 710.514
vjcima M8x13 -tip Feal-(štanca S1)
Corner bracket connection 710.514
screws M8x13 -type Feal-(punch S1)

Spajanje kutnom spojnicom 710.515
uprešavanjem stijenke profila
prema kutnoj spojnici
Corn. brac. connection 710.515
aluminium profile corner crimping

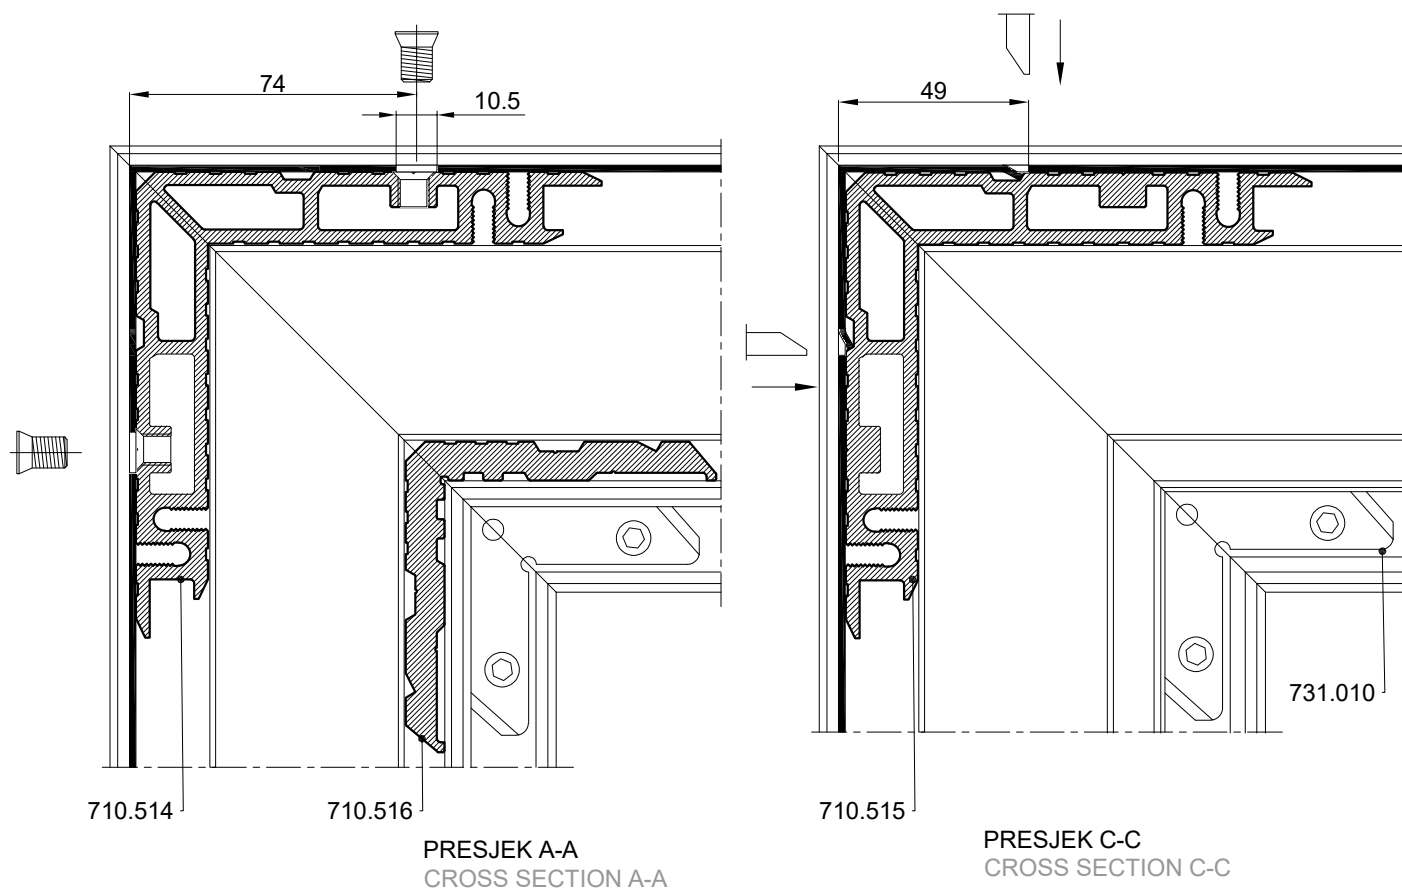

SPAJANJE PROFILA FT-0275 KUTNIM SPOJNICAMA 710.133, 710.172 CONNECTION OF PROFILE FT-0275 WITH CORNER BRACKETS 710.133, 710.172



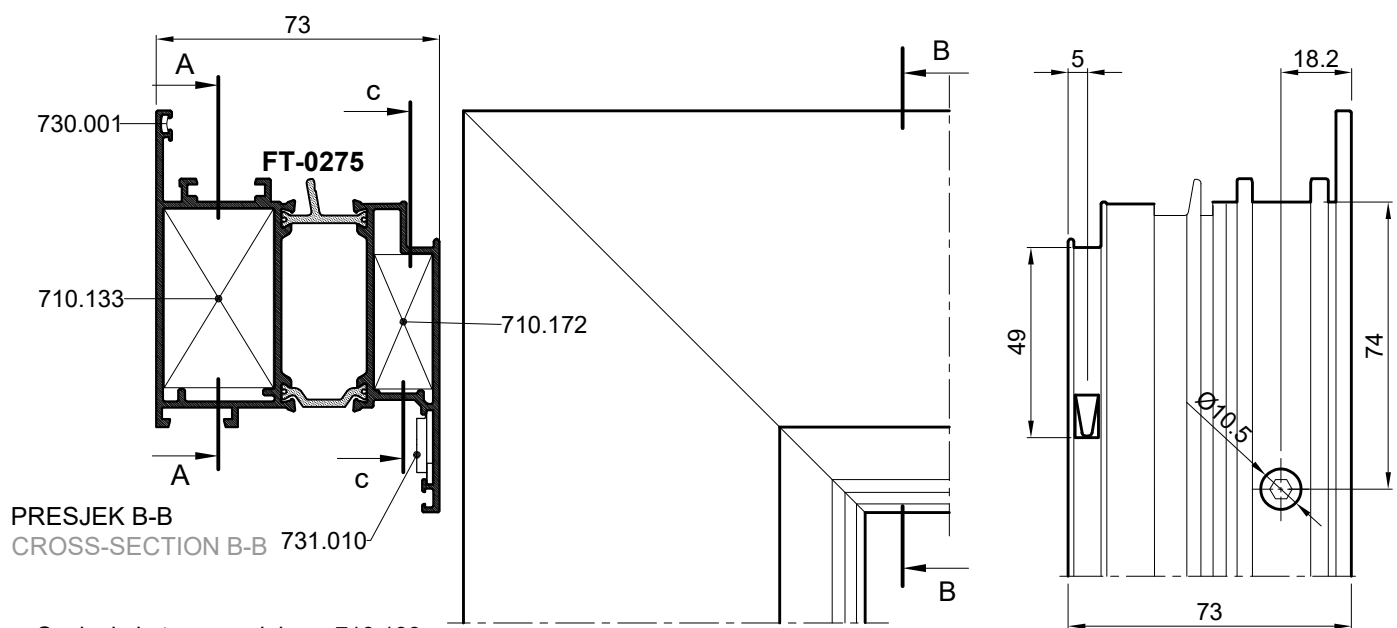


Spajanje kutnom spojnicom 710.133


vijcima M8x13 -tip Feal -(štanca S1)

Corner bracket connection 710.133


screws M8x13 -type Feal -(punch S4)

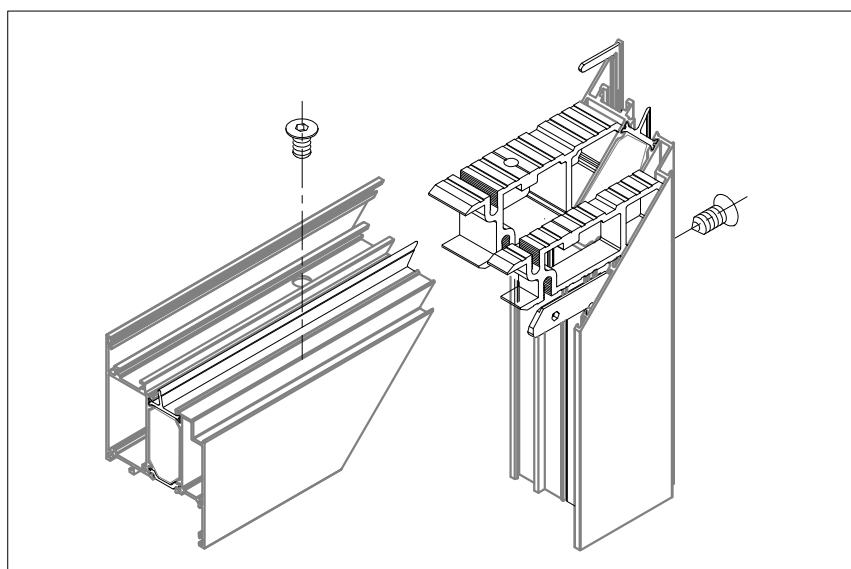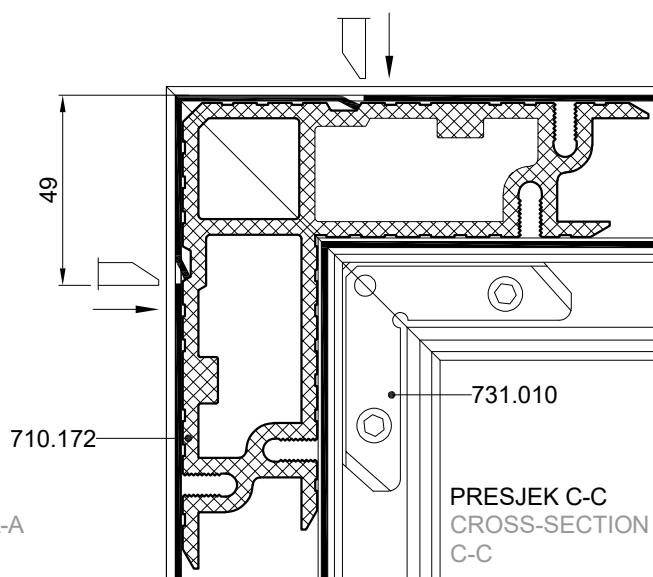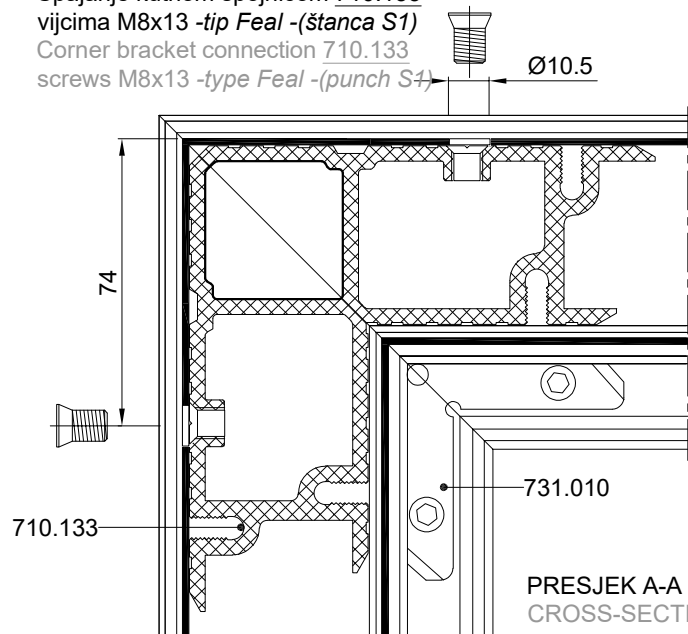

SPAJANJE PROFILA FT-0275 KUTNIM SPOJNICAMA 710.062, 710.172 CONNECTION OF PROFILE FT-0275 WITH CORNER BRACKETS 710.062, 710.172


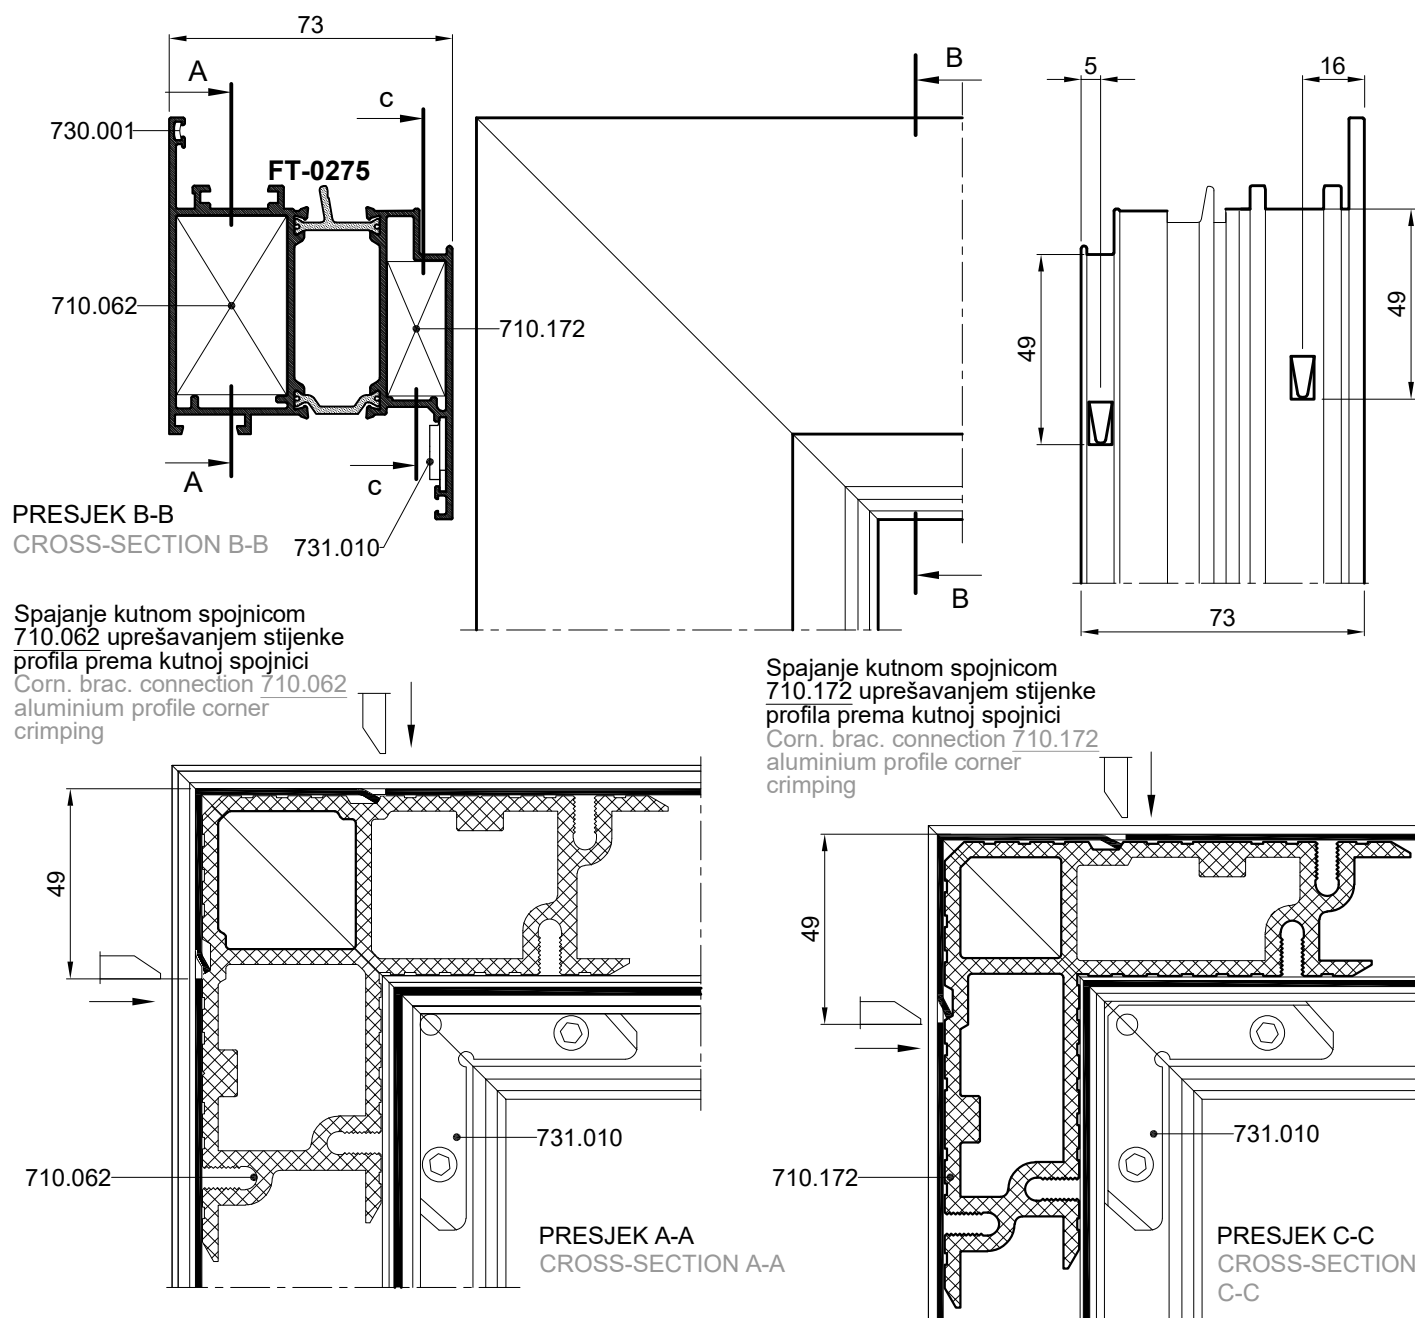


SPAJANJE PROFILA **FT-0291** KUTNIM SPOJNICAMA 710.133, 710.425 CONNECTION OF PROFILE **FT-0291** WITH CORNER BRACKETS 710.133, 710.425

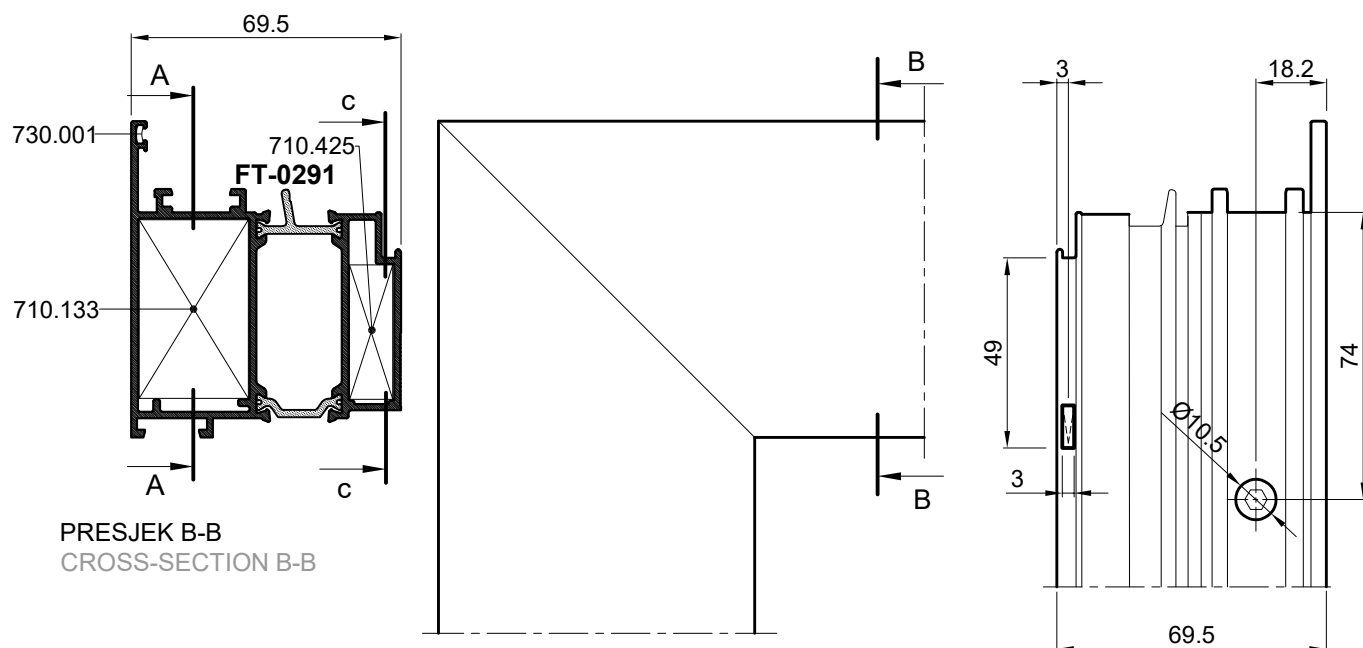


Spajanje kutnom spojnicom 710.133
vijcima M8x13 -tip Feal -(štanca S1)
Corner bracket connection 710.133
screws M8x13 -type Feal -(punch S1)

Spajanje kutnom spojnicom
710.425 uprešavanjem stijenke
profila prema kutnoj spojnici
Corn. brac. connection 710.425
aluminium profile corner crimping

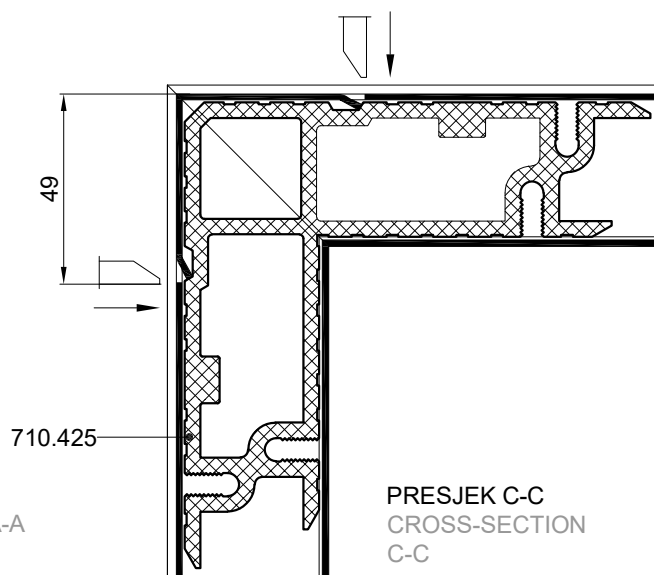
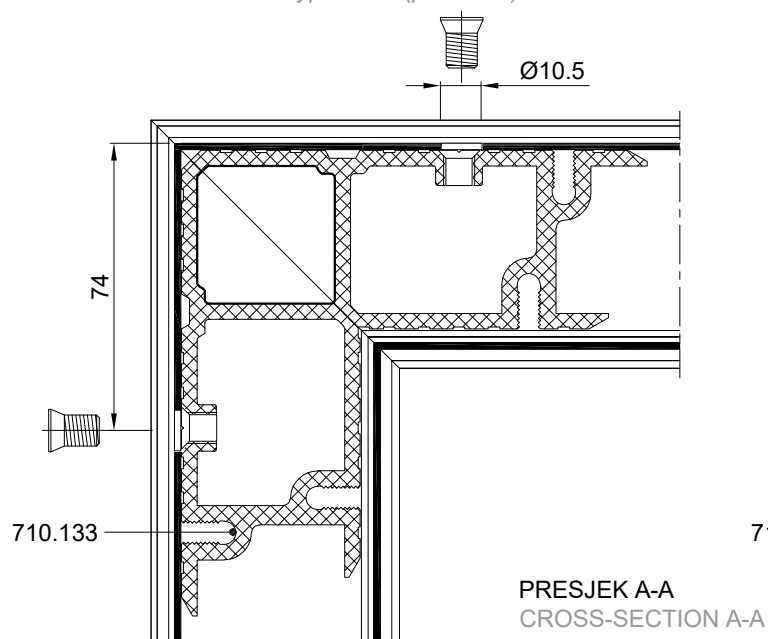


SPAJANJE PROFILA **FT-0291** KUTNIM SPOJNICAMA 710.062, 710.425 CONNECTION OF PROFILE **FT-0291** WITH CORNER BRACKETS 710.062, 710.425

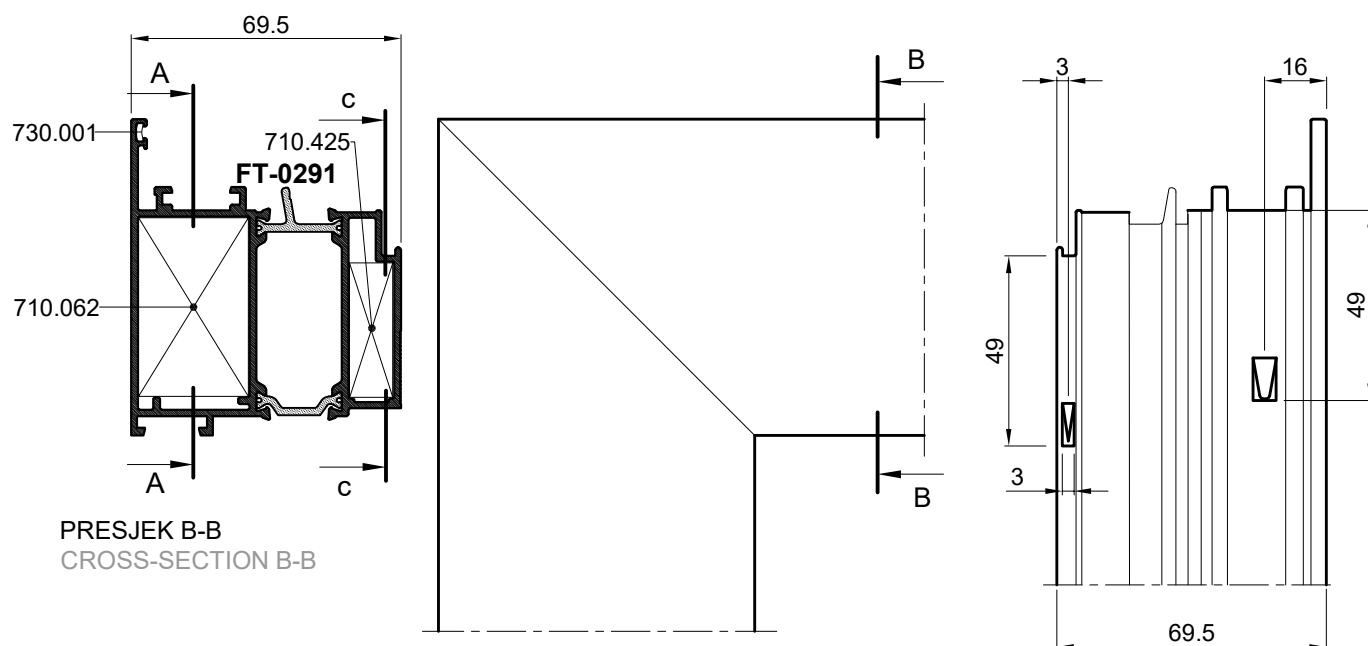


Spajanje kutnom spojnicom 710.062
uprešavanjem stijenke profila
prema kutnoj spojnici
Corn. brac. connection 710.062
aluminium profile corner crimping


Spajanje kutnom spojnicom 710.425
uprešavanjem stijenke profila
prema kutnoj spojnici
Corn. brac. connection 710.425
aluminium profile corner crimping

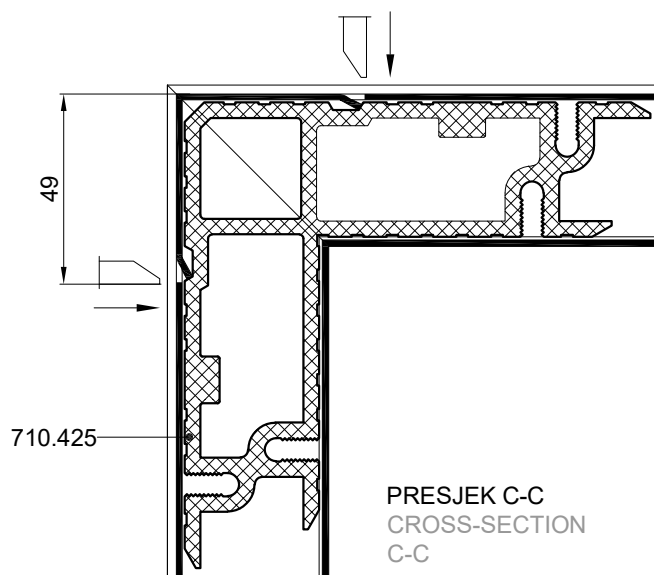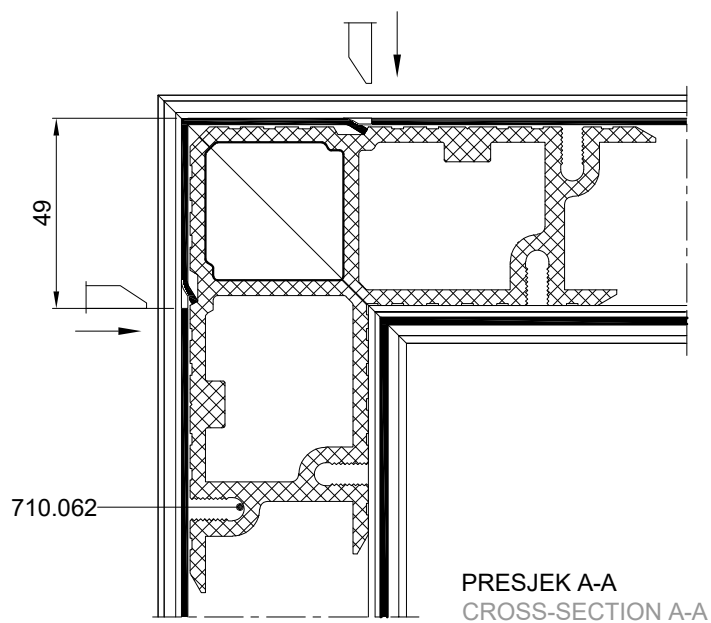


SPAJANJE PROFILA FT-0203 KUTNIM SPOJNICAMA; 730.008, 710.443 CONNECTION OF PROFILE FT-0203 WITH CORNER BRACKETS; 730.008, 710.443

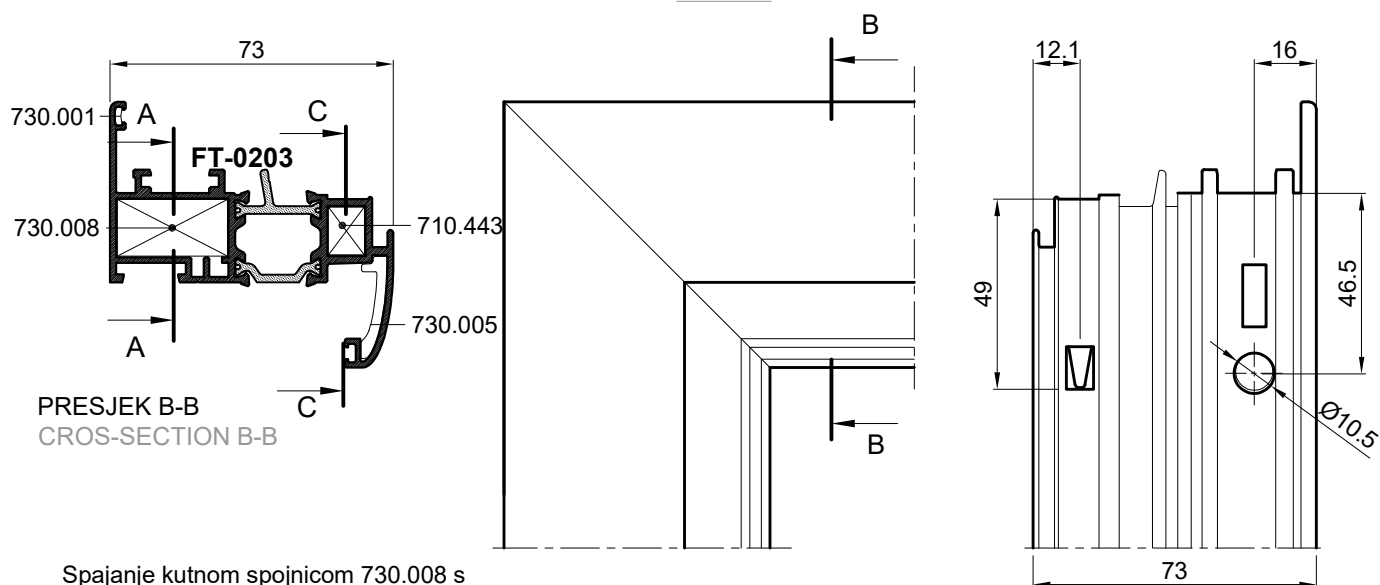



Spajanje kutnom spojnicom 730.008 s predobradom štancanja-(štanca S1)
Connection with corner bracket 730.008 with punching preprocessing-punch S1)

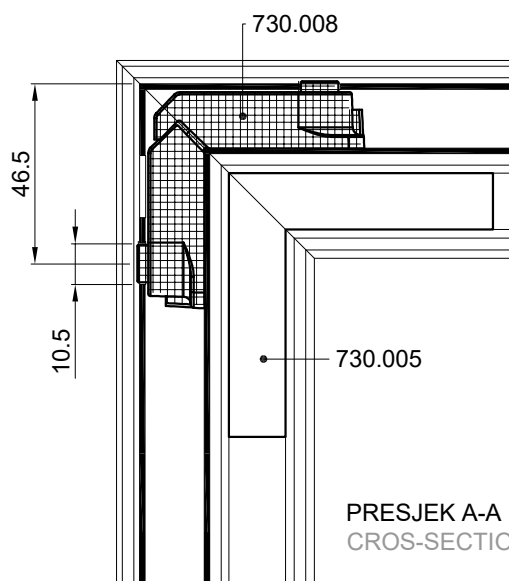


Spajanje kutnom spojnicom 710.443 uprešavanjem stijenke profila prema kutnoj spojnici
Corn. brac. connection 710.443 aluminium profile corner crimping

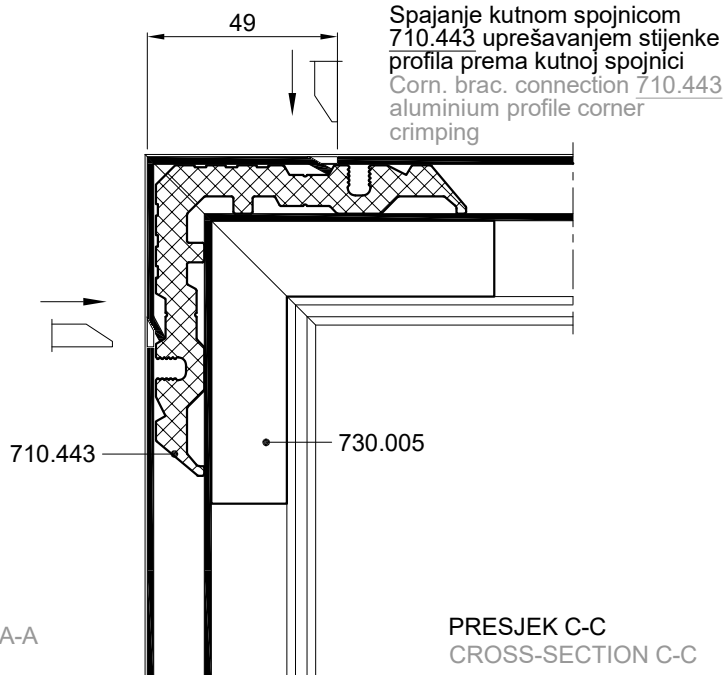

OVAJ RASPORED I NAČIN SPAJANJA KUTNIM SPOJNICAMA PRIMJENJIV JE I NA PROFILE FT-0221
THIS ARRANGEMENT AND BINDING METHOD WITH CORNER BRACKETS IS ALSO APPLICABLE FOR PROFILE FT-0221

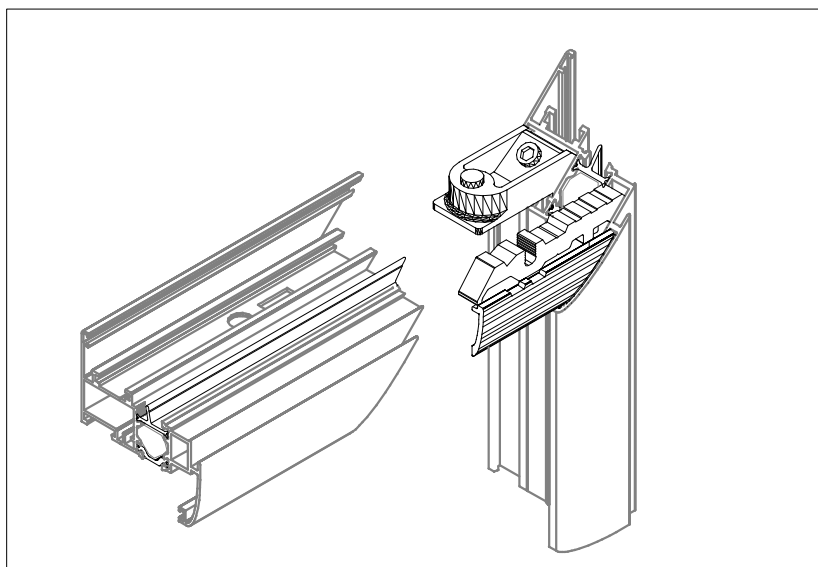



SPAJANJE PROFILA FT-0203 KUTNIM SPOJNICAMA; 710.450, 710.443 CONNECTION OF PROFILE FT-0203 WITH CORNER BRACKETS; 710.450, 710.443



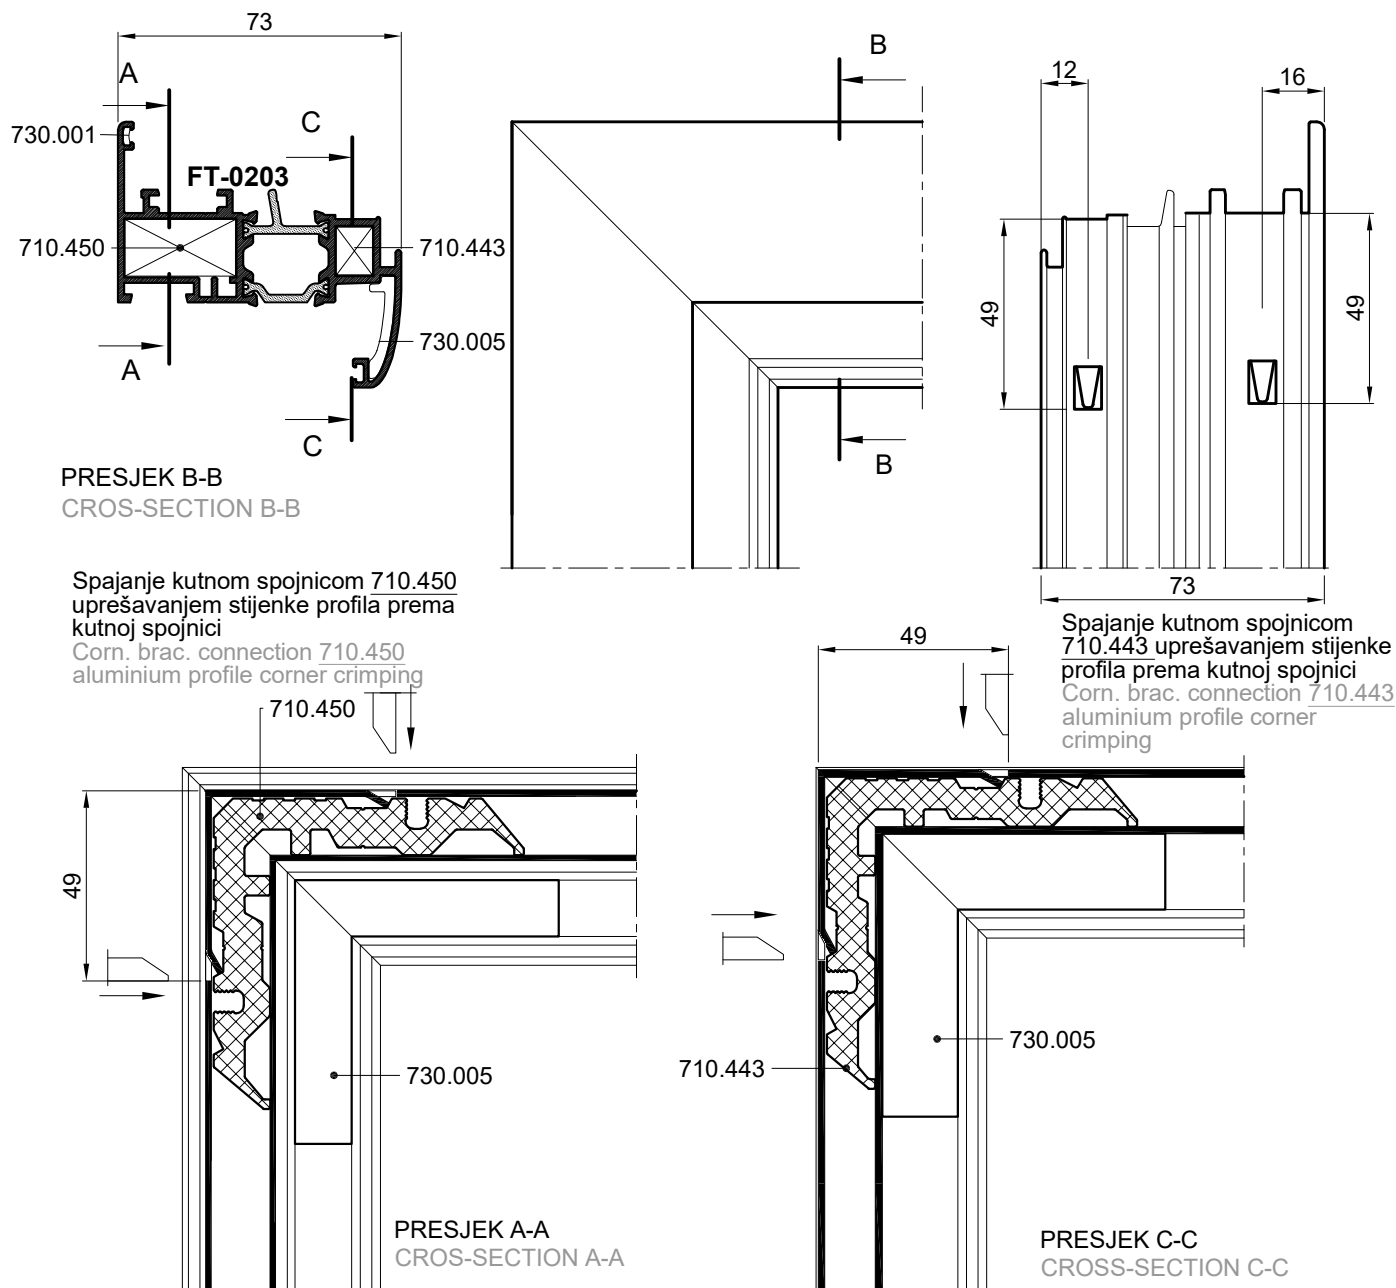


OVAJ RASPORED I NAČIN SPAJANJA KUTNIM SPOJNICAMA PRIMJENJIV JE I NA PROFILE FT-0221



THIS ARRANGEMENT AND BINDING METHOD WITH CORNER BRACKETS IS ALSO APPLICABLE FOR PROFILE FT-0221

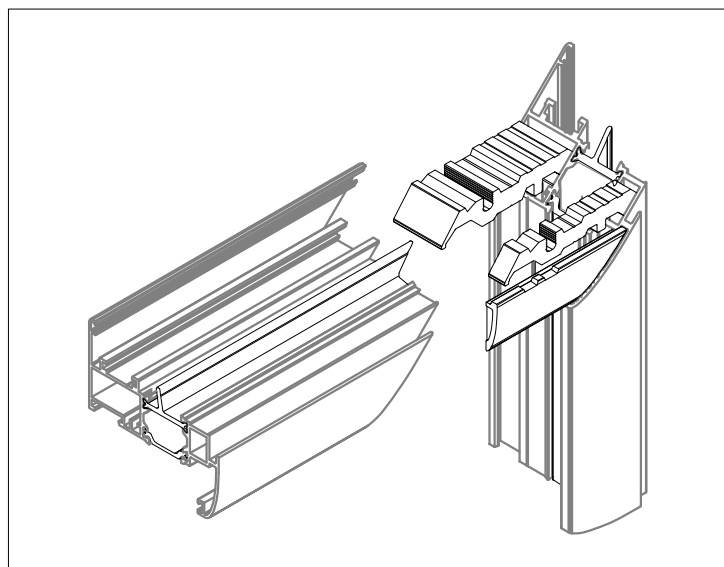

SPAJANJE PROFILA FT-0203 KUTNIM SPOJNICAMA; 710.458, 710.443 CONNECTION OF PROFILE FT-0203 WITH CORNER BRACKETS; 710.458, 710.443

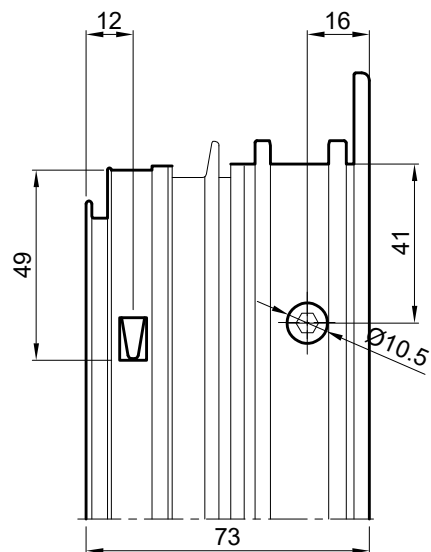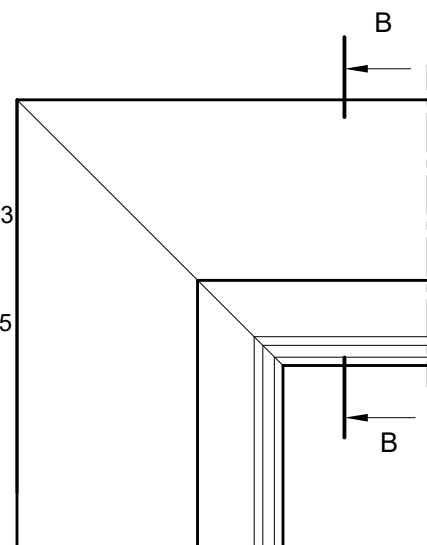
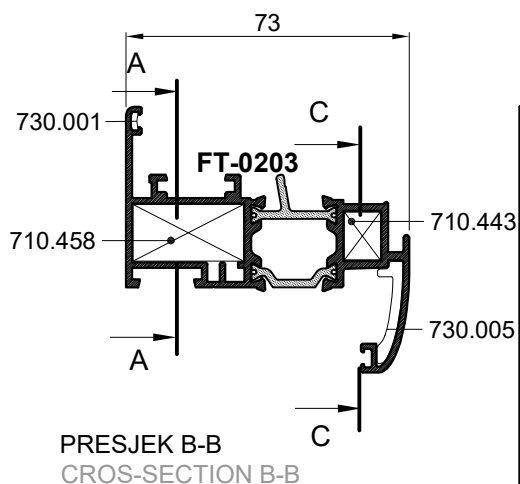


Spajanje kutnom spojnicom 710.458
vijkama M8x13 -tip Feal-(štanca S1)
Corner bracket connection 710.458
screws M8x13 -type Feal-(punch S1)

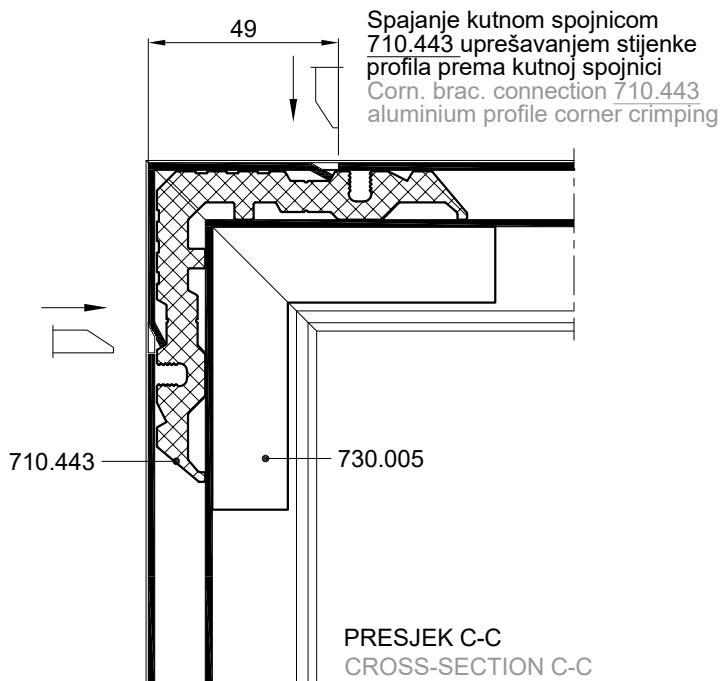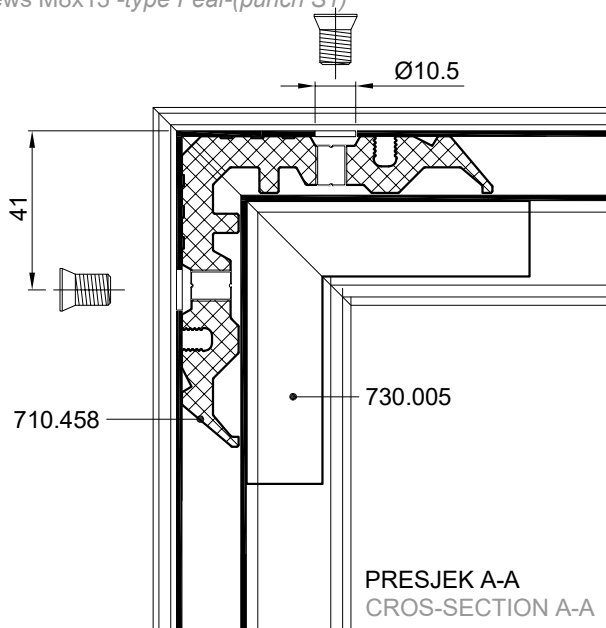


OVAJ RASPORED I NAČIN SPAJANJA KUTNIM
SPOJNICAMA PRIMJENJIV JE I NA PROFILE
FT-0221

THIS ARRANGEMENT AND BINDING METHOD
WITH CORNER BRACKETS IS ALSO
APPLICABLE FOR PROFILE **FT-0221**

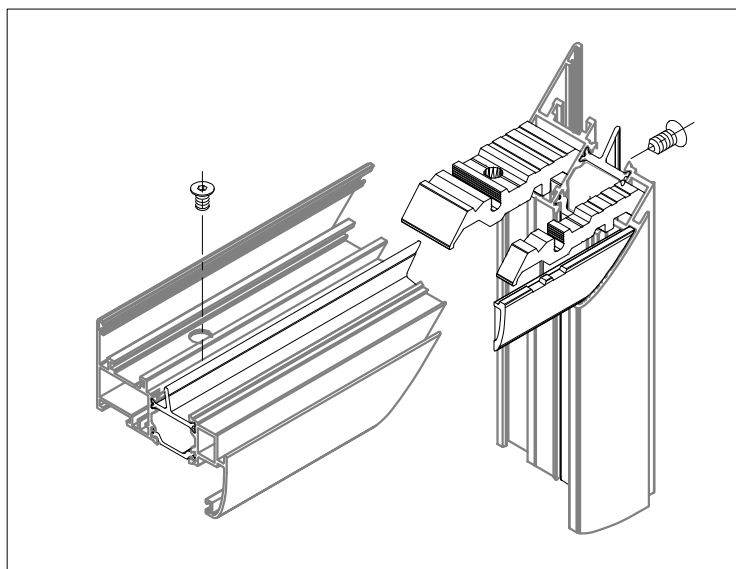



SPAJANJE PROFILA FT-0295 KUTNIM SPOJNICAMA; 730.008, 710.443 CONNECTION OF PROFILE FT-0295 WITH CORNER BRACKETS; 730.008, 710.443

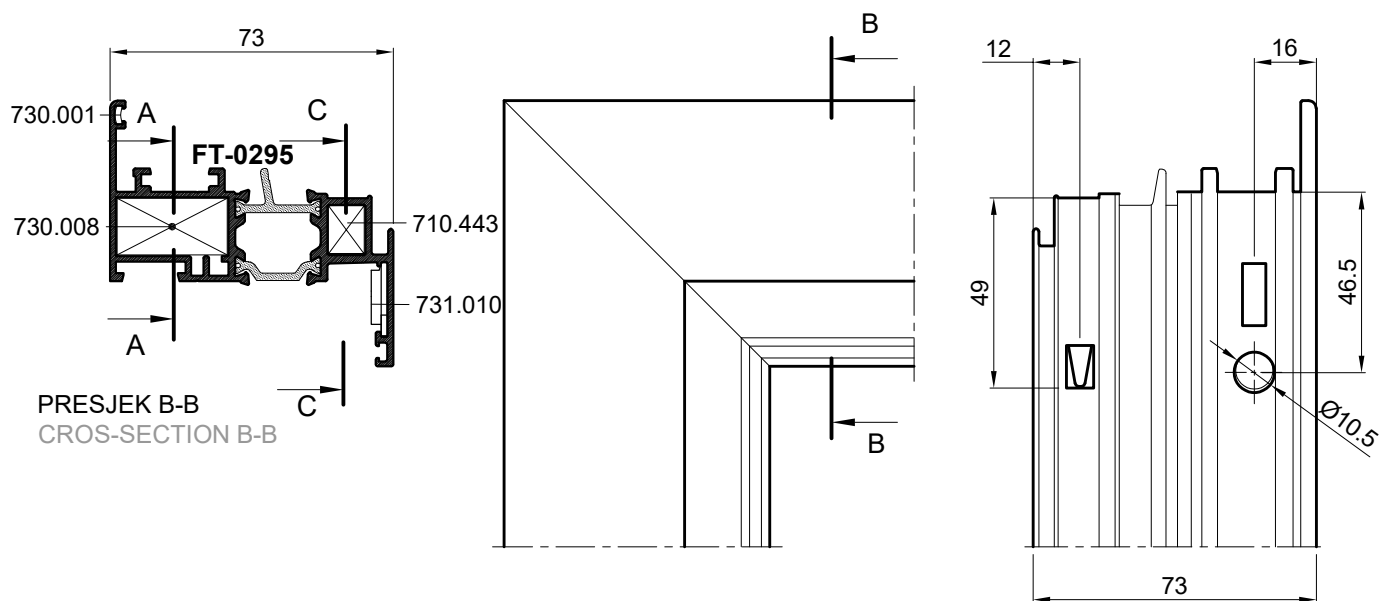


Spajanje kutnom spojnicom 730.008 s
predobradom štancanja-(štanca S1)
Connection with corner bracket 730.008
with punching preprocessing-punch S1)

Spajanje kutnom spojnicom
710.443 uprešavanjem stijenke
profila prema kutnoj spojnici
Corn. brac. connection 710.443
aluminium profile corner crimping

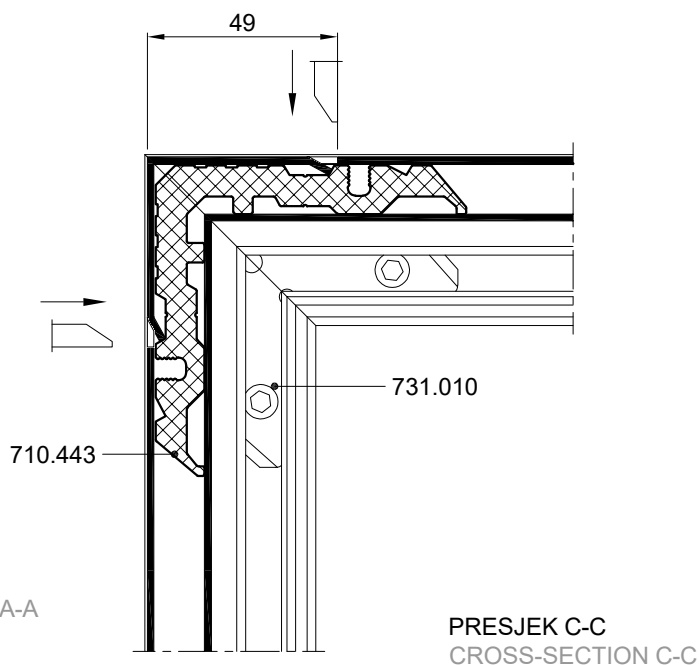
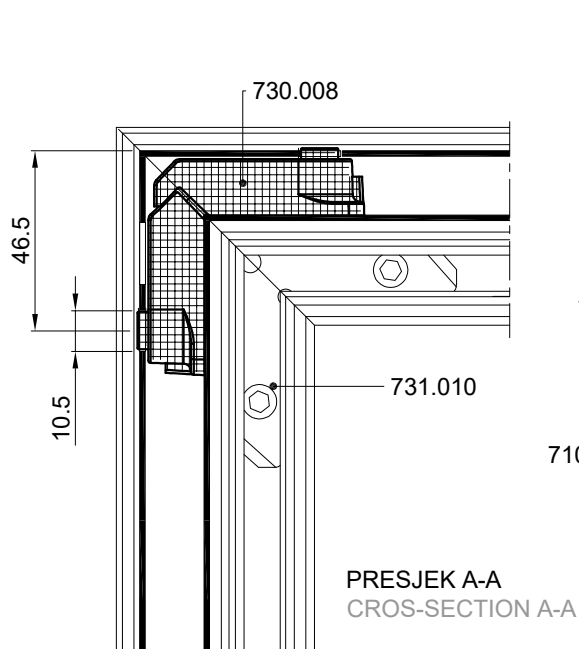


SPAJANJE PROFILA FT-0204 KUTNIM SPOJNICAMA; 730.009, 710.453 CONNECTION OF PROFILE FT-0204 WITH CORNER BRACKETS; 730.009, 710.453

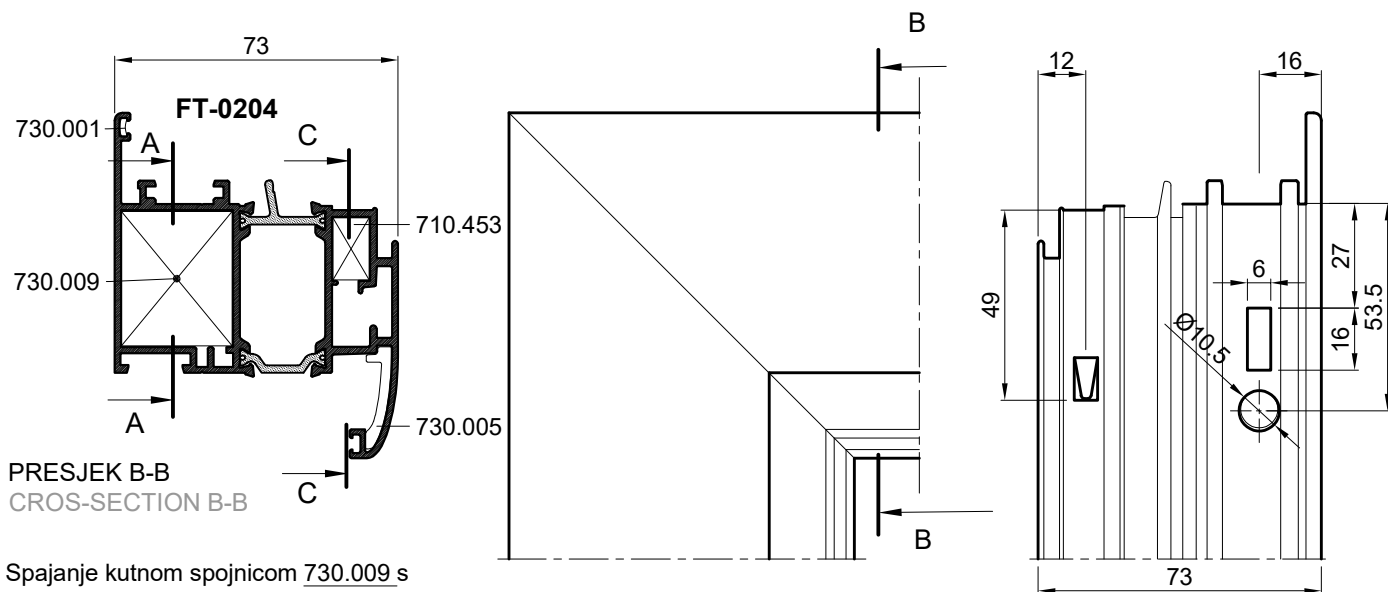



Spajanje kutnom spojnicom 730.009 s
predobradom štancanja-(štanca S1)
Connection with corner bracket 730.009
with punching preprocessing-(punch S1)

Spajanje kutnom spojnicom
710.453 uprešavanjem stijenke
profila prema kutnoj spojnici
Corn. brac. connection 710.453
aluminium profile corner
crimping

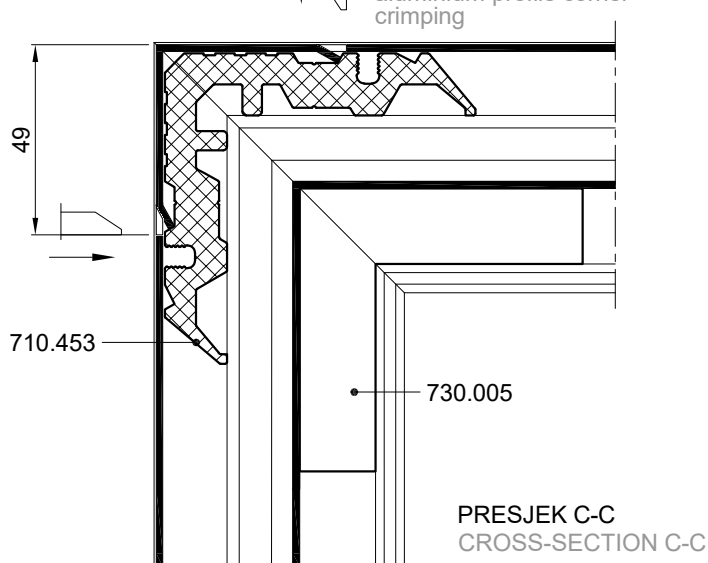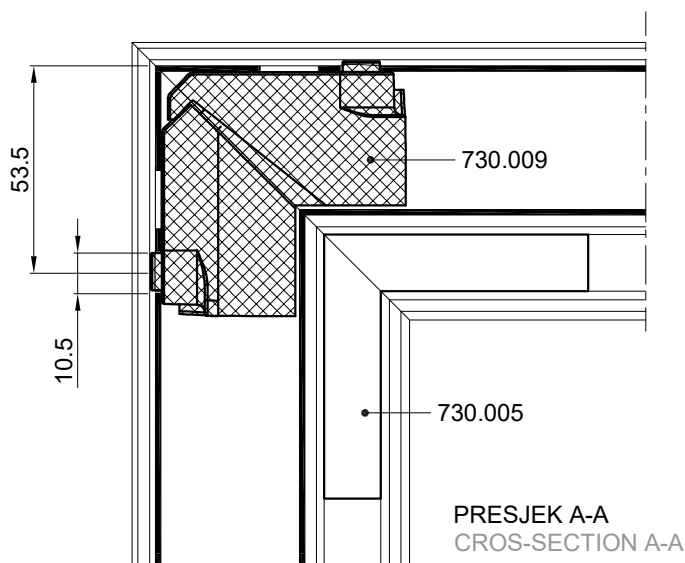


OVAJ RASPORED I NAČIN SPAJANJA KUTNIM
SPOJNICAMA PRIMJENJIV JE I NA PROFILE
FT-0230

THIS ARRANGEMENT AND BINDING METHOD
WITH CORNER BRACKETS IS ALSO
APPLICABLE FOR PROFILE **FT-0230**

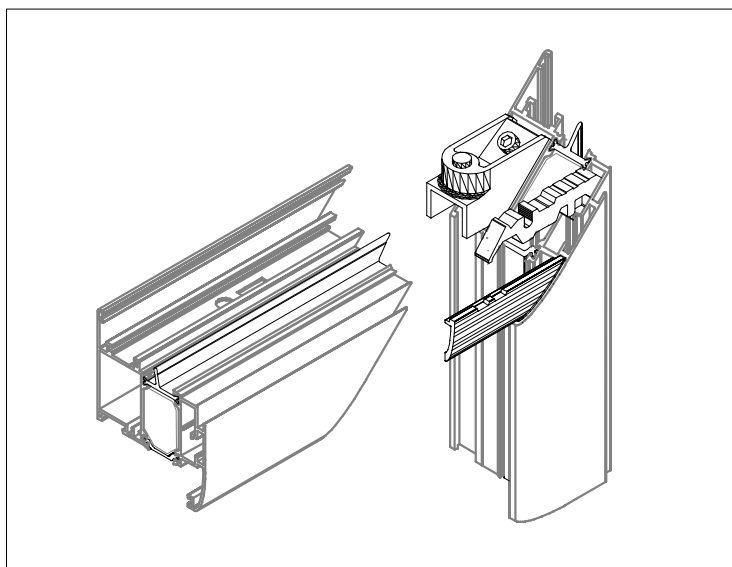



SPAJANJE PROFILA FT-0204 KUTNIM SPOJNICAMA; 710.059, 710.453

CONNECTION OF PROFILES FT-0204 WITH CORNER BRACKETS; 710.059, 710.453

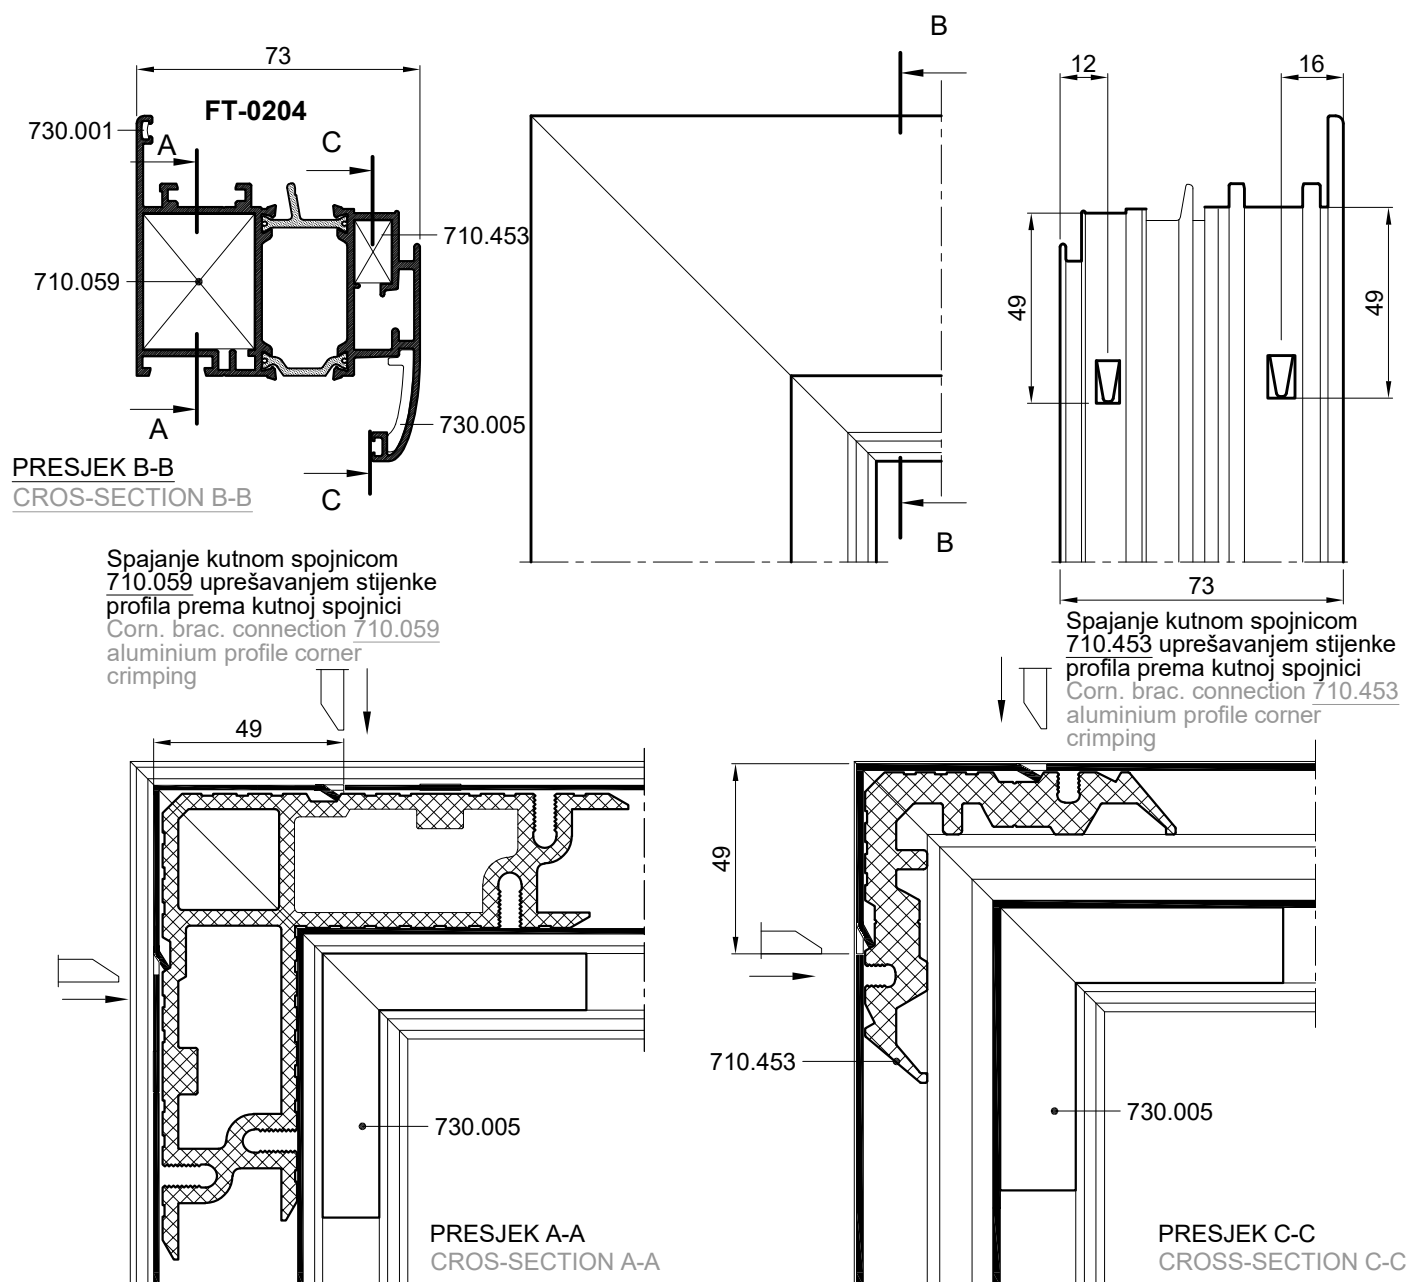


OVAJ RASPORED I NAČIN SPAJANJA KUTNIM SPOJNICAMA PRIMJENJIV JE I NA PROFILE **FT-0230**



THIS ARRANGEMENT AND BINDING METHOD WITH CORNER BRACKETS IS ALSO APPLICABLE FOR PROFILE **FT-0230**

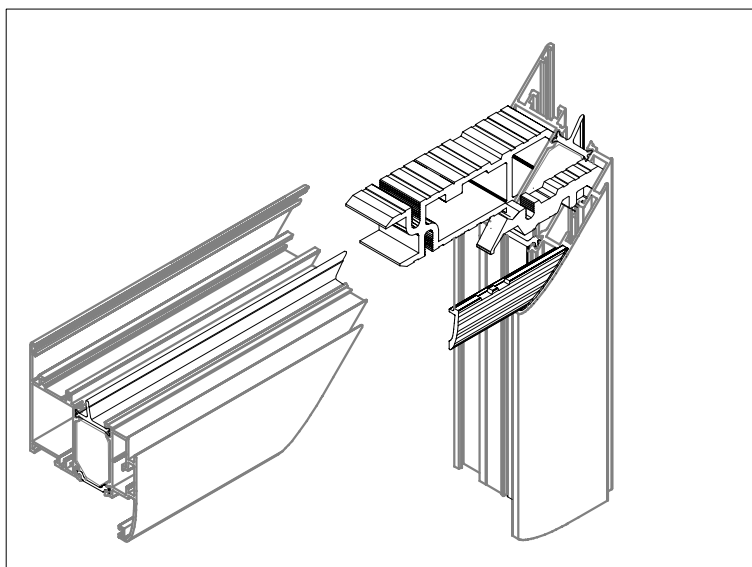


SPAJANJE PROFILA FT-0204 KUTNIM SPOJNICAMA; 710.072, 710.453 CONNECTION OF PROFILE FT-0204 WITH CORNER BRACKETS; 710.072, 710.453

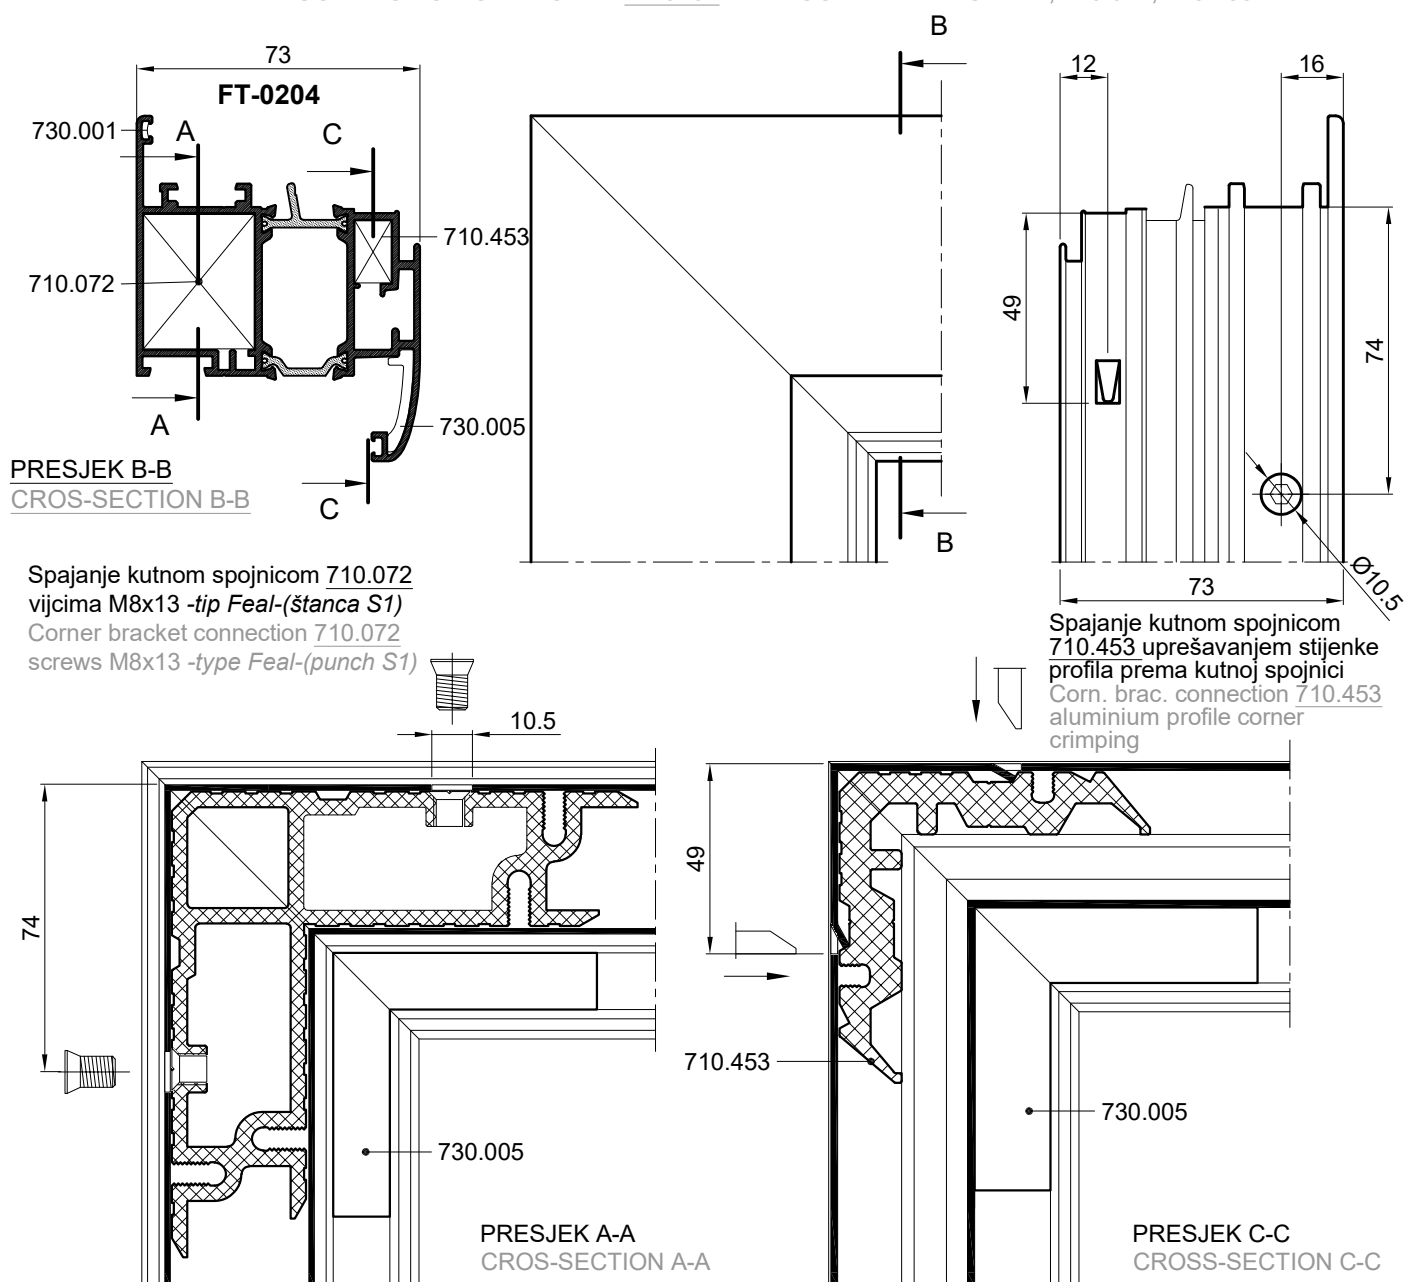

OVAJ RASPORED I NAČIN SPAJANJA KUTNIM SPOJNICAMA PRIMJENJIV JE I NA PROFILE FT-0230
THIS ARRANGEMENT AND BINDING METHOD WITH CORNER BRACKETS IS ALSO APPLICABLE FOR PROFILE FT-0230

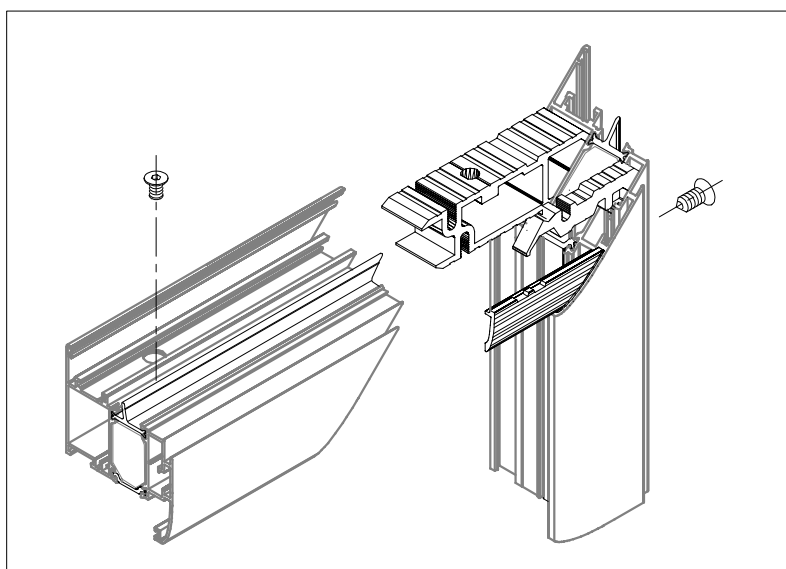



SPAJANJE PROFILA FT-0218 KUTNIM SPOJNICAMA; 710.059, 710.452 CONNECTION OF PROFILE FT-0218 WITH CORNER BRACKETS; 710.059, 710.452

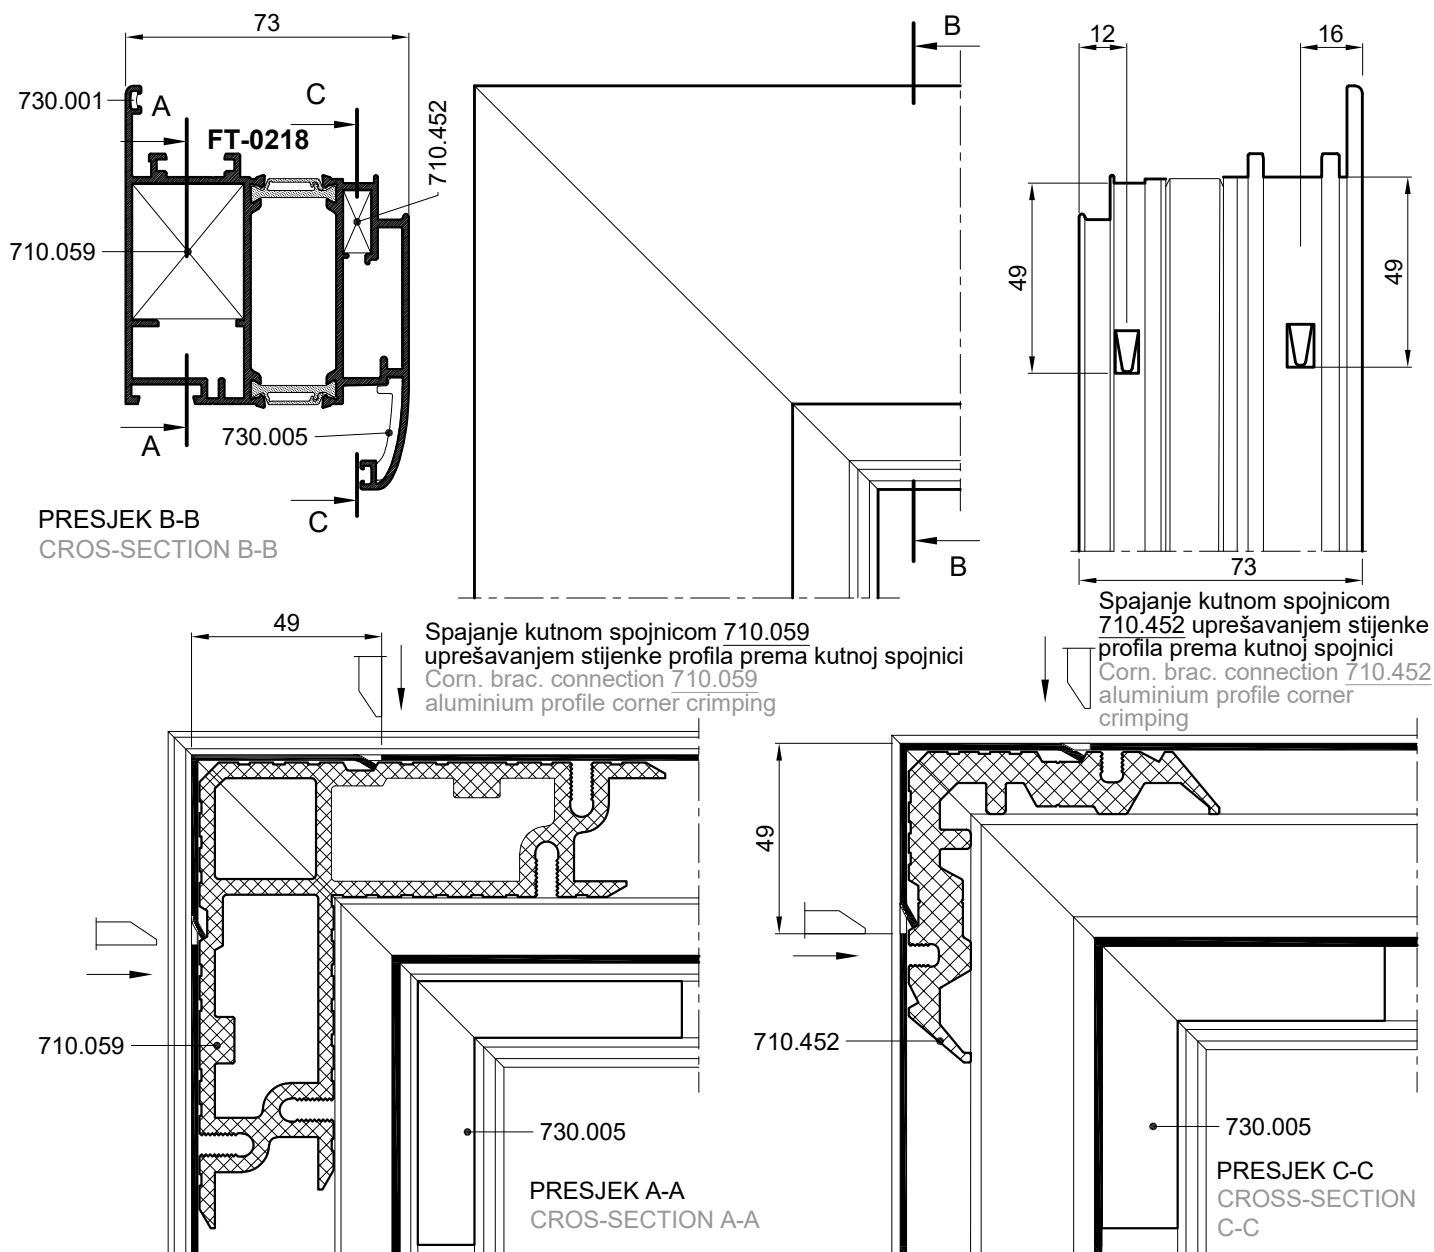


OVAJ RASPORED I NAČIN SPAJANJA KUTNIM SPOJNICAMA PRIMJENJIV JE I NA PROFILE **FT-0247**

THIS ARRANGEMENT AND BINDING METHOD WITH CORNER BRACKETS IS ALSO APPLICABLE FOR PROFILE **FT-0247**

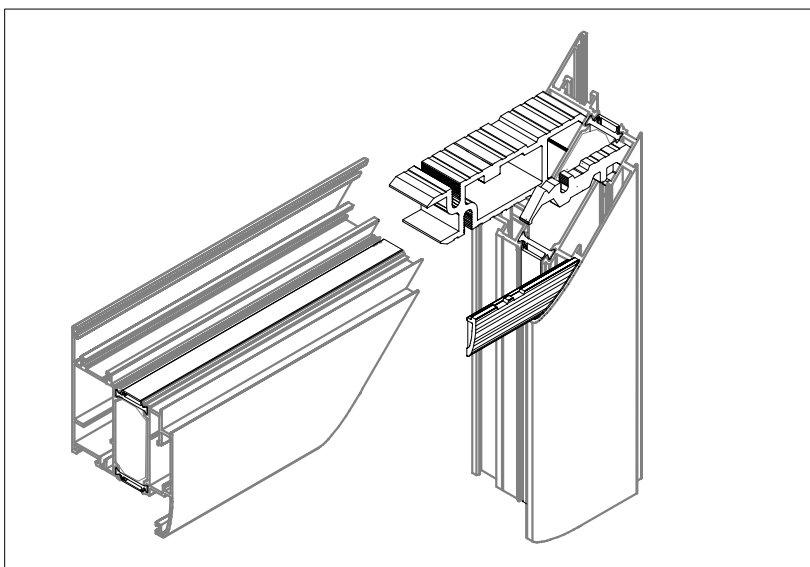



SPAJANJE PROFILA FT-0218 KUTNIM SPOJNICAMA; 710.072, 710.452

CONNECTION OF PROFILES FT-0218 WITH CORNER BRACKETS; 710.072, 710.452

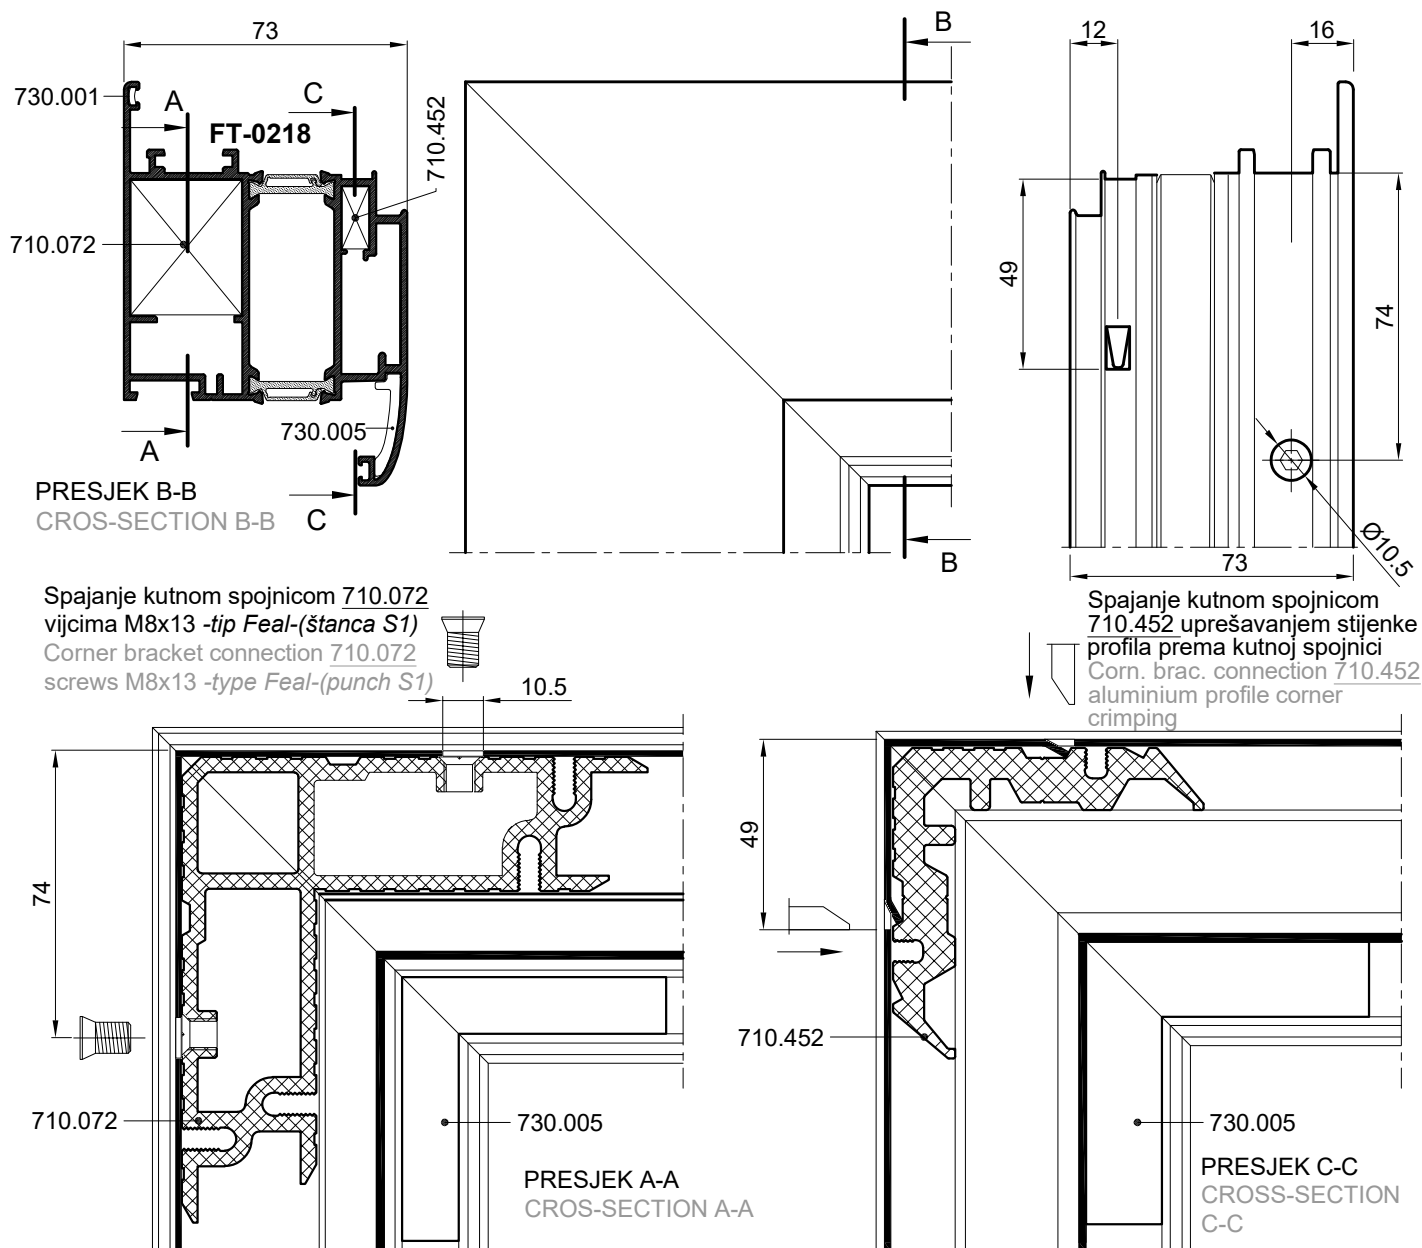


OVAJ RASPORED I NAČIN SPAJANJA KUTNIM SPOJNICAMA PRIMJENJIV JE I NA PROFILES FT-0247


THIS ARRANGEMENT AND BINDING METHOD WITH CORNER BRACKETS IS ALSO APPLICABLE FOR PROFILE FT-0247

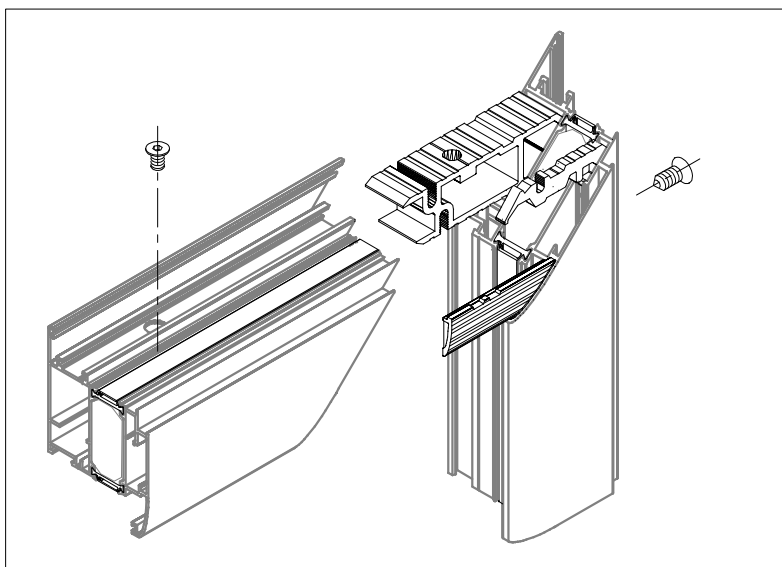



SPAJANJE PROFILA FT-0278 KUTNIM SPOJNICAMA 710.214, 710.189 CONNECTION OF PROFILE FT-0278 WITH CORNER BRACKETS 710.214, 710.189

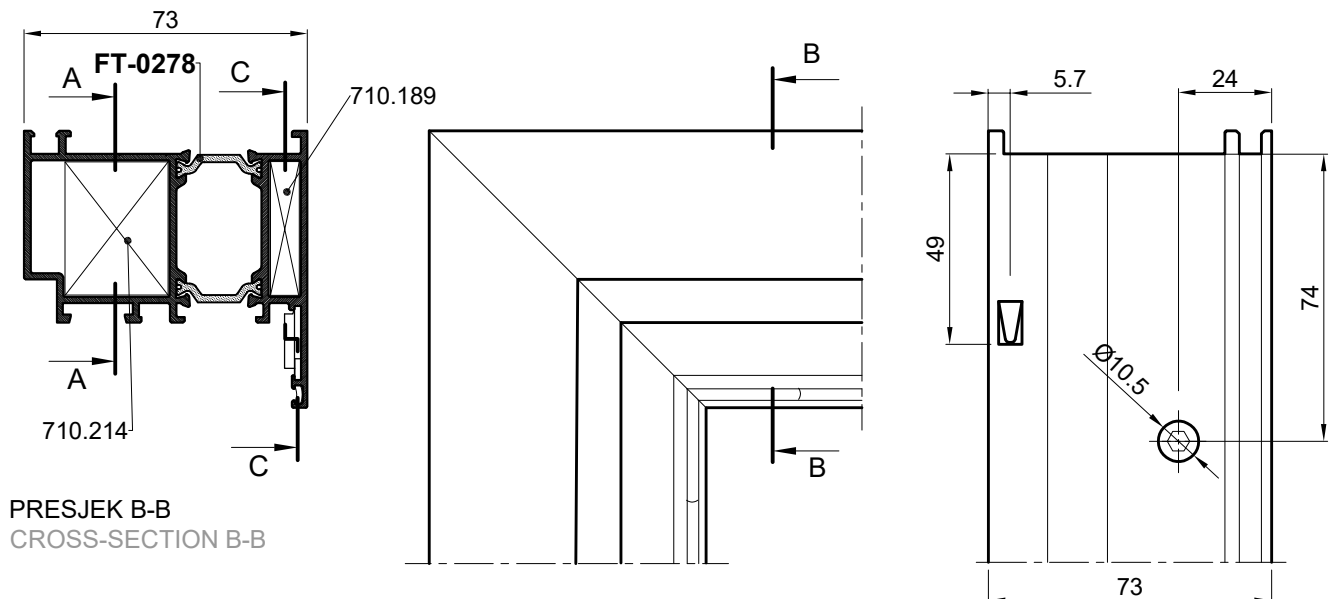

Spajanje kutnom spojnicom 710.214
vjcima M8x13 -tip Feal -(štancaS1)
Corner bracket connection 710.214
screws M8x13 -type Feal -(punch S1)

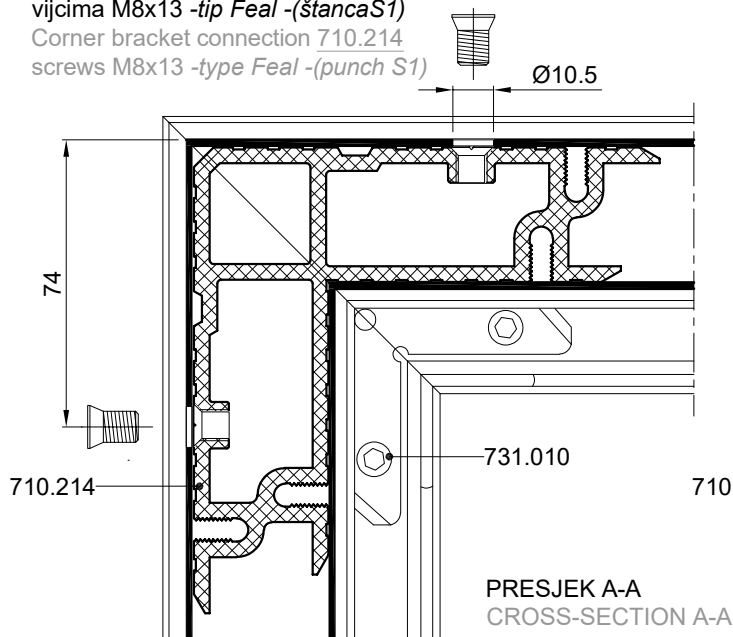


Spajanje kutnom spojnicom
710.189 uprešavanjem stijenke
profila prema kutnoj spojnici
Corn. brac. connection 710.189
aluminium profile corner
crimping

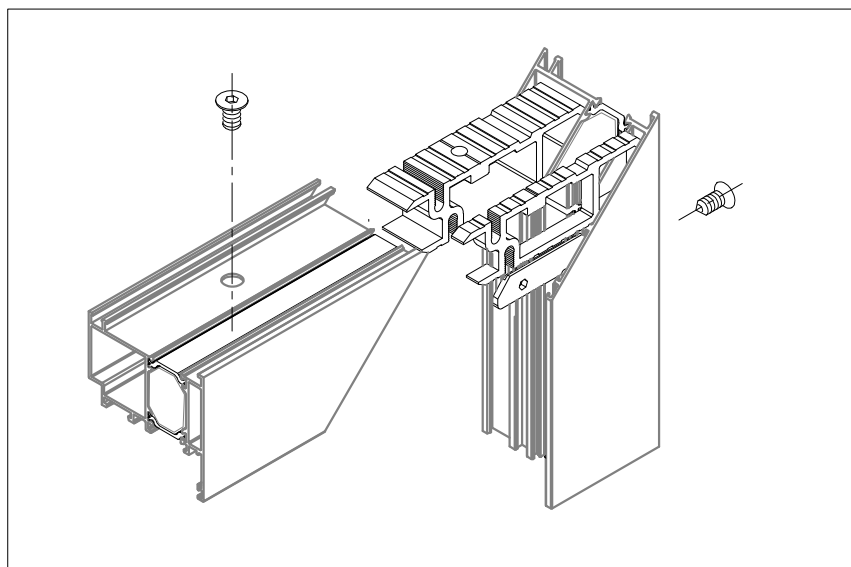
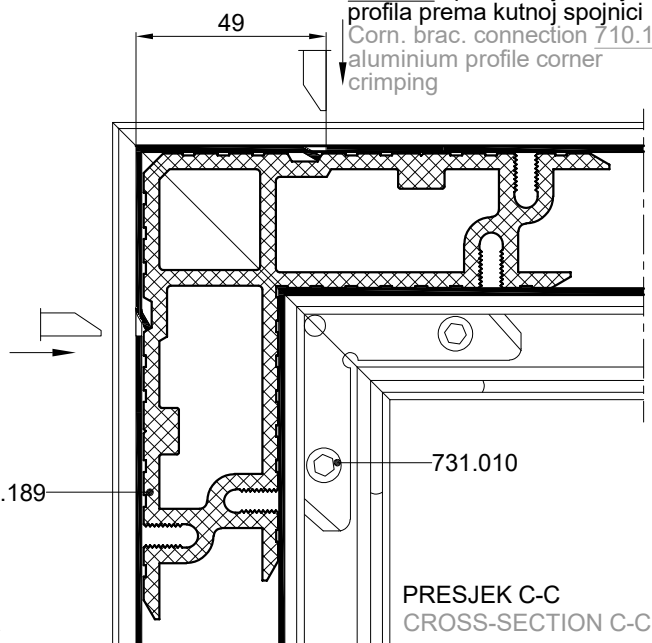


SPAJANJE PROFILA FT-0220 KUTNIM SPOJNICAMA; 710.059, 710.454


CONNECTION OF PROFILE FT-0220 WITH CORNER BRACKETS; 710.059, 710.454

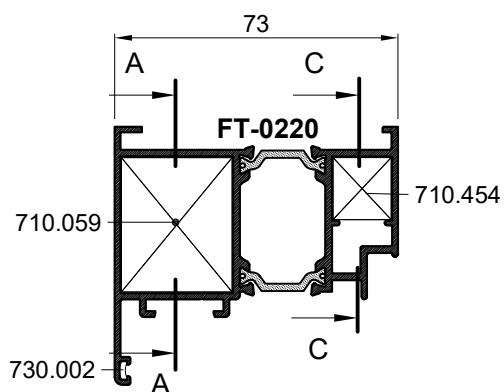

PRESJEK B-B
CROSS-SECTION B-B

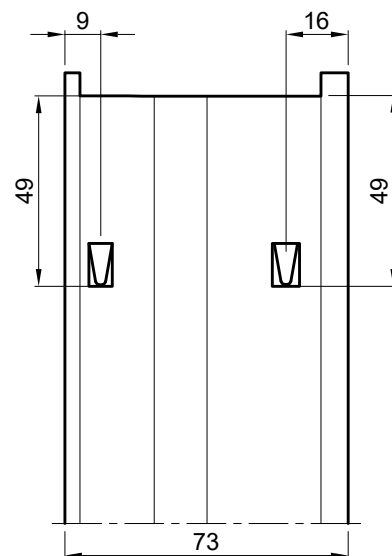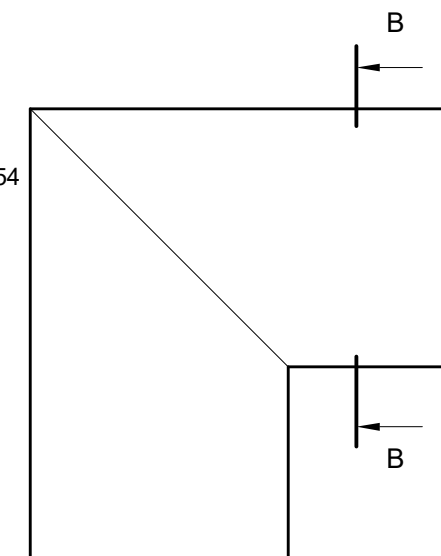


Spajanje kutnom spojnicom
710.059 uprešavanjem stijenke
profila prema kutnoj spojnici
Corn. brac. connection 710.059
aluminium profile corner
crimping

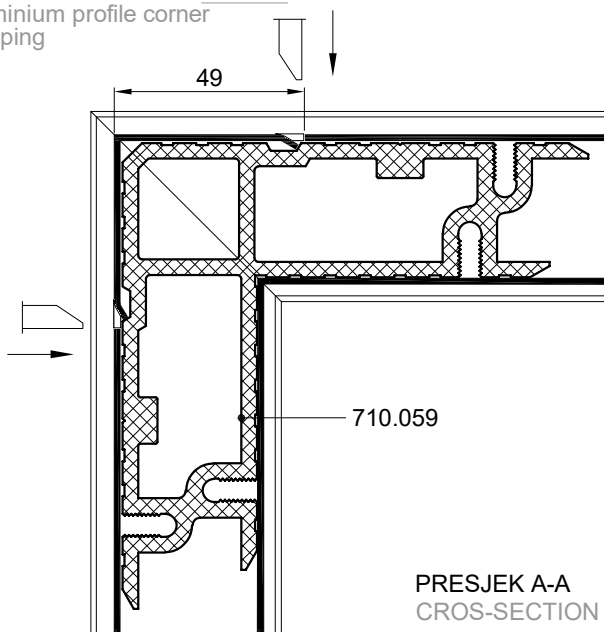


PRESJEK A-A
CROSS-SECTION A-A

Spajanje kutnom spojnicom
710.454 uprešavanjem stijenke
profila prema kutnoj spojnici
Corn. brac. connection 710.454
aluminium profile corner
crimping

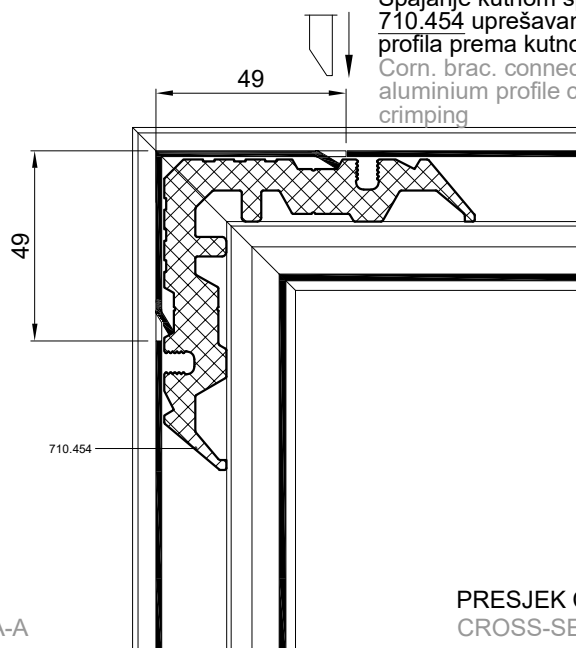

PRESJEK C-C
CROSS-SECTION C-C

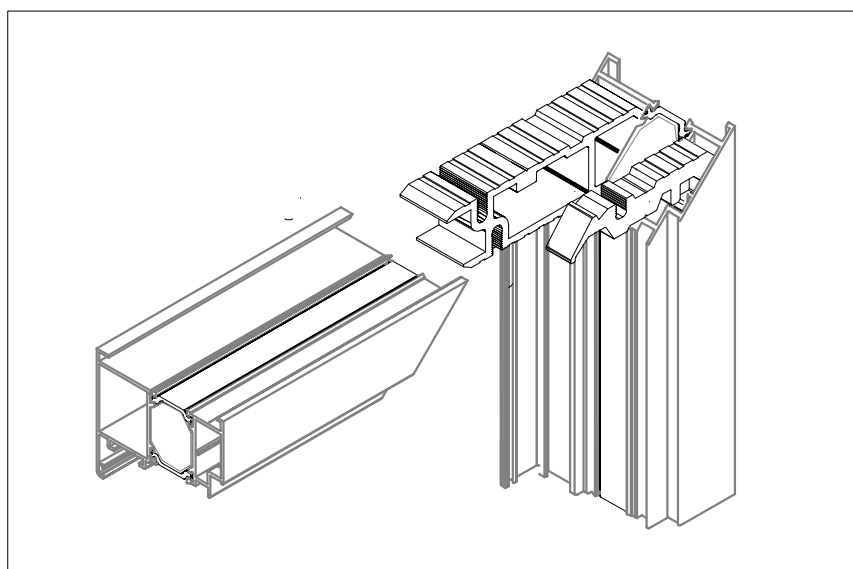


49

Corn. brack. connection 710.454
aluminium profile corner
crimping


710.454

PRESJEK C-C
CROSS-SECTION C-C





SPAJANJE PROFILA FT-0220 KUTNIM SPOJNICAMA; 710.072, 710.459


CONNECTION OF PROFILE FT-0220 WITH CORNER BRACKETS; 710.072, 710.459

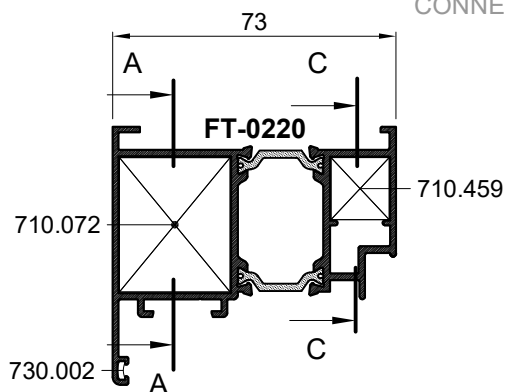

PRESJEK B-B
CROS-SECTION B-B

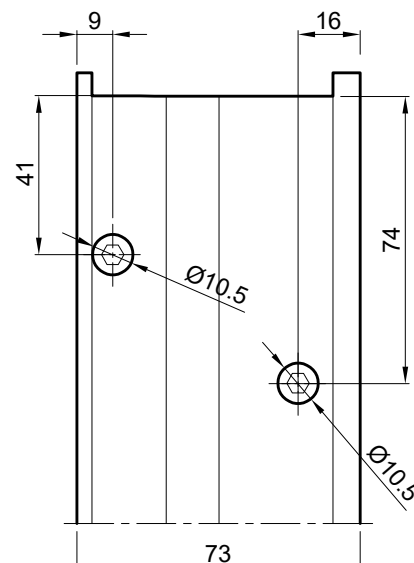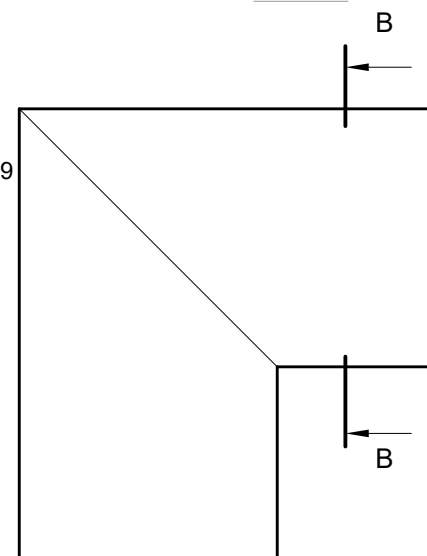


Spajanje kutnom spojnicom 710.072
vijcima M8x13 -tip Feal-(štanca S1)
Corner bracket connection 710.072
screws M8x13 -type Feal-(punch S1)

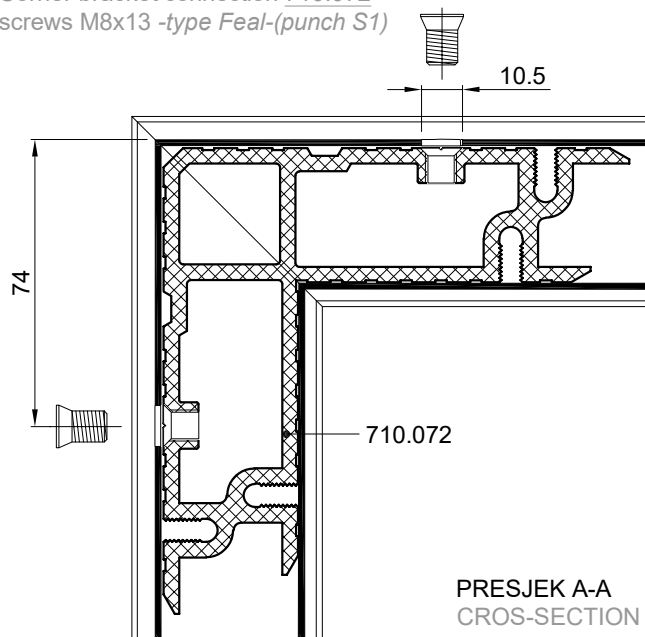


PRESJEK A-A
CROS-SECTION A-A

Spajanje kutnom spojnicom 710.459
vijcima M8x13 -tip Feal
Corner bracket connection 710.459
screws M8x13 -type Feal

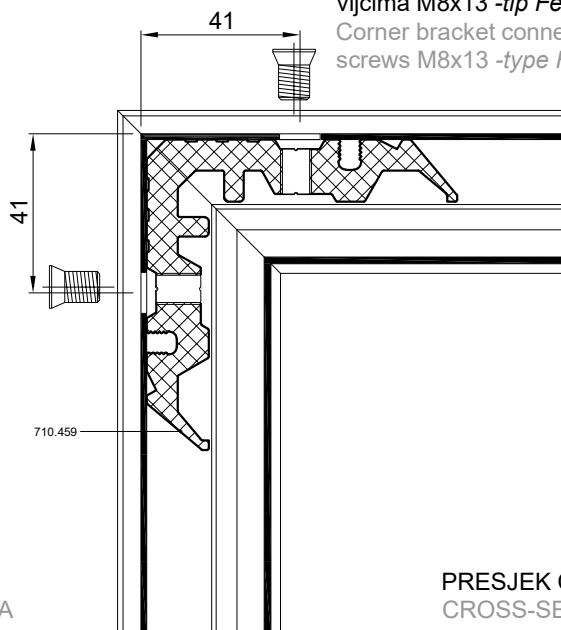


PRESJEK C-C
CROSS-SECTION C-C


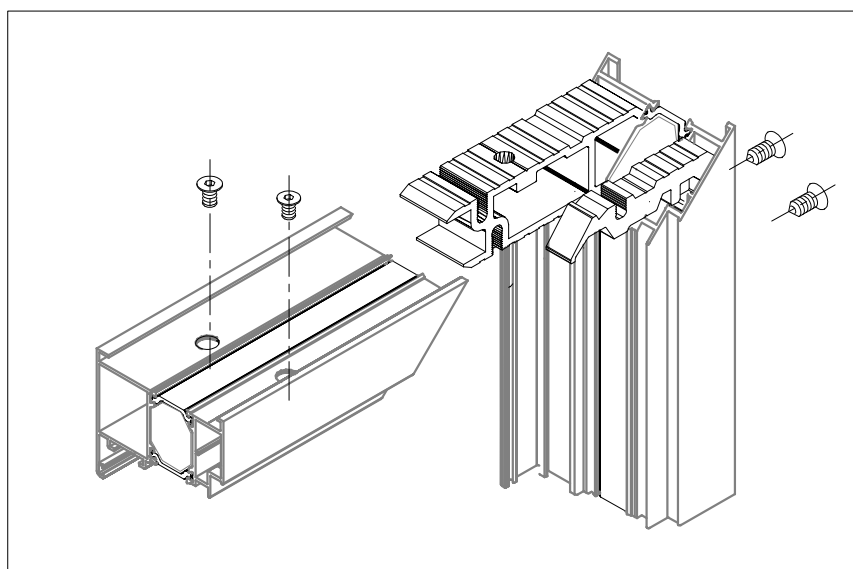


SPAJANJE PROFILA FT-0239 KUTNIM SPOJNICAMA; 710.436, 725.104


CONNECTION OF PROFILE FT-0239 WITH CORNER BRACKETS; 710.436, 725.104

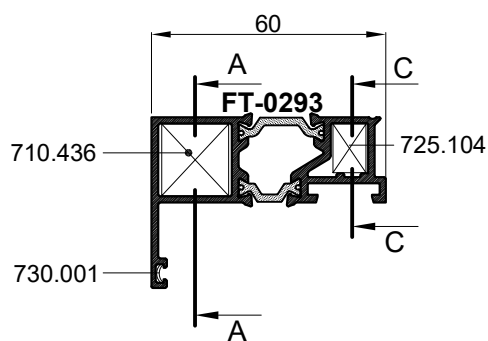

PRESJEK B-B
CROSS SECTION B-B

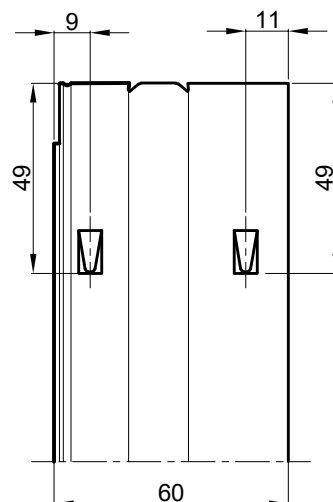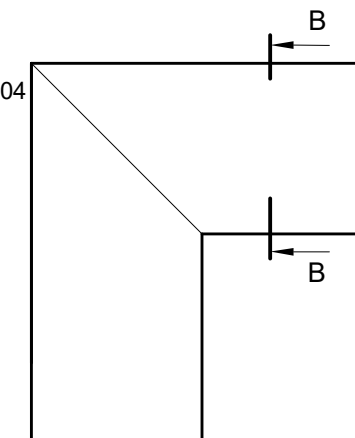


Spajanje kutnom spojnicom
710.436 uprešavanjem stijenke
profila u kutnu spojnicu
Corn. brac. connection 710.436
aluminium profile corner crimping

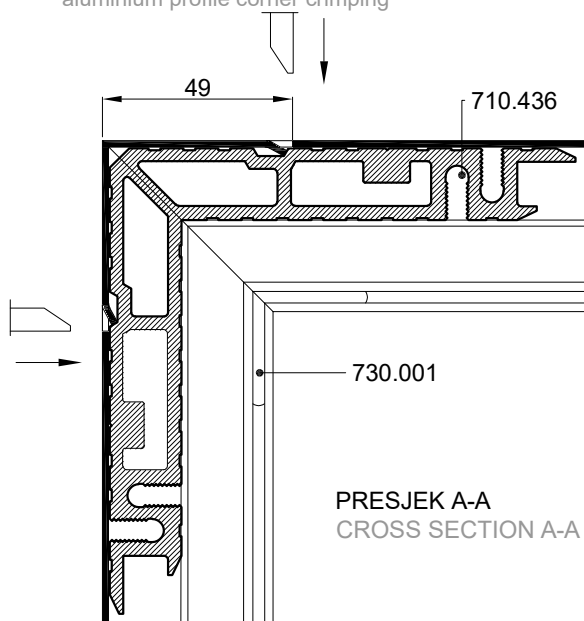


PRESJEK A-A
CROSS SECTION A-A


Spajanje kutnom spojnicom 725.104
uprešavanjem stijenke profila u kutnu spojnicu
Corn. brac. connection 725.104
aluminium profile corner crimping

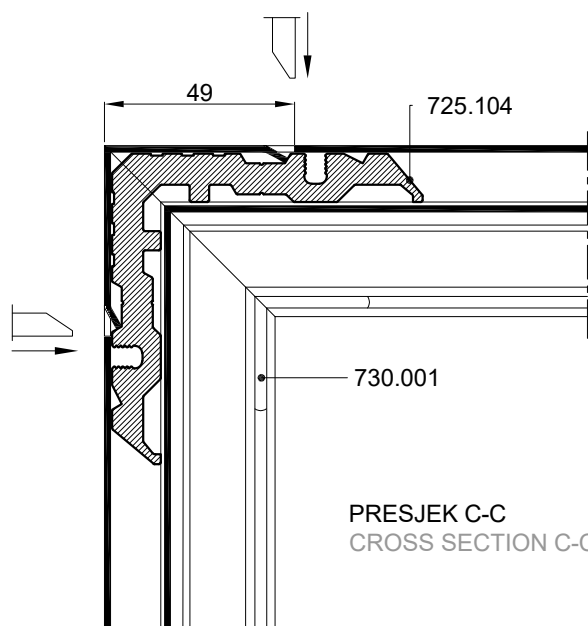

PRESJEK C-C
CROSS SECTION C-C



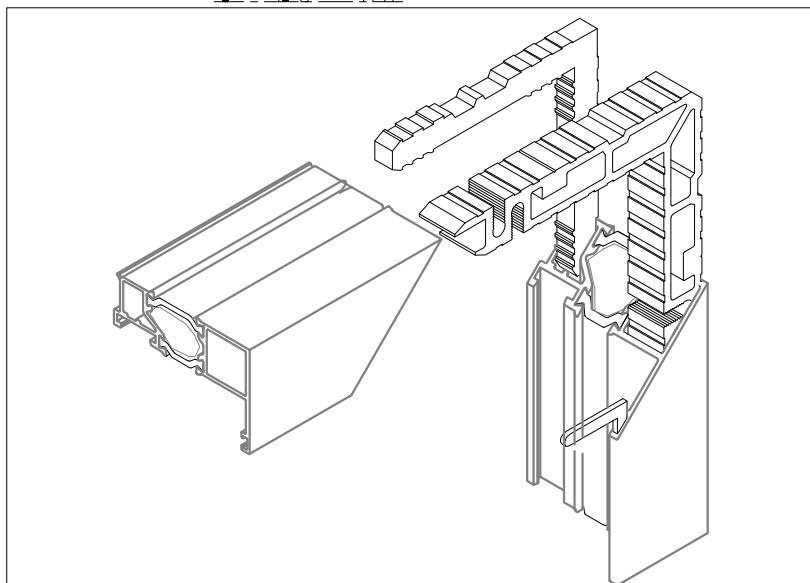


SPAJANJE PROFILA FT-0279 KUTNIM SPOJNICAMA 710.133, 710.172 CONNECTION OF PROFILE FT-0279 WITH CORNER BRACKETS 710.133, 710.172

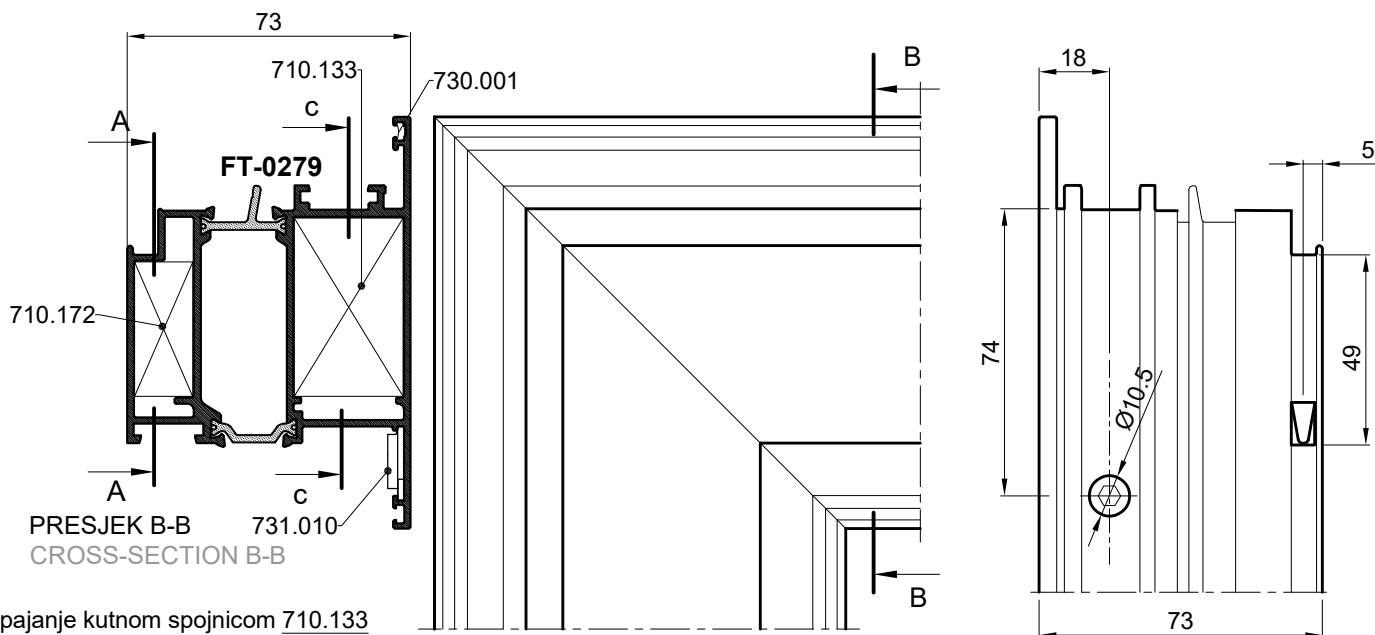


Spajanje kutnom spojnicom 710.133
vijcima M8x13 -tip Feal -(štanca S1)
Corner bracket connection 710.133
screws M8x13 -type Feal -(punch S1)

Spajanje kutnom spojnicom 710.172
uprešavanjem stijenke profila prema kutnoj spojnici
Corn. brac. connection 710.172
aluminium profile corner crimping

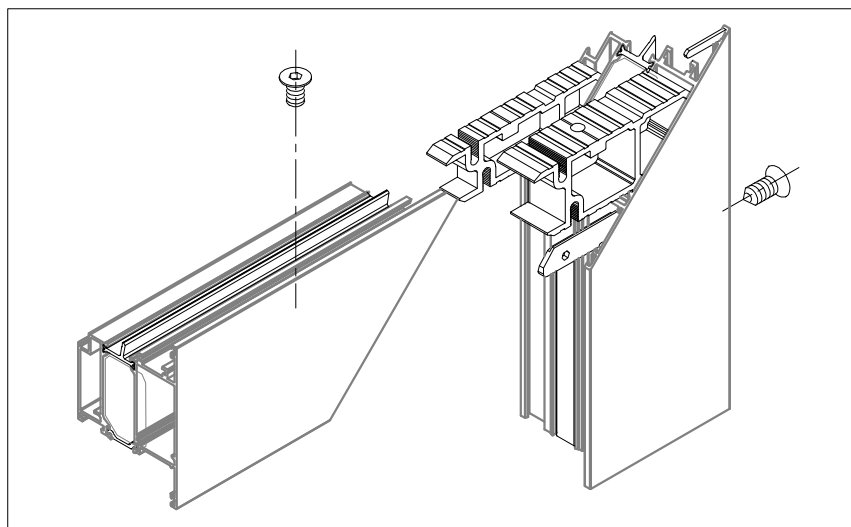
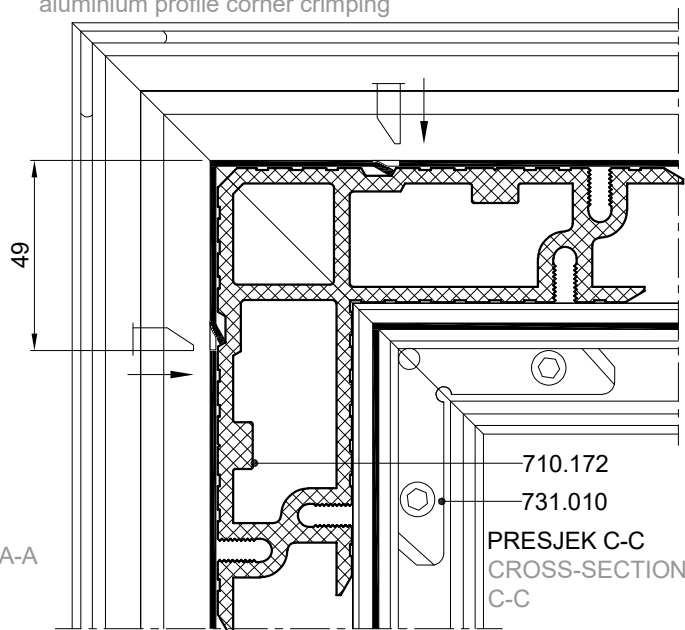
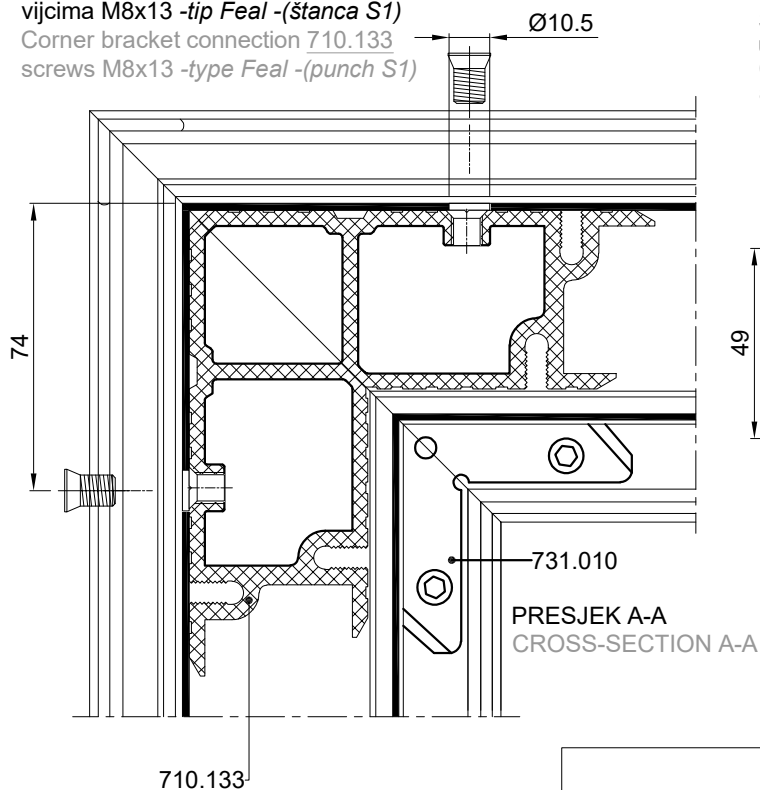


SPAJANJE PROFILA **FT-0279** KUTNIM SPOJNICAMA 710.062, 710.172 CONNECTION OF PROFILE **FT-0279** WITH CORNER BRACKETS 710.062, 710.172


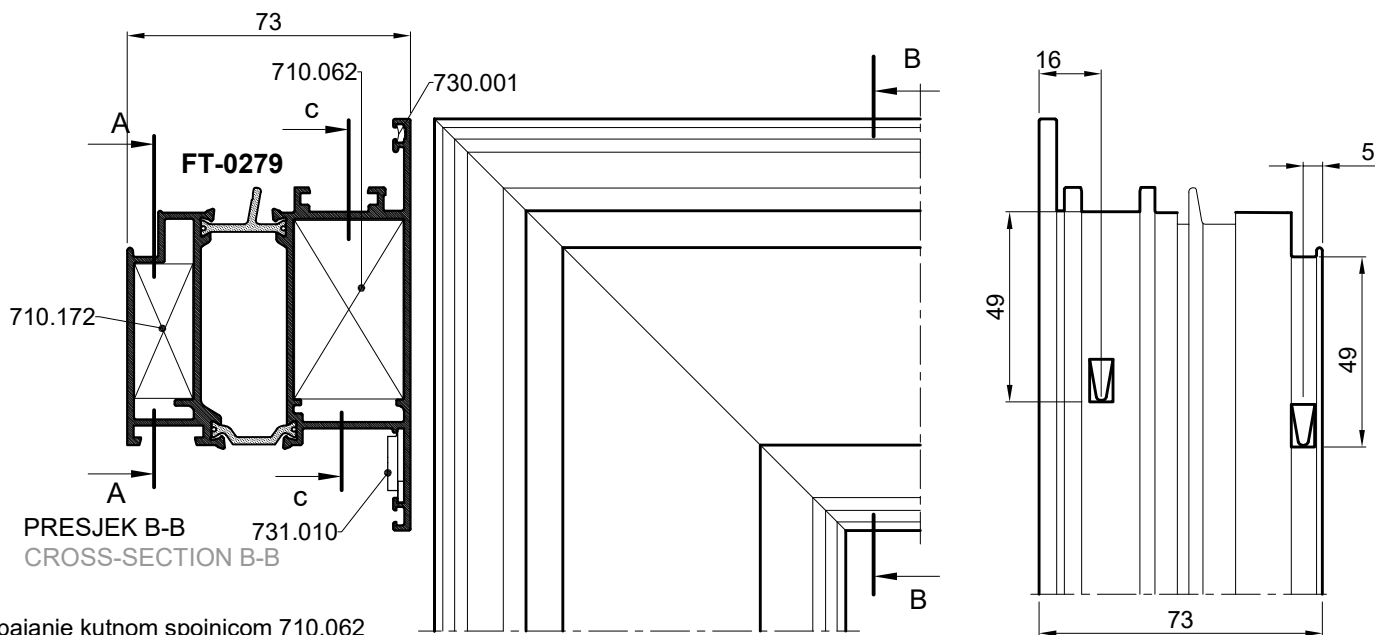


Spajanje kutnom spojnicom 710.062
uprešavanjem stijenke profila prema kutnoj spojnici
Corn. brac. connection 710.062
aluminium profile corner crimping



Spajanje kutnom spojnicom 710.172
uprešavanjem stijenke profila prema kutnoj spojnici
Corn. brac. connection 710.172
aluminium profile corner crimping

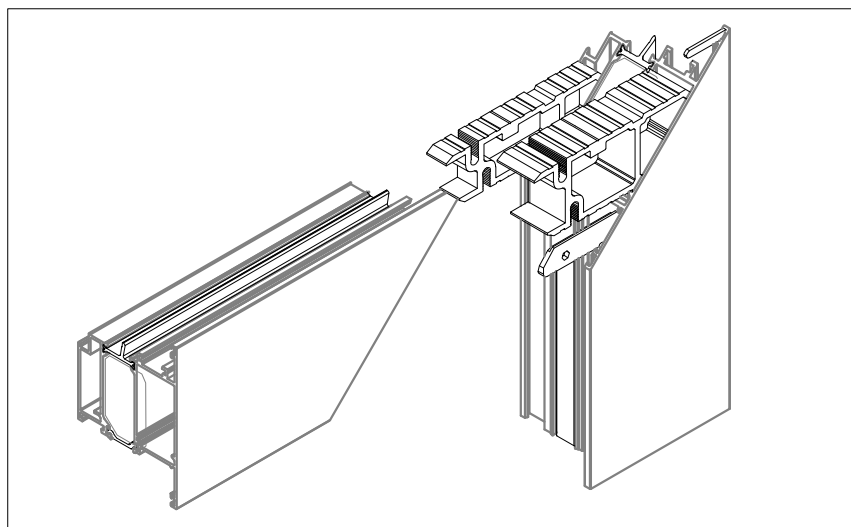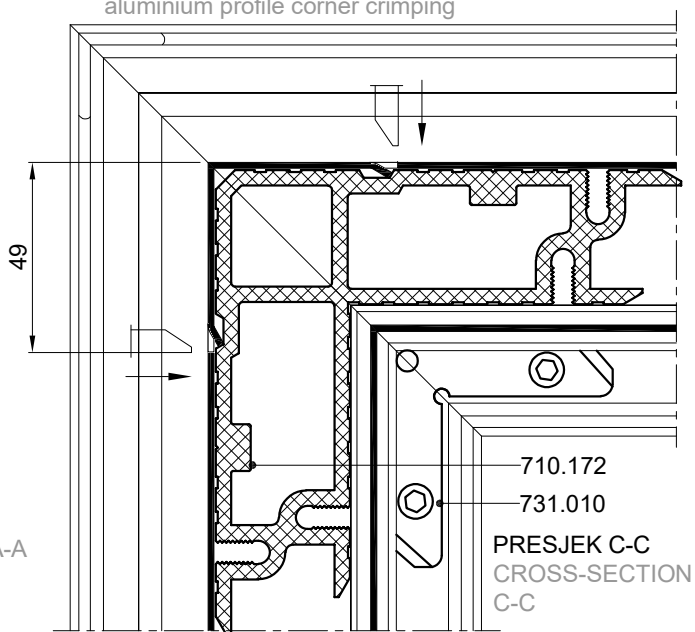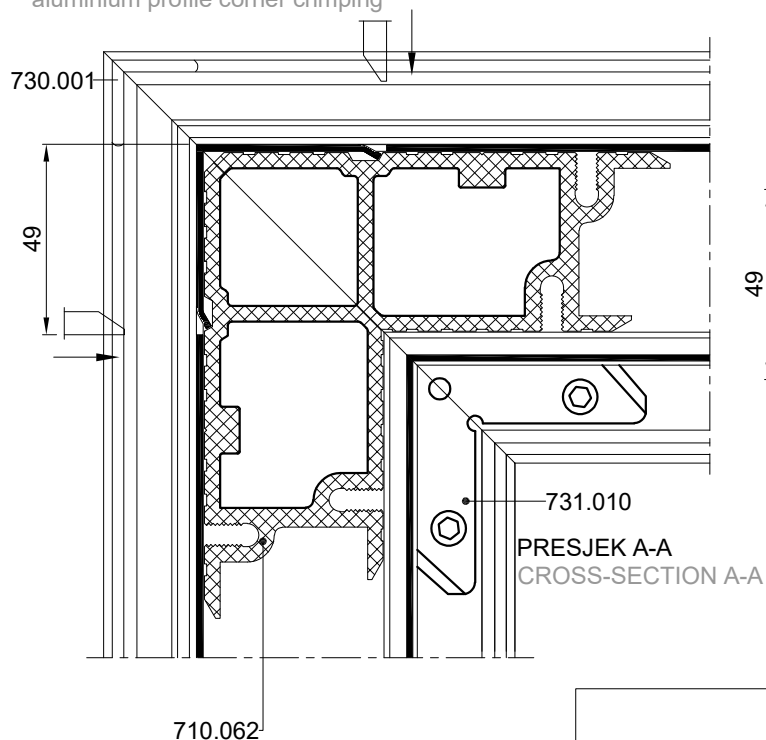



SPAJANJE PROFILA FT-0283 KUTNIM SPOJNICAMA 710.215, 710.216 CONNECTION OF PROFILE FT-0283 WITH CORNER BRACKETS 710.215, 710.216

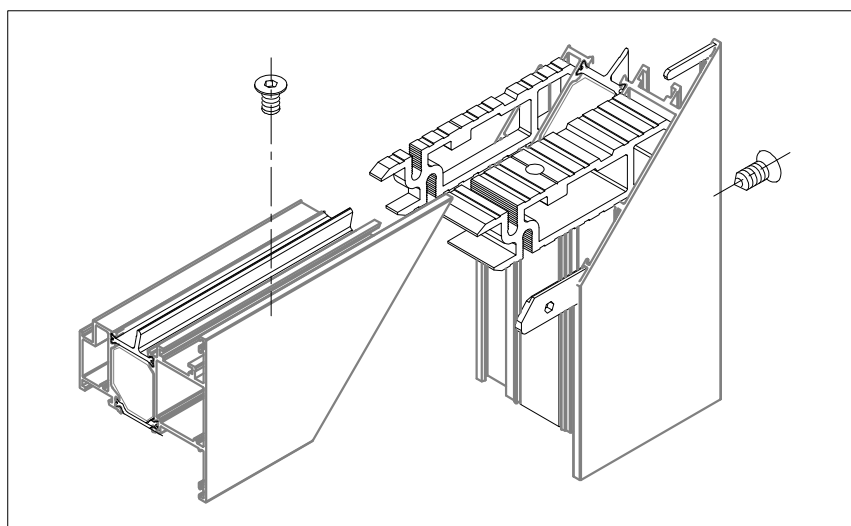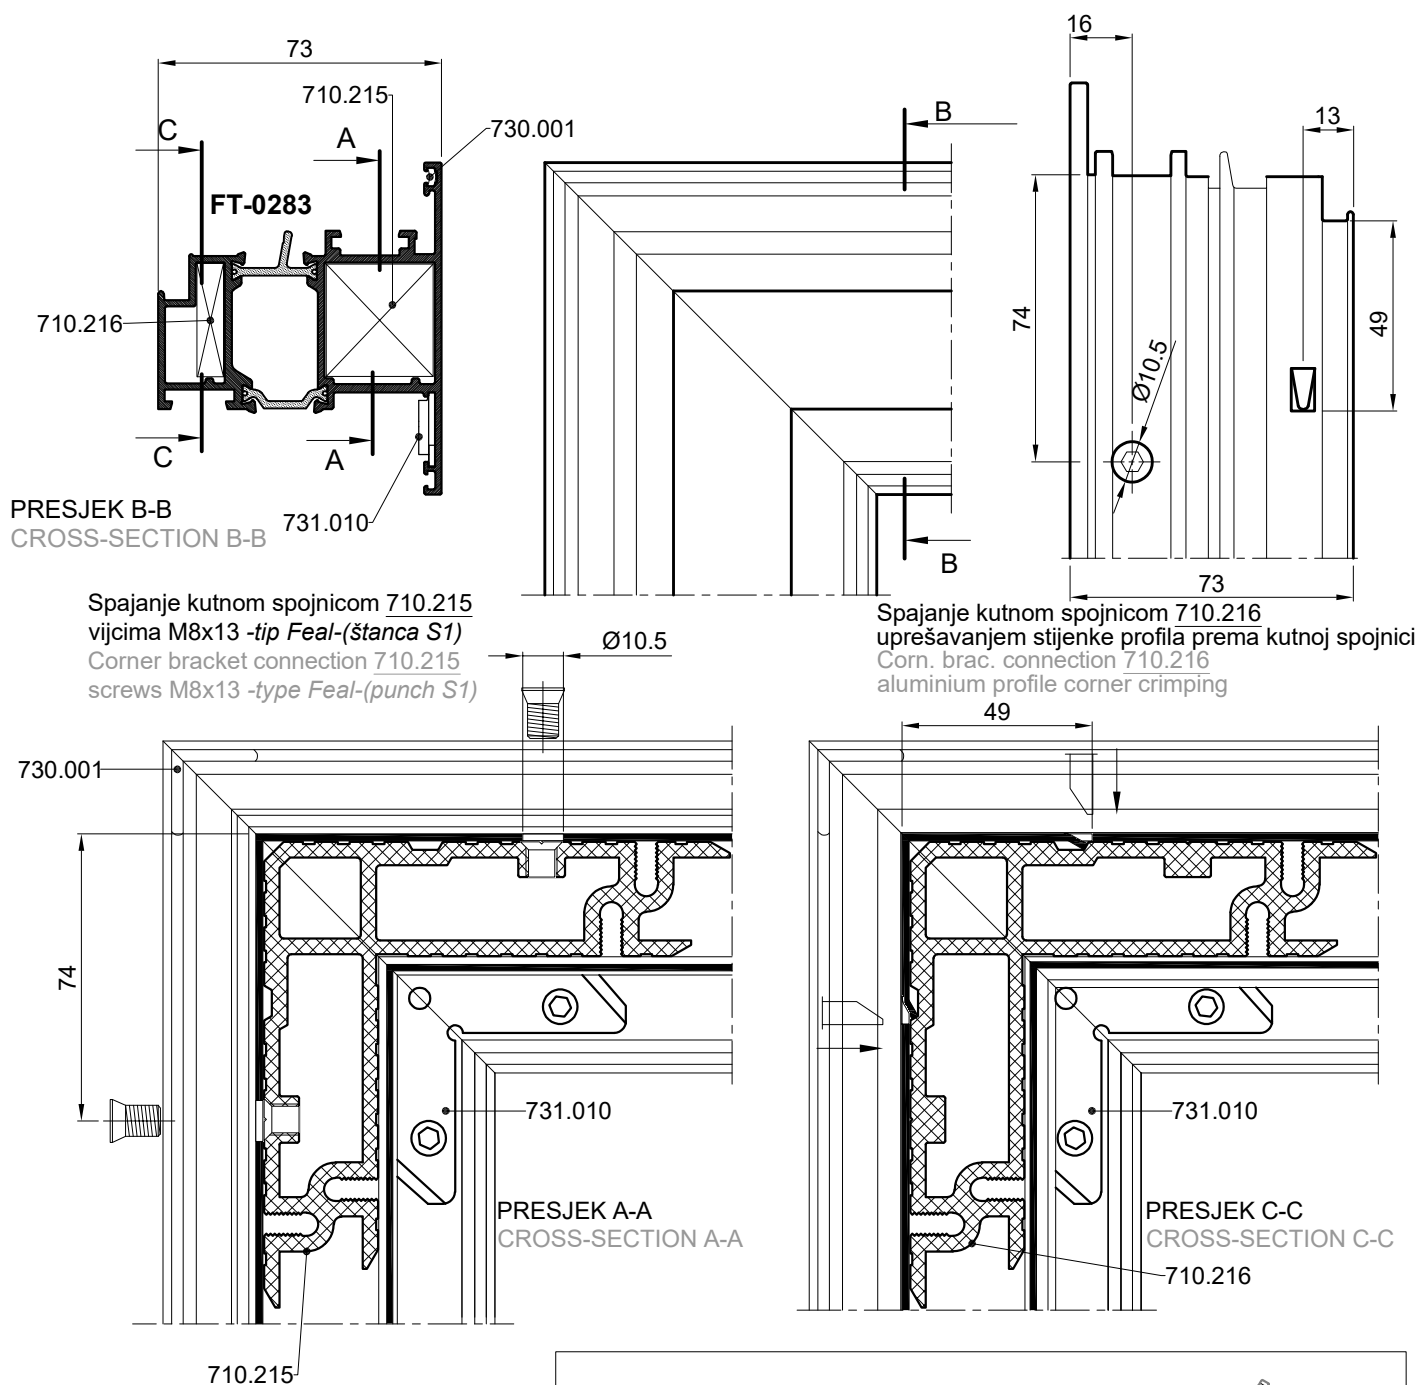


SPAJANJE PROFILA FT-0219 KUTNIM SPOJNICAMA; 710.059, 710.454 CONNECTION OF PROFILE FT-0219 WITH CORNER BRACKETS; 710.059, 710.454

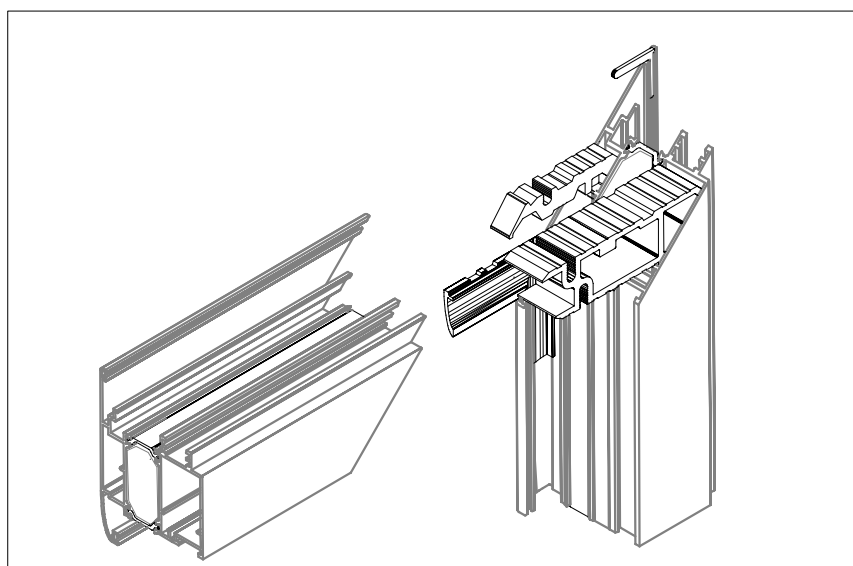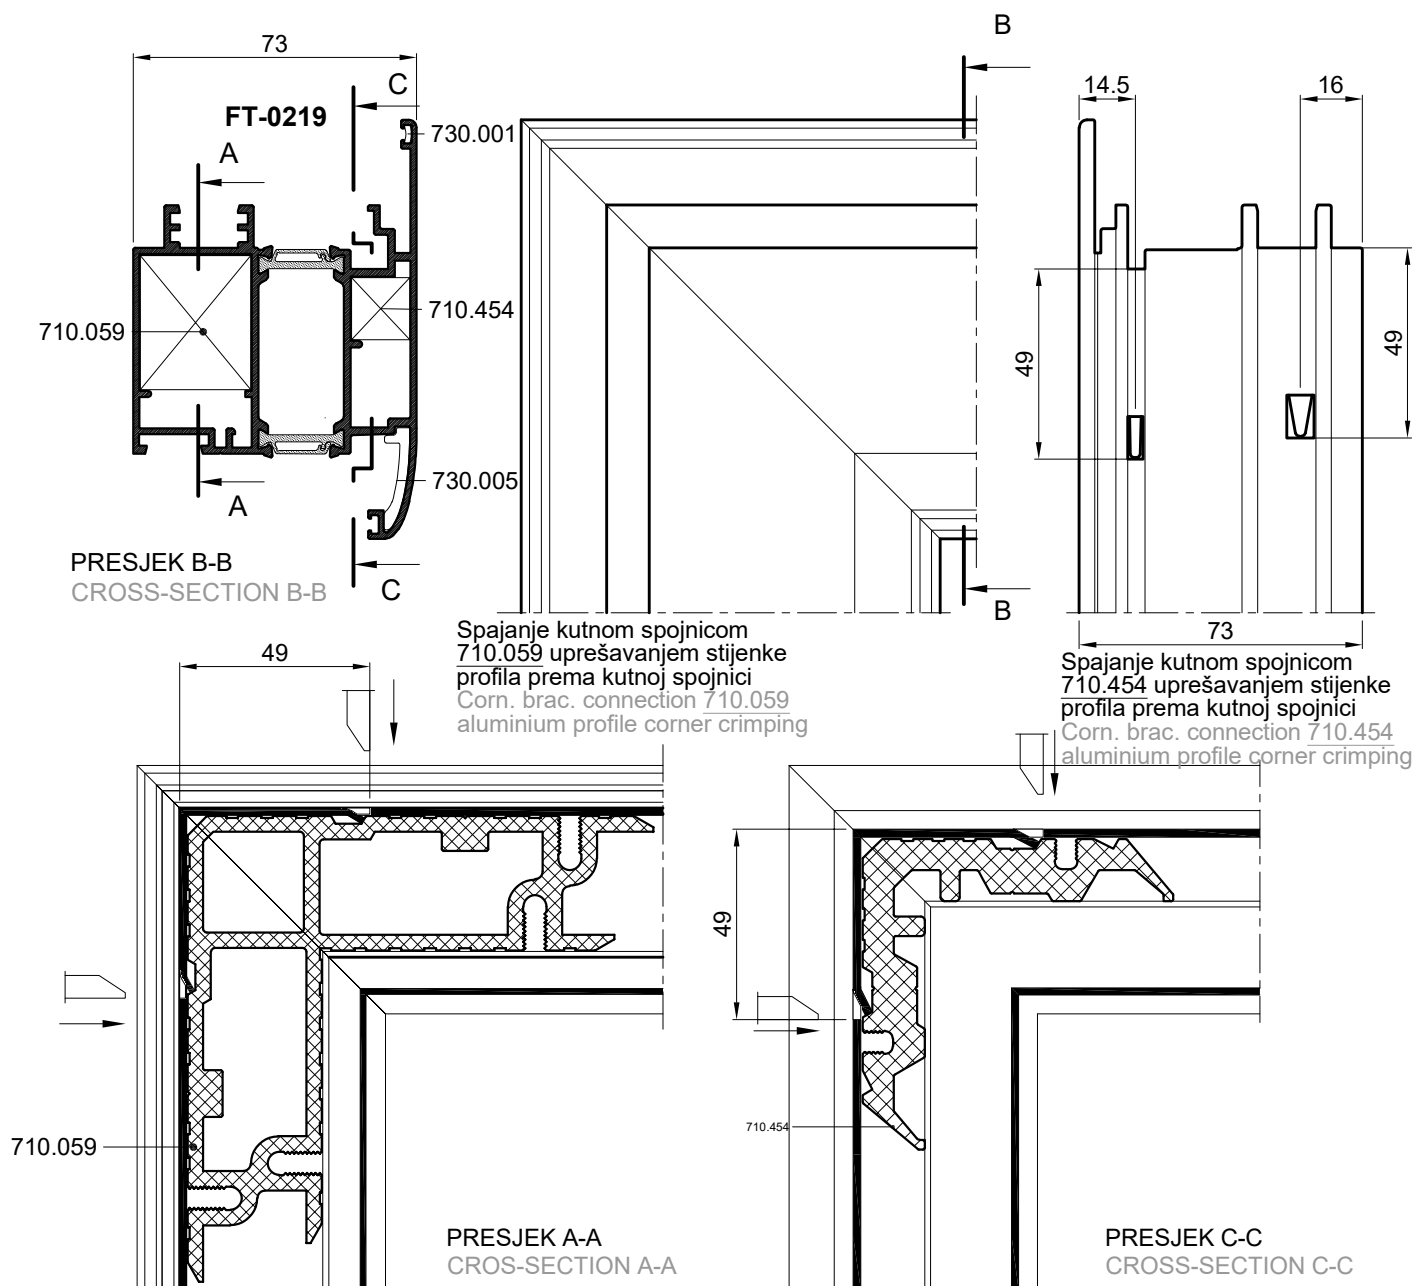


SPAJANJE PROFILA FT-0219 KUTNIM SPOJNICAMA; 710.099, 710.454
CONNECTION OF PROFILE FT-0219 WITH CORNER BRACKETS; 710.099, 710.454

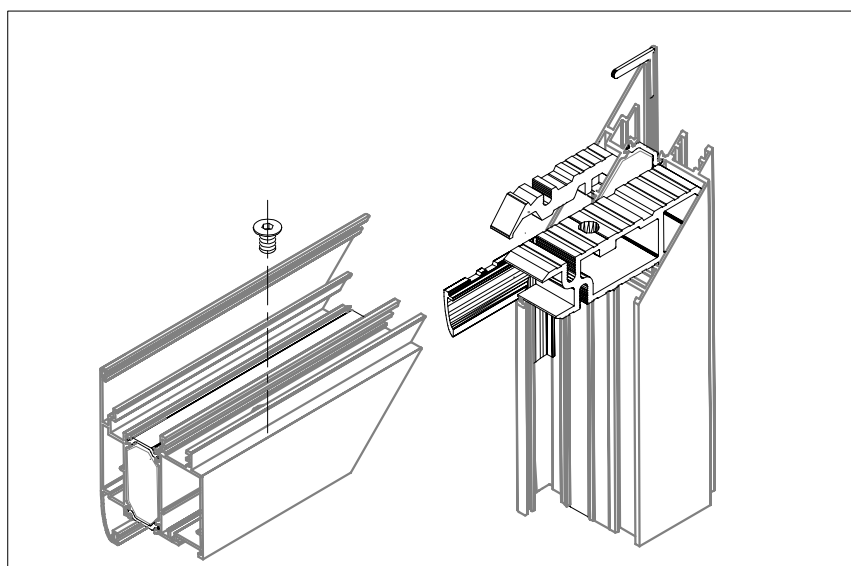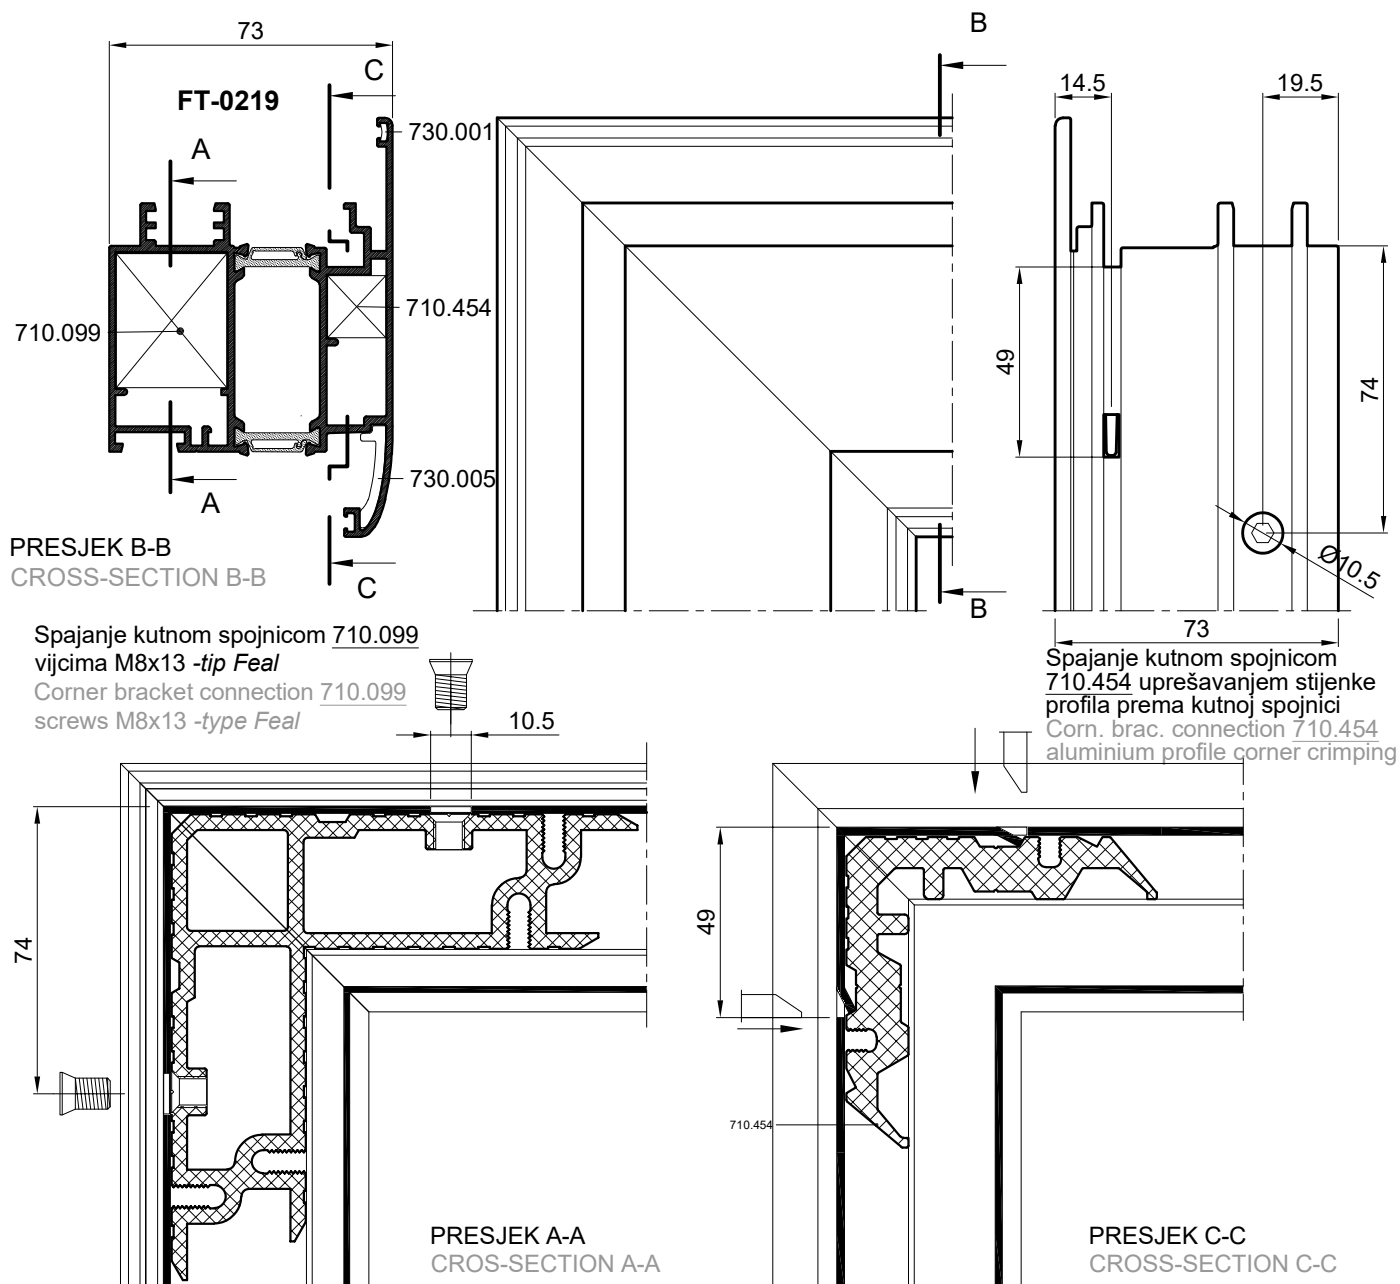


SPAJANJE PROFILA FT-0210 KUTNIM SPOJNICAMA; 710.450, 710.453 CONNECTION OF PROFILE FT-0210 WITH CORNER BRACKETS; 710.059, 710.454

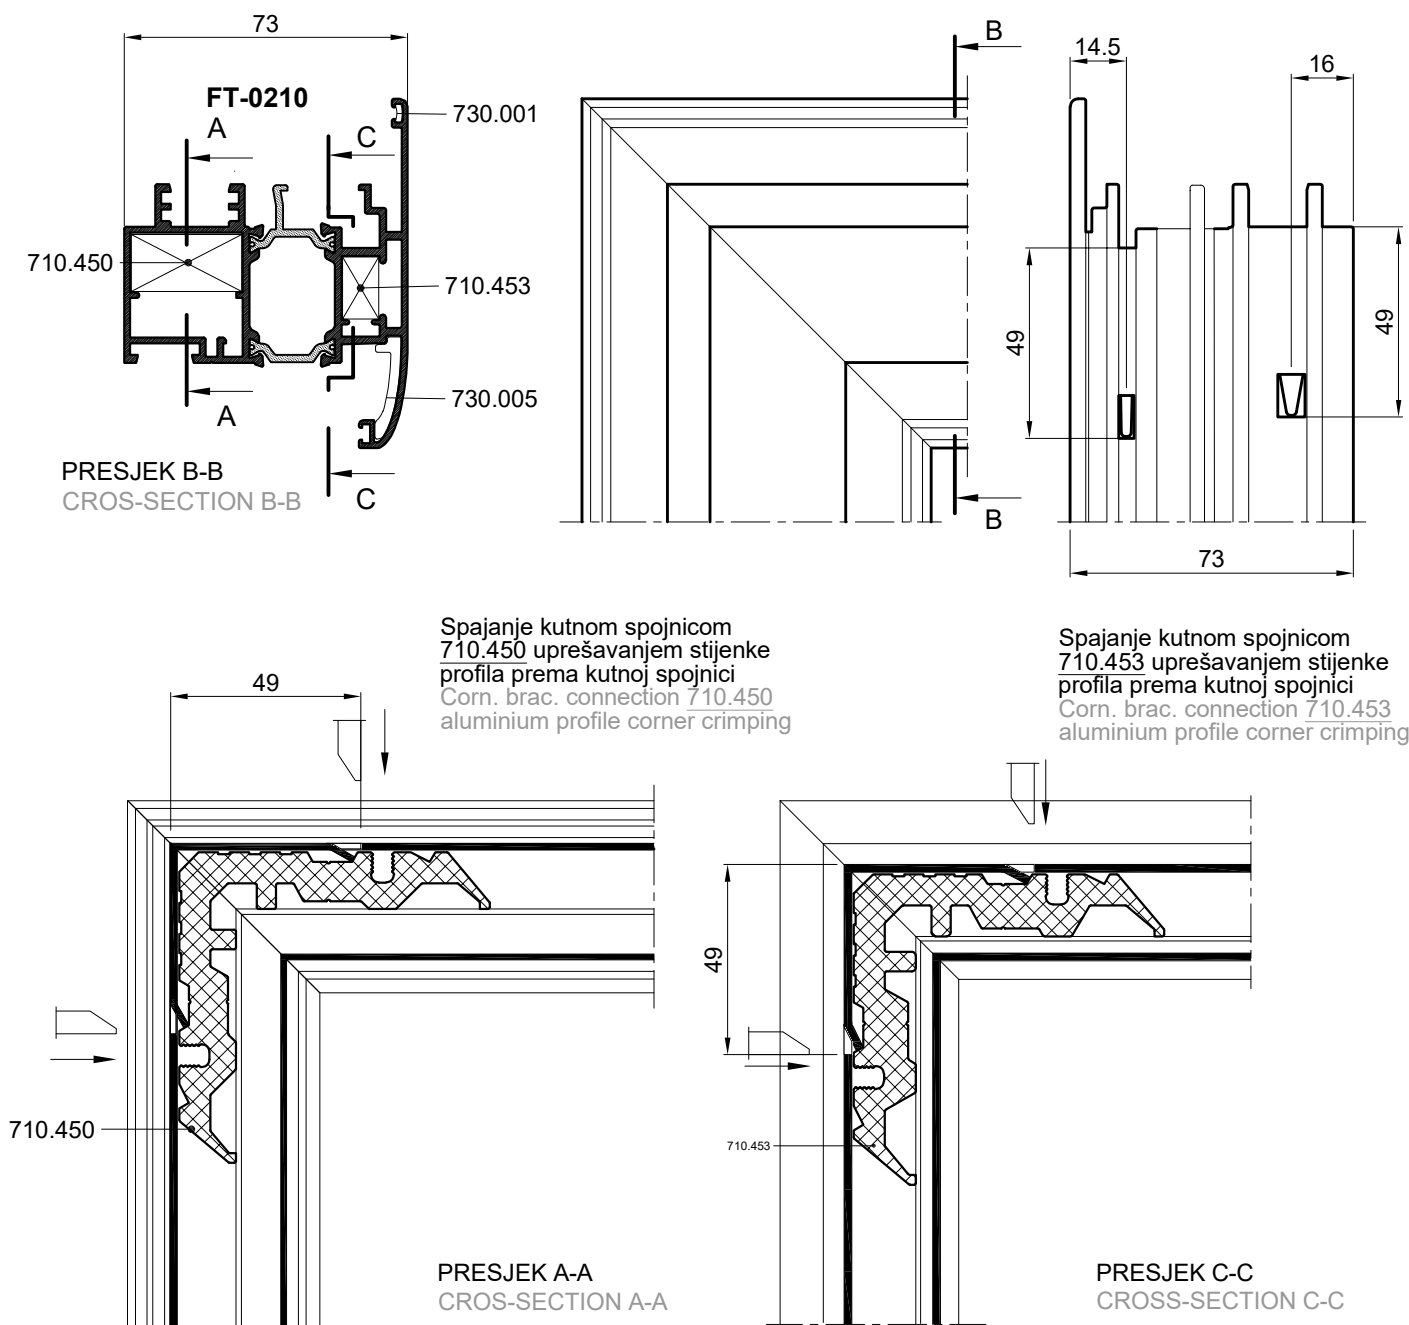



SPAJANJE PROFILA FT-0210 KUTNIM SPOJNICAMA; 710.458, 710.453 CONNECTION OF PROFILE FT-0210 WITH CORNER BRACKETS; 710.059, 710.454

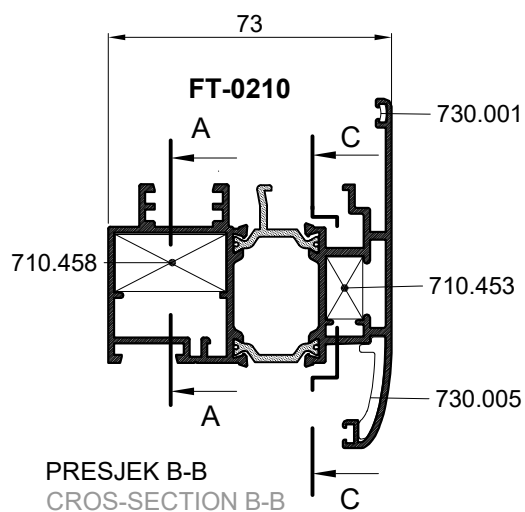


Spajanje kutnom spojnicom 710.458
vjcima M8x13 -tip Feal-(štanca S1)
Corner bracket connection 710.458
screws M8x13 -type Feal-(punch S1)

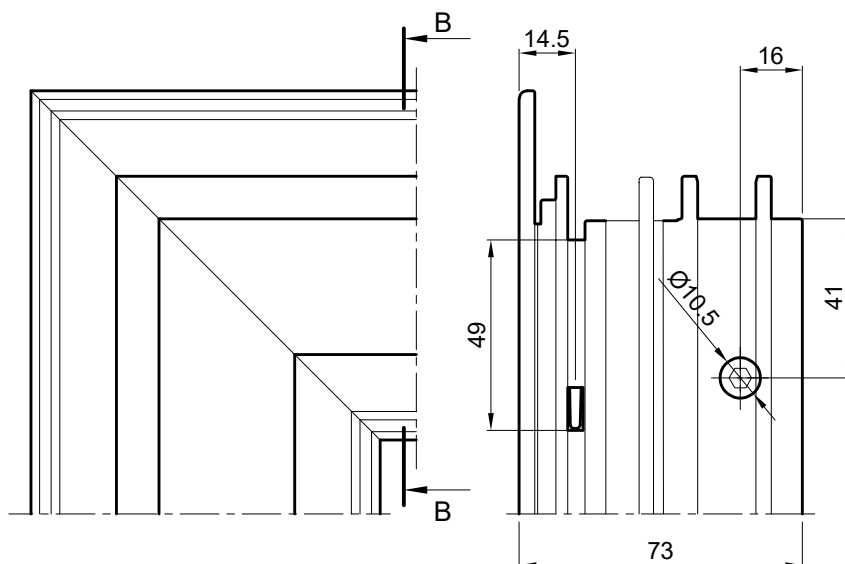


Spajanje kutnom spojnicom
710.453 uprešavanjem stijenke
profila prema kutnoj spojnici
Corn. brac. connection 710.453
aluminium profile corner crimping

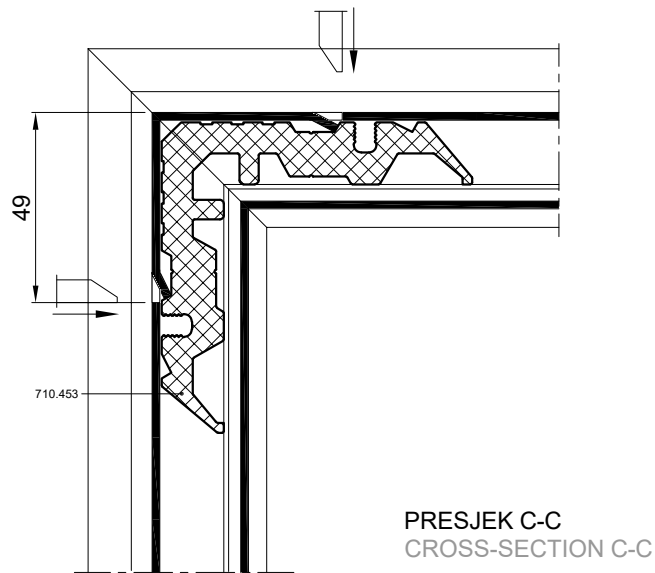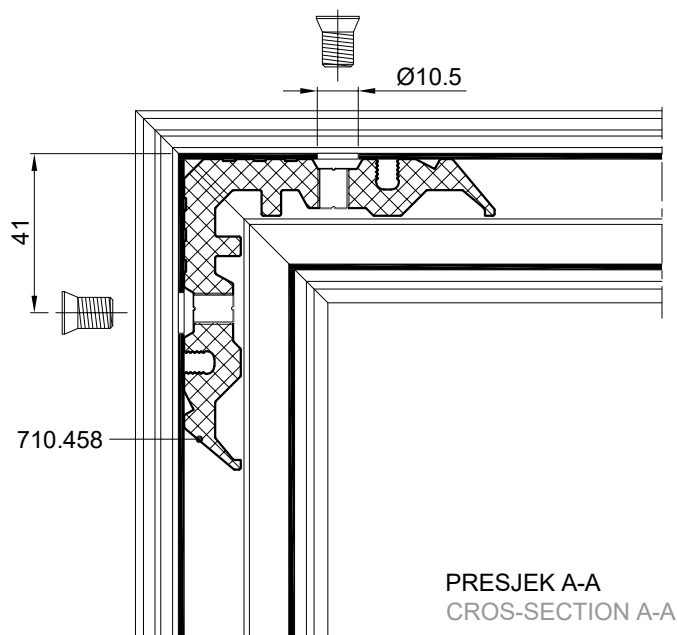



SPAJANJE PROFILA FT-0290 KUTNIM SPOJNICAMA; 725.705, 725.711 i 725.712 CONNECTION OF PROFILE FT-0290 WITH CORNER BRACKETS; 725.705, 725.711 and 725.712

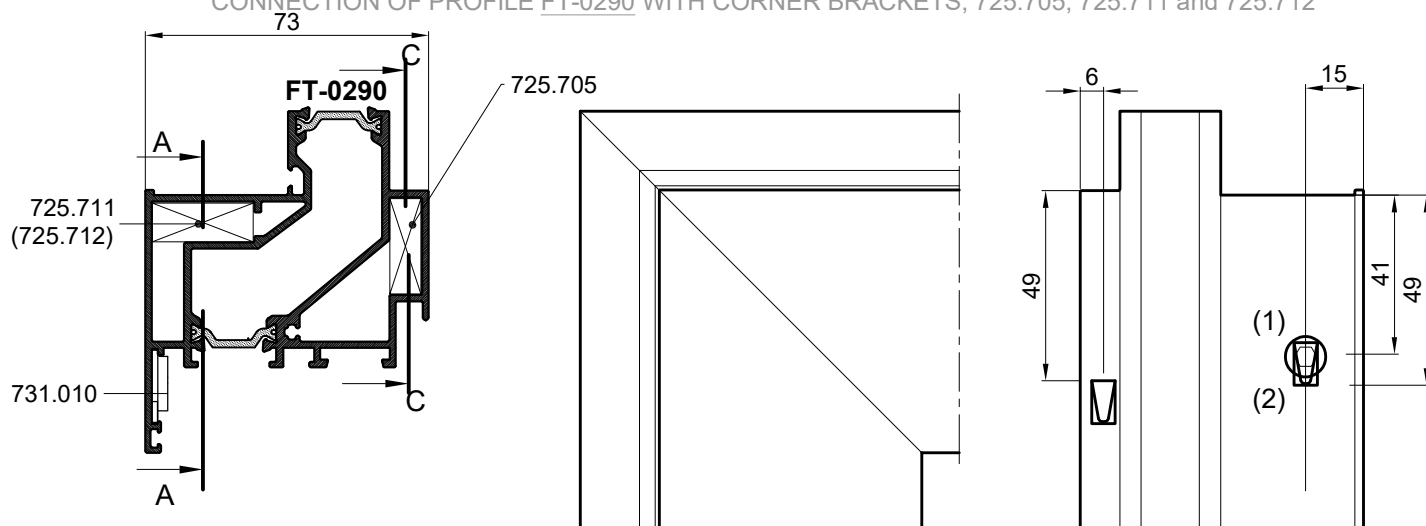


Spajanje kutnom spojnicom 725.712
uprešavanjem stijenke profila prema kutnoj
spojnici
Corn. brac. connection 725.712
aluminium profile corner crimping

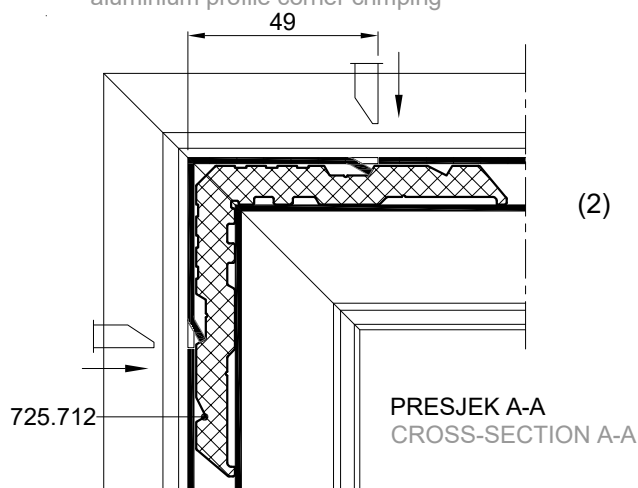


Spajanje kutnom spojnicom 725.705
uprešavanjem stijenke profila prema kutnoj spojnici
Corn. brac. connection 725.705
aluminium profile corner crimping

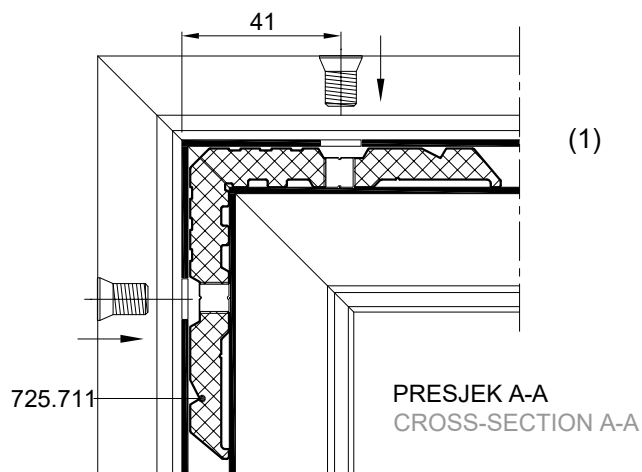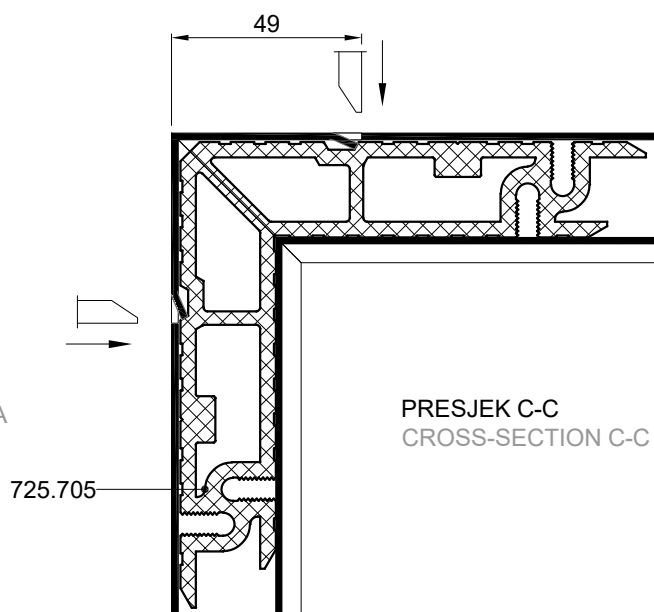



Spajanje kutnom spojnicom 725.711
vijcima M8x13(431.266)-tip Feal
Corner bracket connection 725.711
screws M8x13(431.266) -type Feal

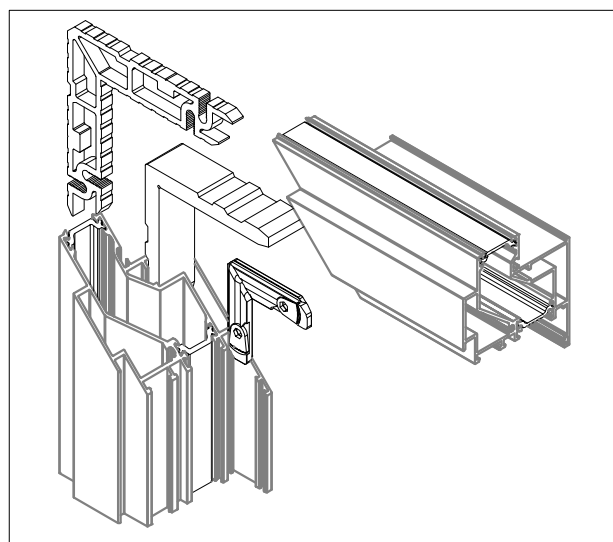


SPAJANJE PROFILA FT-0236 KUTNIM SPOJNICAMA; 710.461, 710.443 CONNECTION OF PROFILE FT-0236 WITH CORNER BRACKETS; 710.461, 710.443

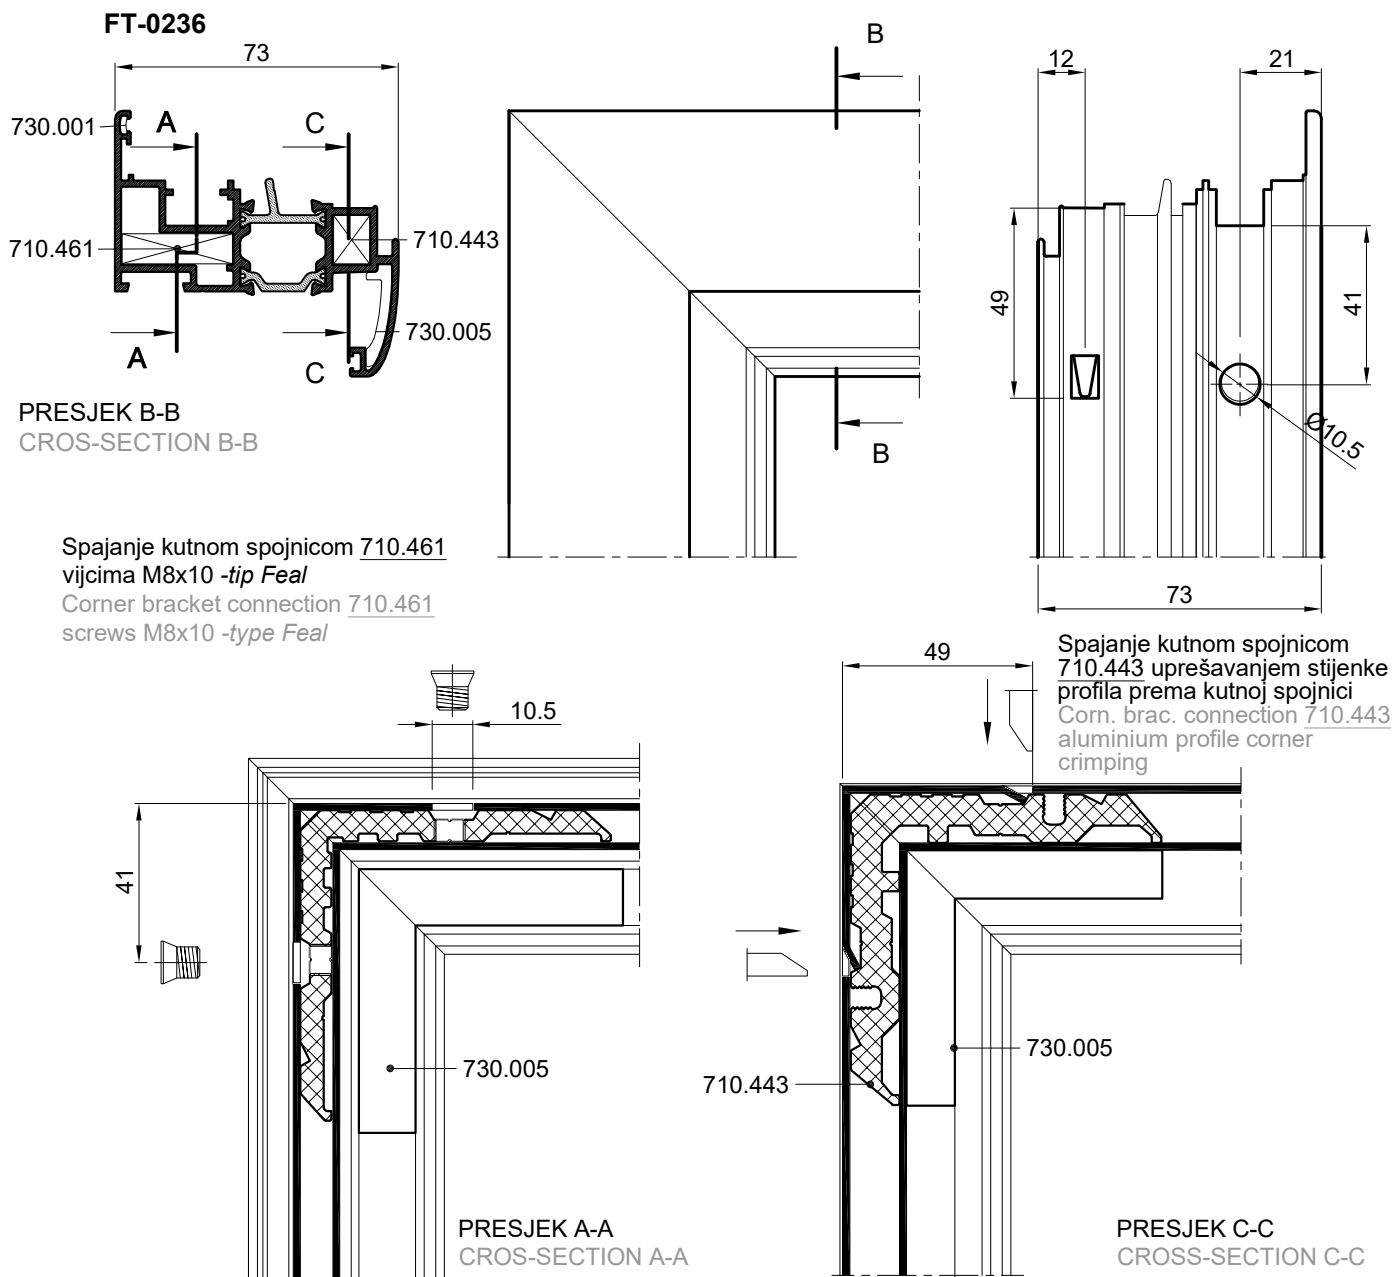



OVAJ RASPORED I NAČIN SPAJANJA
KUTNIM SPOJNICAMA PRIMJENJIV JE I NA
PROFILE **FT-0239**
THIS ARRANGEMENT AND BIDDING METHOD
WITH CORNER BRACKETS IS ALSO
APPLICABLE FOR PROFILE **FT-0239**

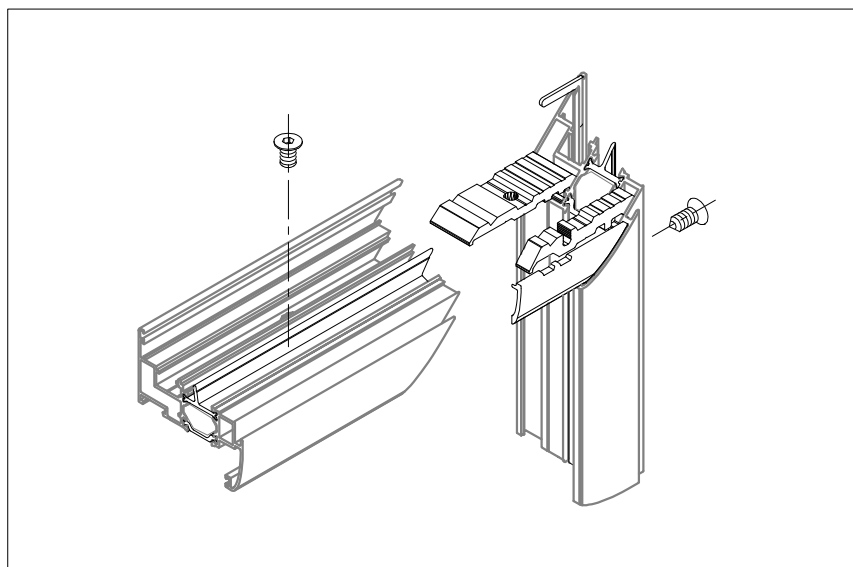


SPAJANJE PROFILA FT-0236 KUTNIM SPOJNICAMA; 710.479, 710.443 CONNECTION OF PROFILE FT-0236 WITH CORNER BRACKETS; 710.479, 710.443

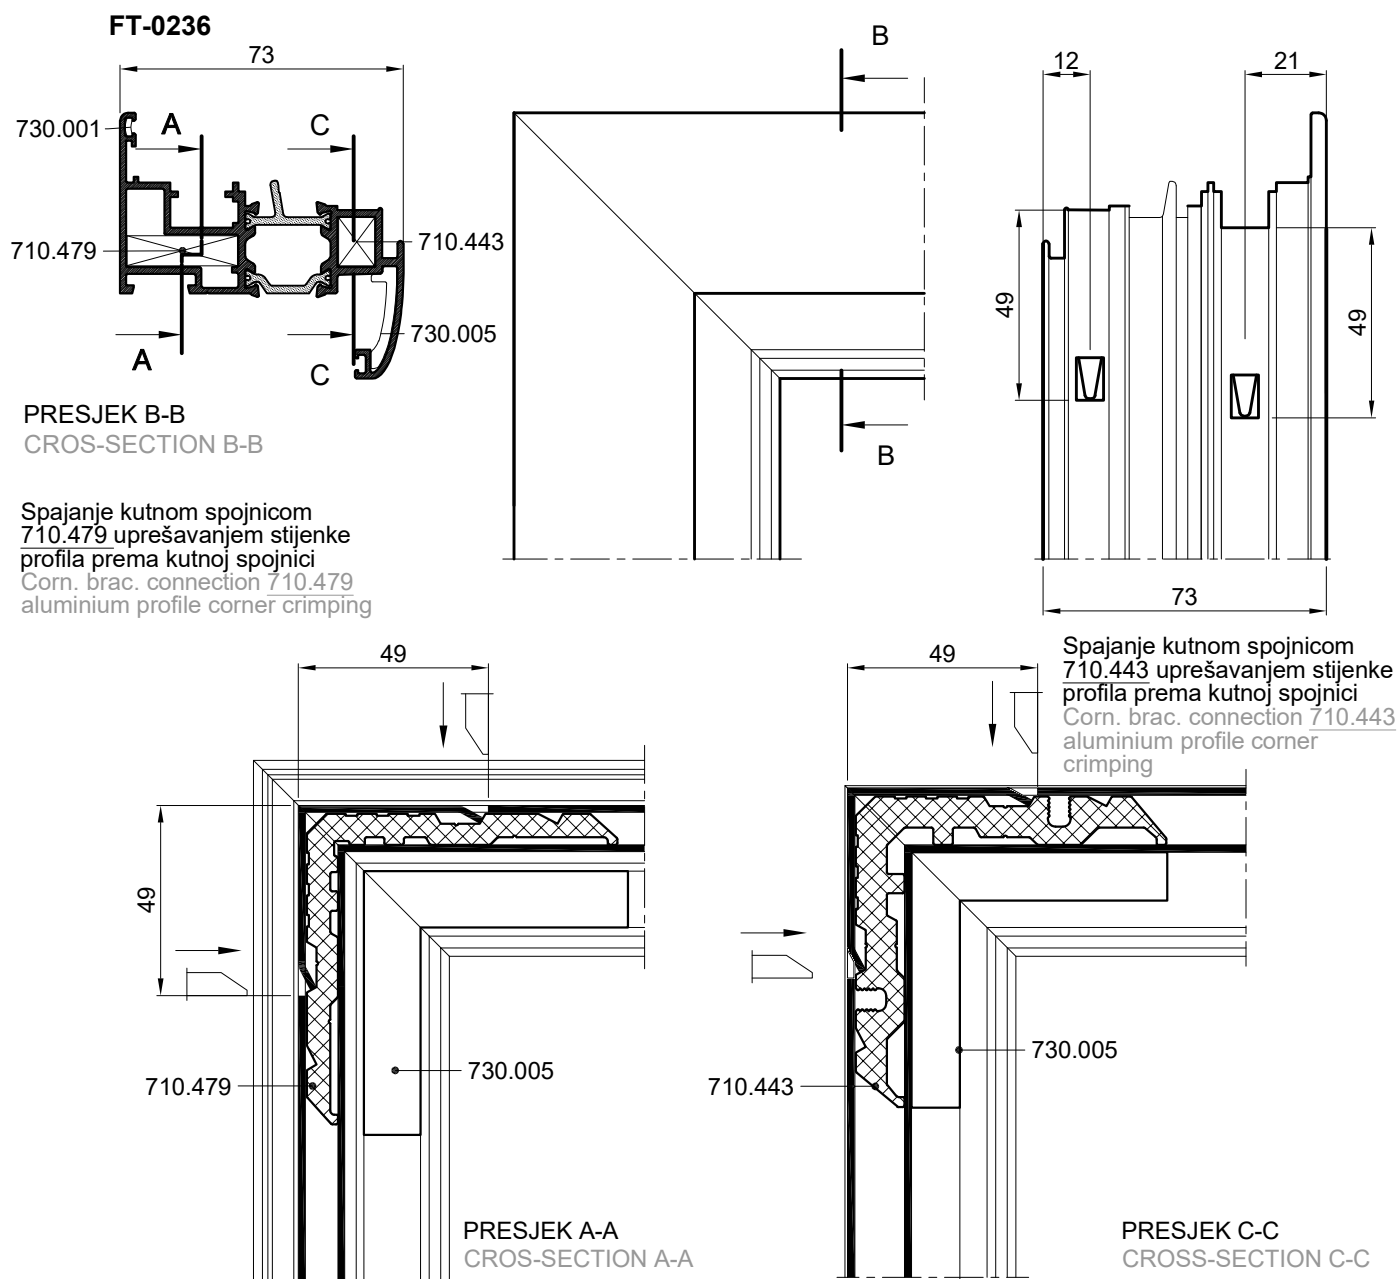



OVAJ RASPORED I NAČIN SPAJANJA KUTNIM SPOJNICAMA PRIMJENJIV JE I NA PROFILE **FT-0239**
THIS ARRANGEMENT AND BIDDING METHOD WITH CORNER BRACKETS IS ALSO APPLICABLE FOR PROFILE **FT-0239**

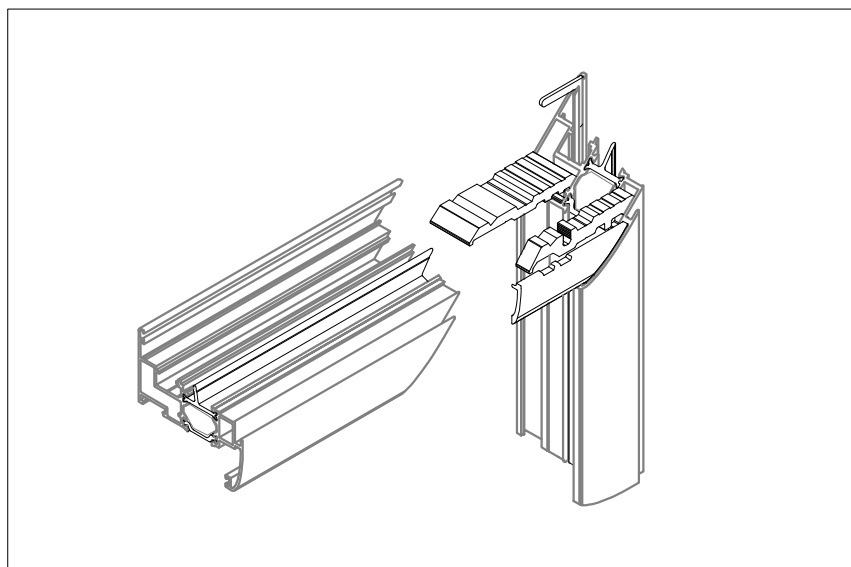

SPAJANJE PROFILA FT-0296 KUTNIM SPOJNICAMA; 710.461, 710.443
CONNECTION OF PROFILE FT-0236 WITH CORNER BRACKETS; 710.461, 710.443



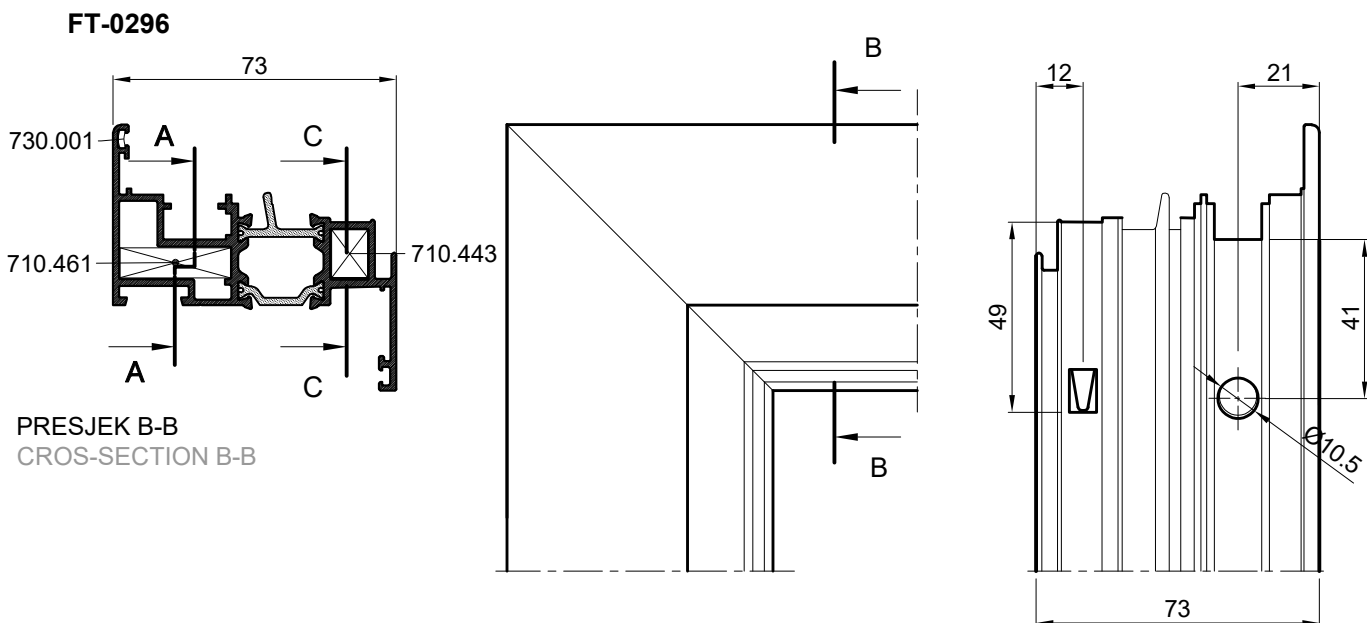


Spajanje kutnom spojnicom 710.461
vijcima M8x10 -*tip Feal*
Corner bracket connection 710.461
screws M8x10 -*type Feal*

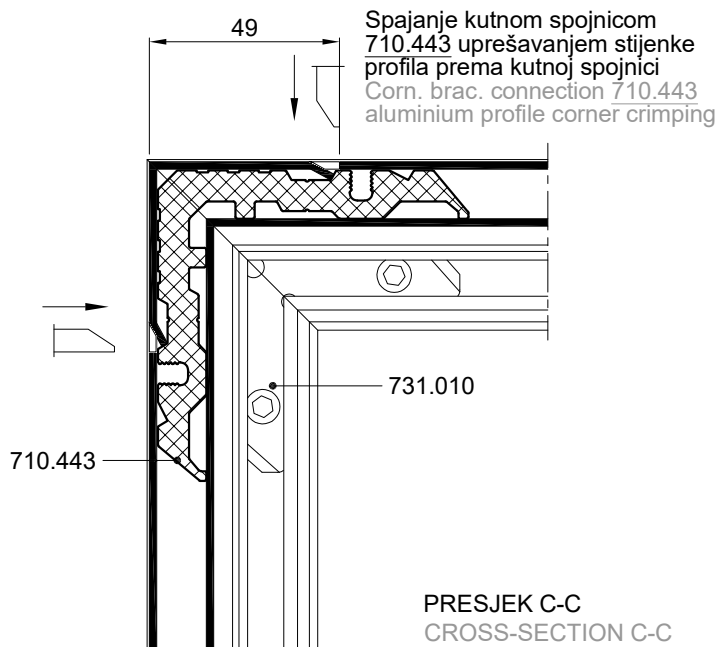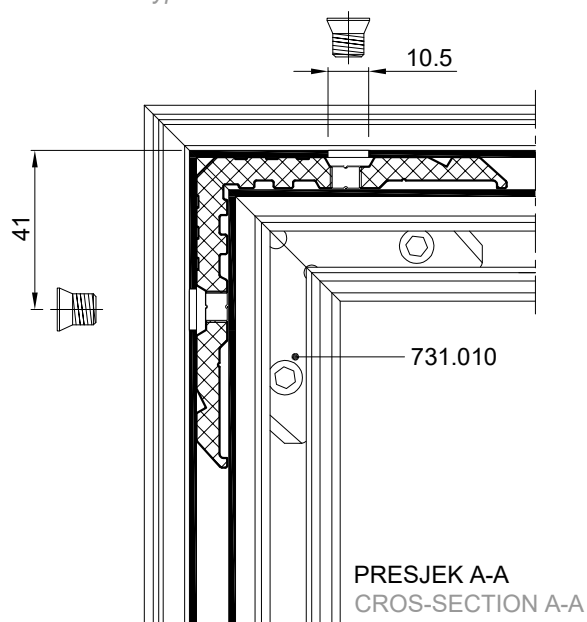


SPAJANJE PROFILA FT-0244 KUTNIM SPOJNICAMA; 710.099, 710.453 CONNECTION OF PROFILE FT-0244 WITH CORNER BRACKETS; 710.099, 710.453


FT-0244

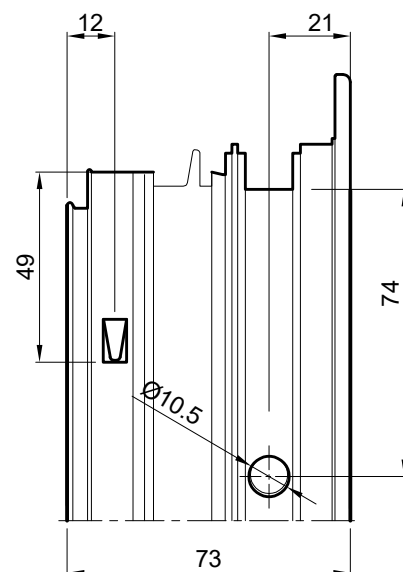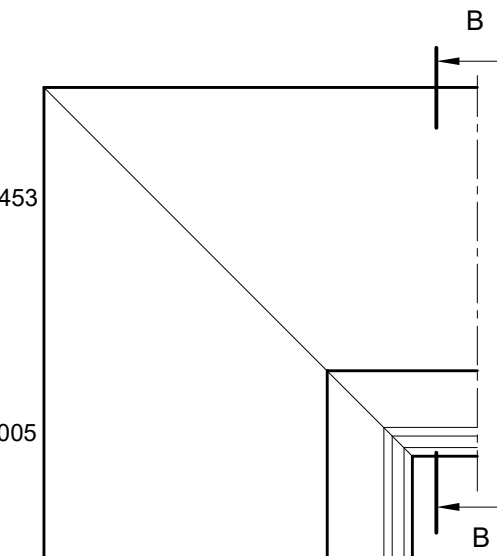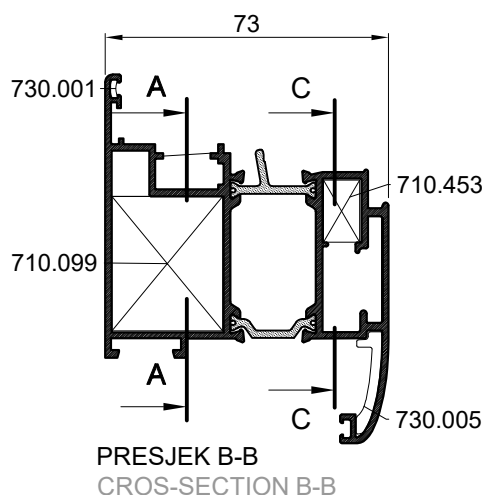



Spajanje kutnom spojnicom 710.099
vijcima M8x13 -tip Feal-(štanca S1)
Corner bracket connection 710.099
screws M8x13 -type Feal-(punch S1)

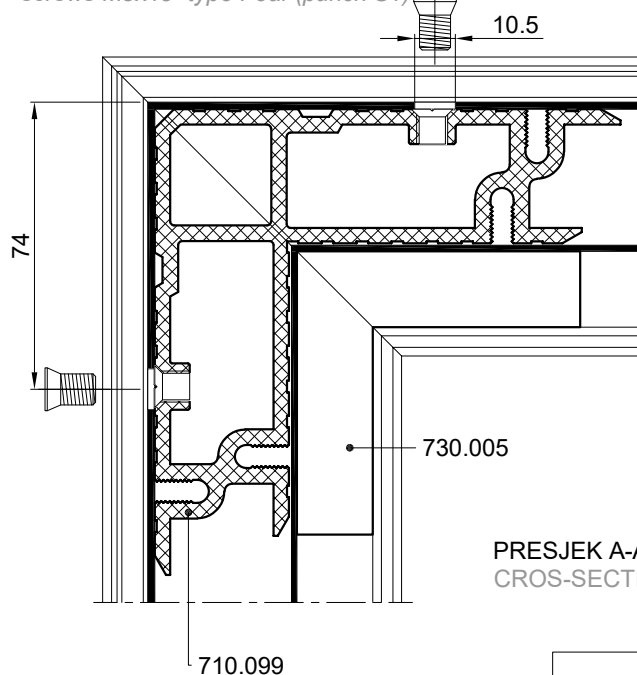


Spajanje kutnom spojnicom
710.453 uprešavanjem stijenke
profila prema kutnoj spojnici
Corn. brac. connection 710.453
aluminium profile corner crimping

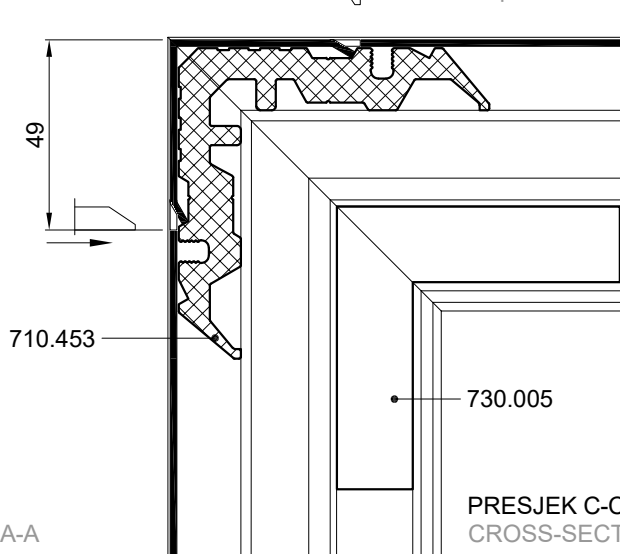

OVAJ RASPORED I NAČIN SPAJANJA
KUTNIM SPOJNICAMA PRIMJENJIV JE I NA
PROFILE **FT-0246**
THIS ARRANGEMENT AND BIDDING METHOD
WITH CORNER BRACKETS IS ALSO
APPLICABLE FOR PROFILE **FT-0246**

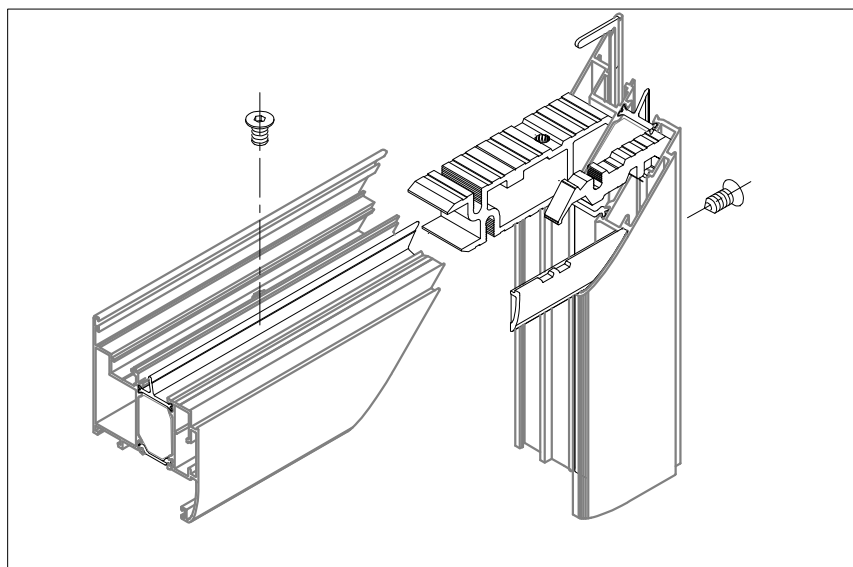



SPAJANJE PROFILA FT-0244 KUTNIM SPOJNICAMA; 710.059, 710.453 CONNECTION OF PROFILE FT-0244 WITH CORNER BRACKETS; 710.059, 710.453

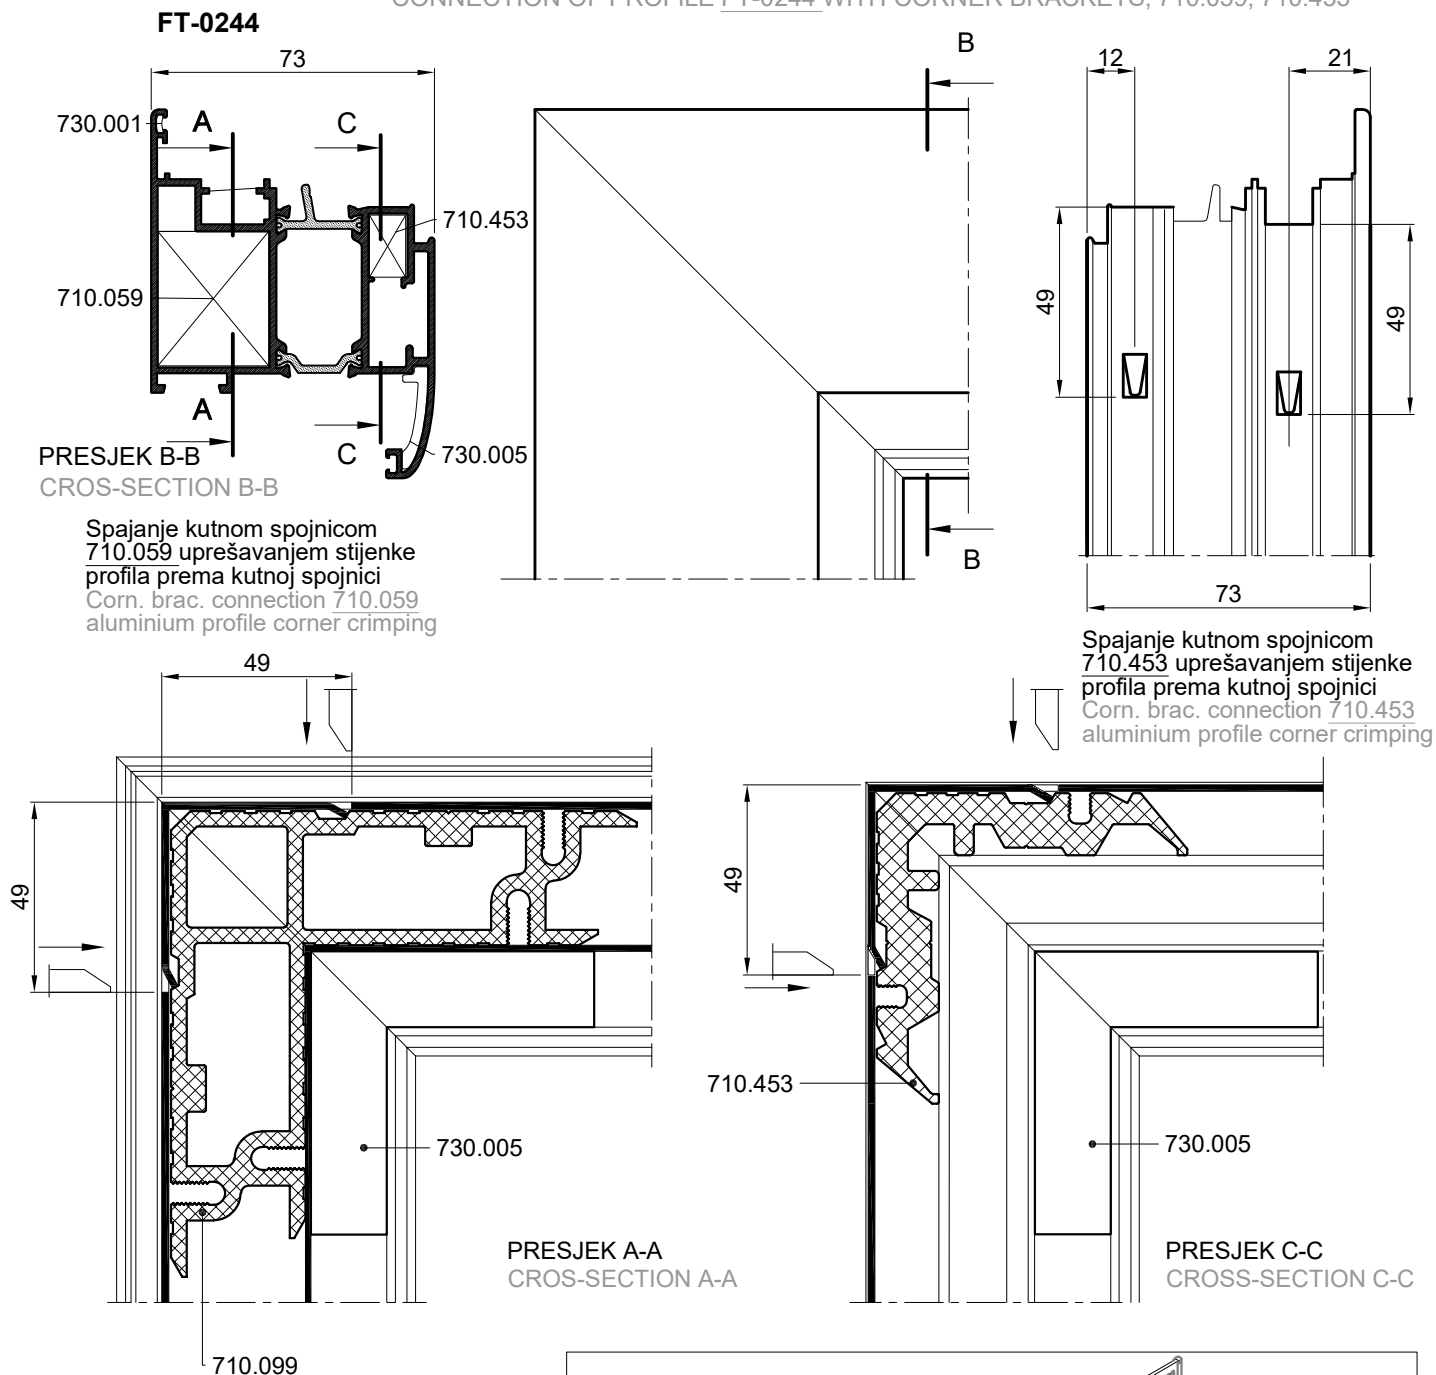


OVAJ RASPORED I NAČIN SPAJANJA
KUTNIM SPOJNICAMA PRIMJENJIV JE I NA
PROFILE **FT-0246**

THIS ARRANGEMENT AND BIDDING METHOD
WITH CORNER BRACKETS IS ALSO
APPLICABLE FOR PROFILE **FT-0246**

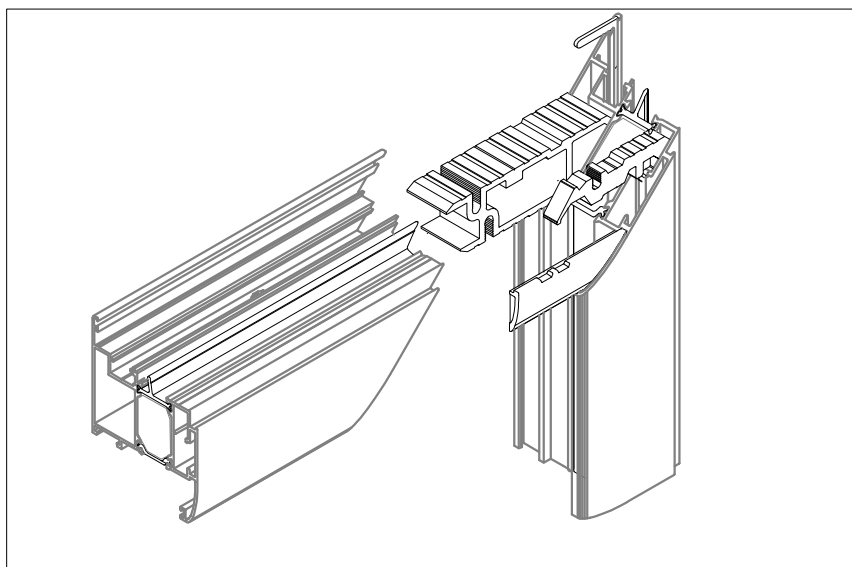


OBRADA PROFILA PREČKE (FT-0205, FT-0206, FT-0207, FT-0208, FT-0243, FT-0264, FT-0265, FT-0228) PREMA PROFILIMA KRILA, RAMA I PREČKE.


PROCESSING MULLION PROFILES (FT-0205, FT-0206, FT-0207, FT-0208, FT-0243, FT-0264, FT-0265, FT-0228) TOWARDS SASH, FRAME AND MULLION PROFILES.

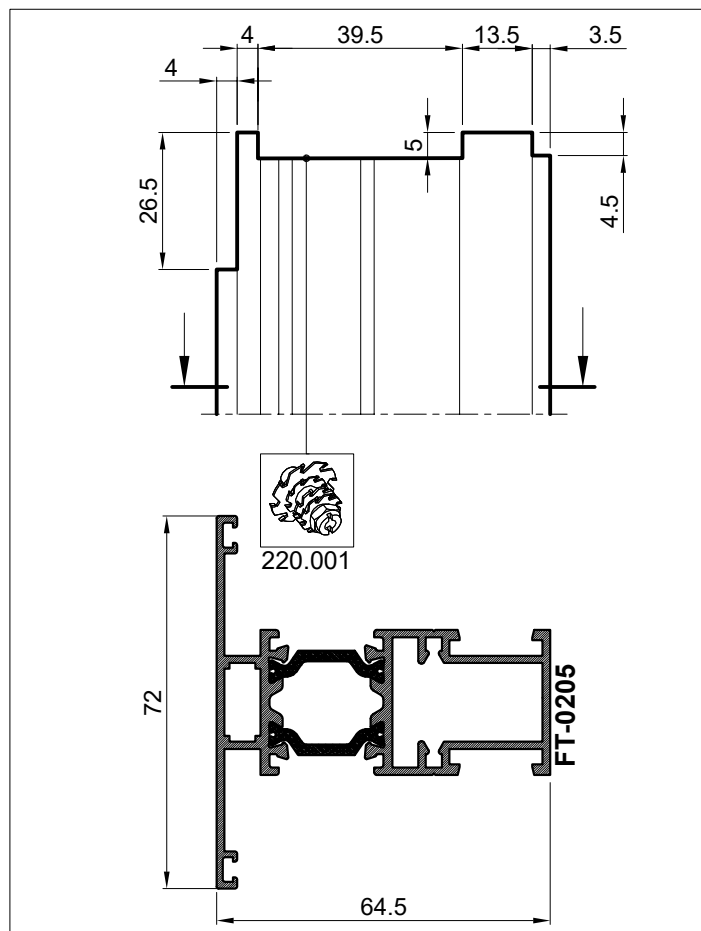


OBRADU RADITI SNOPOM GLODALA 220.001
PROCESSING WITH MILLING TOOL 220.001

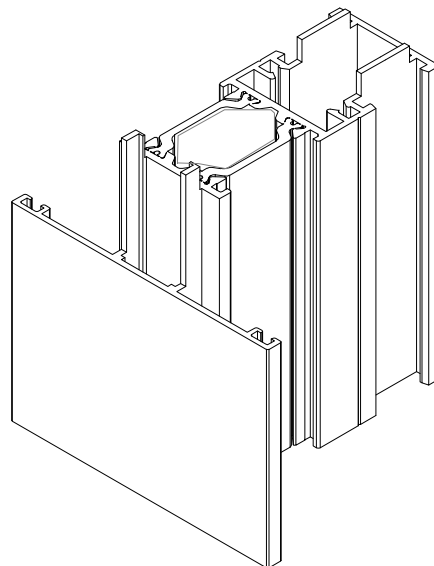

OBRADA PROFILA JE ISTA I ZA PROFILE:
PROFILE PROCESSING IS THE SAME FOR PROFILES:



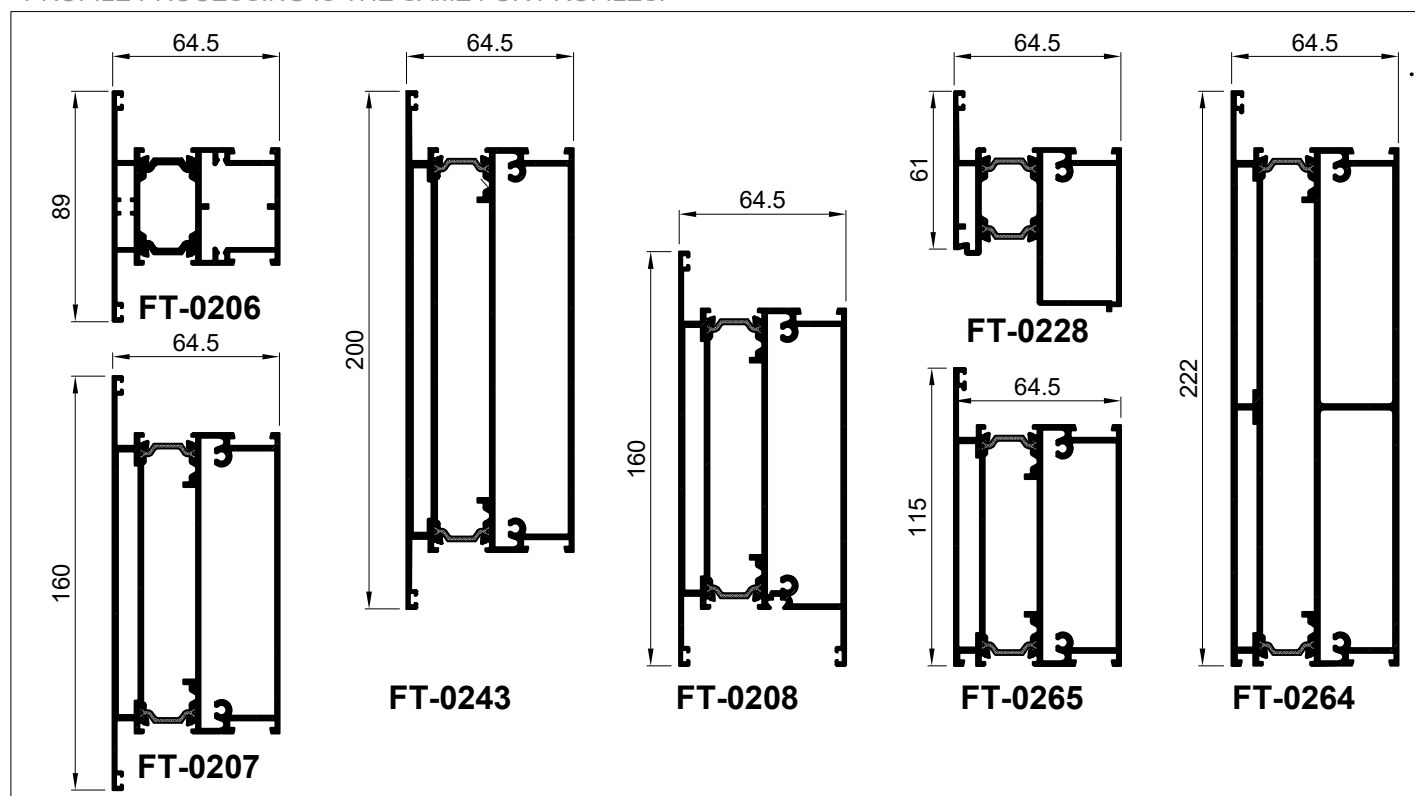


SPAJANJE PROFILA PREČKE I RAMA VIJCIMA CONNECTION OF MULLION PROFILE WITH SCREWS


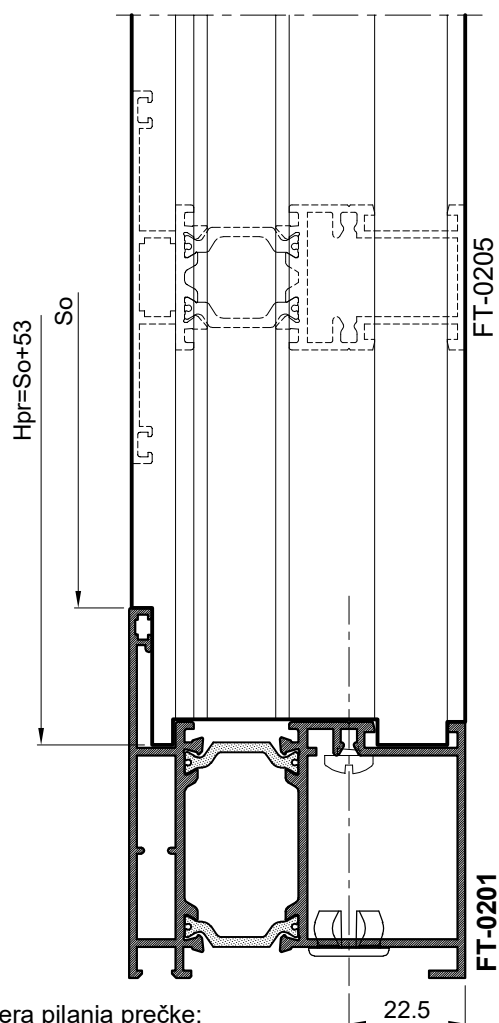


Mjera pilanja prečke:
Lpr=So /svijetli otvor/ + 53 mm
Cutting length of mullion:
Lmu=So /light opening/ + 53 mm



OBRADA PROFILA PROCESING PROFILE

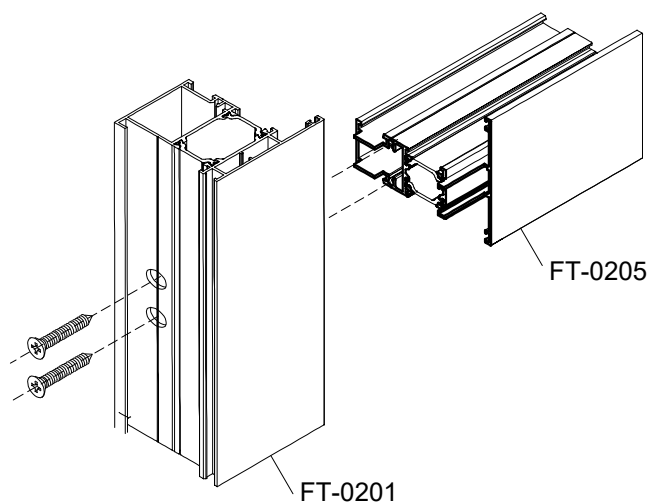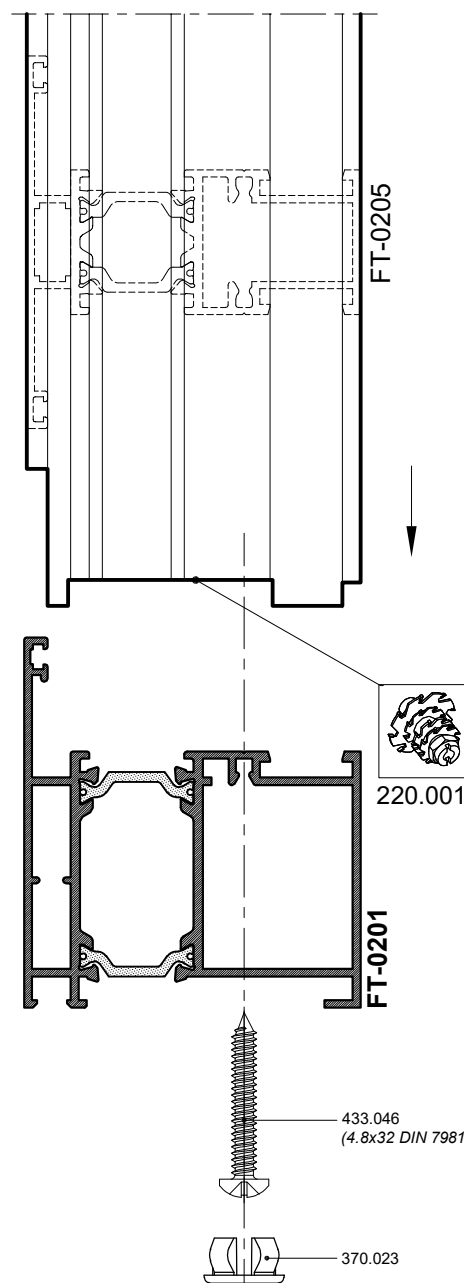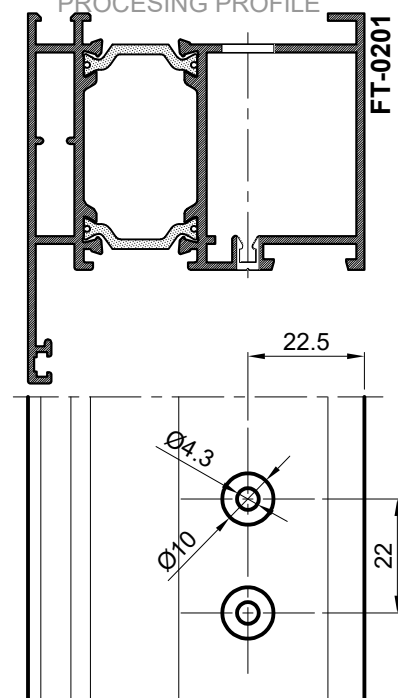





SPAJANJE PROFILA RAMA FT-0201 VEZNICIMA CONNECTION OF FRAME PROFILE FT-0201 WITH CONNECTORS

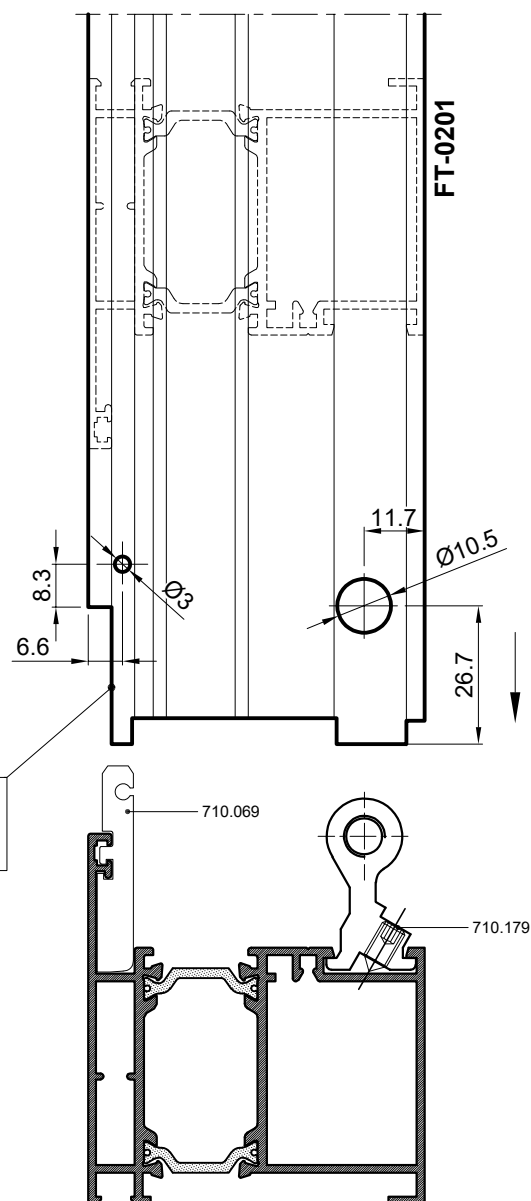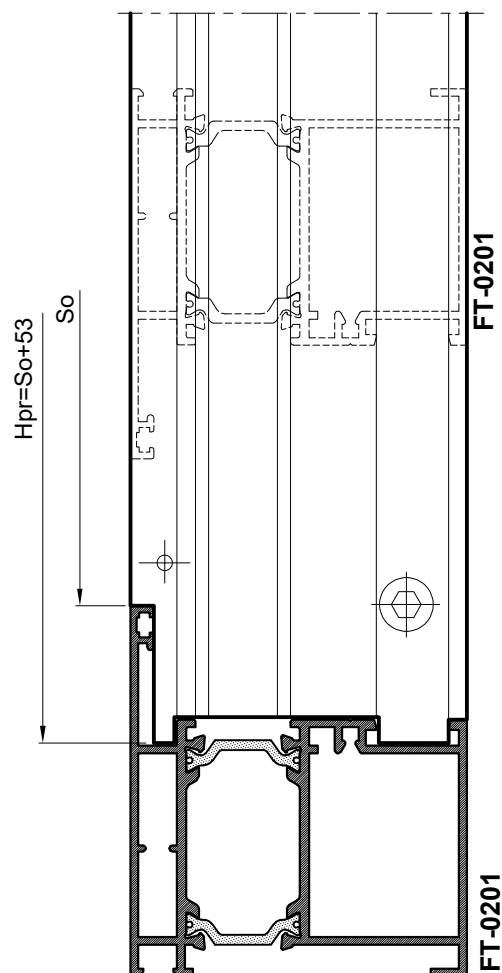


Mjera pilanja profil FT-0201F:
Lpr=So /svijetli otvor/ + 53 mm
Cutting length of profile FT-0201F:
Lmu=So /light opening/ + 53 mm

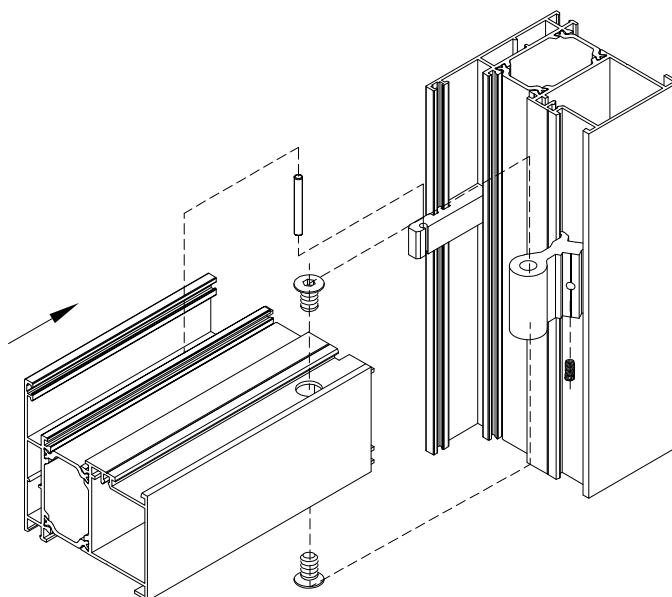

SPAJANJE PROFILA FT-0205 I FT-0201 VEZNICIMA CONNECTION PROFILE FT-0205 AND FT-0201 WITH CONNECTORS

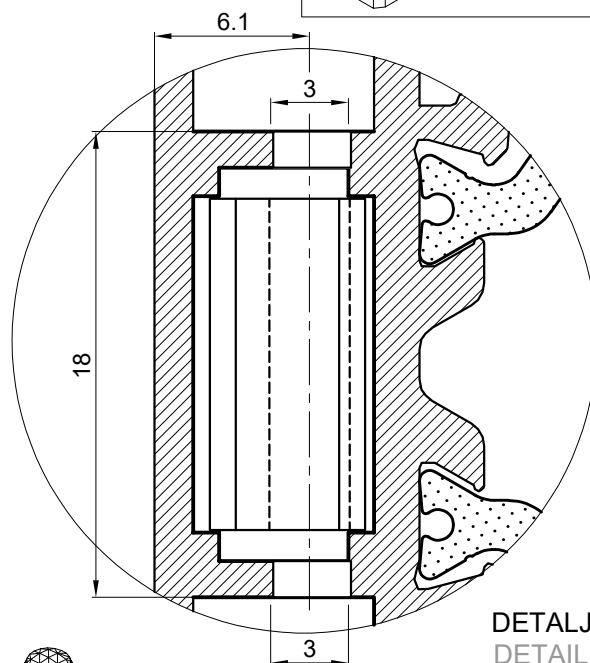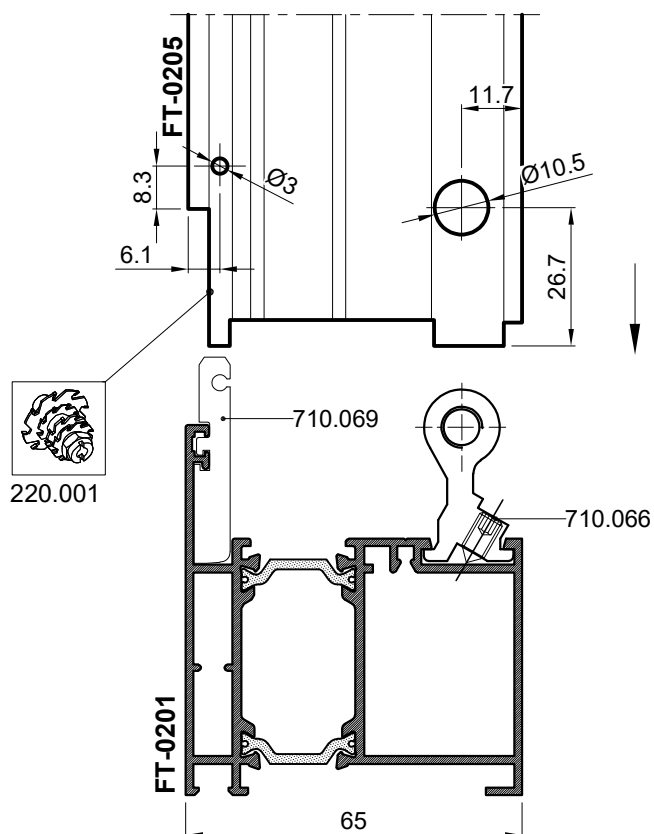


DETALJ A
DETAIL A
M 5:1




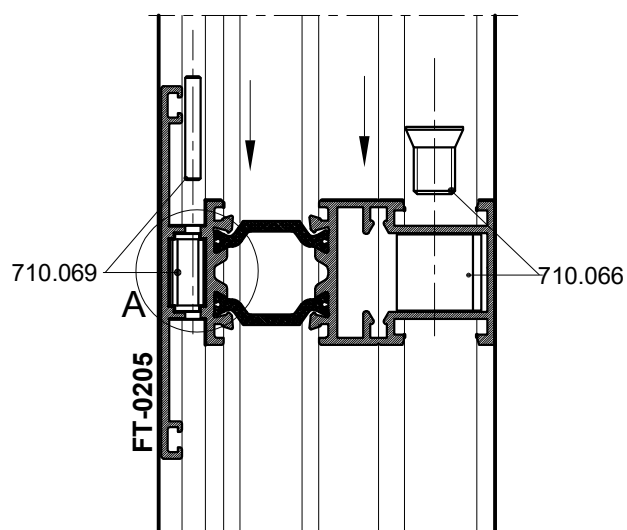


141.008
pomoćni alat za ugradnju
auxiliary tool for montage



Ugradnja veznika 710.069 olakšana je
uporabom pomoćnog alata za ugradnju 141.008
Installation of connector 710.069 is facilitated
by using auxiliary tool for montage 141.008

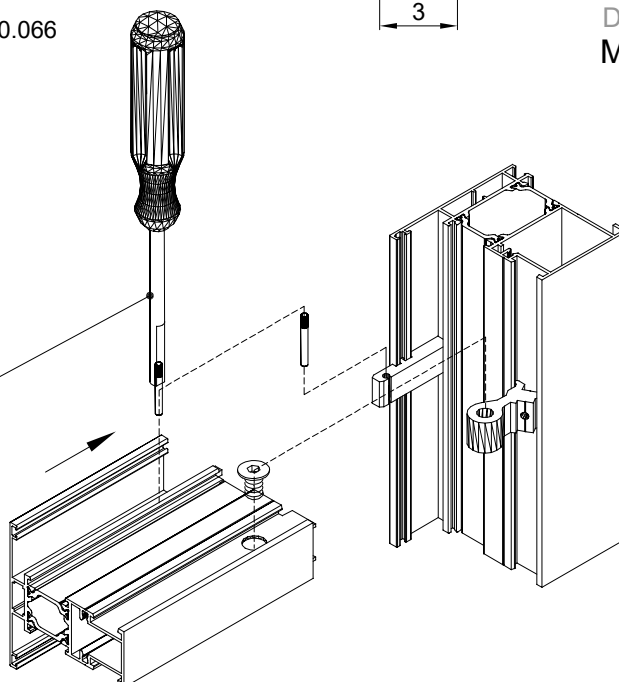

SPAJANJE PROFILA FT-0206 I FT-0201 VEZNICIMA CONNECTION OF PROFILES FT-0206 AND FT-0201 WITH CONNECTORS

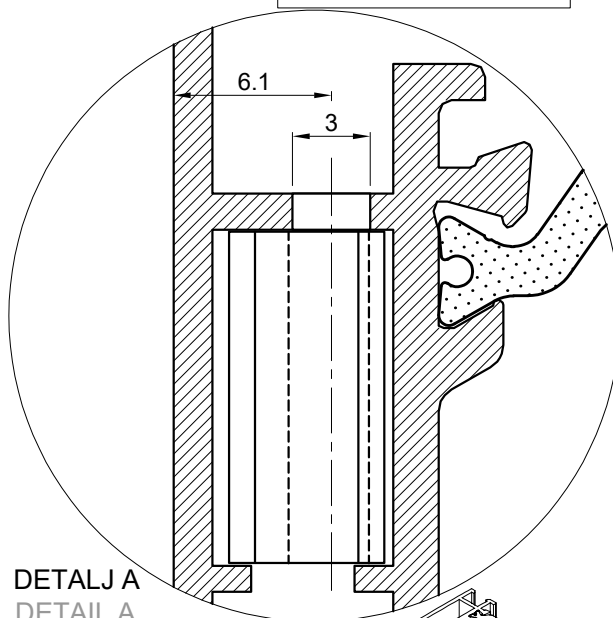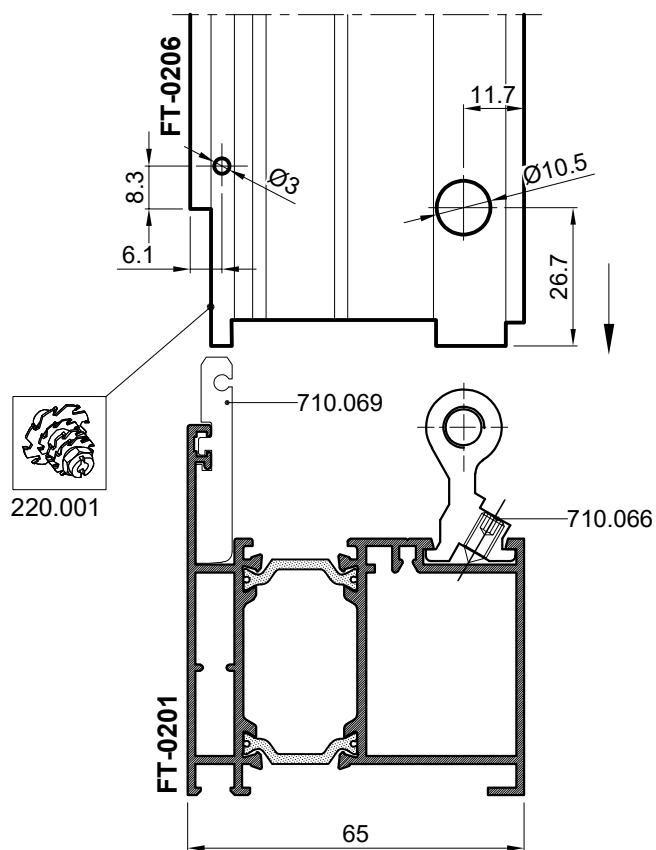


DETALJ A
DETAIL A
M 5:1


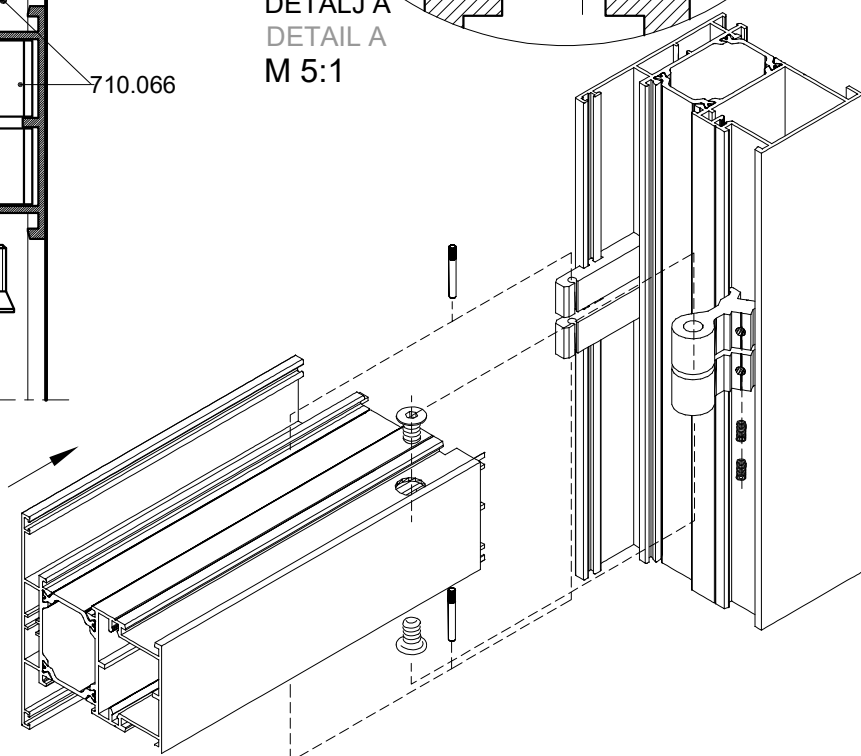
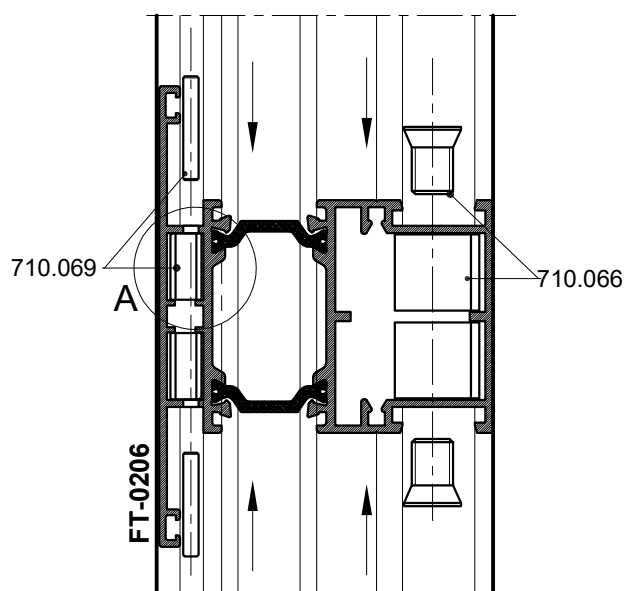


SPAJANJE PROFILA FT-0207 I FT-0201 VEZNICIMA


CONNECTION OF PROFILES FT-0207 AND FT-0201 WITH CONNECTORS

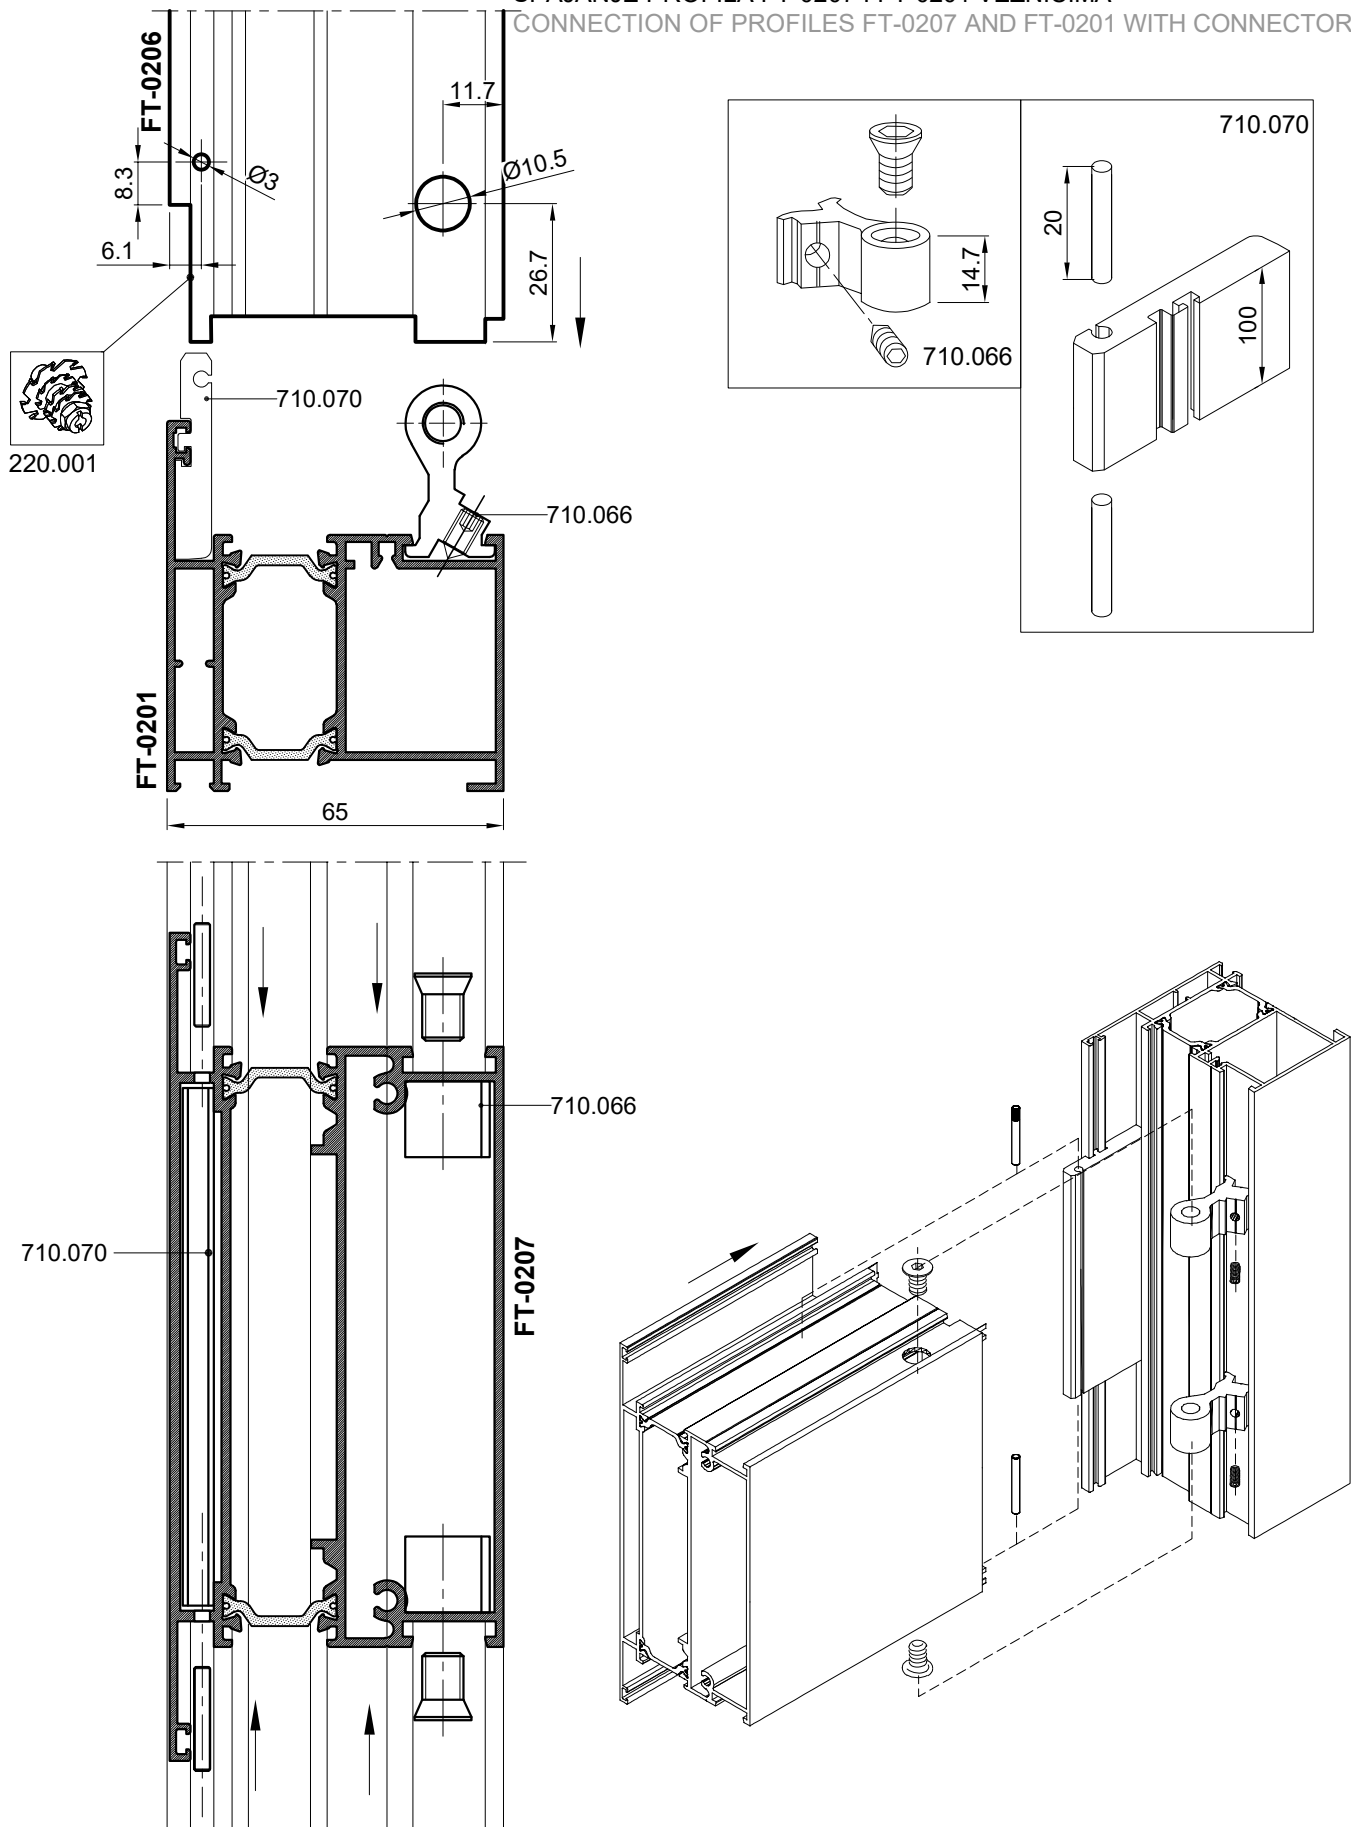





SPAJANJE PROFILA FT-0205 I FT-0206 VEZNICIMA CONNECTION OF PROFILES FT-0205 AND FT-0206 WITH CONNECTORS

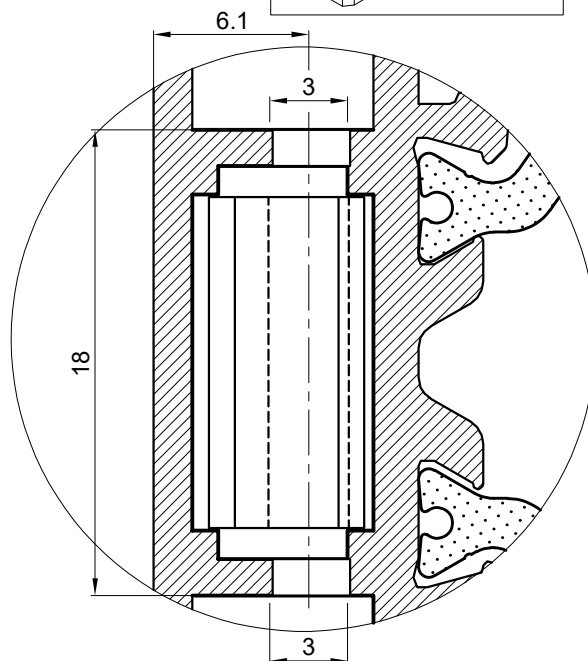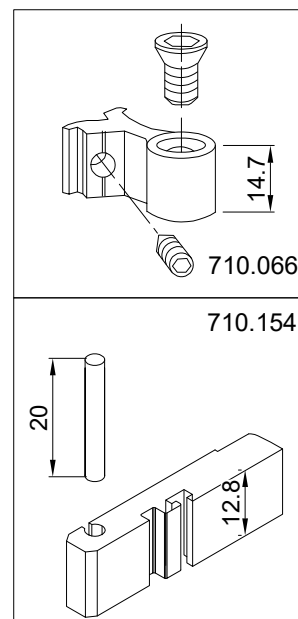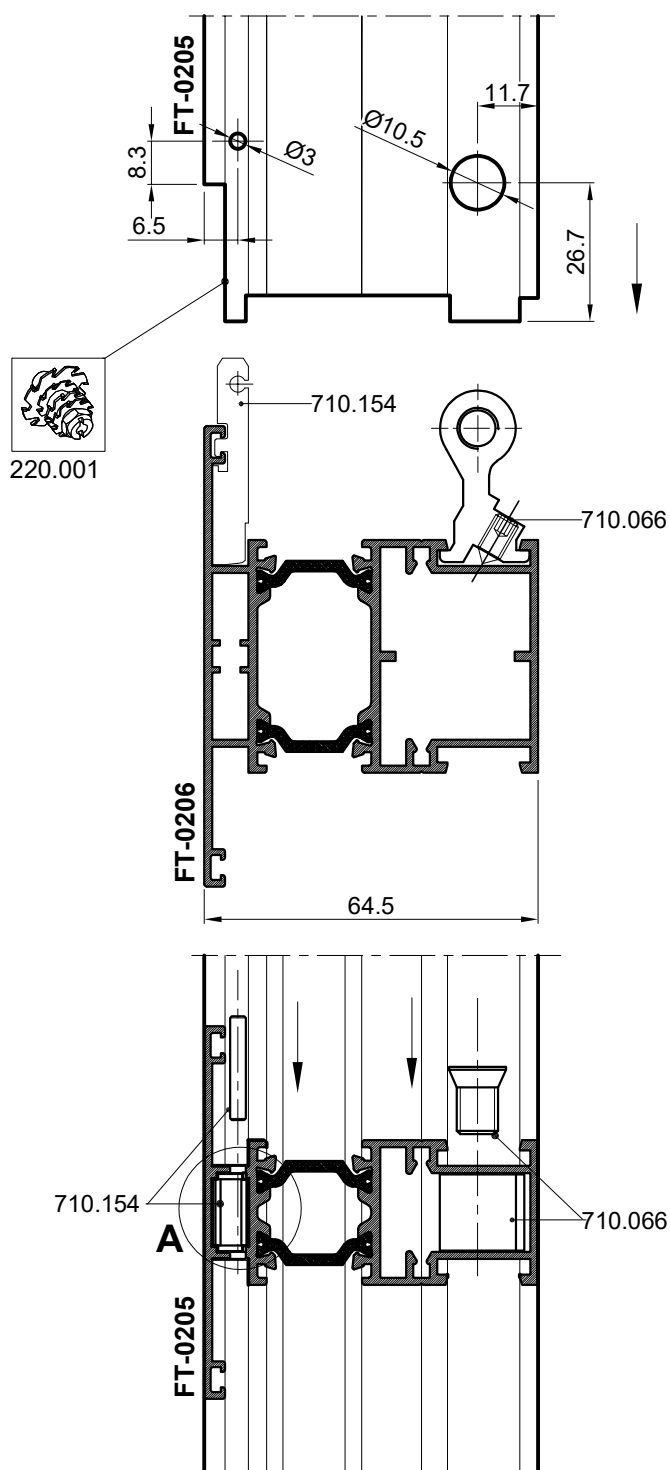


DETALJ A
DETAIL A
M 5:1

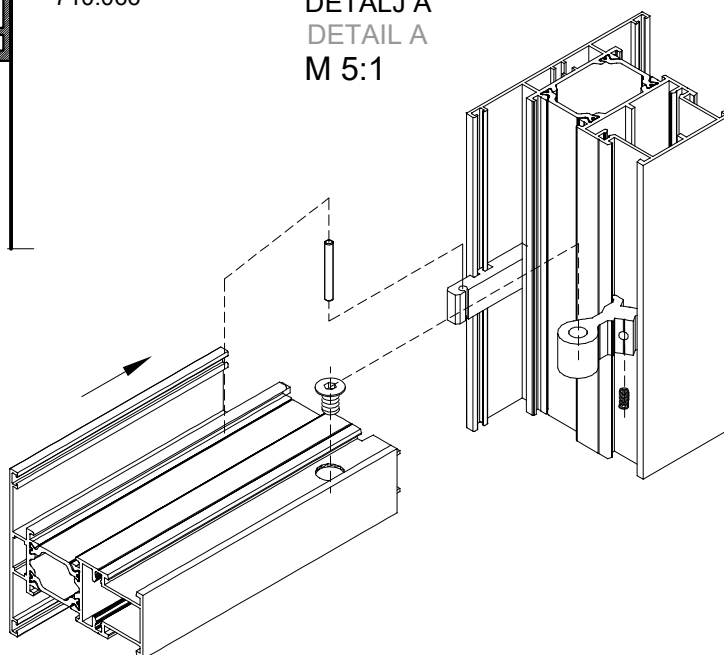





SPAJANJE PROFILA FT-0206 I FT-0206 VEZNICIMA CONNECTION OF PROFILES FT-0206 AND FT-0206 WITH CONNECTORS

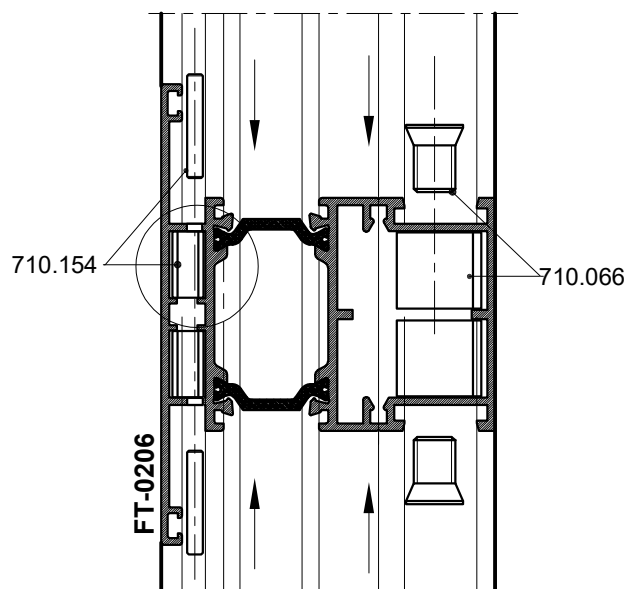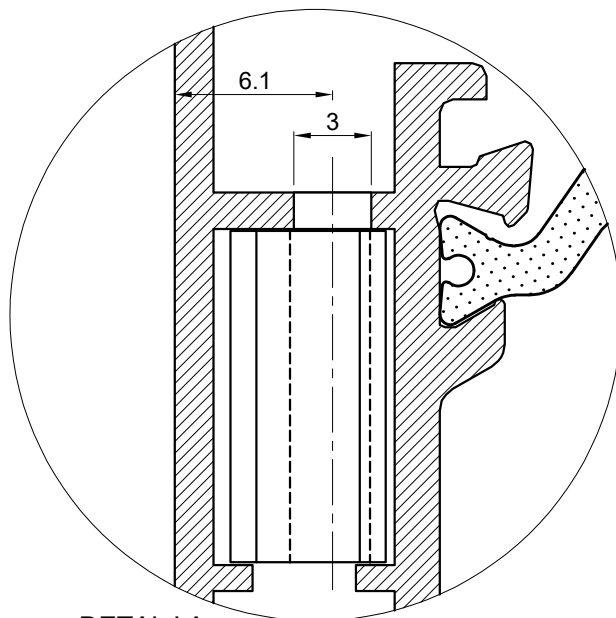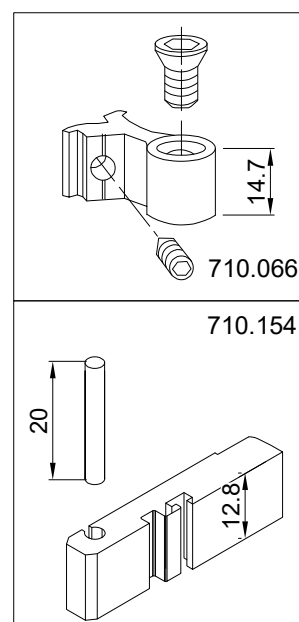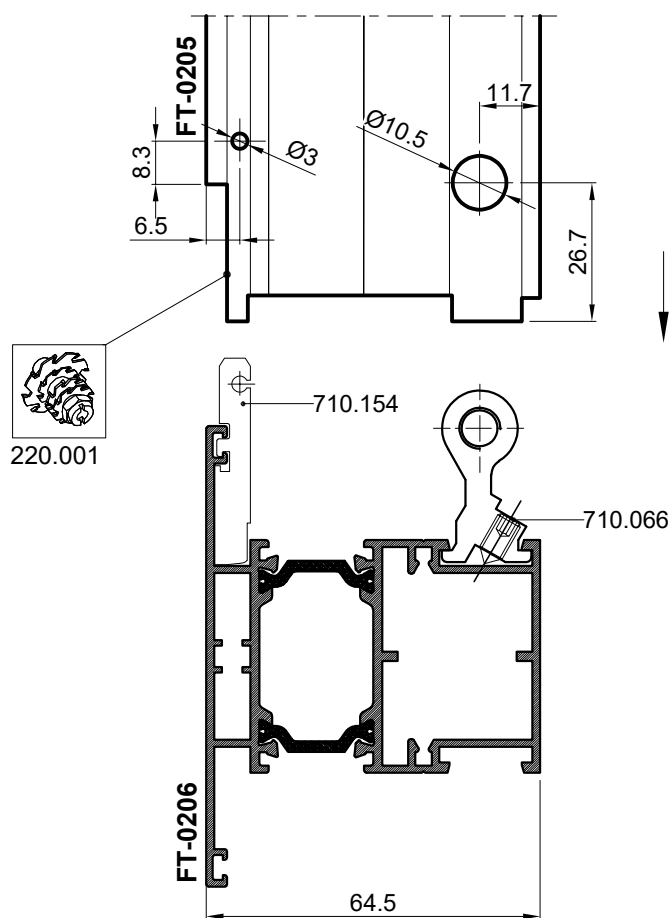

DETALJ A
DETAIL A
M 5:1

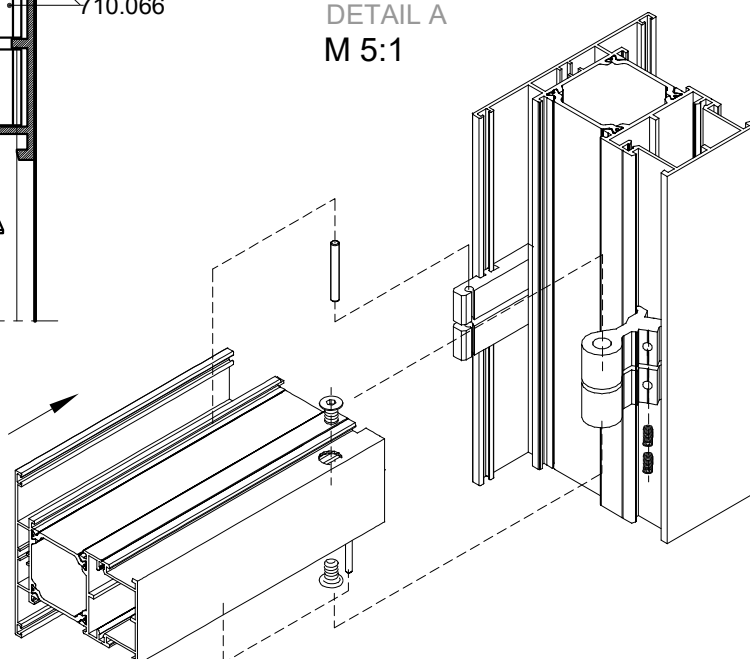


SPAJANJE PROFILA FT-0205 I FT-0203 VEZNICIMA CONNECTION OF PROFILES FT-0205 AND FT-0203 WITH CONNECTORS

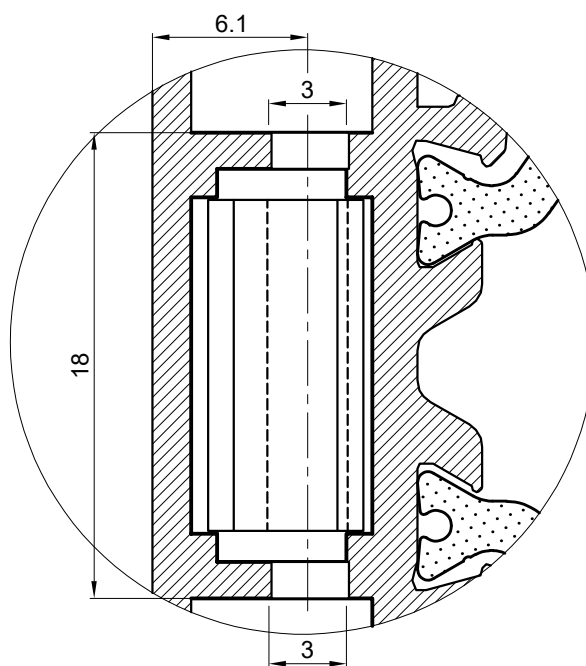


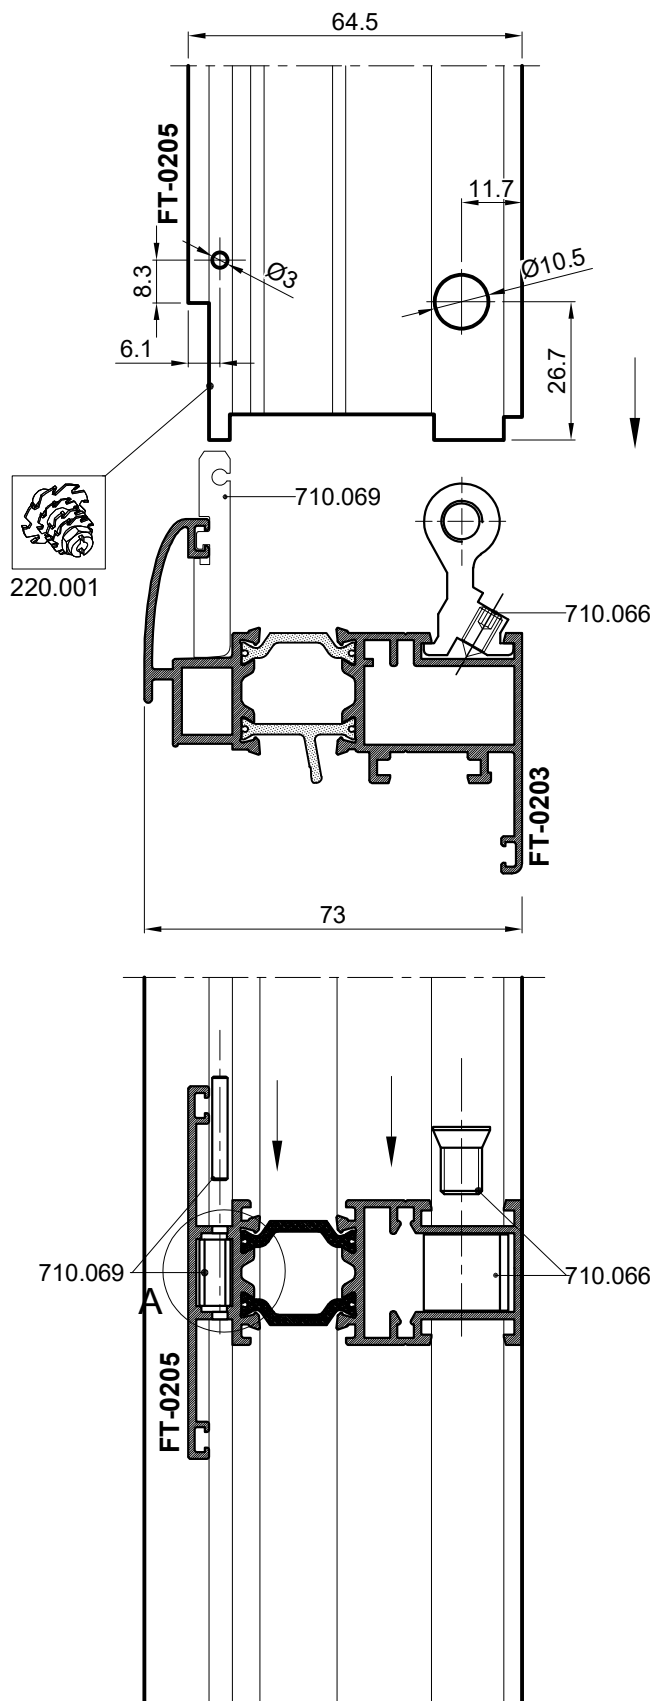


DETALJ A
DETAIL A
M 5:1

SPAJANJE PROFILA FT-0295 I FT-0284 VEZNICIMA CONNECTION OF PROFILES FT-0295 AND FT-0284 WITH CONNECTORS

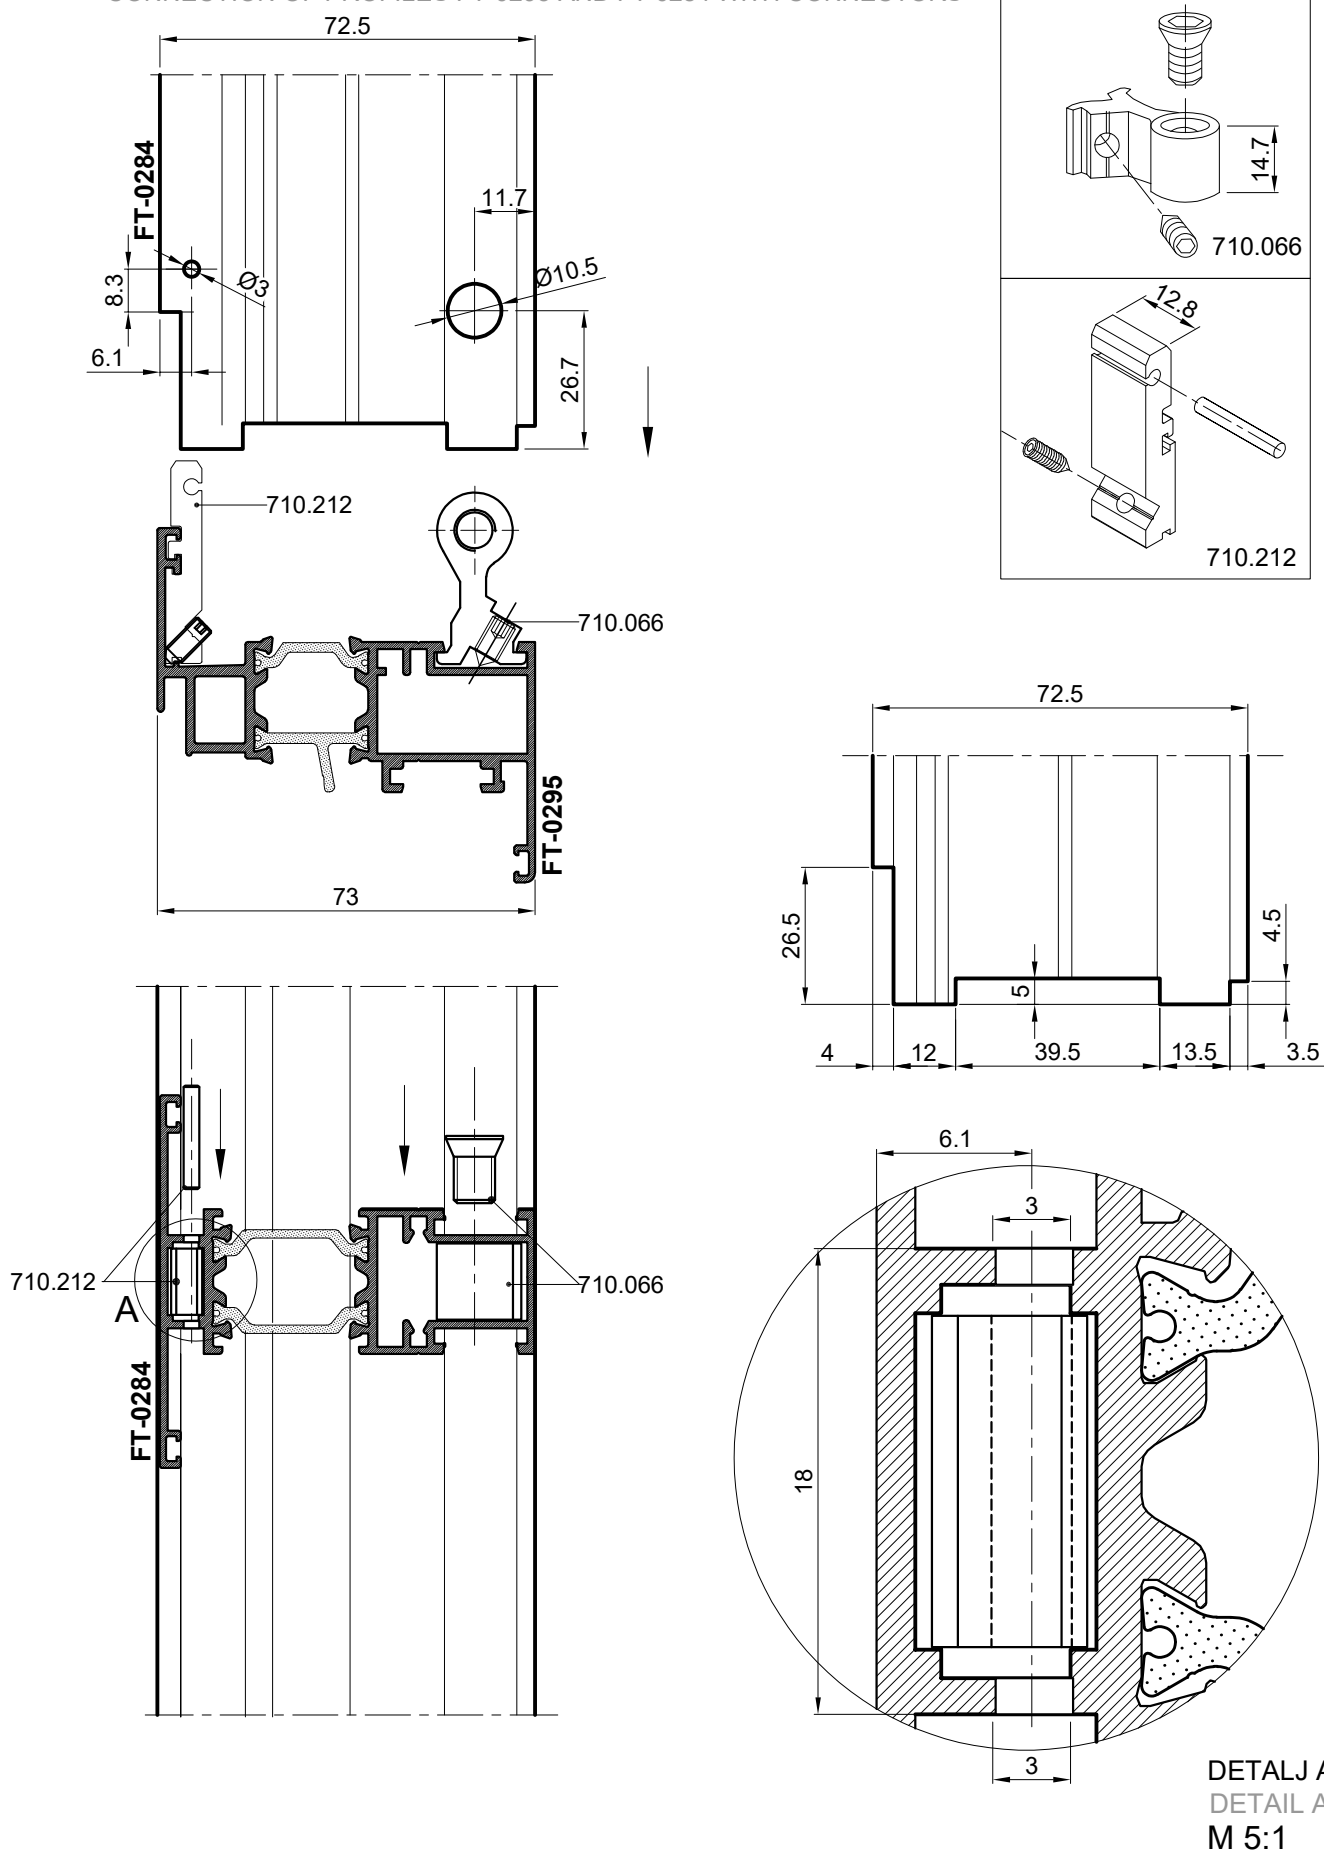





SPAJANJE PROFILA FT-0206 I FT-0204 VEZNICIMA CONNECTION OF PROFILES FT-0206 AND FT-0204 WITH CONNECTORS

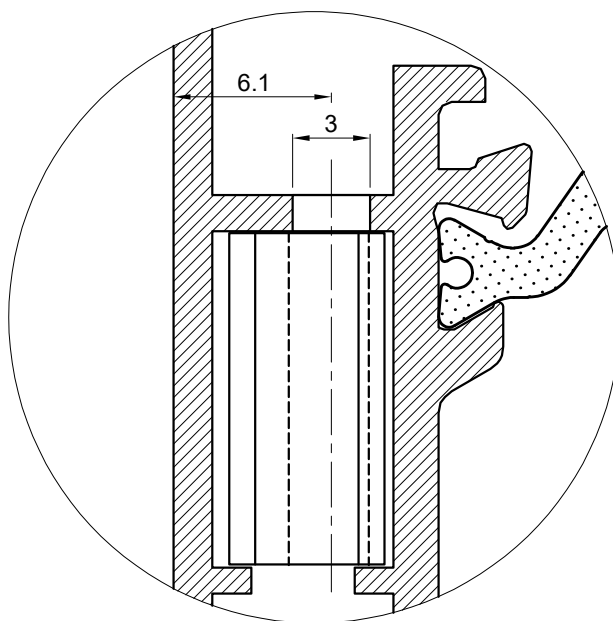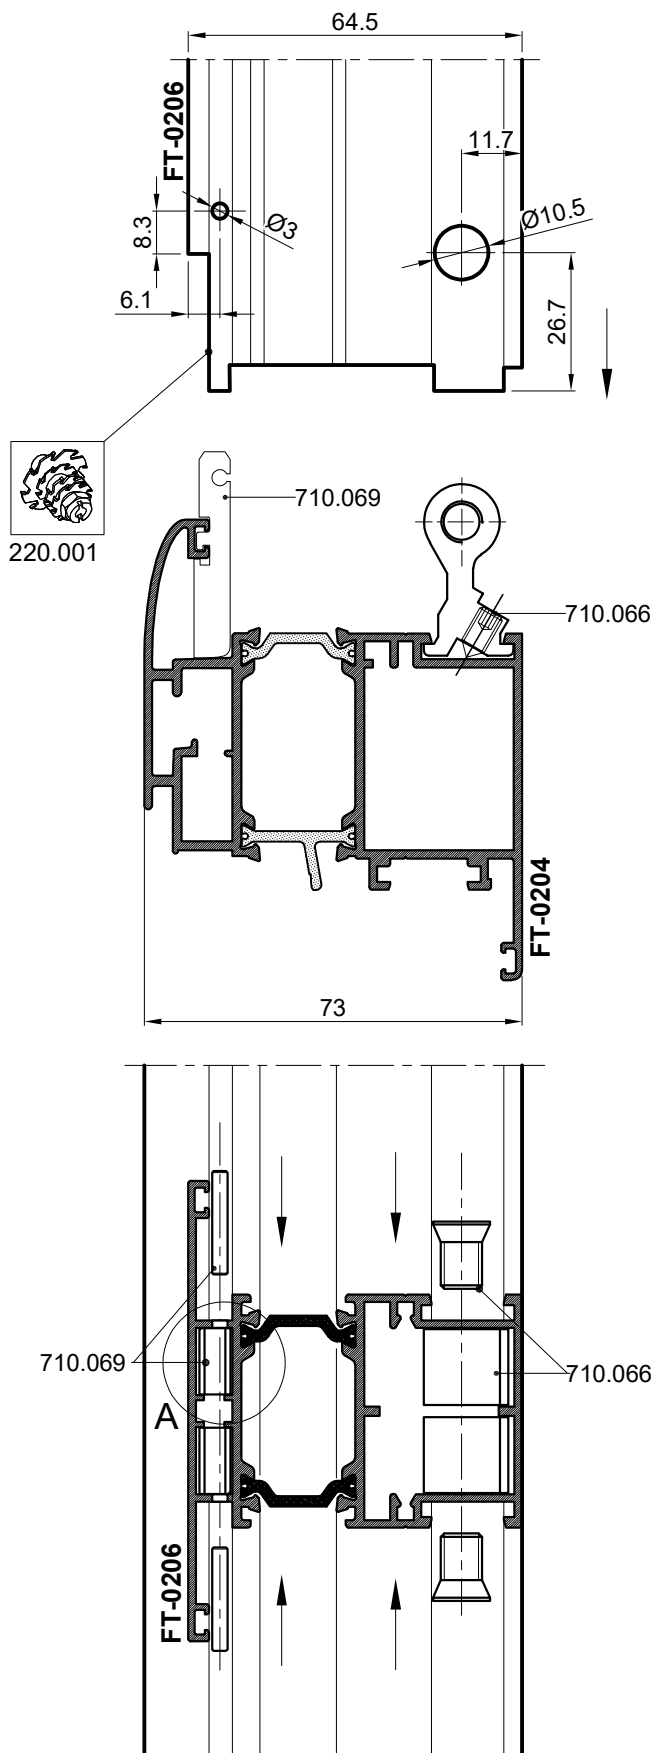

DETALJ A
DETAIL A
M 5:1

SPAJANJE PROFILA FT-0265 i FT-0207 VEZNICIMA

CONNECTION OF PROFILES FT-0265 and FT-0207 WITH CONNECTORS

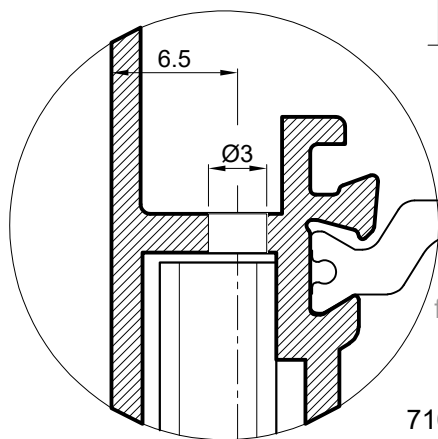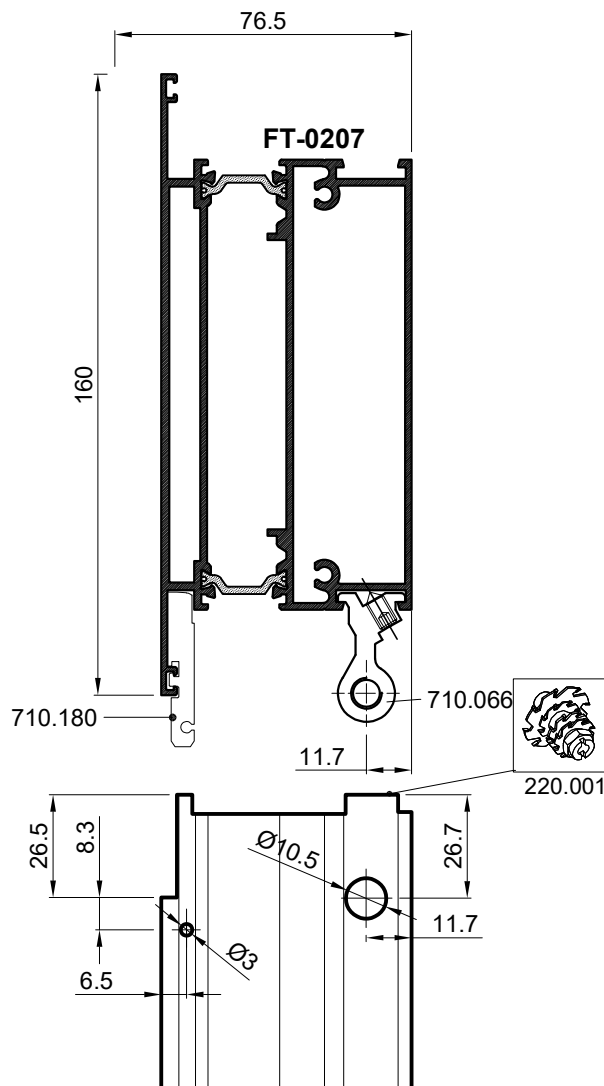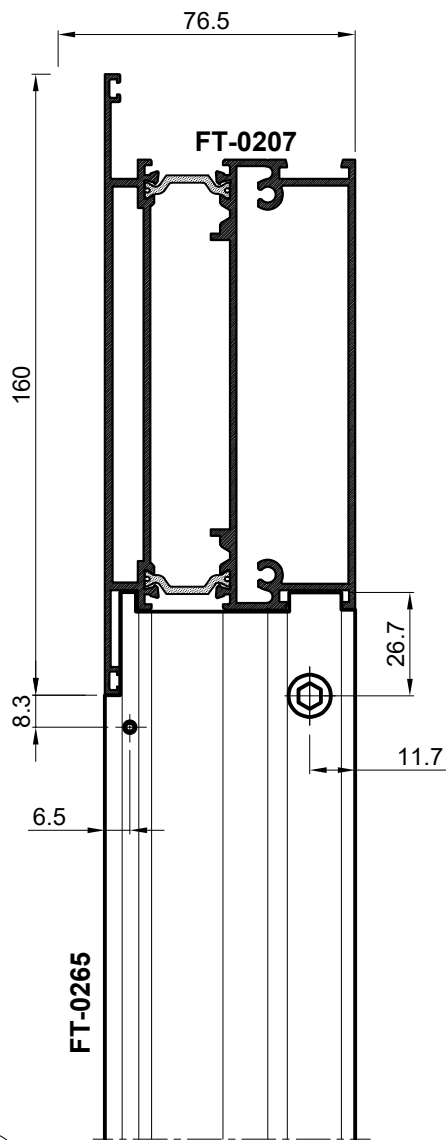

Obrada za
veznik
Processing
for connector


710.180

710.066


L=14.7

L=78




20

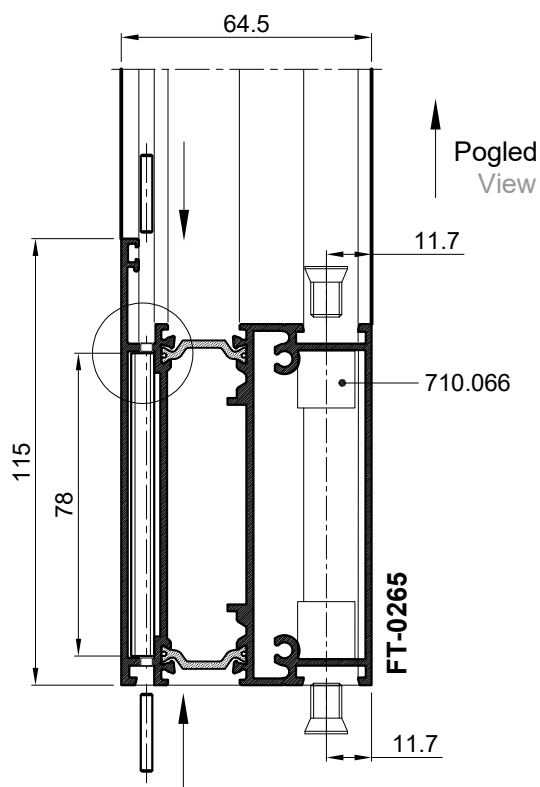




Pogled
View




SPAJANJE PROFILA FT-0265 i FT-0231 VEZNICIMA CONNECTION OF PROFILES FT-0265 and FT-0231 WITH CONNECTORS

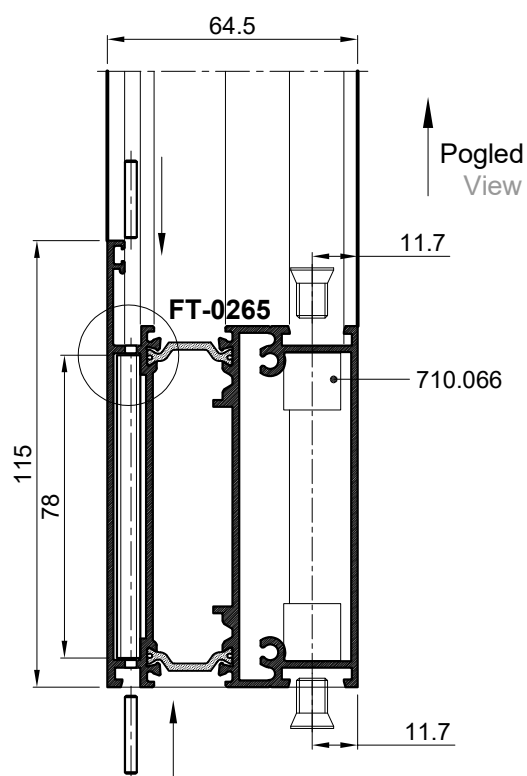
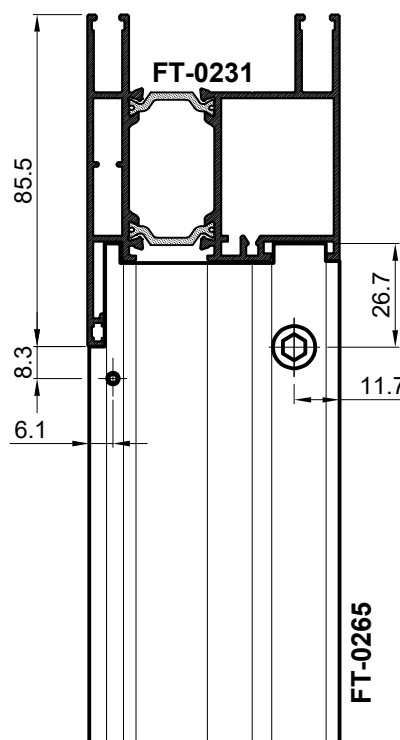
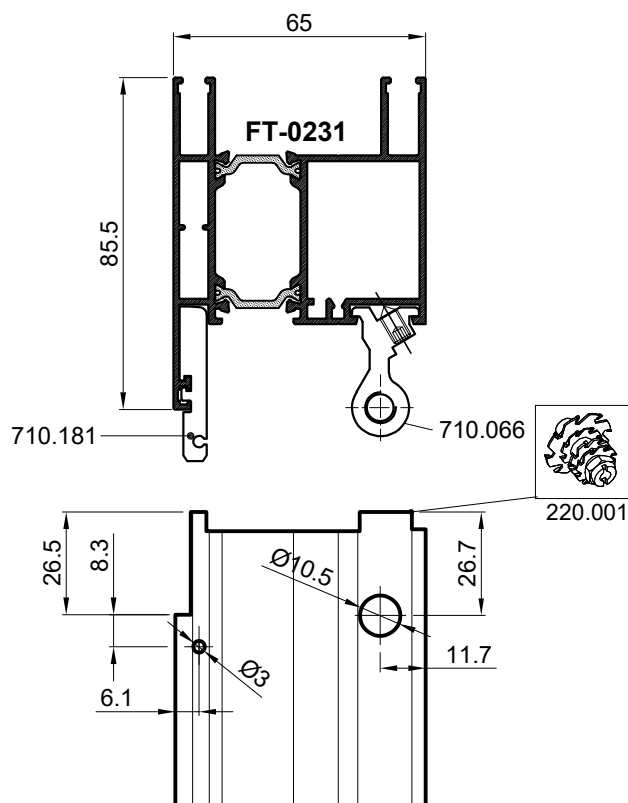


Obrada za
veznik
Processing
for connector

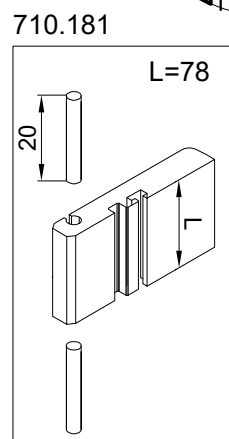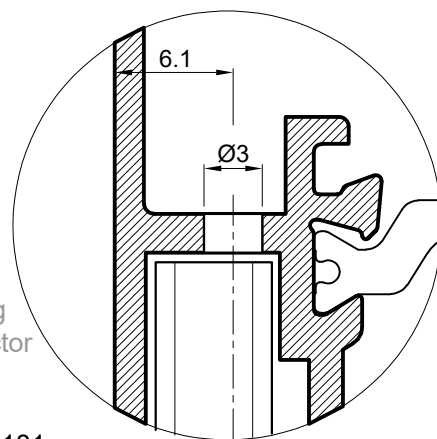




SPAJANJE PROFILA
FT-0264 i FT-0207
VEZNICIMA
CONNECTION OF
PROFILES FT-0264 and
FT-0207 WITH
CONNECTORS

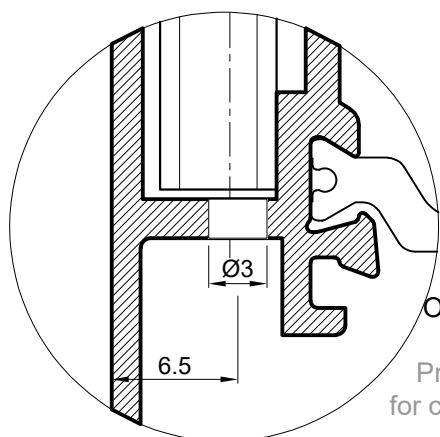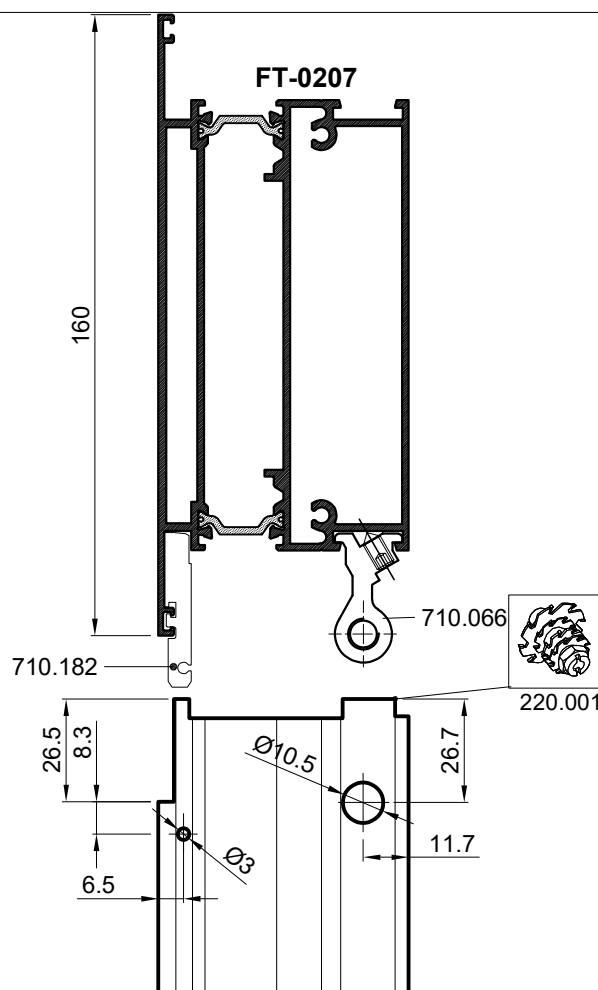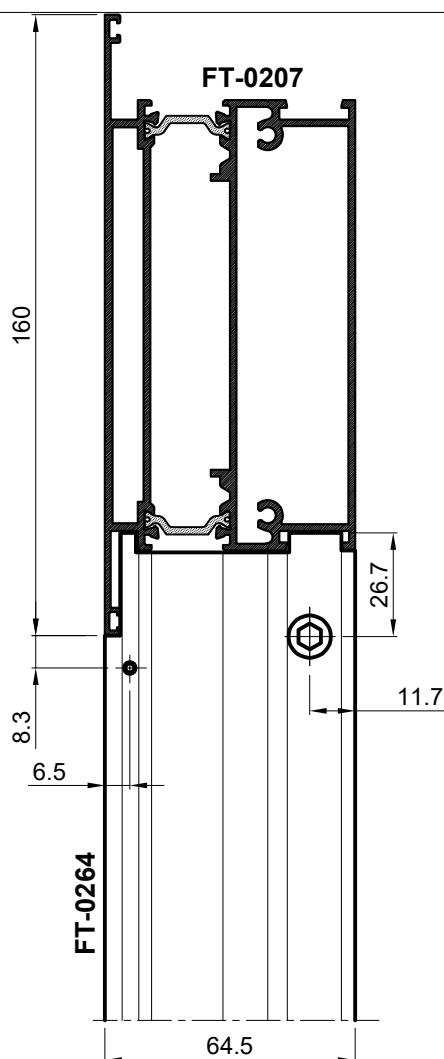

Obrada za
veznik
Processing
for connector

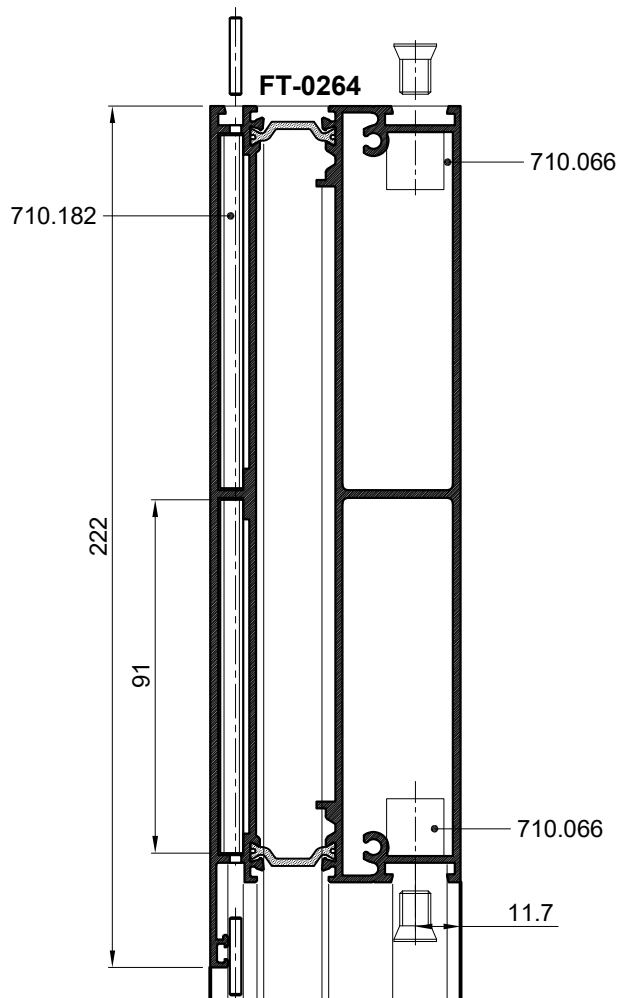



710.066

L=14.7

L=91





710.182



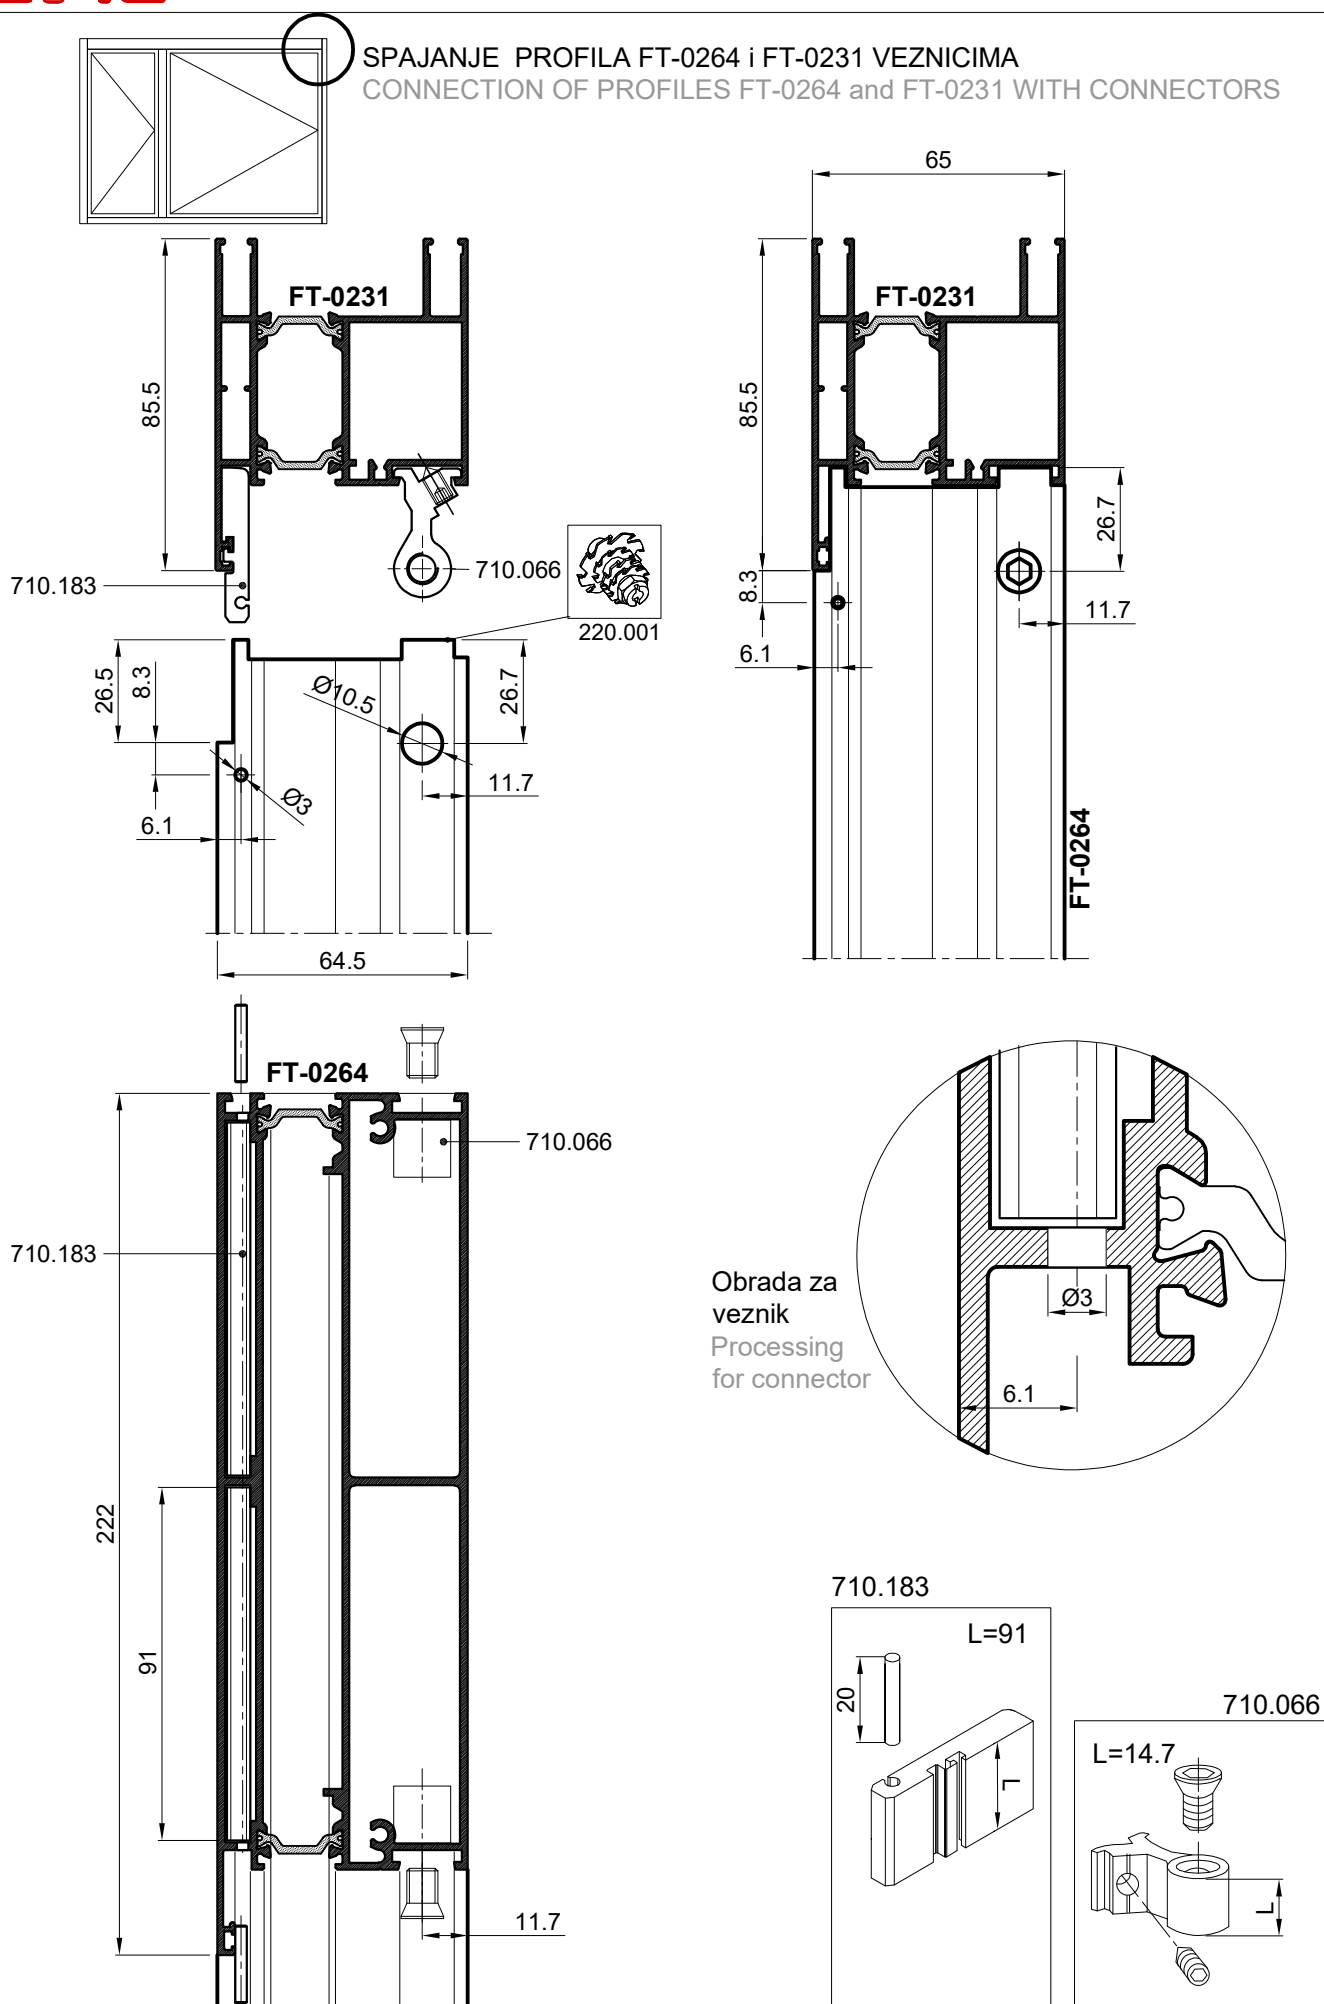


SPAJANJE PROFILA FT-0207 I FT-0207 VEZNICIMA

CONNECTION OF PROFILES FT-0207 AND FT-0207 WITH CONNECTORS

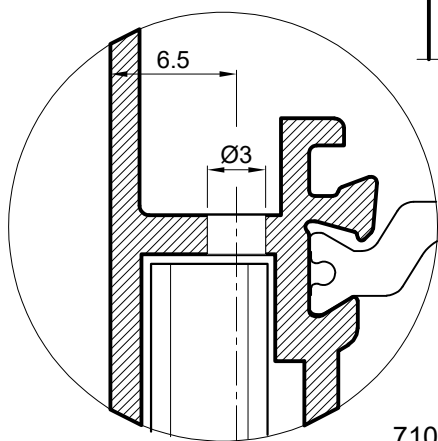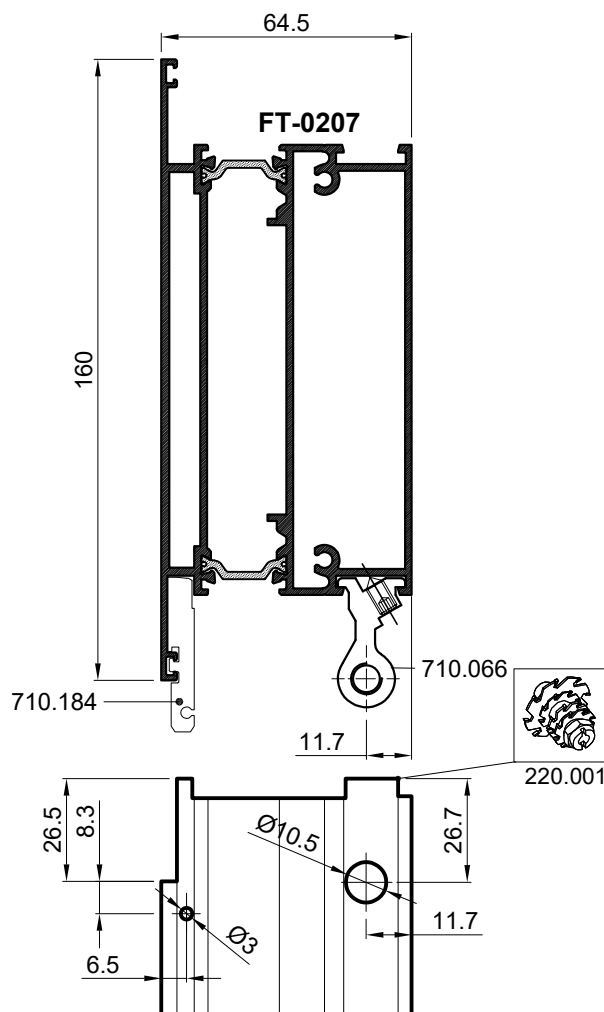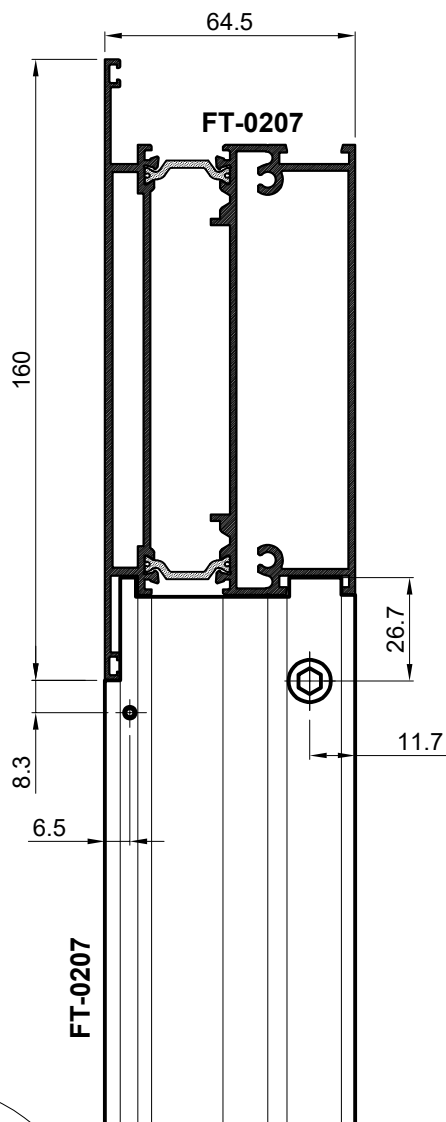

Obrada za
veznik
Processing
for connector

710.184

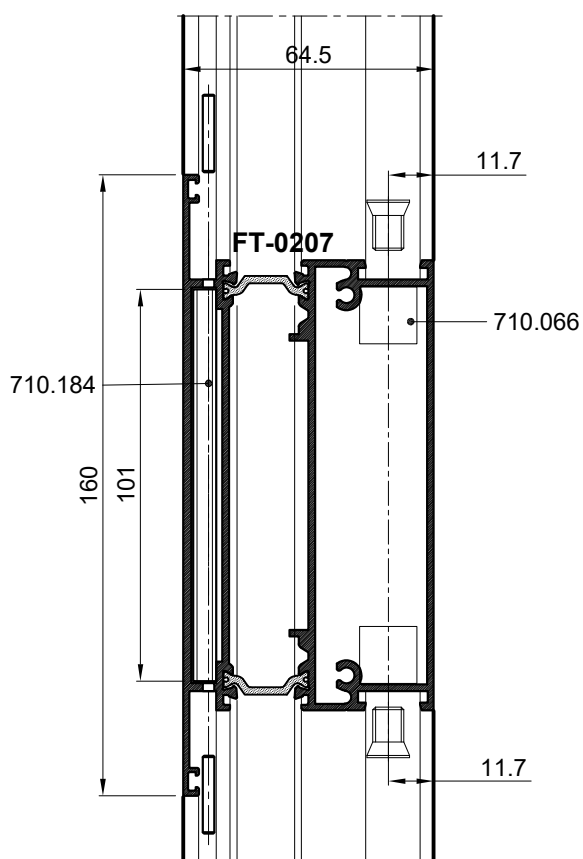


710.066







L=14.7

L=101

20







SPAJANJE PROFILA FT-0243 i FT-0201 VEZNICIMA CONNECTION OF PROFILES FT-0243 and FT-0201 WITH CONNECTORS

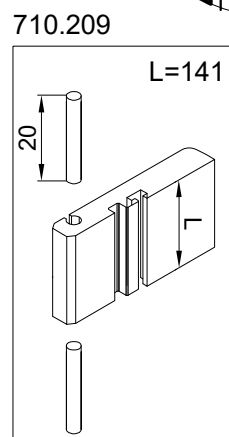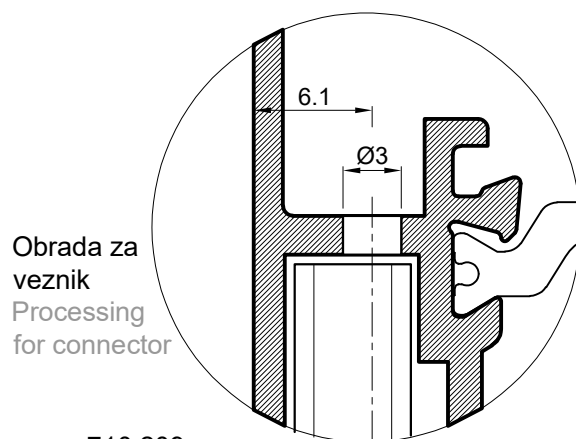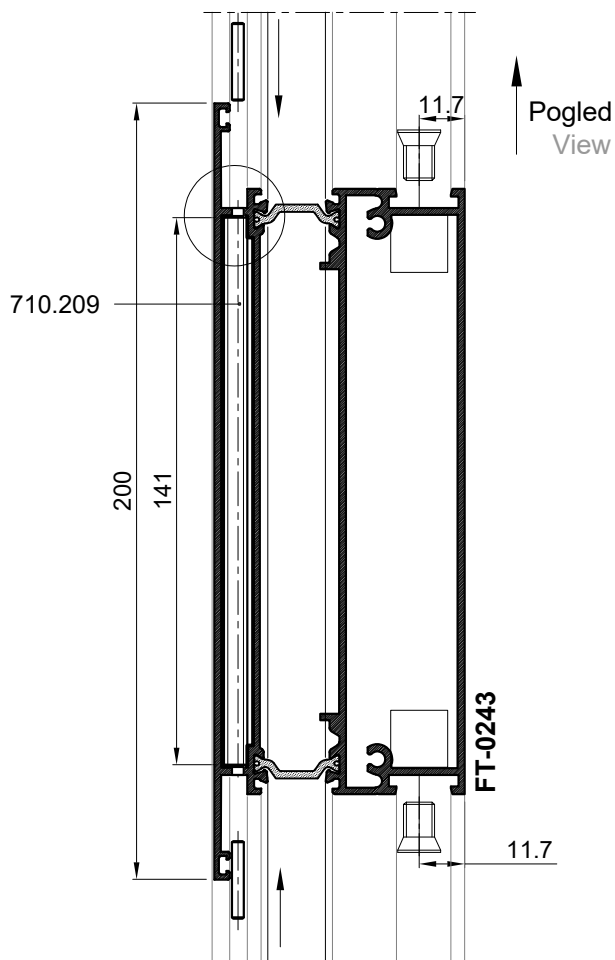
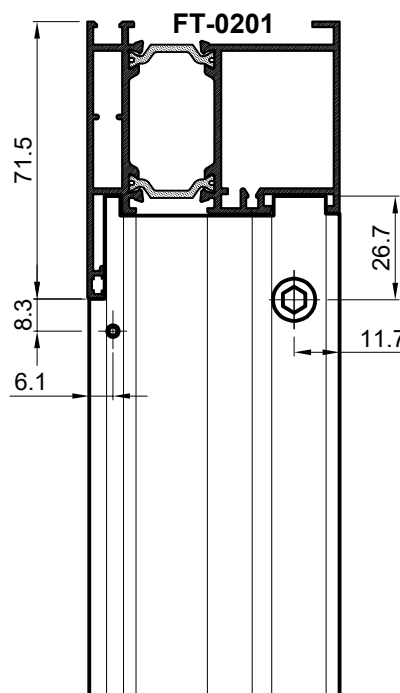
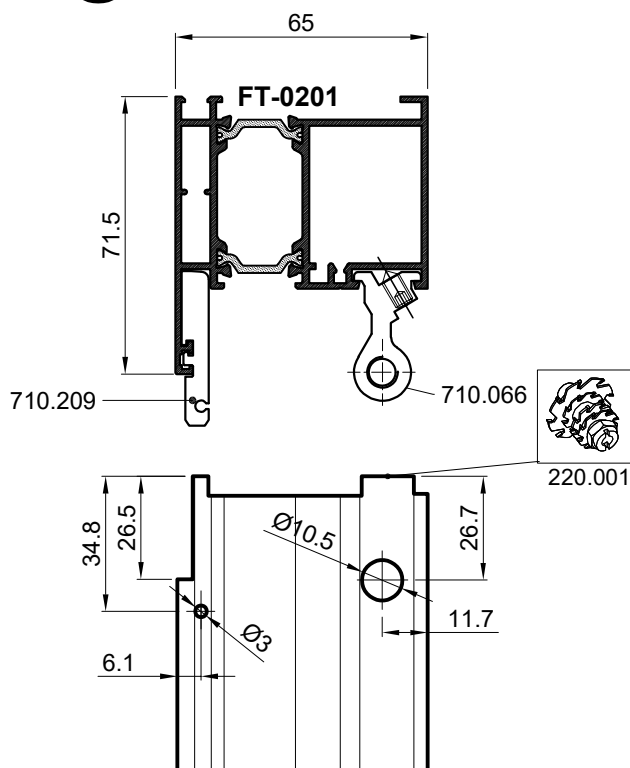


SPAJANJE PROFILA FT-0243 i FT-0264 VEZNICIMA




CONNECTION OF PROFILES FT-0243 and FT-0264 WITH CONNECTORS

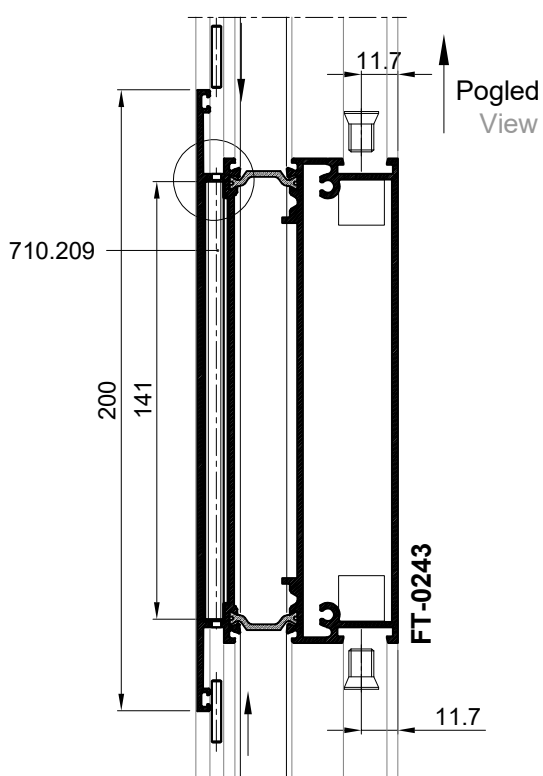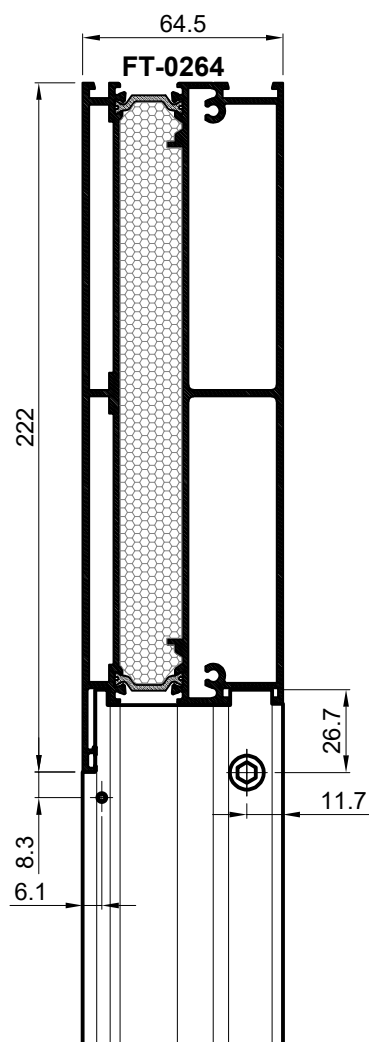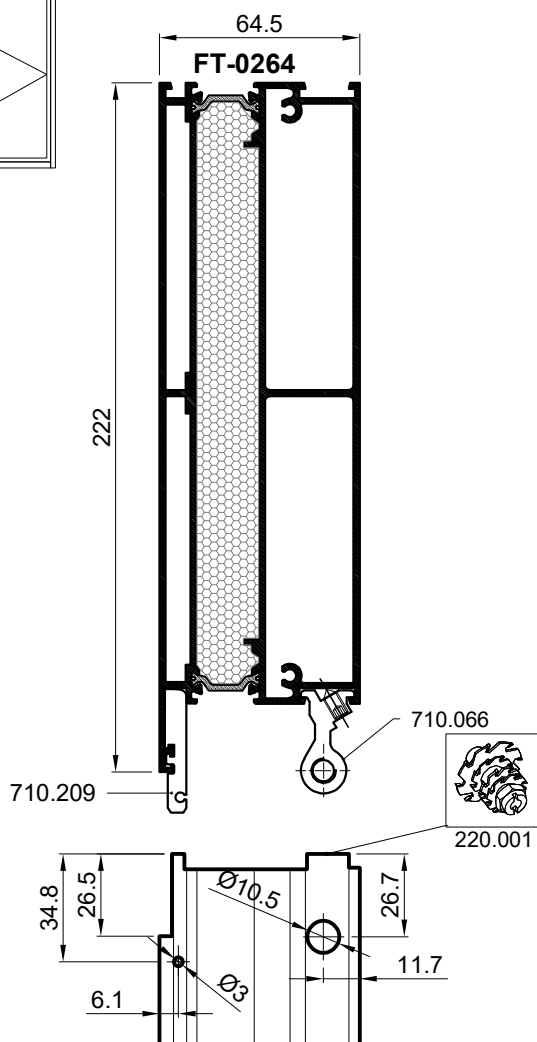




Obrada za
veznik
Processing
for connector

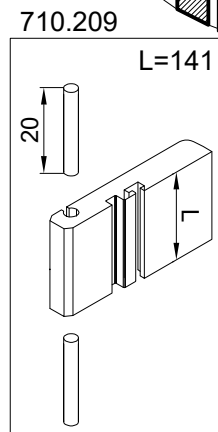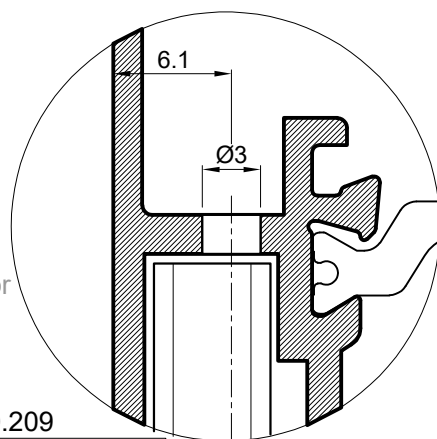



OBRADA I SPAJANJE PROFILA FT-0276 i FT-0274 VEZNICIMA PROCESSING AND CONNECTION OF PROFILES FT-0276 i FT-0274 WITH CONNECTORS

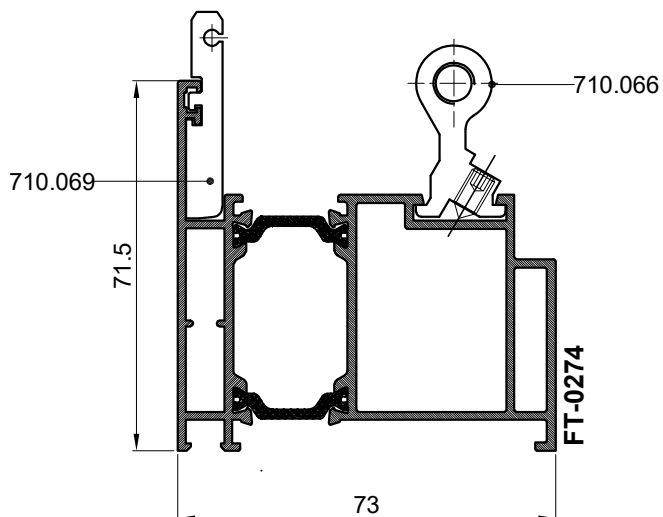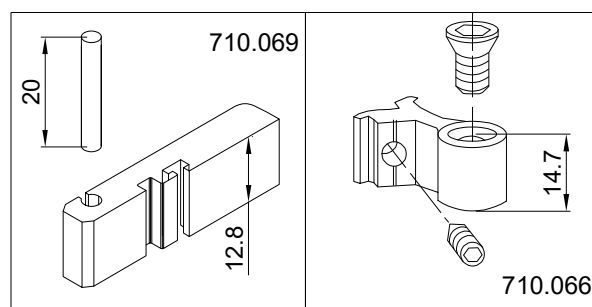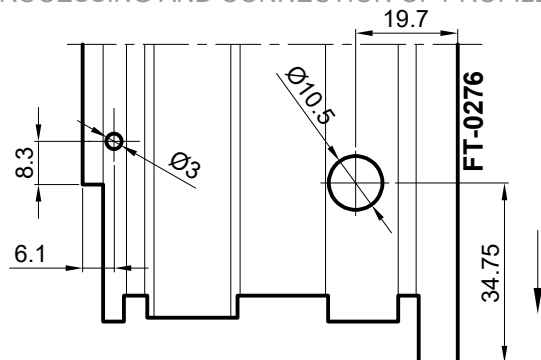





OBRADA PROFILA PREČKE
-obrada na glodalici ili obradnom centru
PROCESSING OF MULLION PROFILE
-processing on mill or machining centre

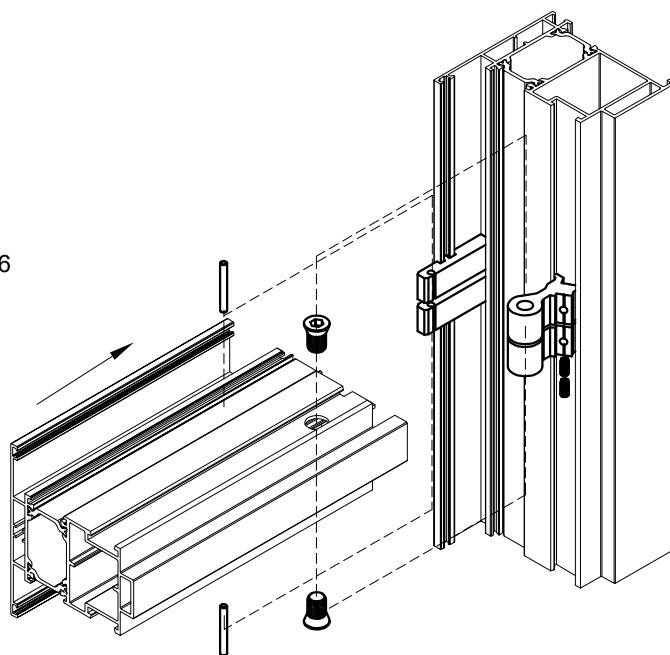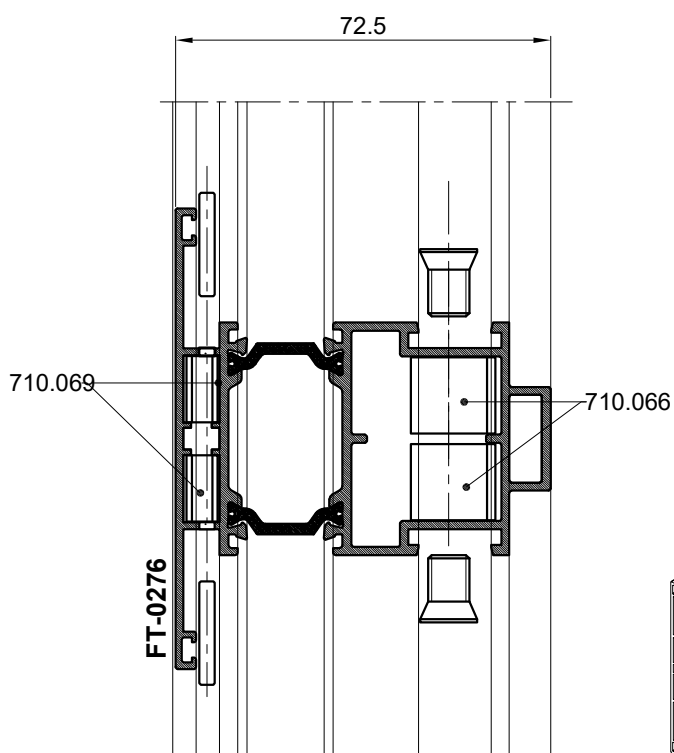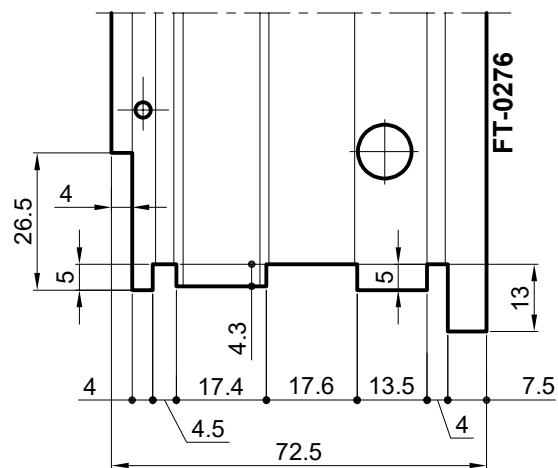

OBRADA I SPAJANJE PROFILA FT-0276 I FT-0276 VEZNICIMA PROCESSING AND CONNECTION OF PROFILES FT-0276 I FT-0276 WITH CONNECTORS

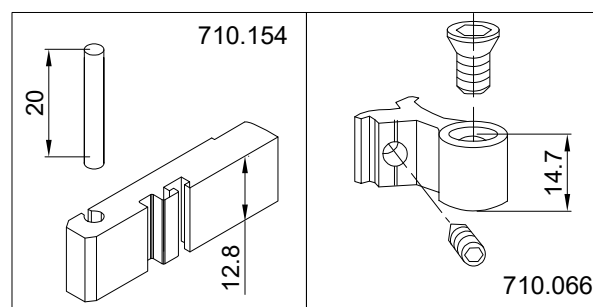
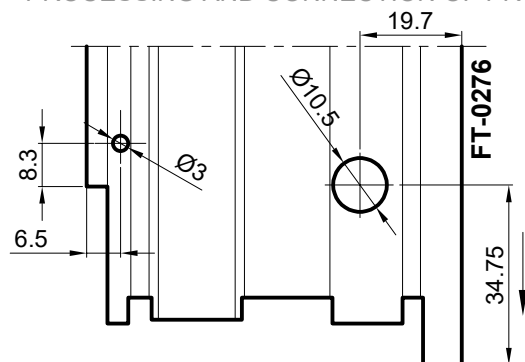


OBRADA PROFILA PREČKE
-obrada na glodalici ili obradnom centru
PROCESSING OF MULLION PROFILE
-processing on mill or machining centre

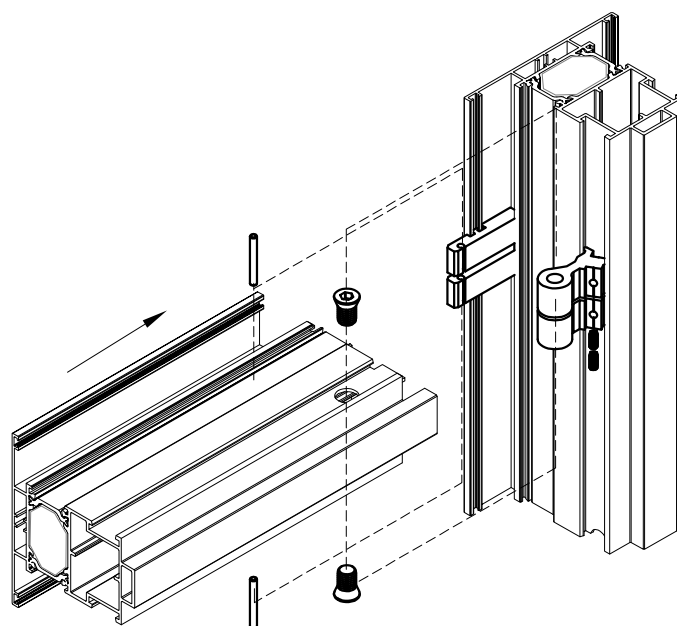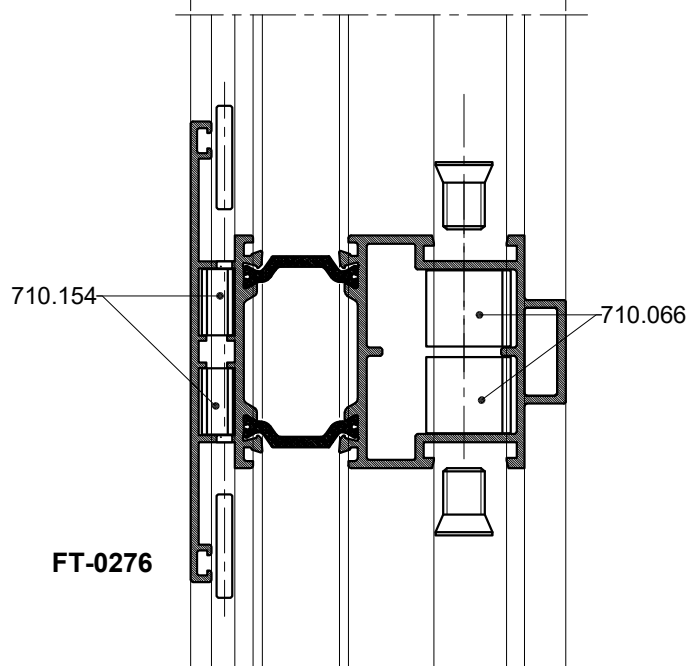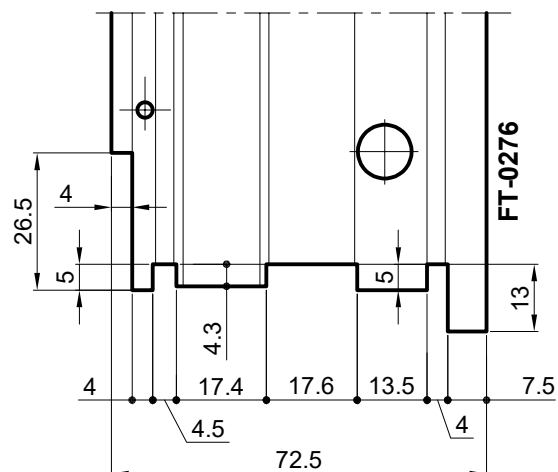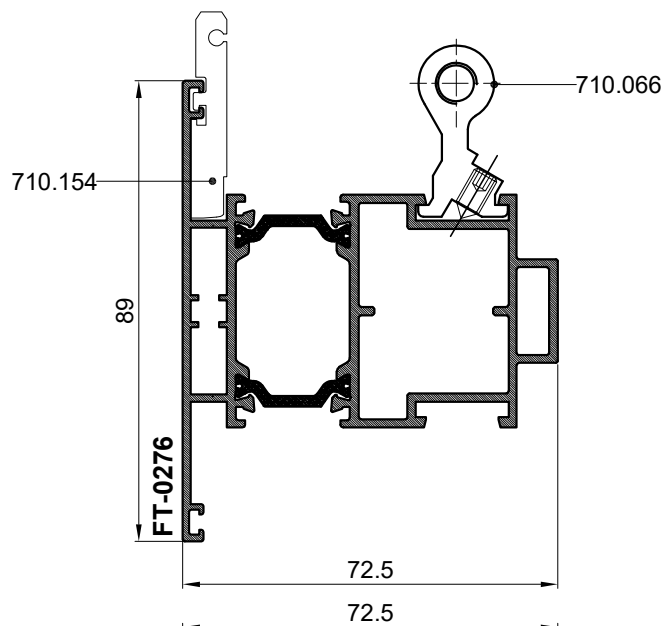

OBRADA I SPAJANJE PROFILA FT-0274 I FT-0208 VEZNICIMA

PROCESSING AND CONNECTION OF PROFILES FT-0274 I FT-0208 WITH CONNECTORS

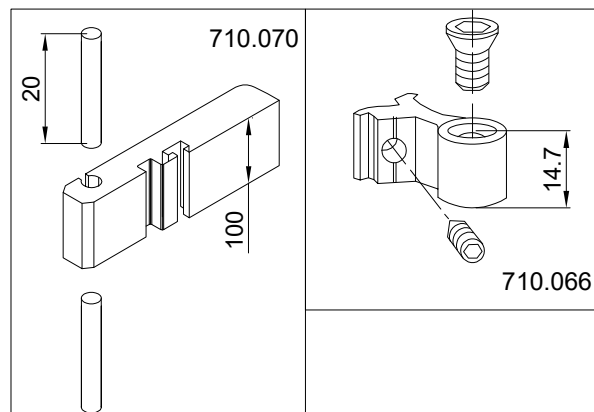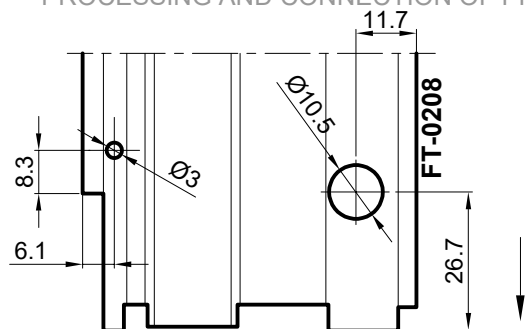

OBRADA PROFILA PARAPETNE PREČE





-obrada snopom glodala za obradu prečki
art.220.001

-obrada na glodalici ili obradnom centru

PROCESSING OF SPANDREL MULLION PROFILE




-processing with bundle of milling cutters for mullion
processing art.220.001

-processing on mill or machining centre

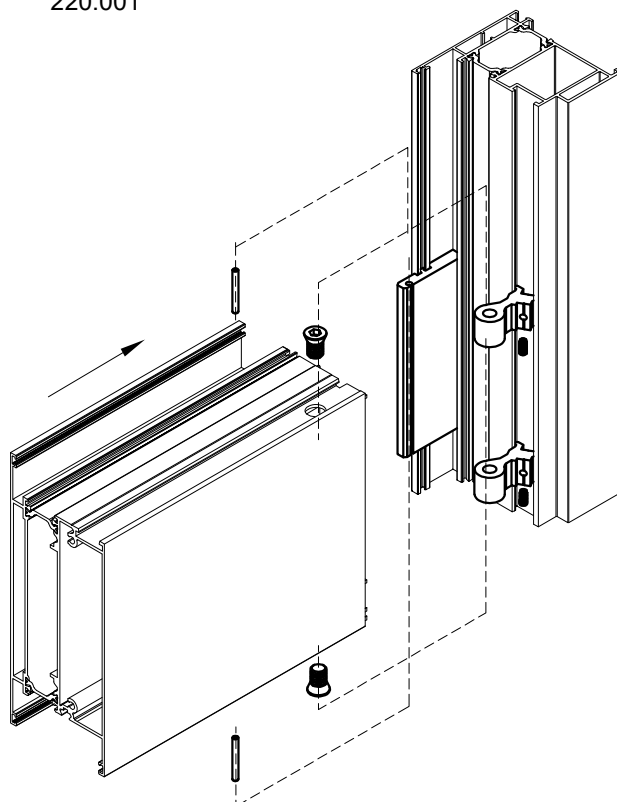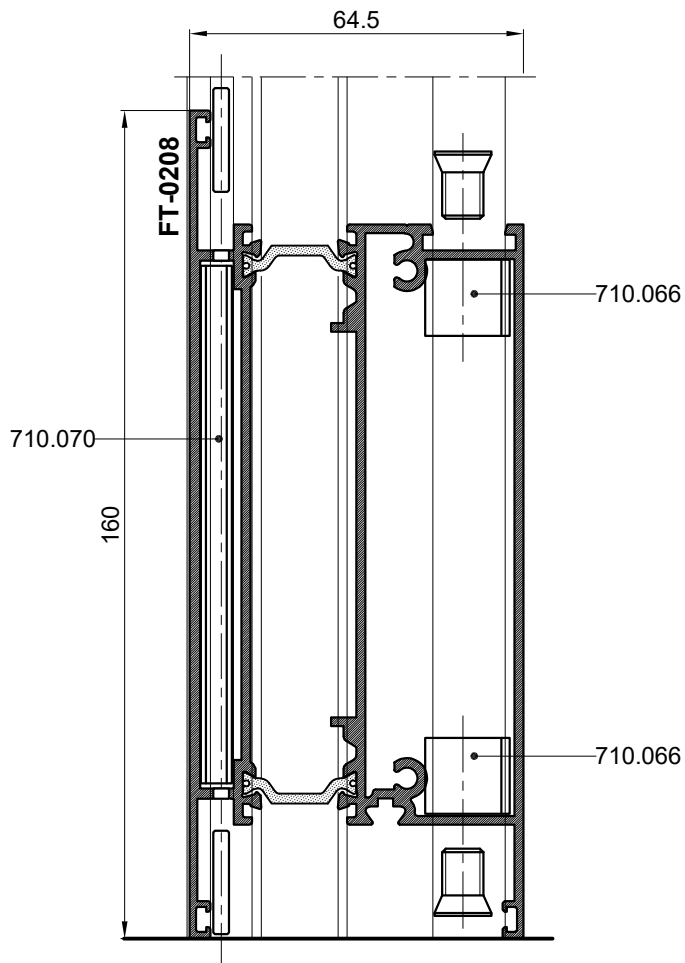
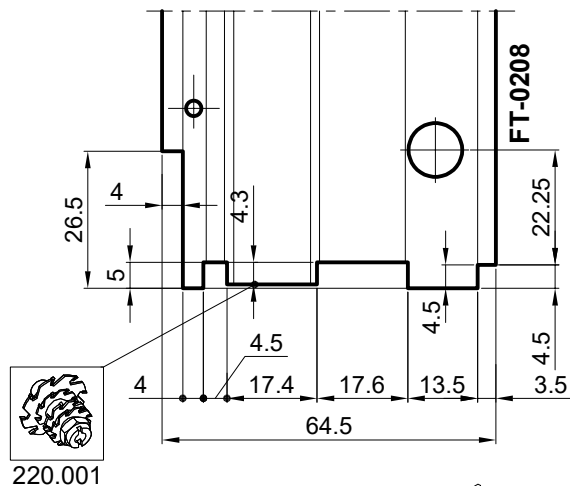
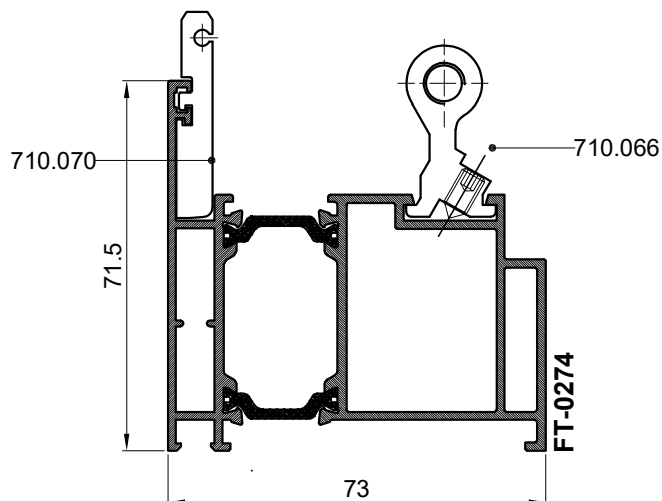


OBRADA I SPAJANJE PROFILA FT-0275 I FT-0282 VEZNICIMA

PROCESSING AND CONNECTION OF PROFILES FT-0275 I FT-0282 WITH CONNECTORS

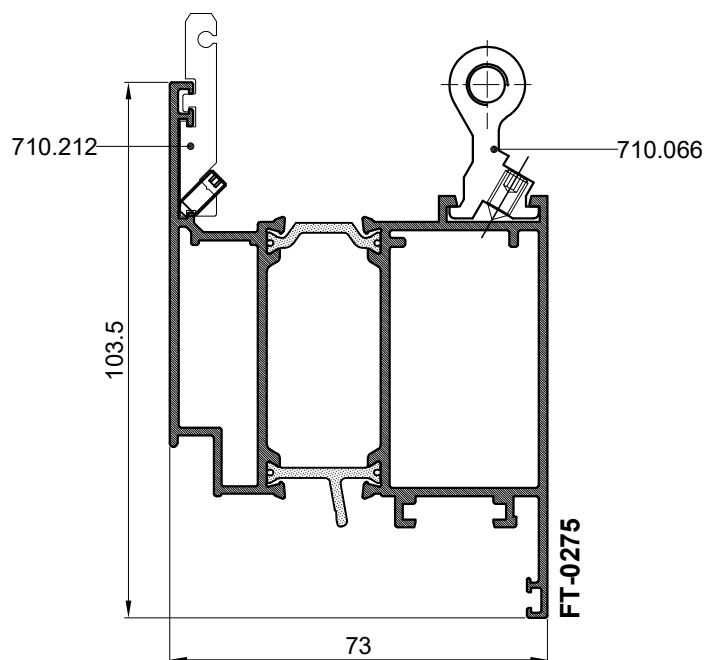
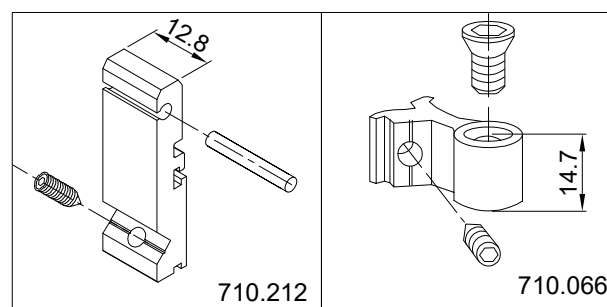
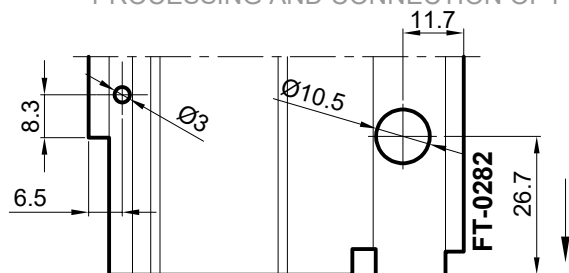


Obrada profila parapetne prečke
-obrada na glodalici ili obradnom centru
Processing of spandrel mullion profile
-processing on mill or machining centre

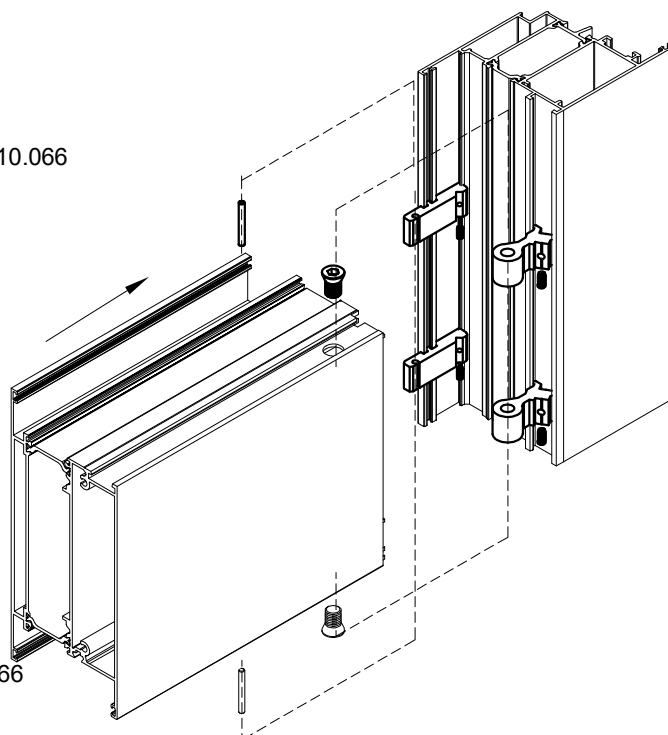
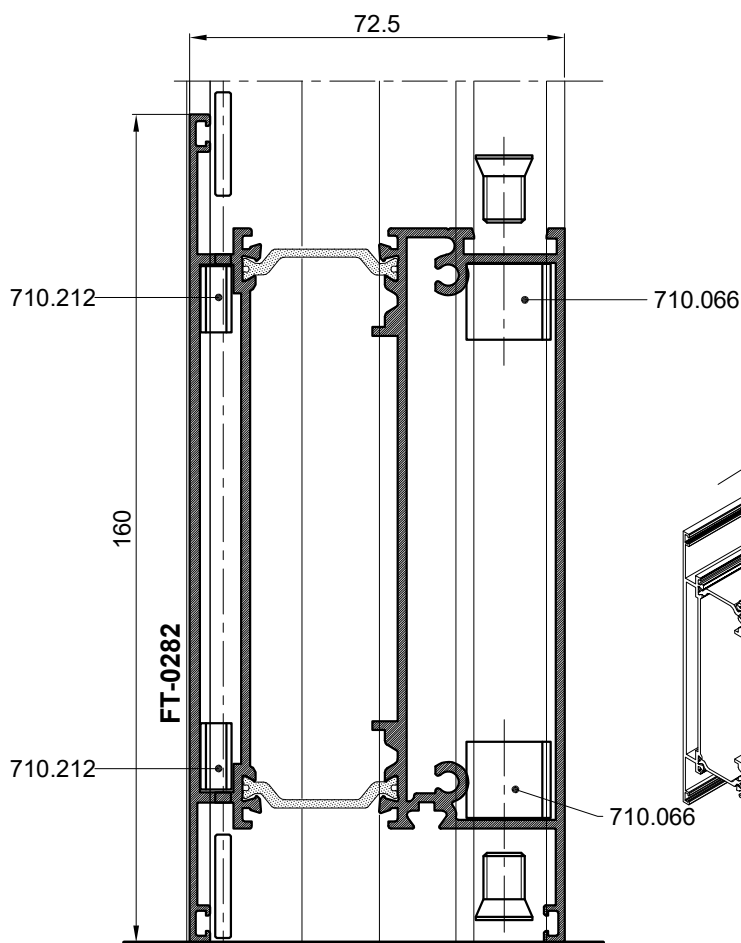
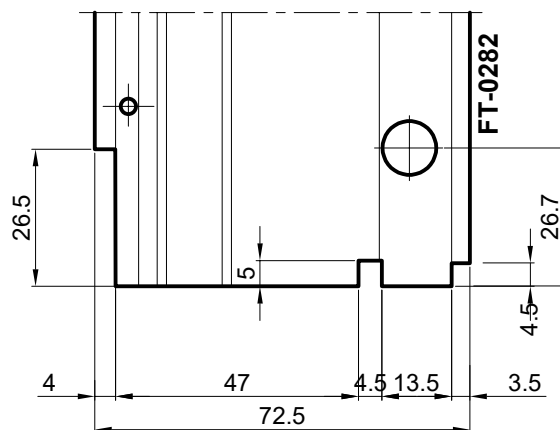


OBRADA I SPAJANJE PROFILA FT-0279 I FT-0282 VEZNICIMA

PROCESSING AND CONNECTION OF PROFILES FT-0279 I FT-0282 WITH CONNECTORS

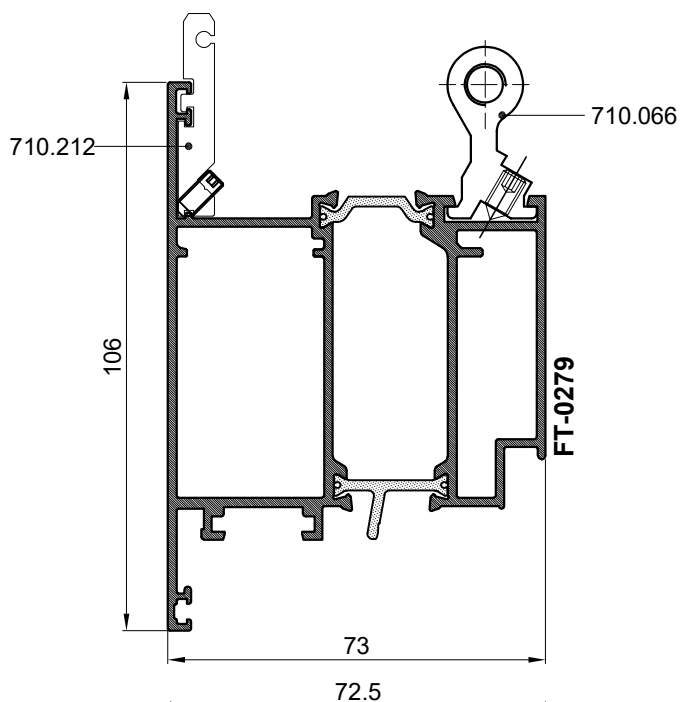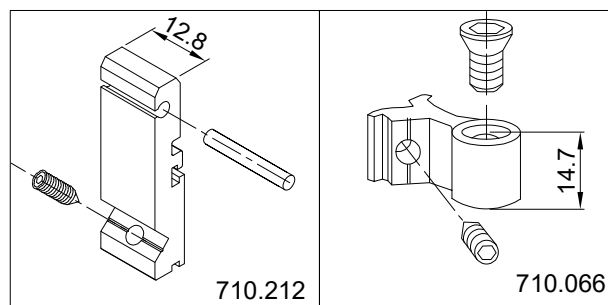
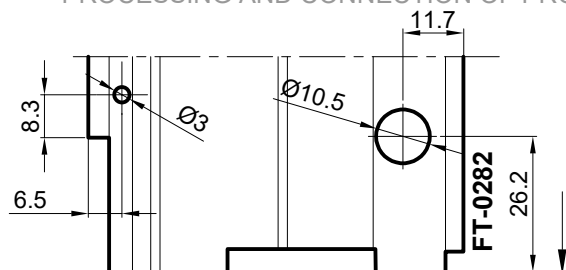


Obrada profila parapetne prečke
-obrada na glodalici ili obradnom centru
Processing of spandrel mullion profile
-processing on mill or machining centre

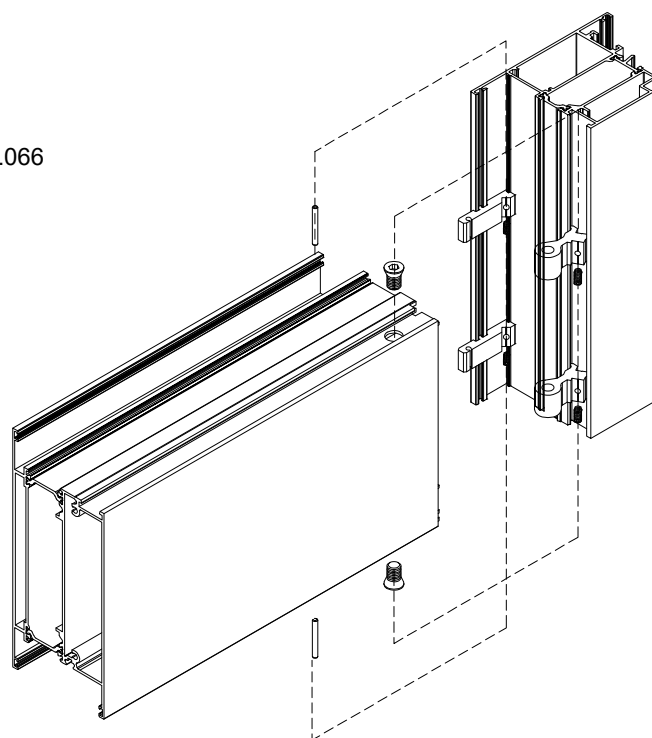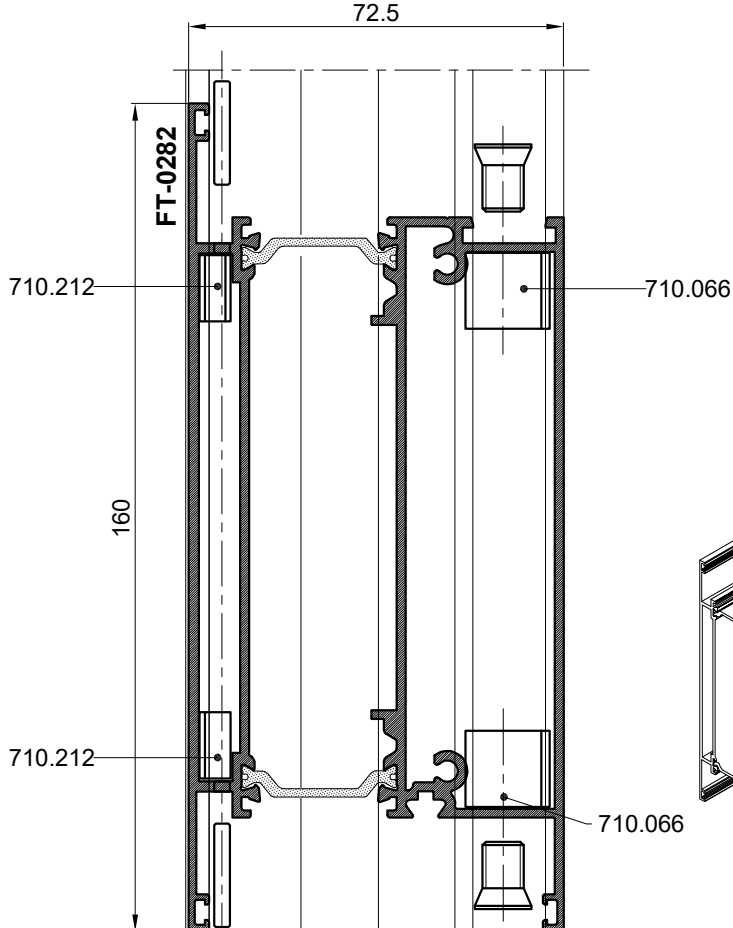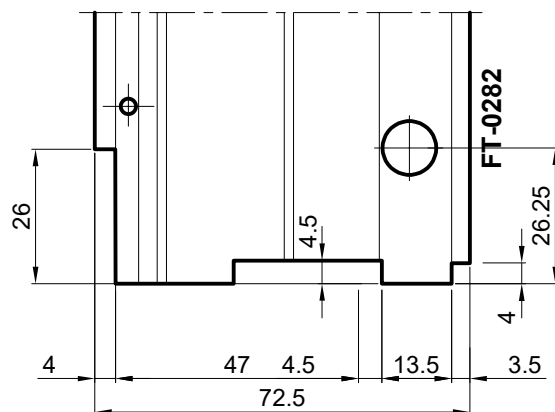

OBRADA I SPAJANJE PROFILA FT-0276 i FT-0274 VEZNICIMA

PROCESSING AND CONNECTION OF PROFILES FT-0276 i FT-0274 WITH CONNECTORS


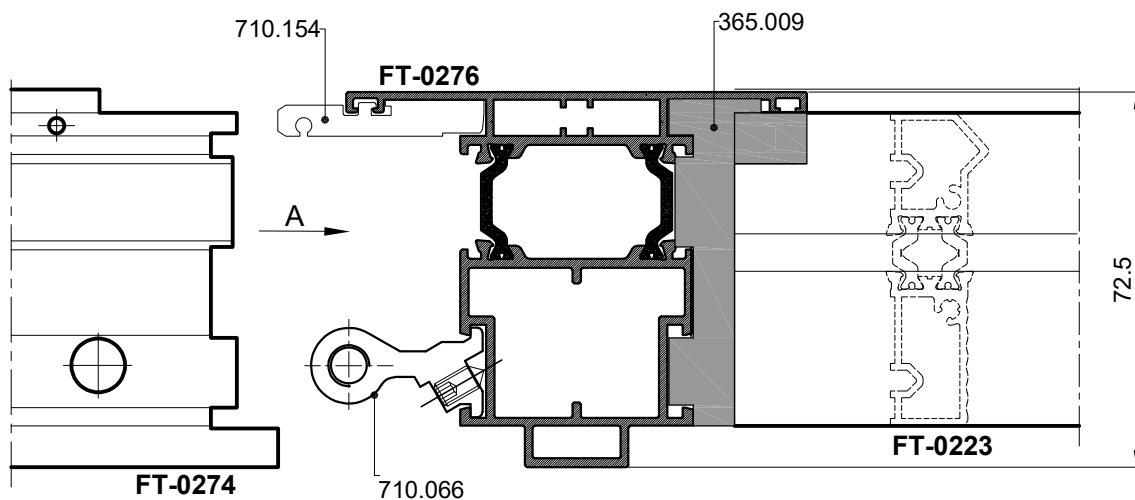



Obrada profila rama FT-0274

- obrada na glodalici ili obradnom centru





Processing of frame profile FT-0274

-processing on mill or machining centre

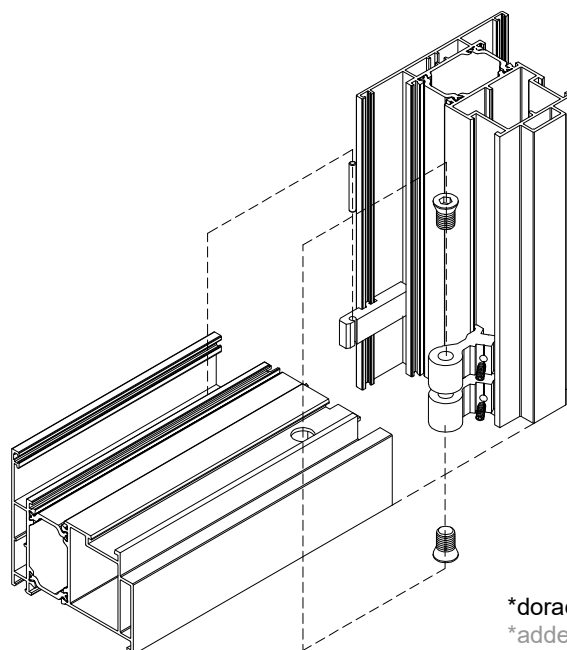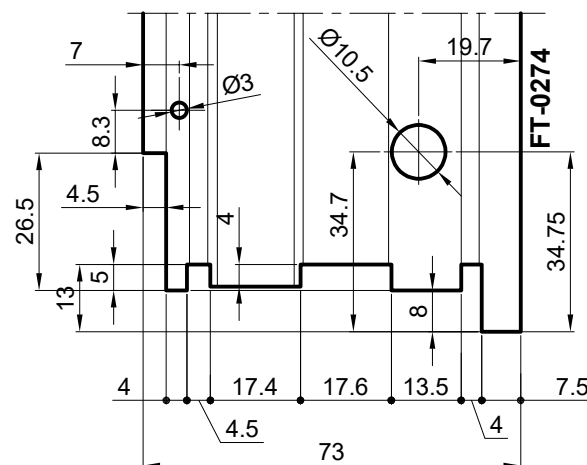
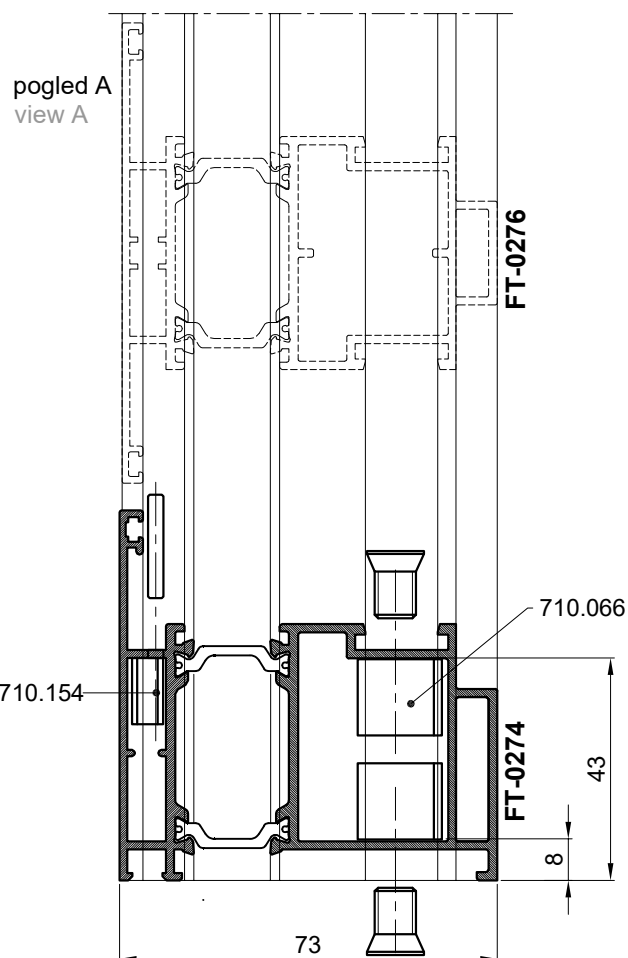


*dorađeno
*added

SPAJANJE PROFILA PREČKE FT-0209 I RAMA VIJCIMA CONNECTION OF MULLION FT-0209 AND PROFILE WITH SCREWS

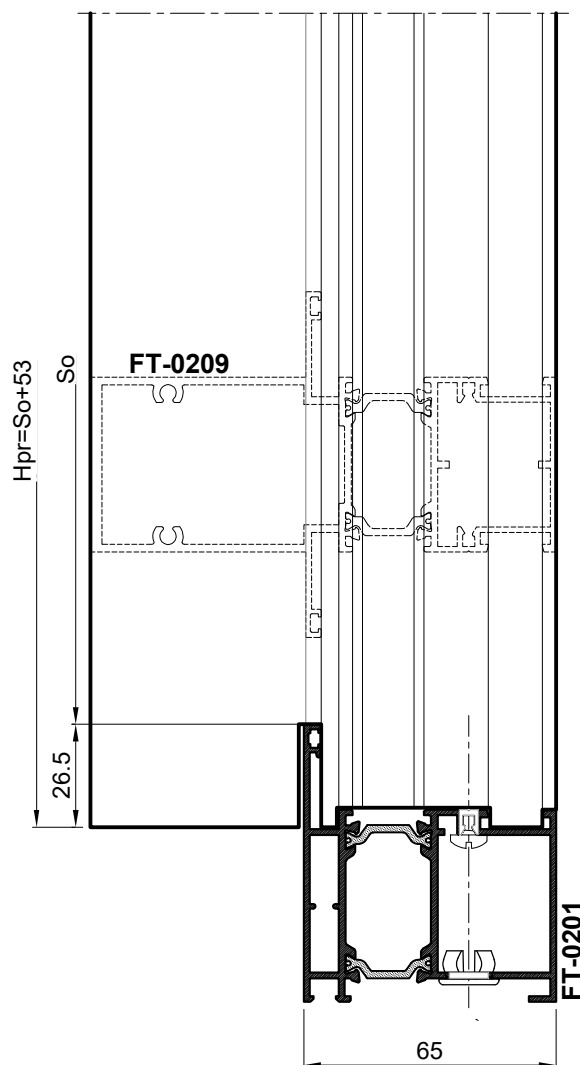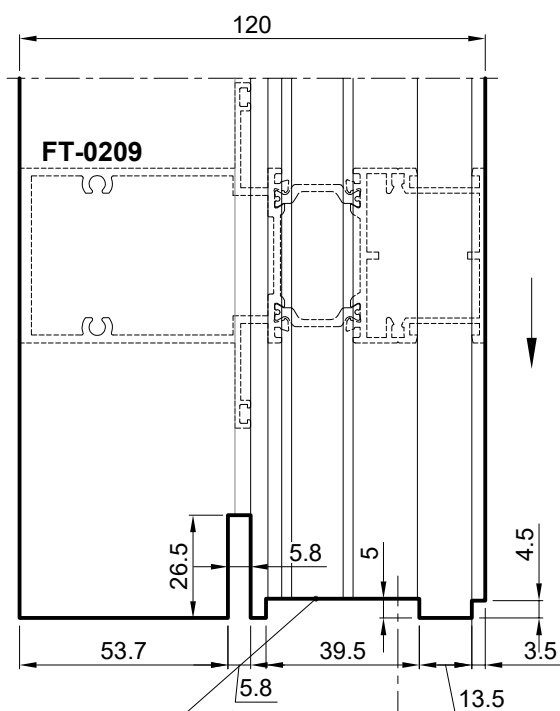


Mjera pilanja prečke:
Lpr=So /svijetli otvor/ + 53 mm
Cutting length of mullion:
Lmu=So /light opening/ + 53 mm

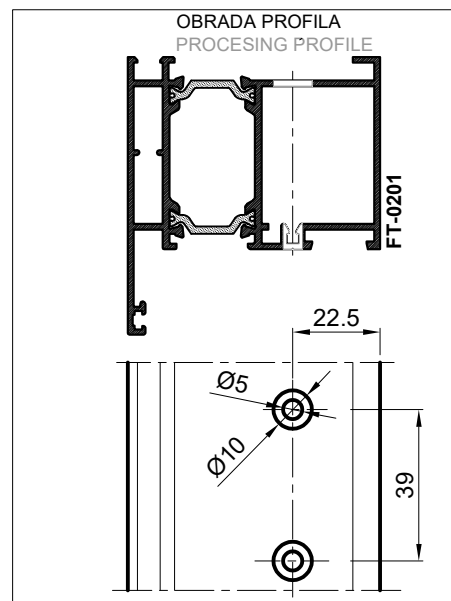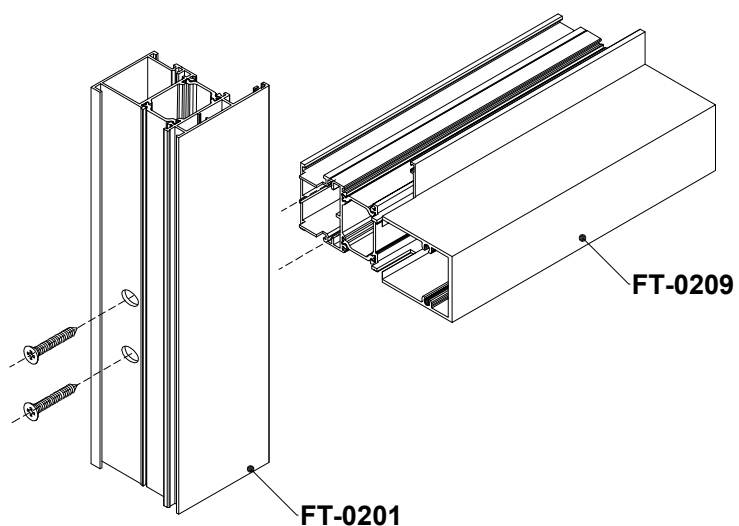

Rezne liste

Cutting lists



PROFILI	opis		kom.	mjera	pilanje
PROFILES	description		pcs	measure	cutting
FT-0201	horizontala okvira	horizontal frame profile	2	L	45-45
FT-0201	vertikalna okvira	vertical frame profile	2	H	45-45
FT-0221	horizontalna krila	horizontal sash profile	2	Lkr=L-87	45-45
FT-0221	vertikalna krila	vertical sash profile	2	Hkr=H-87	45-45
Z40-667	horizontalna lajsna	horizontal bead	2	Lkr-93	90-90
Z40-667	vertikalna lajsna	vertical bead	2	Hkr-137	90-90
NC-1459	klizač	slider			90-90
Z40-657	okapnica	drip cap	1	Lkr-70	90-90

OKOVI

HARDWARE

730.009	kutna spojnica rama	frame corner bracket	4		
710.452	kutna spojnica rama	frame corner bracket	4		
730.002	kutna spojnica rama	frame corner bracket	4		
730.008	kutna spojnica krila	sash corner bracket	4		
710.443	kutna spojnica krila	sash corner bracket	4		
730.005	kutna spojnica krila	sash corner bracket	4		
730.001	kutna spojnica krila	sash corner bracket	4		
134.026	otklopno-zaokretni meh. (Stublina 4135.00)	Tilt and turn mechanism (Stublina 4135.00)	1		
373.003	maska za drenažni otvor	mask for drainage holes	2		
433.017	vijak 3.9x16 za Z40-657	screw 3.9x16 for Z40-657	3		

BRTVE



GASKETS


338.001	centralna brtva	central gasket		2L+2H	
328.006	brtva u krilu	gasket in sash		2L+2H	
328.004	brtva prema staklu	glazing gasket		2L+2H	
311.004	brtva prema staklu	glazing gasket		2L+2H	
345.001	kutni umetak brtve	corner insert	4		
348.002	ispuna po opsegu stakla	fill around the glass		2L+2H	

STAKLO



GLASS


26 mm			1	Lkr-112 x Hkr-112	
-------	--	--	---	-------------------	--

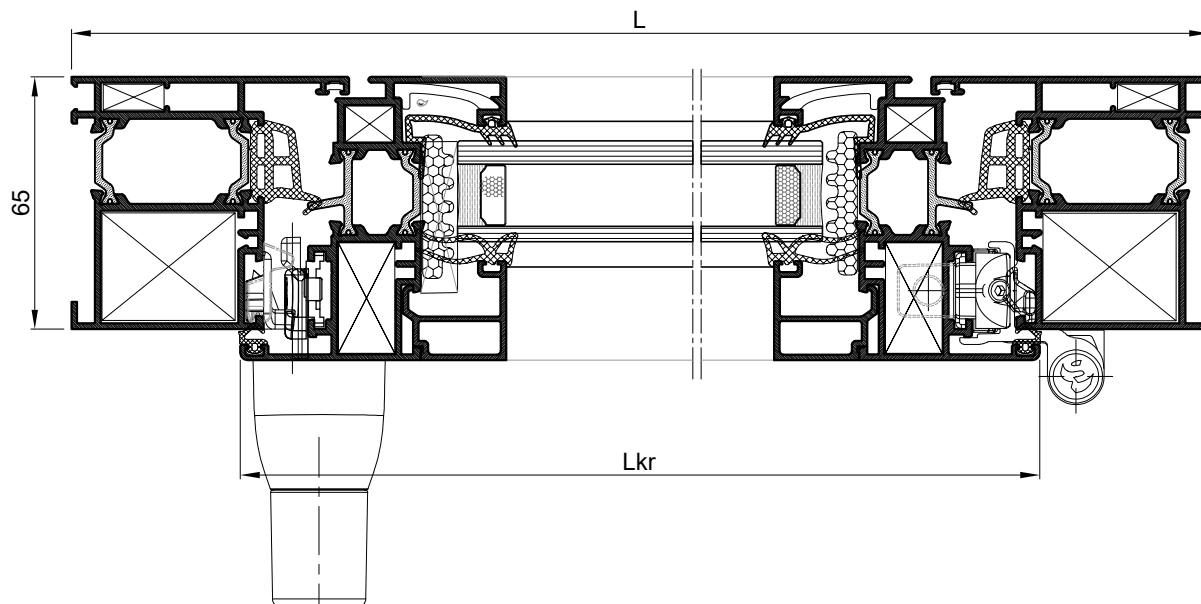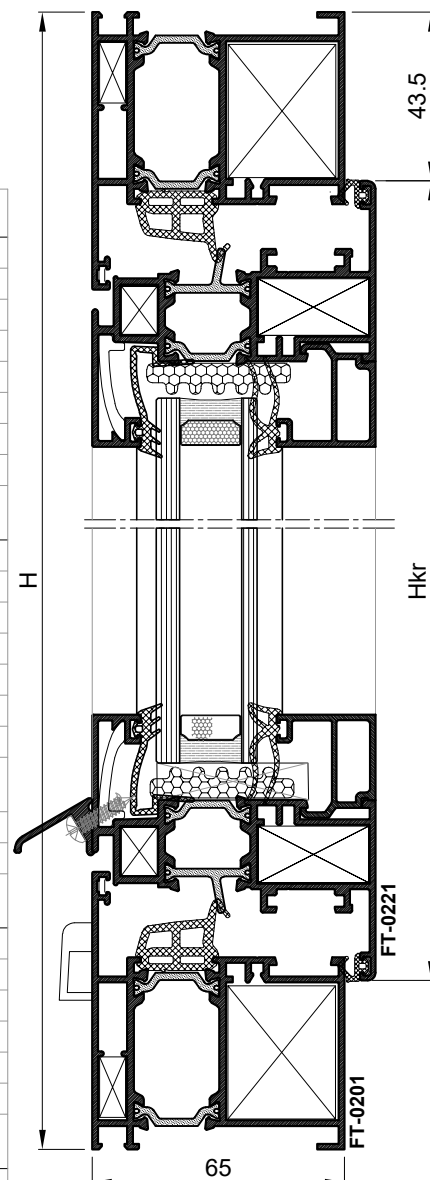






PROFILI PROFILES	opis description		kom. pcs	mjera measure	pilanje cutting
FT-0201	horizontala okvira	horizontal frame profile	2	L	45-45
FT-0201	vertikala okvira	vertical frame profile	2	H	45-45
FT-0221	horizontala krila	horizontal sash profile	4	Lkr=L/2-46	45-45
FT-0221	vertikala krila	vertical sash profile	4	Hkr=H-87	45-45
FT-0286	profil kombatute	flying mullion profile	1	Hkr-68	90-90
Z40-667	horizontalna lajsna	horizontal bead	4	Lkr-93	90-90
Z40-667	vertikalna lajsna	vertical bead	4	Hkr-137	90-90
NC-1459	klizač	slider			90-90
Z40-657	okapnica (gl. krilo)	drip cap (main sash)	1	Lkr-70	90-90
Z40-657	okapnica (pom. krilo)	drip cap (aux. sash)	1	Lkr-4	90-90
OKOVI HARDWARE					
730.009	kutna spojnica rama	frame corner bracket	4		
710.452	kutna spojnica rama	frame corner bracket	4		
730.002	kutna spojnica rama	frame corer bracket	4		
730.008	kutna spojnica krila	sash corner bracket	8		
710.443	kutna spojnica krila	sash corner bracket	8		
730.005	kutna spojnica krila	sash corner bracket	8		
730.001	kutna spojnica krila	sash corner bracket	8		
134.026	otklopno-zaokretni meh. (Stublina 4135.00)	Tilt and turn mechanism (Stublina 4135.00)	1		
134.036	ključanje pom. krila	lock. mech. for auxiliary sash	1		
134.026	pasivno ključanje - Stublina	passive locking - Stublina	1		
134.037	šarke za pomoćno krilo	hinges for auxiliary sash	1		
134.038	dodatni element za gornju šarku	additional element for top hinge	1		
373.003	maska za drenažni otvor	mask for drainage holes	2		
365.062	umetak za FT-0286	insert for FT-0286	L+D		
433.017	vijak 3.9x16 za Z40-657	screw 3.9x16 for Z40-657	6		
433.046	vijak 4.8x32 za FT-0286	screw 4.8x32 for FT-0286	3		
433.134	vijak 4.8x38 za FT-0286	screw 4.8x38 for FT-0286	3		
BRTVE GASKETS					
338.001	centralna brtva	central gasket		2L+4H	
328.006	brtva u krilu	gasket in sash		2L+4H	
328.004	brtva prema staklu	glazing gasket		2L+4H	
311.004	brtva prema staklu	glazing gasket		2L+4H	
345.001	kutni umetak brtve	corner insert	4		
348.002	ispuna po opsegu stakla	fill around the glass		2L+4H	
STAKLO GLASS					
26 mm			2	Lkr-112 x Hkr-112	

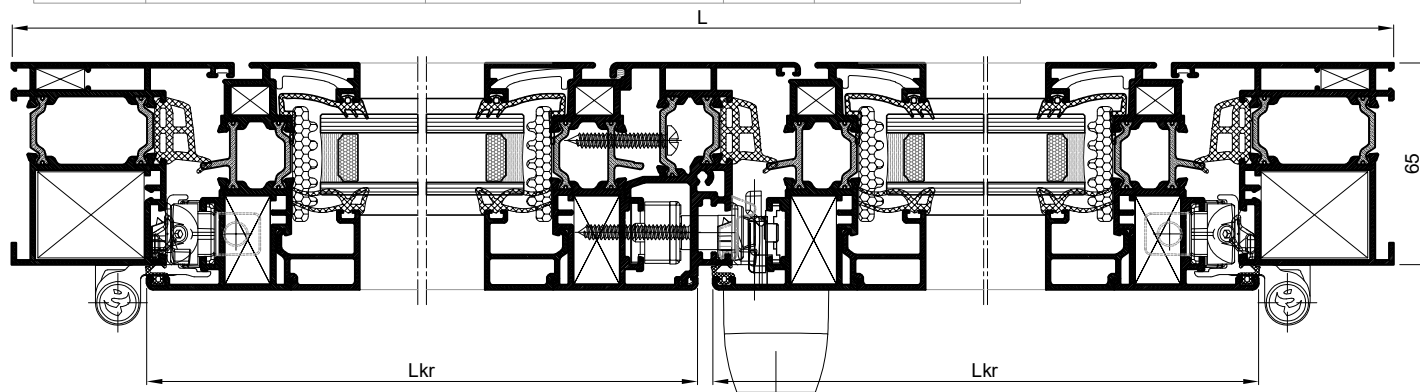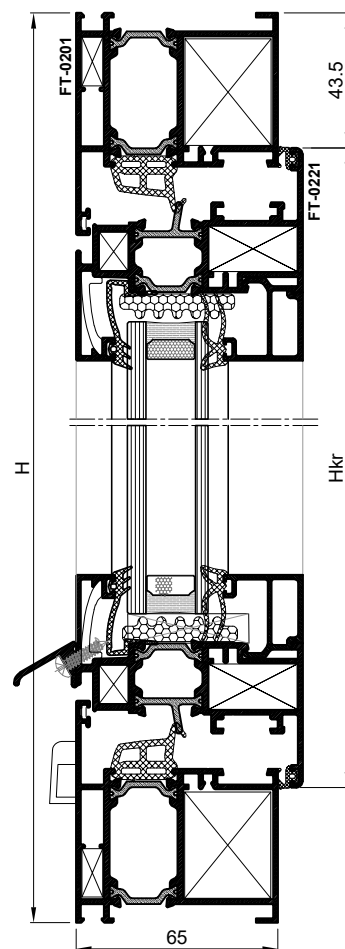





PROFILI PROFILES	opis description		kom. pcs	mjera measure	pilanje cutting
FT-0201	horizontalna okvira	horizontal frame profile	2	L	45-45
FT-0201	vertikalna okvira	vertical frame profile	2	H	45-45
FT-0221	horizontalna krila	horizontal sash profile	4	Lkr=L/2-51.5	45-45
FT-0221	vertikalna krila	vertical sash profile	4	Hkr=H-87	45-45
FT-0205	prečka vertikalna	vertical mullion	1	H-89	90-90
Z40-667	horizontalna lajsna -fiksno	horizontal bead -fixed	2	L/2-63.5	90-90
Z40-667	vertikalna lajsna -fiksno	vertical bead -fixed	2	H-143	90-90
Z40-667	horizontalna lajsna	horizontal bead	2	Lkr-93	
Z40-667	vertikalna lajsna	vertical bead	2	Hkr-137	
NC-1459	klizač	slider			90-90
Z40-657	okapnica	drip cap	1	Lkr-68	90-90
OKOVI HARDWARE					
730.009	kutna spojnica rama	frame corner bracket	4		
710.452	kutna spojnica rama	frame corner bracket	4		
730.002	kutna spojnica rama	frame corner bracket	4		
730.008	kutna spojnica krila	sash corner bracket	4		
710.443	kutna spojnica krila	sash corner bracket	4		
730.005	kutna spojnica krila	sash corner bracket	4		
730.001	kutna spojnica krila	sash corner bracket	8		
134.026	otklopno-zaokretni meh.(Stublina 4135.00)	Tilt and turn mechanism (Stublina 4135.00)	1		
710.066	dodatni veznik	add. connector	2		
710.069	veznik	connector	2		
373.003	maska za drenažni otvor	mask for drainage holes	2		
433.017	vijak 3.9x16 za Z40-657	screw 3.9x16 for Z40-657	3		
BRTVE GASKETS					
338.001	centralna brtva	central gasket		L+2H	
328.006	brtva u krilu	gasket in sash		L+2H	
328.004	brtva prema staklu	glazing gasket		2L+4H	
311.004	brtva prema staklu	glazing gasket		2L+4H	
345.001	kutni umetak brtve	corner insert	4		
348.002	ispuna po opsegu stakla	fill around the glass		2L+4H	
STAKLO GLASS					
26 mm			1	L/2-82.5 x H-118	
26 mm			1	Lkr-112 x Hkr-112	

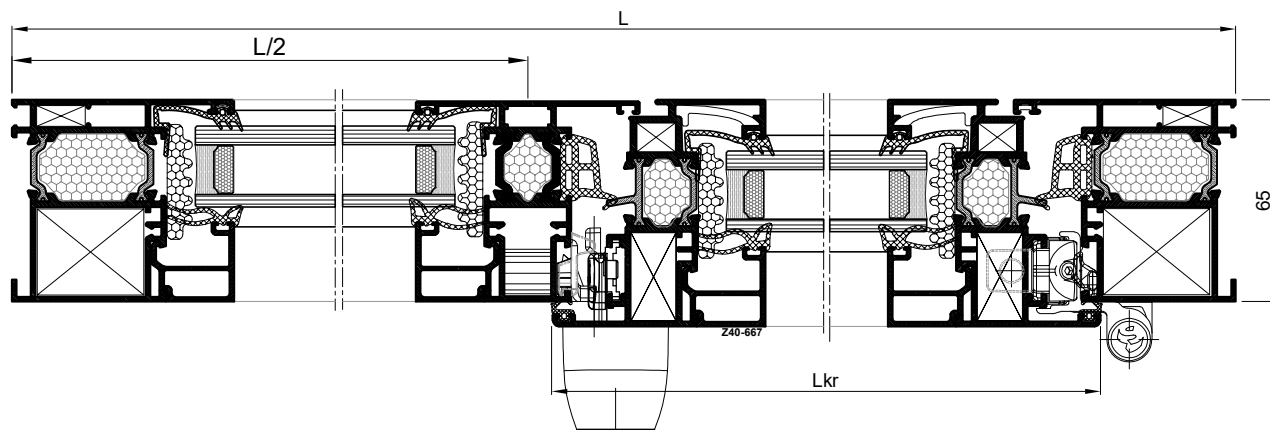
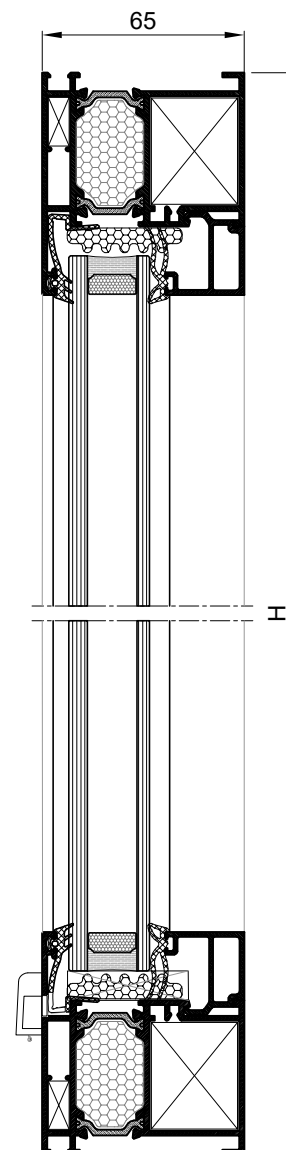




Jednokrilni prozor, otvaranje oko srednje osi -
Okov: UNITAS 18/3 (GU)
Single-sash window, opening around middle axis
Hardware: UNITAS 18/3 (GU)

Profil	opis	kom	mjera	pilanje
Profile	description	pcs	measure	cutting
FT-0201	horizontalna rama horizontal frame profile	2	L	45-45
FT-0201	vertikalna rama vertical frame profile	2	H	45-45
FT-0210	horizontalna krila horizontal sash profile	2	Lkr=L-153	45-45
FT-0210	vertikalna krila vertical sash profile	2	Hkr=H-153	45-45
FT-0213	horizontalna kombatuta horizontal flying mullion	2	H-87	45-45
FT-0213	vertikalna kombatuta g. vertical flying mullion	2	detalj details	
FT-0213	vertikalna kombatuta d. vertical flying mullion	2	detalj details	
Z40-667	staklolajsna horizontalna horizontal glazing bead	2	Lkr-136	90-90
Z40-667	staklolajsna vertikalna vertical glazing bead	2	Hkr-180	90-90
Vezni elementi opis		kom		
Conn. elements description		pcs		
710.072	kutna spojnica rama frame corner bracket	4		
710.452	kutna spojnica rama frame corner bracket	4		
710.458	kutna spojnica krila sash corner bracket	4		
710.453	kutna spojnica krila sash corner bracket	4		
730.005	kutna spojnica krila sash corner bracket	4		
730.002	kutna spojnica krila i rama sash and frame corner bracket	4(2+2)		
730.001	kutna spojnica u komb. corner bracket in flying mullion	4		
373.003	maska otvora za kond. mask for drainage holes	2		
UNITAS 18/3	mehanizam za otvaranje opening mechanism	1		
Brtve opis		kom	mjera	
Gaskets description		pcs	measure	
328.006	brtva u ramu, krilu i komb. gasket in fr., sh., and fl.mu.		4L+4H	
328.004	brtva stakla vanjska glazing gasket exterior		2L+2H	
311.004	brtva stakla unutarnja glazing gasket interior		2L+2H	
348.002	ispuna po opsegu stakla fill around the glass		2L+2H	
Staklo opis			mjera	
Staklo description			measure	
26 mm (6+16+4)IZO staklo IZO glass		1	Lkr-155xHkr-155	

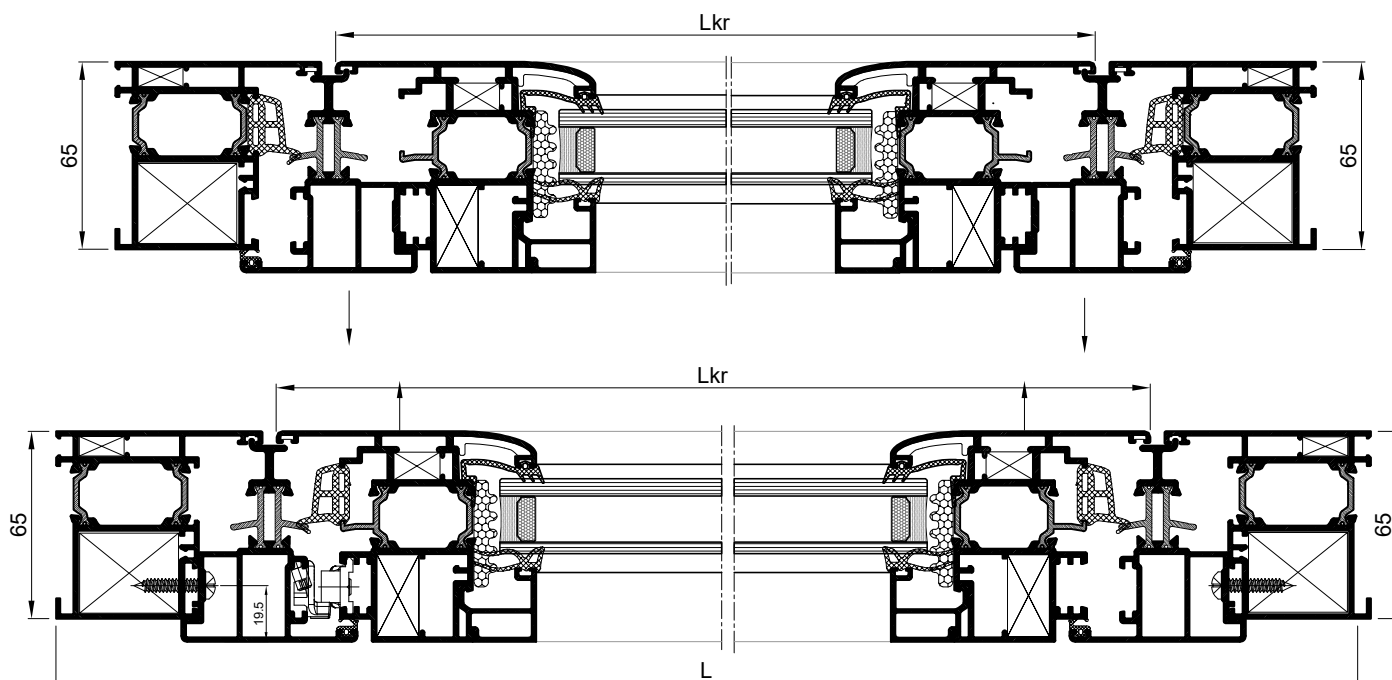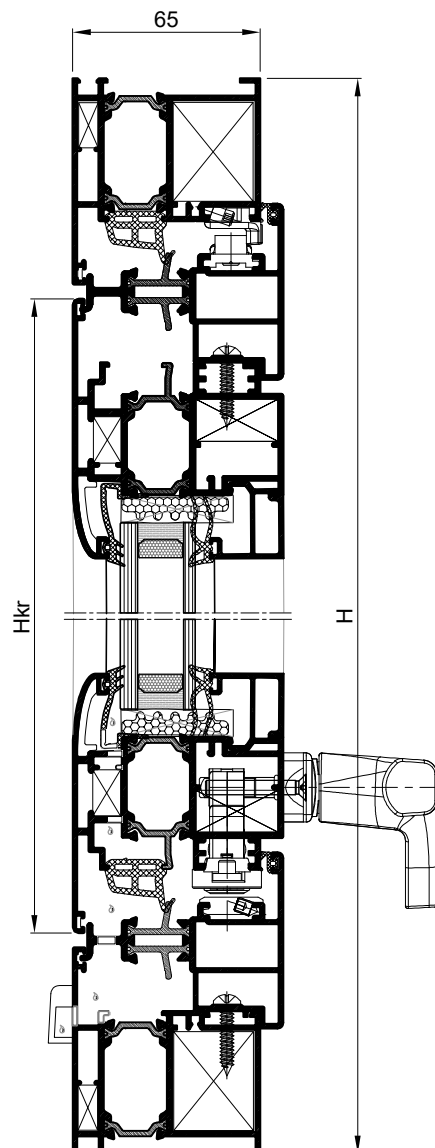

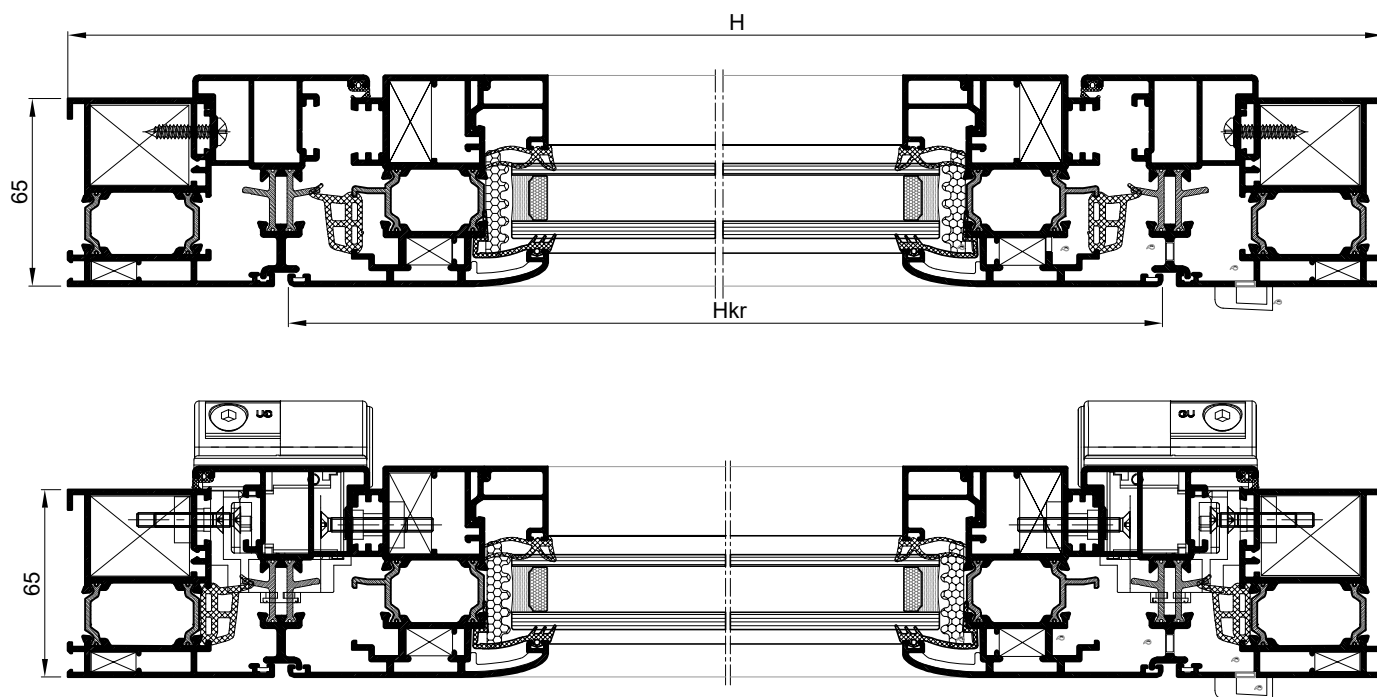

Profil	opis	kom	mjera	pilanje
Profile	description	pcs	measure	cutting
FT-0201	horizontalna rama horizontal frame profile	2	L	45-45
FT-0201	vertikalna rama vertical frame profile	2	H	45-45
FT-0210	horizontalna krila horizontal sash profile	2	Lkr=L-153	45-45
FT-0210	vertikalna krila vertical sash profile	2	Hkr=H-153	45-45
FT-0213	vertikalna kombatuta vertical flying mullion	1	H-87	45-45
FT-0213	horizontalna kombatuta horizontal flying mullion	2	H-87	45-45
FT-0213	horizontalna kombatuta horizontal flying mullion	2	detalj details	detalj details
Z40-667	staklolajsna horizontalna horizontal glazing bead	2	detalj details	detalj details
Z40-667	staklolajsna vertikalna vertical glazing bead	2	Hkr-180	90-90

- Jednokrilni prozor,

otvaranje oko srednje osi

- Okov: UNITAS 88 (GU), TIP D


-Single-sash window,


opening around middle axis

Hardware:

UNITAS 88 (GU), Typ D

UNITAS 88 (GU) mehanizam za otvaranje opening mechanism			
1	kom	mjera	
Brtve	opis	pcs	measure
Gasket	description		
328.006	brtva u ramu, krilu i komb. gasket in fr., sh., and f. m.	4	4L+4H
328.004	brtva stakla vanjska glass gasket exterior	2	2L+2H
311.004	brtva stakla unutarnja glass gasket interior	2	2L+2H
348.002	ispuna po opsegu stakla fill around the glass	2	2L+2H
Staklo	opis	mjera	
Glass	description	measure	
26 mm (6+16+4)	IZO staklo IZO glass	1	Lkr-155xHkr-155

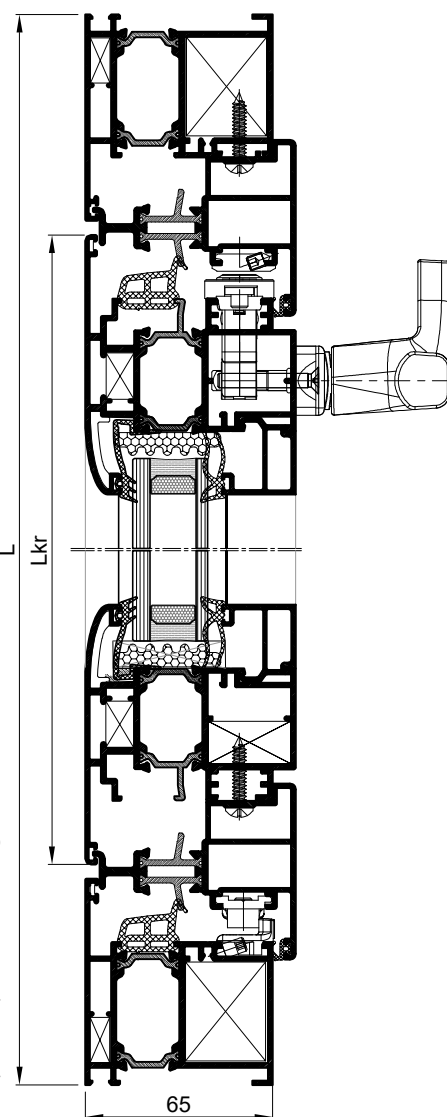

PROFILI
PROFILES

			kom pcs	mjera measure	pilanje cutting
FT-0274	horizontalna okvira	horizontal frame profile	1	L	45-45
FT-0223	prag	threshold	1	Lkr-28	90-90
FT-0274	vertikalna okvira	vertical frame profile	2	H	45-90
FT-0275	horizontalna krila	horizontal leaf profile	2	Lkr=L-87	45-45
FT-0275	vertikalna krila	vertical leaf profile	2	Hkr=H-53.5	45-45
F-1483	profil	profile	1	Lkr-47	90-90
Z40-668	horizontalna lajsna	horizontal bead	2	Lkr-163	90-90
Z40-668	vertikalna lajsna	vertical bead	2	Hkr-207	90-90

VEZNI ELEMENTI

CONNECTION ELEMENTS



			kom pcs	
710.072	kutna spojnica rama	frame corner bracket	2	
710.452	kutna spojnica rama	frame corner bracket	2	
710.133	kutna spojnica krila	leaf corner bracket	4	
710.172	kutna spojnica krila	leaf corner bracket	4	
730.001	kutna spojnica krila i rama	corner bracket for leaf and frame	6	
731.010	kutna spojnica krila	leaf corner bracket	4	
114.004	šarka	hinge	2	
124.001	brava 35 mm	lock 35 mm	1	
124.003	prihvatnik jezička brave (šild)	lock latchbolt acceptor	1	
104.009	ručka	handle	par pair	
124.002	cilindar (uložak) za bravu	cylinder (lock insert)	1	
124.032	štitnik cilindra za bravu	lock cylinder protector	2	
365.009	umetak praga	threshold insert	L+D	
363.065	umetak za profil F-1483	insert for the profile F-1483	L+D	
433.118	vijak 4.2x19 za F-1483	screw 4.2x19 for F-1483	4	
433.021	vijak 3.9x32 za FT-0223	screw 3.9x32 for FT-0223	4	


BRTVE
GASKETS

			mjera measure
328.006	brtva u krilu	gasket in leaf	3L+4H
338.001	centralna brtva	central gasket	L+2H
328.003	brtva prema staklu vanjska	glazing gasket exterior	2L+2H
311.004	brtva prema staklu unutarnja	glazing gasket interior	2L+2H
345.001	kutni umetak centralne brtve	corner insert of central gasket	2 kom
344.071	brtva prema pragu	gasket toward threshold	L
340.013	ispuna po opsegu stakla	fill around the glass	2L+2H

STAKLO
GLASS

	kom pcs	mjera measure
27 mm	1	Lkr-182 x Hkr-182

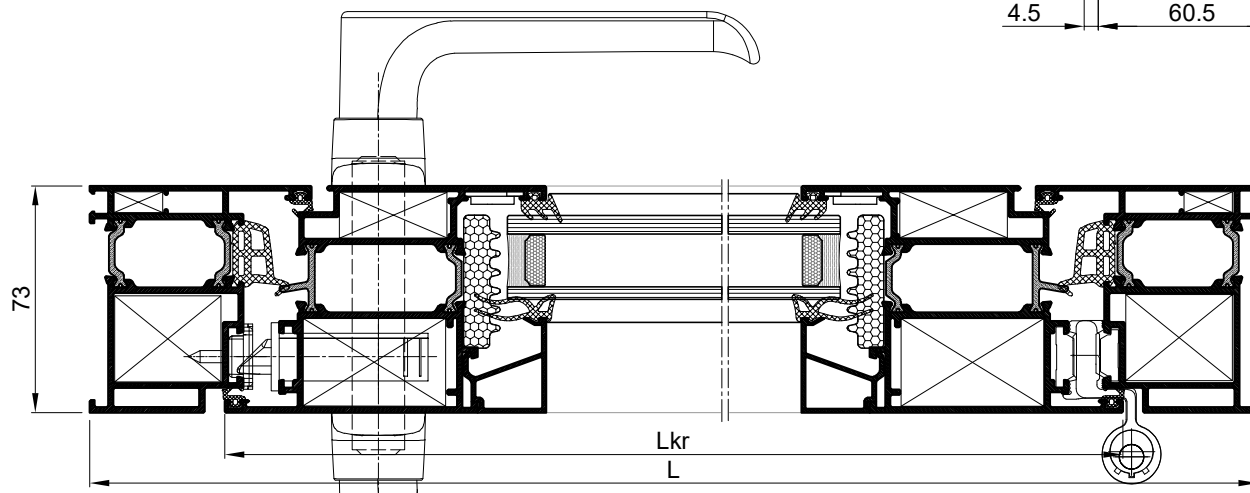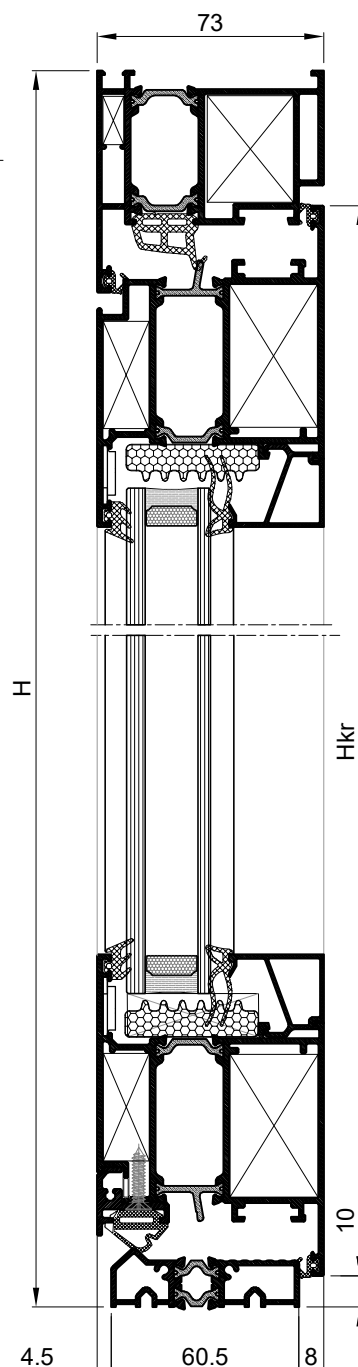

PROFILI
PROFILES

			kom pcs	mjera measure	pilanje cutting
FT-0201	horizontala okvira	horizontal frame profile	1	L	45-45
FT-0201	vertikala okvira	vertical frame profile	2	H	45-90
FT-0218	horizontala krila	horizontal leaf profile	2	Lkr=L-87	45-45
FT-0218	vertikala krila	vertical leaf profile	2	Hkr=H-53.5	45-45
Z40-667	horizontalna lajsna	horizontal bead	2	Lkr-164	90-90
Z40-667	vertikalna lajsna	vertical bead	2	Hkr-208	90-90
FT-0223	prag	threshold	1	Lkr-28	90-90
F-1483	profil	profile	1	Lkr-72	90-90

OKOVI

HARDWARE

710.059	kutna spojnica rama i krila	sash and frame corn. brac.	6		
710.452	kutna spojnica krila i rama	sash and frame corn. brac.	6		
730.005	kutna spojnica krila	sash corner bracket	4		
730.001	kutna spojnica krila	sash corner bracket	4		
730.002	kutna spojnica rama	frame corner bracket	2		
113.009	šarka - 68 mm	hinge - 68 mm	2		
124.001	brava	lock	1		
124.003	prihvatnik jezička brave (šild)	lock latchbolt acceptor	1		
104.009	ručka	handle	par		
124.002	uložak za bravu	cylinder (lock insert)	1		
124.032	štitnik cilindra za bravu	lock cylinder protector	1		
365.009	umetak praga	threshold insert	L+D		
363.065	umetak za profil F-1483	insert for the profile F-1483	L+D		
433.118	vijak 4.2x19 za F-1483	screw 4.2x19 for F-1483	4		
433.021	vijak 3.9x32 za FT-0223	screw 3.9x32 for FT-0223	4		

BRTVE



GASKET


			kom pcs	mjera measure
328.006	brtva u krilu	gasket in leaf		2L+4H
328.004	brtva prema staklu	glazing gasket		2L+2H
311.004	brtva prema staklu	glazing gasket		2L+2H
344.071	brtva prema pragu	gasket towards threshold		L
348.002	ispuna po opsegu stakla	fill around the glass		2L+2H

STAKLO

GLASS

			kom pcs	mjera measure
26 mm			1	Lkr-183 x Hkr-183

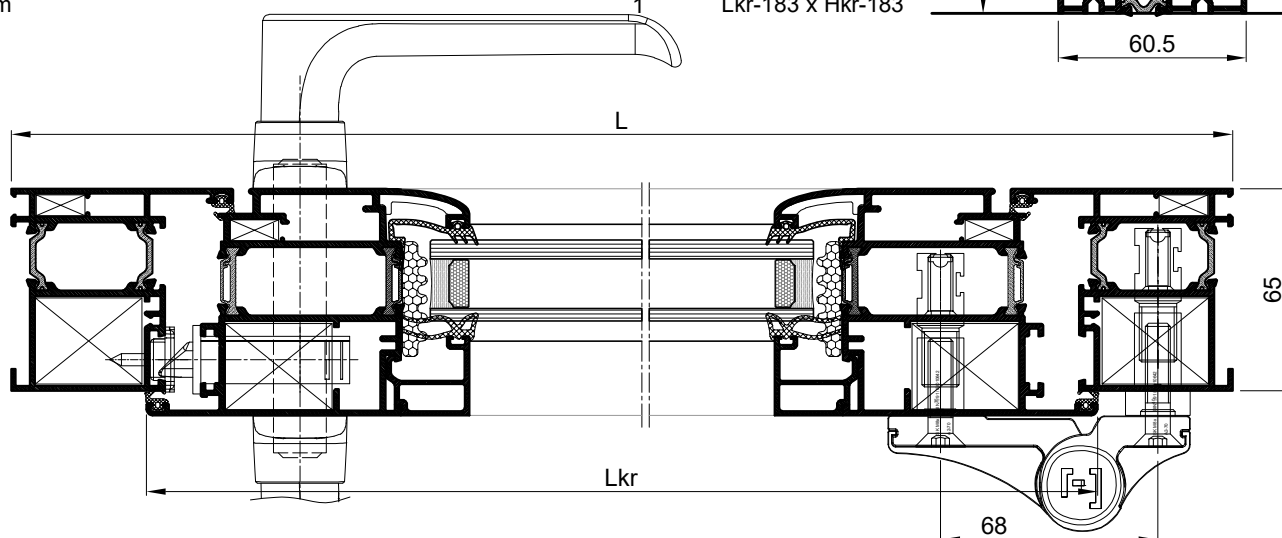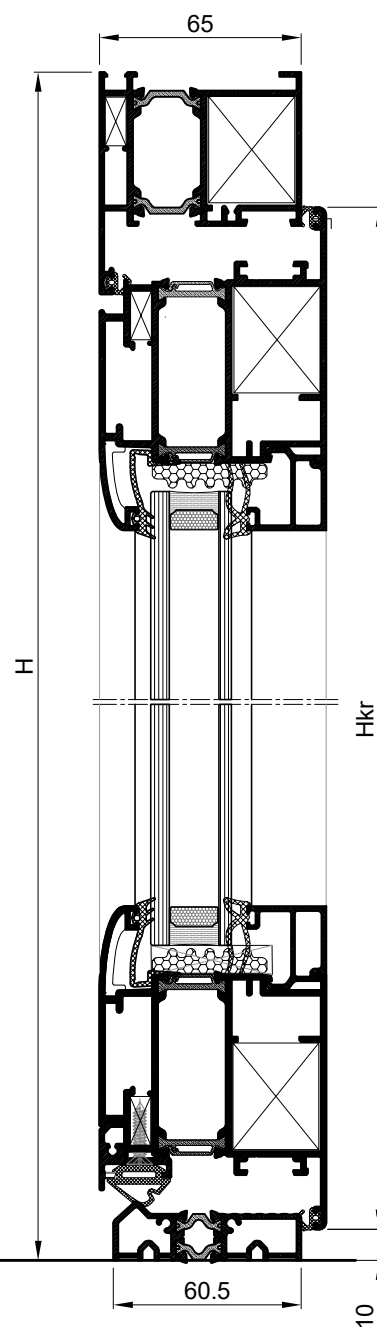

PROFILI
PROFILES

			kom pcs	mjera measure	pilanje cutting
FT-0201	horizontala okvira	horizontal frame profile	1	L	45-45
FT-0201	vertikala okvira	vertical frame profile	2	H	45-90
FT-0218	horizontala krila	horizontal leaf profile	1	Lkr=L-87	45-45
FT-0208	horizontala krila-parapet	hor. leaf profile - spandrel	1	Lkr=154	90-90
FT-0218	vertikala krila	vertical sash profile	2	Hkr=H-49.5	45-90
Z40-667	horizontalna lajsna	horizontal bead	2	Lkr=164	90-90
Z40-667	vertikalna lajsna	vertical bead	2	Hkr=264	90-90

OKOVI

HARDWARE

			kom pcs		
710.059	kutna spojnica krila i rama	leaf and frame corn. brac.	4		
710.452	kutna spojnica krila i rama	leaf and frame corn. brac.	4		
730.005	kutna spojnica krila	leaf corner bracket	2		
730.001	kutna spojnica krila	leaf corner bracket	2		
730.002	kutna spojnica rama	frame corner bracket	2		
710.066	veznik	connector	4		
710.070	dodatni veznik	additional connector	2		
114.001	šarka	hinge	2		
124.001	brava 35 mm s jezičkom	lock 35 mm with latchbolt	1		
124.003	prihvatnik jezička brave (šild)	lock latchbolt acceptor	1		
104.009	ručka	handle	par		
124.002	uložak za bravu	cylinder (lock insert)	1		
124.032	štitnik uloška (cilindra)	lock cylinder protector	2		
373.003	maska za drenažni otvor	mask for drainage holes	2		
433.030	vijak 4.2x19 za 521.001	screw 4.2x19 for 521.001	4		

BRTVE



GASKETS


			kom pcs	mjera measure
328.006	brtva u krilu	gasket in leaf		2L+4H
328.004	brtva prema staklu	glazing gasket		2L+2H
311.004	brtva prema staklu	glazing gasket		2L+2H
521.001	držač četkaste brtve	brush gasket holder		L
347.001	četkasta brtva	brush gasket		L
348.002	ispuna po opsegu stakla	fill around the glass		2L+2H

STAKLO

GLASS

		kom pcs	mjera measure
26 mm		1	Lkr=183 x Hkr=239

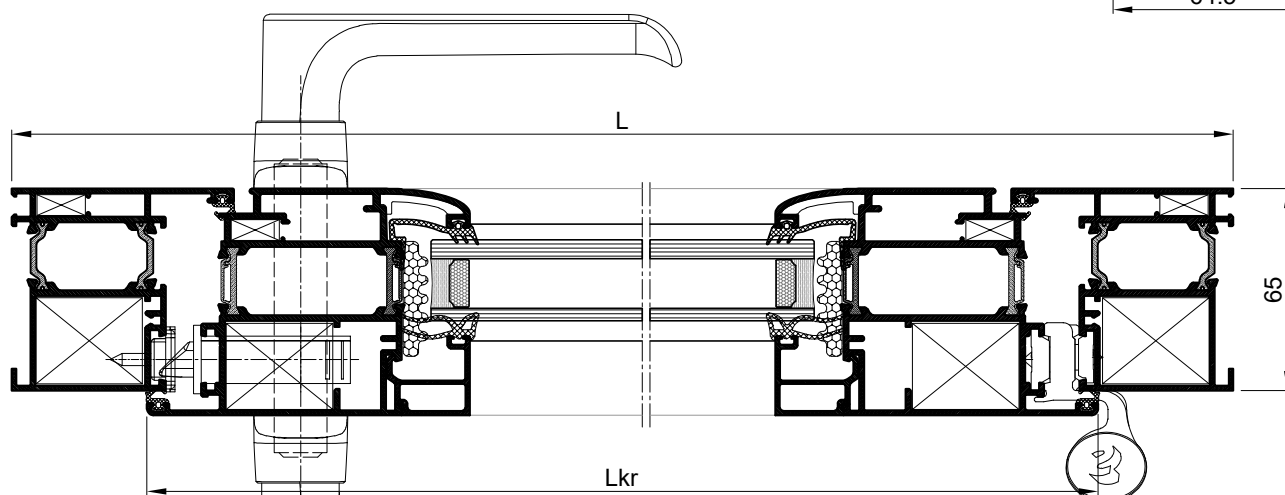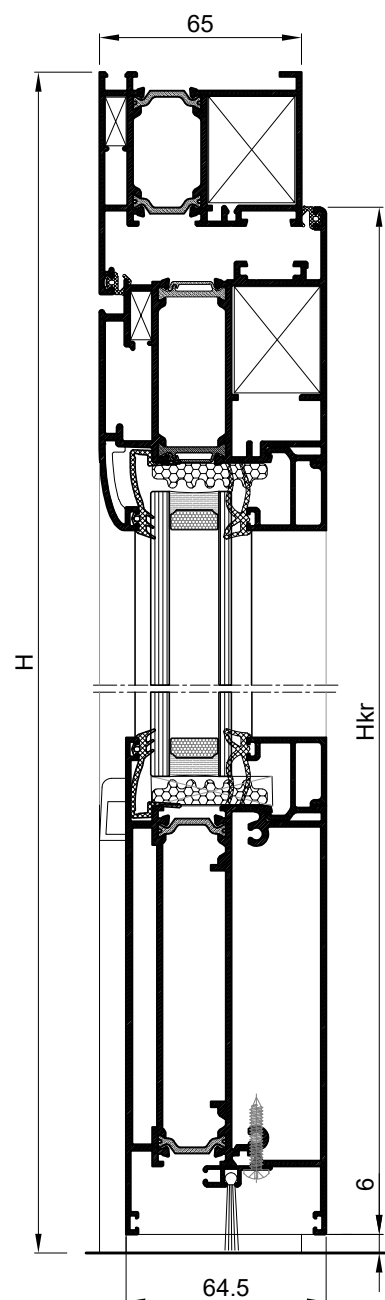

PROFILI
PROFILES

			kom pcs	mjera measure	pilanje cutting
FT-0274	horizontala okvira	horizontal frame profile	1	L	45-45
FT-0223	prag	threshold	1	L-115	90-90
FT-0274	vertikalna okvira	vertical frame profile	2	H	45-90
FT-0275	horizontalna krila	horizontal leaf profile	4	Lkr=L/2-46	45-45
FT-0275	vertikalna krila	vertical leaf profile	4	Hkr=H-53.5	45-45
FT-0277	kombatuta	flying mullion	1	Hkr-68	90-90
F-1483	profil (gl. krilo)	profile (main leaf)	1	Lkr-47	90-90
F-1483	profil (pom. krilo)	profile (aux. leaf)	1	Lkr+9	90-90
Z40-668	horizontalna lajsna	horizontal bead	4	Lkr-163	90-90
Z40-668	vertikalna lajsna	vertical bead	4	Hkr-207	90-90

VEZNI ELEMENTI
CONNECTION ELEMENTS



			kom kom		
710.072	kutna spojnica rama	frame corner bracket	2		
710.452	kutna spojnica rama	frame corner bracket	2		
710.133	kutna spojnica krila	leaf corner bracket	8		
710.172	kutna spojnica krila	leaf corner bracket	8		
730.001	kutna spojnica krila i rama	cor. bra. leaf and frame	10		
731.010	kutna spojnica krila	leaf corner bracket	8		
144.000	krakun za pasivno krilo	latch for passive sash	2		
114.004	šarka	hinge	4		
124.001	brava 35 mm s jezičkom	lock 35 mm with latchbolt	1		
124.003	prihv. jezička brave (šild)	lock latchbolt acceptor	1		
104.009	ručka	handle	par		
124.002	cilindar (uložak) za bravu	cylinder (lock insert)	1		
124.032	štitnik uloška (cilindra)	lock cylinder protector	2		
365.009	umetak praga	threshold insert	L+D		
433.118	vijak 4.2x19 za F-1483	screw 4.2x19 for F-1483	4		
433.021	vijak 3.9x32 za FT-0223	screw 3.9x32 for FT-0223	4		
433.046	vijak 4.8x32 za FT-0277	screw 4.8x32 for FT-0277	4		
433.134	vijak 4.8x38 za FT-0277	screw 4.8x38 for FT-0277	4		
363.080	umetak za FT-0277	insert for FT-0277	par		


BRTVE
GASKETS

			kom pcs	mjera measure
328.006	brtva u krilu	gasket in leaf		3L+6H
338.001	centralna brtva	central gasket		L+3H
328.003	brtva prema staklu vanjska	glazing gasket exterior		2L+4H
311.004	brtva prema staklu unutarnja	glazing gasket interior		2L+4H
345.001	kutni umetak centralne brtve	corner insert of central gasket		2 kom
344.071	brtva prema pragu	gasket towards threshold		L

STAKLO
GLASS

		kom pcs	mjera measure
27 mm		2	Lkr-182 x Hkr-182

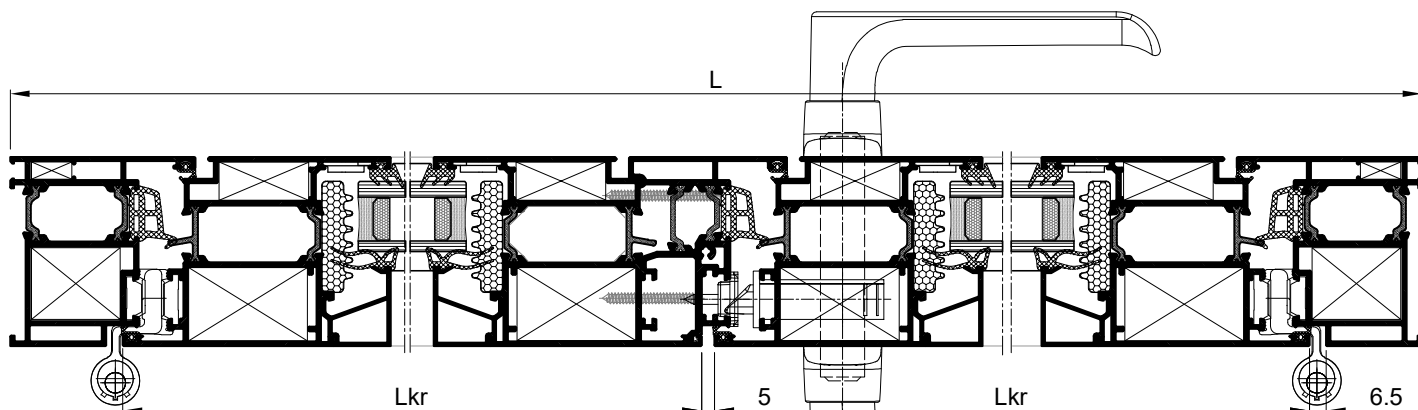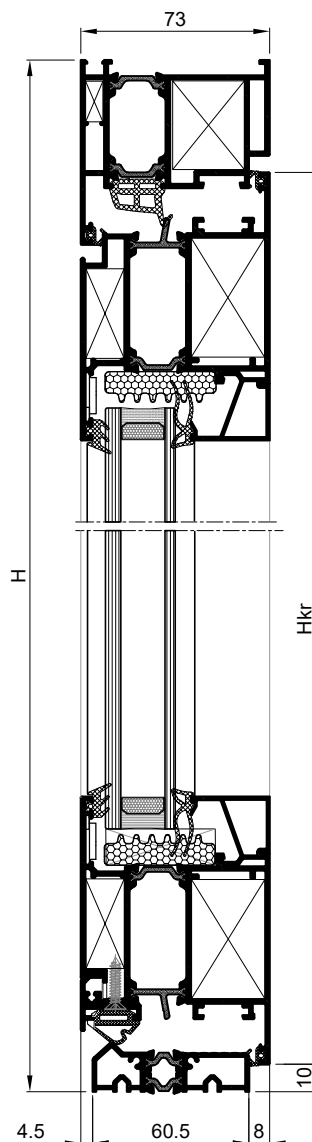



PROFILI PROFILES

			kom pcs	mjera measure	pilanje cutting
FT-0274	horizontala okvira	horizontal frame profile	1	L	45-45
FT-0274	vertikalna okvira	vertical frame profile	2	H	45-90
FT-0275	horizontalna krila	horizontal leaf profile	1	Lkr=L/2-60	45-45
FT-0282	horizontalna krila	horizontal leaf profile	1	Lkr-154	90-90
FT-0275	vertikalna krila	vertical leaf profile	2	Hkr=H-50	45-90
FT-0276	prečka	mullion	1	H-37	90-90
FT-0208	parapetna prečka (na f.)	spandrel profile (on fix.)	1	L/2-63	90-90
Z40-668	horizontalna lajsna	horizontal bead	2	Lkr-163	90-90
Z40-668	vertikalna lajsna	vertical bead	2	Hkr-263	90-90
Z40-667	horizontalna lajsna	horizontal bead	2	L/2-72	90-90
Z40-667	vertikalna lajsna	vertical bead	2	H-239	90-90
F-1408	profil na fiksnom dijelu	profile on fixed part	1	L/2-72	90-90

VEZNI ELEMENTI

CONNECTION ELEMENTS

			kom pcs	
710.072	kutna spojnica rama	frame corner bracket	2	
710.452	kutna spojnica rama	frame corner bracket	2	
710.133	kutna spojnica krila	leaf corner bracket	2	
710.172	kutna spojnica krila	leaf corner bracket	2	
730.001	kutna spojnica krila i rama	cor. bra. leaf and frame	4	
731.010	kutna spojnica krila	leaf corner bracket	2	
710.066	veznik	connector	10	
710.154	dodatni veznik	additional connector	2	
710.212	dodatni veznik	additional connector	4	
710.070	dodatni veznik	additional connector	2	
114.004	šarka	hinge	2	
124.001	brava 35 mm	lock 35 mm	1	
124.003	prihv. jezička br. (šild)	lock latchbolt acceptor	1	
104.009	ručka	handle	par	
124.002	cilindar (uložak) za bravu	cylinder (lock insert)	1	
124.032	štitnik cilindra za bravu	lock cylinder protector	2	
433.030	vijak 3.9x19	screw 3.9x19	12	

BRTVE



GASKETS


			kom pcs	mjera measure
328.006	brtva u krilu	gasket in leaf		L+4H
338.001	centralna brtva	central gasket		L/2+2H
328.003	brtva prema st. vanjska kr.	glazing gasket ext.		L+2H
311.004	brtva prema st. unutarnja kr.	glazing gasket int.		L+2H
311.003	brtva prema st. vanjska f.	glazing gasket ext.		L+2H
328.004	brtva prema st. unutarnja f.	glazing gasket int.		L+2H
345.001	kutni umetak centralne brtve	corner ins. of central gas.		L
521.001	držač četkaste brtve	brush gasket holder	2	
347.001	četkasta brtva	brush gasket		L
340.013	ispuna po opsegu stakla	fill around the glass		L+2H
348.002	ispuna po opsegu stakla	fill around the glass		L+2H

STAKLO

GLASS

	kom pcs	mjera measure
27 mm	1	Lkr-182 x Hkr-239
26 mm	1	L/2-91 x H-215

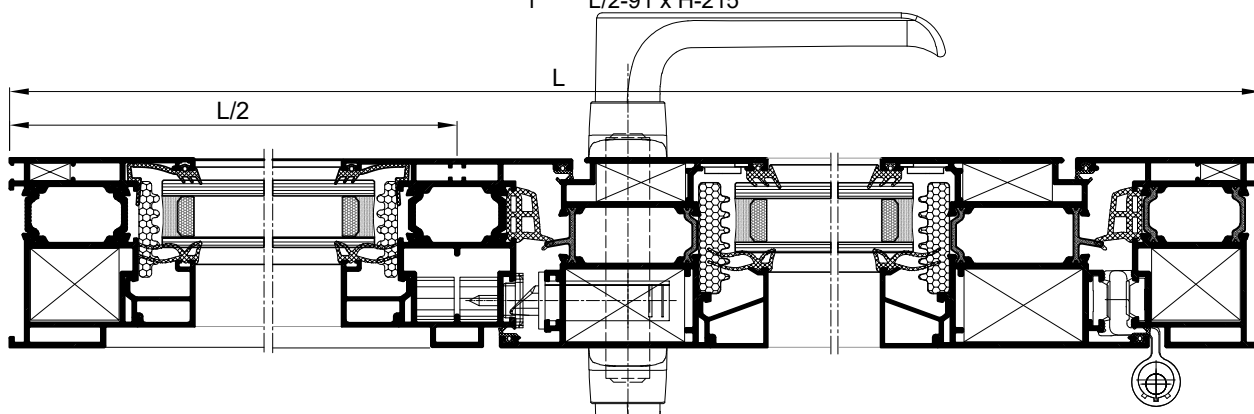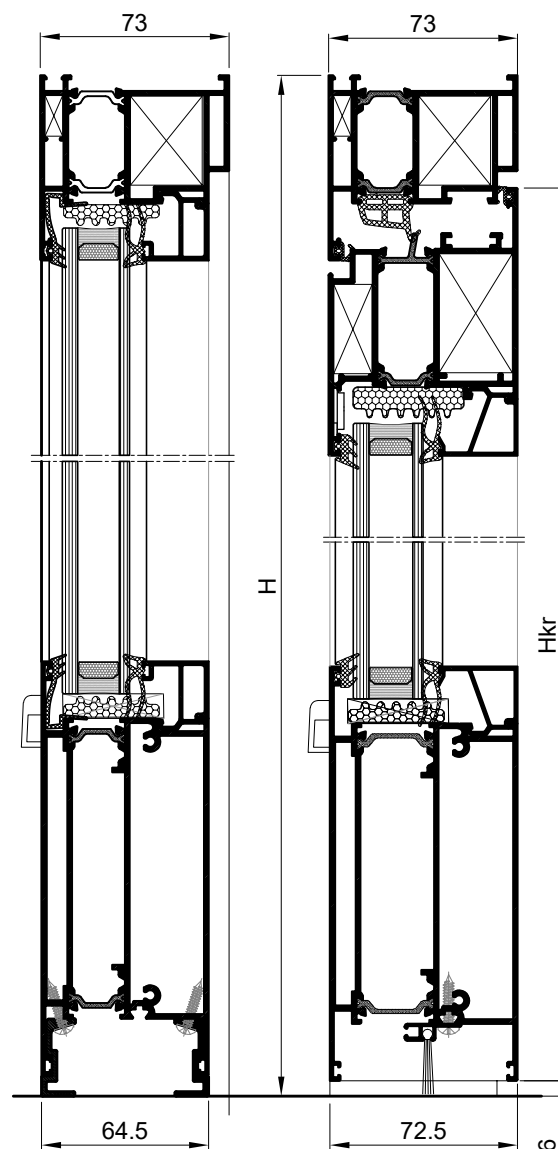

PROFILI
PROFILES

			kom pcs	mjera measure	pilanje cutting
FT-0278	horizontalna okvira	horizontal frame profile	1	L	45-45
FT-0223	prag	threshold	1	Lkr-3	90-90
FT-0278	vertikalna okvira	vertical frame profile	2	H	45-90
FT-0279	horizontalna krila	horizontal leaf profile	2	Lkr=L-87	45-45
FT-0279	vertikalna krila	vertical leaf profile	2	Hkr=H-53.5	45-45
F-1483	profil	profile	1	Lkr-72	90-90
Z40-668	horizontalna lajsna	horizontal bead	2	Lkr-168	90-90
Z40-668	vertikalna lajsna	vertical bead	2	Hkr-212	90-90

VEZNI ELEMENTI

CONNECTION ELEMENTS

			kom pcs		
710.214	kutna spojnica rama	frame corner bracket	2		
710.189	kutna spojnica rama	frame corner bracket	2		
710.133	kutna spojnica krila	leaf corner bracket	4		
710.172	kutna spojnica krila	leaf corner bracket	4		
730.001	kutna spojnica krila i rama	cor.bra. leaf and frame	6		
731.010	kutna spojnica krila i rama	cor.bra. leaf and frame	6		
114.004	šarka	hinge	2		
124.001	brava 35 mm s jezičkom	lock 35 mm with latchbolt	1		
124.003	prihv. jezička brave (šild)	lock latchbolt acceptor	1		
104.009	ručka	handle	par		
124.002	cilindar (uložak) za bravu	cylinder (lock insert)	1		
124.032	štitnik uloška (cilindra)	lock cylinder protector	2		
433.118	vijak 4.2x19 za F-1483	screw 4.2x19 for F-1483	4		
433.021	vijak 3.9x32 za FT-0223	screw 3.9x32 for FT-0223	4		
363.065	umetak za F-1483	insert for the profile F-1483 L+D			

BRTVE



GASKETS


			kom pcs	mjera measure
328.006	brtva u krilu	gasket in leaf		3L+4H
338.001	centralna brtva	central gasket		L+2H
328.003	brtva prema staklu vanjska	glazing gasket exterior		2L+2H
311.004	brtva prema staklu unutarnja	glazing gasket interior		2L+2H
345.001	kutni umetak centralne brtve	corner insert of central gasket	2 kom	
344.071	brtva prema pragu	gasket towards threshold	L	
348.002	ispuna po opsegu stakla	fill around glass		2L+H

STAKLO

GLASS

		kom pcs	mjera measure
27 mm		1	Lkr-187 x Hkr-187

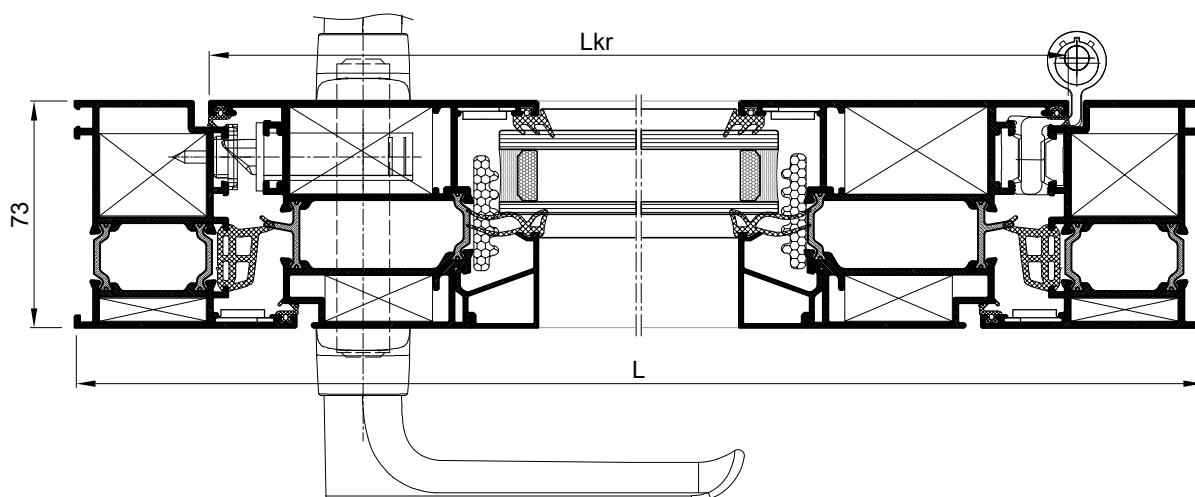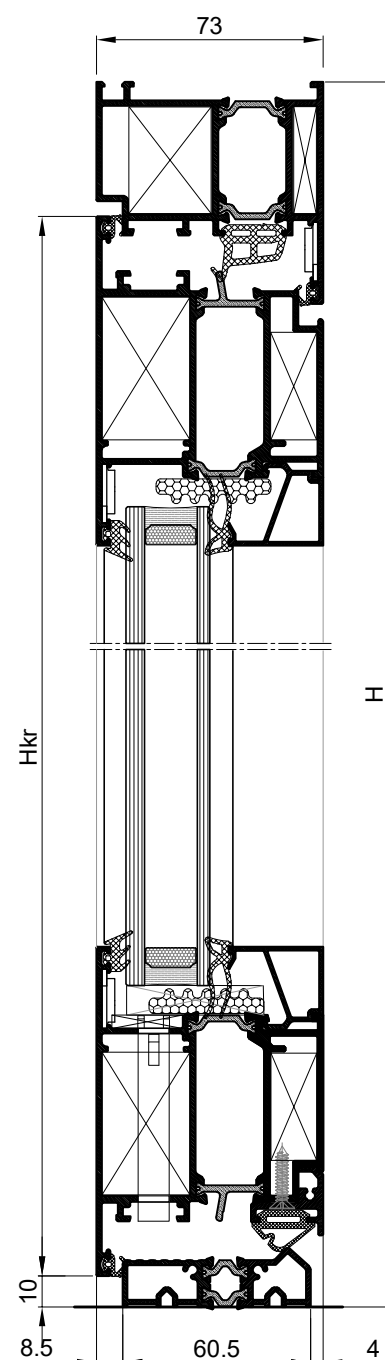

PROFILI
PROFILES

			kom pcs	mjera measure	pilanje cutting
FT-0278	horizontala okvira	horizontal frame profile	1	L	45-45
FT-0223	prag	threshold	1	Lkr-3	90-90
FT-0278	vertikala okvira	vertical frame profile	2	H	45-90
FT-0279	horizontala krila	horizontal leaf profile	4	Lkr=L/2-46	45-45
FT-0279	vertikala krila	vertical leaf profile	4	Hkr=H-53.5	45-45
FT-2281	kombatuta	flying mullion	1	Hkr-68	90-90
F-1483	profil (gl. krilo)	profil (main leaf)	1	Lkr-47	90-90
F-1483	profil (pom. krilo)	profil (aux. leaf)	1	Lkr+9	90-90
Z40-668	horizontalna lajsna	horizontal bead	4	Lkr-168	90-90
Z40-668	vertikalna lajsna	vertical bead	4	Hkr-212	90-90

VEZNI ELEMENTI

CONNECTION ELEMENTS

			kom pcs	
710.214	kutna spojnica rama	frame corner bracket	2	
710.189	kutna spojnica rama	frame corner bracket	2	
710.133	kutna spojnica krila	leaf corner bracket	8	
710.172	kutna spojnica krila	leaf corner bracket	8	
730.001	kutna spojnica krila i rama	cor.bra. leaf and frame	10	
731.010	kutna spojnica krila	leaf corner bracket	10	
144.000	krakun za pasivno krilo	latch for passive sash	2	
114.004	šarka	hinge	4	
124.001	brava 35 mm s jezičkom	lock 35 mm with latchbolt	1	
124.003	prihv. jezička brave (šild)	lock latchbolt acceptor	1	
104.009	ručka	handle	par	
124.002	cilindar (uložak) za bravu	cylinder (lock insert)	1	
124.032	štitnik cilindra za bravu	lock cylinder protector	2	
433.021	vijak 3.9x32 za FT-0223	screw 3.9x32 for FT-0223	4	
433.046	vijak 4.8x32 za FT-2281	screw 4.8x32 for FT-2281	8	
433.118	vijak 4.2x19 za F-1483	screw 4.2x19 for F-1483	6	
360.009	odvod kaplj.-monodrain	drainage-monodrain	2	
365.065	umetak za FT-2281	insert for FT-2281	L+D	
363.065	umetak za profil F-1483	insert for the profile F-1483	L+D	

BRTVE


GASKET

			kom pcs	mjera measure
328.006	brtva u krilu	gasket in sash		3L+6H
338.001	centralna brtva	central gasket		L+3H
328.003	brtva prema staklu vanjska	glazing gasket exterior		2L+4H
311.004	brtva prema staklu unutarnja	glazing gasket interior		2L+4H
345.001	kutni umetak centralne brtve	corner insert of central gasket	2 kom	
344.072	brtva prema pragu	gasket towards threshold	L	
348.002	ispuna po opsegu stakla	fill around glass		2L+4H

STAKLO

GLASS

			kom pcs	mjera measure
27 mm			2	Lkr-187 x Hkr-187

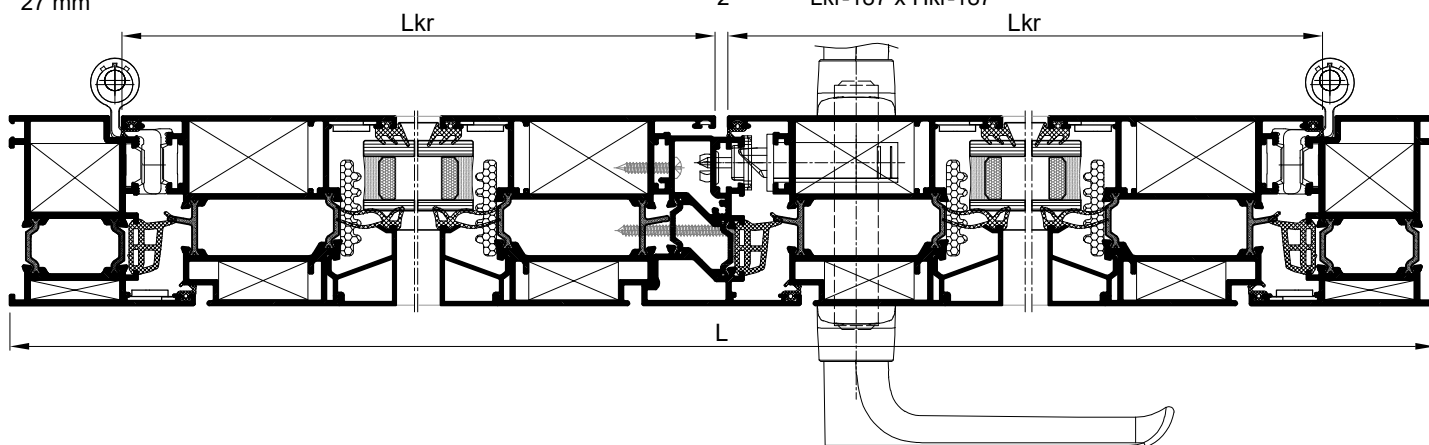

PROFILI
PROFILES

PROFILI	PROFILES			pilanje cutting
FT-0274	horizontala okvira	horizontal frame profile	1	L 45-45
FT-0274	vertikala okvira	vertical frame profile	2	H 45-90
FT-0279	horizontala krila	horizontal leaf profile	1	Lkr=L/2-126 45-45
FT-0282	horizontala krila	horizontal leaf profile	1	Lkr-159 90-90
FT-0279	vertikala krila	vertical leaf profile	2	Hkr=H-83 45-90
FT-0276	prečka	mullion	1	H-37 90-90
FT-0208	par. prečka (na fiksnoj)	pandrel profile (on fix.)	1	L/2-63 90-90
FT-2280	profil za okr. otv. okomit	profile for turn open. ver	2	H-37 90-45
FT-2280	profil za okr. otv. vod.	profile for turn. open. hor.	1	L/2-47 45-45
Z40-668	horizontalna lajsna krila	horizontal bead	2	Lkr-168 90-90
Z40-668	vertikalna lajsna krila	vertical bead	2	Hkr-266 90-90
Z40-667	horizontalna lajsna	horizontal bead	2	L/2-72 90-90
Z40-667	vertikalna lajsna	vertical bead	2	H-239 90-90
F-1408	profil na fiksnoj dijelu	profile on fixed part	1	L/2-72 90-90

VEZNI ELEMENTI

CONNECTION ELEMENTS

VEZNI ELEMENTI	CONNECTION ELEMENTS			kom kom
710.072	kutna spojnica rama	frame corner bracket	2	
710.452	kutna spojnica rama	frame corner bracket	2	
710.133	kutna spojnica krila	leaf corner bracket	2	
710.172	kutna spojnica krila	leaf corner bracket	2	
730.001	kutna spojnica krila i rama	cor.bra. leaf and fr.	4	
730.002	kutna spojnica krila i rama	cor.bra. leaf and fr.	2	
731.010	kutna spojnica krila	leaf corner bracket	2	
710.066	veznik	connector	12	
710.154	dodatni veznik	additional connector	2	
710.212	dodatni veznik	additional connector	4	
710.070	dodatni veznik	additional connector	2	
114.004	šarka	hinge	2	
124.001	brava 35 mm	lock 35 mm	1	
124.003	prihv. jezička brave(šild)	lock latchbolt acceptor	1	
104.009	ručka	handle	par	
124.002	cilindar (uložak) za bravu	lock insert (cylinder)	1	
124.032	štitnik cilindra za bravu	lock cylinder protector	2	
363.066	umetak za FT-0223	insert for FT-0223	L+D	
433.047	vijak 4.8x38 (FT-0280)	screw 4.8x38(FT-0280)	12	
433.135	vijak 4.8x45 (FT-0280)	screw 4.8x45(FT-0280)	12	
433.030	vijak 4.3x19	screw 4.3x19	12	

BRTVE



GASKETS


BRTVE	GASKETS			mjera measure
328.006	brtva u krilu	gasket in leaf		L+4H
338.001	centralna brtva	central gasket		L/2+2H
321.003	brtva prema staklu vanjska	glazing gasket exterior		L+2H
311.004	brtva prema staklu unutarnja	glazing gasket interior		L+2H
328.004	brtva prema staklu vanjska	glazing gasket exterior		L+2H
311.004	brtva prema staklu unutarnja	glazing gasket interior		L+2H
345.001	kutni umetak centralne brtve	corner insert of central gas.	2 kom	
521.001	držač četkaste brtve	brush gasket holder	L	
347.001	četkasta brtva	brush gasket	L	
348.002	ispuna po opsegu stakla	fill around glass		2L+4H

STAKLO

GLASS

STAKLO	GLASS	kom pcs	mjera measure
27 mm		1	Lkr-187 x Hkr-241
26 mm		1	L/2-91 x H-215

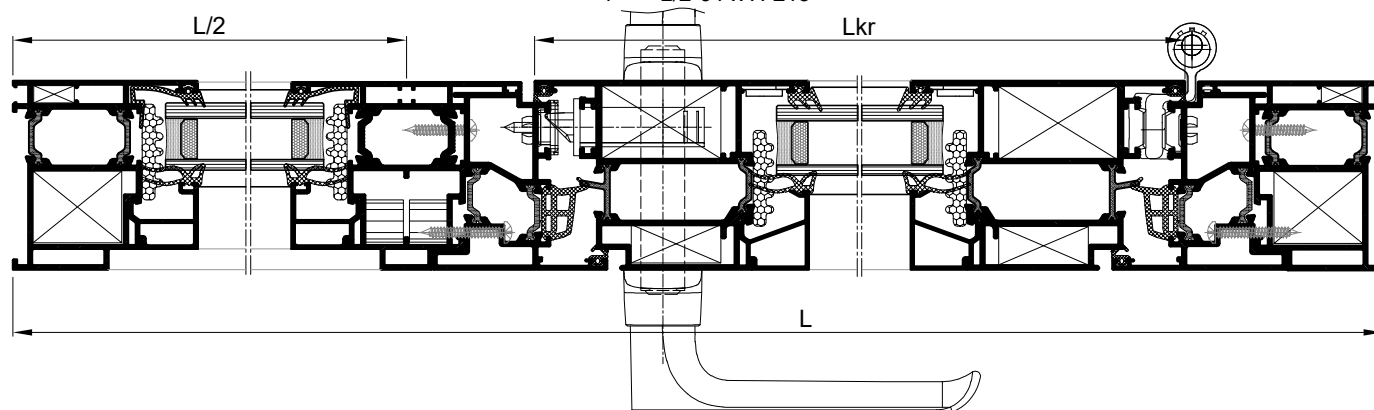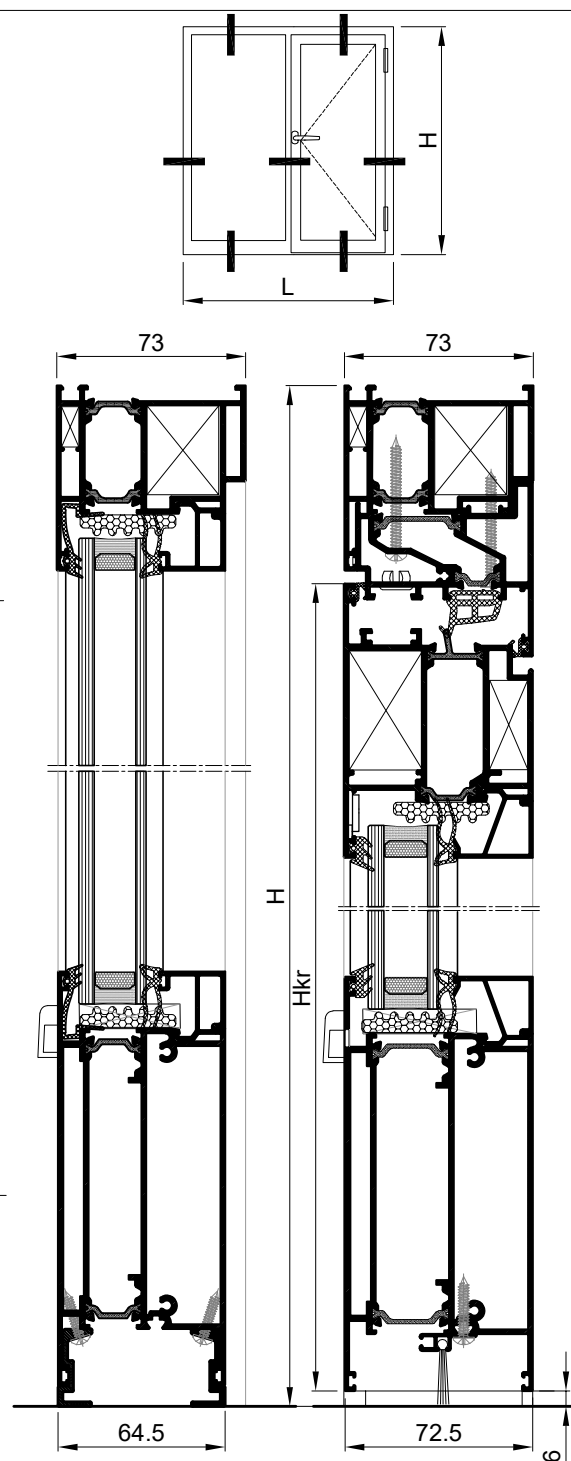


PROFILI
PROFILES

			kom pcs	mjera measure	pilanje cutting
FT-0201	horizontala okvira	horizontal frame profile	2	L	45-45
FT-0201	vertikala okvira	vertical frame profile	2	H	45-45
FT-0236	horizontala krila	horizontal sash profile	2	Lkr=L-87	45-45
FT-0236	vertikala krila	vertical sash profile	2	Hkr=H-87	45-45
Z40-667	horizontalna lajsna	horizontal bead	2	Lkr-93	90-90
Z40-667	vertikalna lajsna	vertical bead	2	Hkr-137	90-90
Z40-657	okapnica	drip edge	1	Lkr-70	90-90

OKOVI
HARDWARE



			kom pcs	mjera measure
730.009	kutna spojnica rama	frame corner bracket	4	
710.452	kutna spojnica rama	frame corner bracket	4	
730.002	kutna spojnica rama	frame corner bracket	4	
710.461	kutna spojnica krila	sash corner bracket	4	
710.443	kutna spojnica krila	sash corner bracket	4	
730.005	kutna spojnica krila	sash corner bracket	4	
730.001	kutna spojnica krila	sash corner bracket	4	
142.054	Otkl-zaokr.okov-UNI-JET C	TILT&TURN UNI-JET C	1	
433.017	vijak 3.9x16 za Z40-657	screw 3.9x16 for Z40-657	4	
373.003	maska za drenažni otvor	mask for drainage holes	2	


BRTVE
GASKETS

			kom pcs	mjera measure
338.001	centralna brtva	central gasket		2L+2H
328.006	brtva u krilu	gasket in sash		2L+2H
328.004	brtva prema staklu	glazing gasket		2L+2H
311.004	brtva prema staklu	glazing gasket		2L+2H
345.001	kutni umetak	corner insert	4	
348.002	ispuna po opsegu stakla	fill around glass		2L+2H

STAKLO
GLASS

		kom pcs	mjera measure
26 mm		1	Lkr-112 x Hkr-112

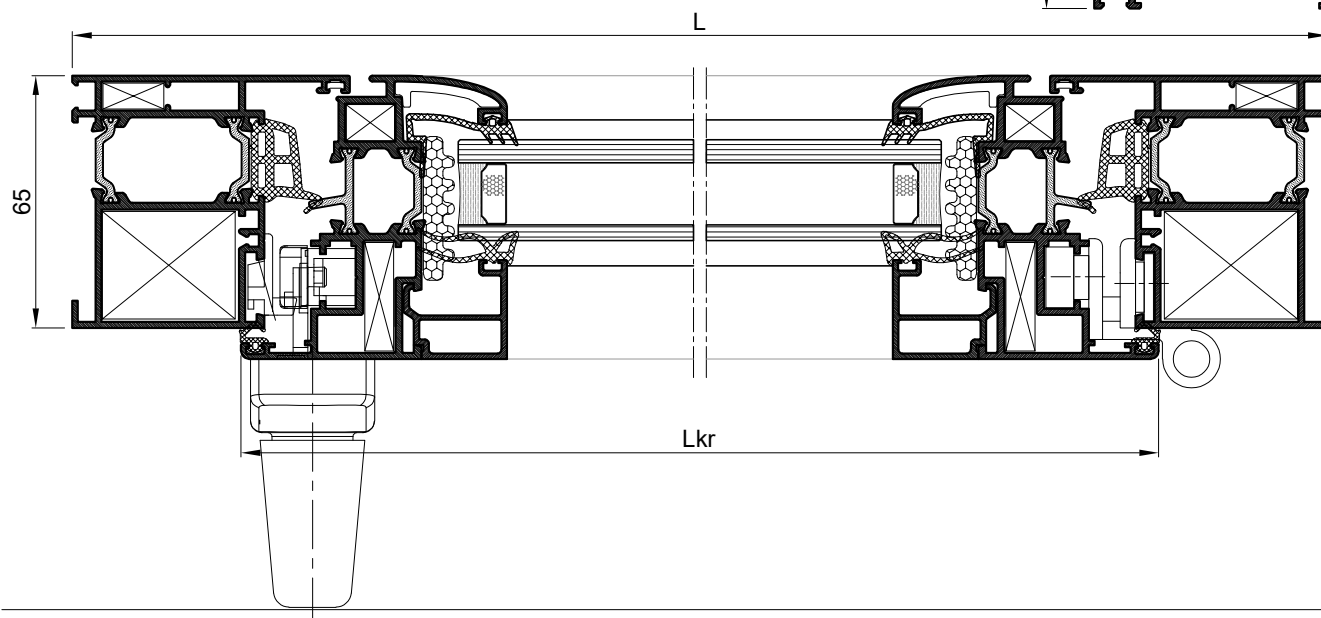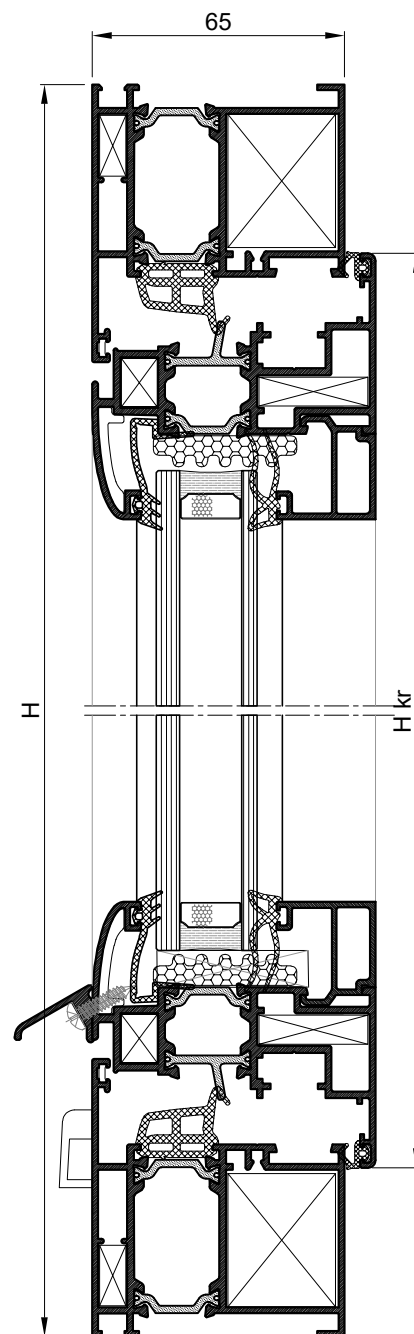

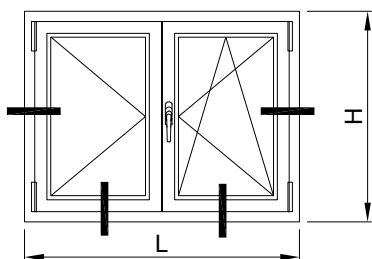
PROFILI
PROFILES

			kom pcs	mjera measure	pilanje cutting
FT-0201	horizontala okvira	horizontal frame profile	2	L	45-45
FT-0201	vertikala okvira	vertical frame profile	2	H	45-45
FT-0236	horizontala krila	horizontal sash profile	4	Lkr=L/2-46	45-45
FT-0236	vertikala krila	vertical sash profile	4	Hkr=H-87	45-45
FT-0237	profil kombatute	flying mullion profile	1	Hkr-68	90-90
Z40-667	horizontalna lajsna	horizontal bead	4	Lkr-93	90-90
Z40-667	vertikalna lajsna	vertical bead	4	Hkr-137	90-90
Z40-657	okapnica 1	drip edge 1	1	Lkr-70	90-90
Z40-657	okapnica 2	drip edge 2	1	Lkr-4	90-90

OKOVI

HARDWARE

			kom pcs	mjera measure
730.009	kutna spojnica rama	frame corner bracket	4	
710.452	kutna spojnica rama	frame corner bracket	4	
730.002	kutna spojnica rama	frame corner bracket	4	
710.461	kutna spojnica krila	sash corner bracket	8	
710.443	kutna spojnica krila	sash corner bracket	8	
730.005	kutna spojnica krila	sash corner bracket	8	
730.001	kutna spojnica krila	sash corner bracket	8	
142.054	otkl-zaokr.okov-UNI-JET C	TILT&TURN UNI-JET C	1	
142.055	UNI-JET C za pom.krilo	UNI-JET C for aux. sash	1	
373.003	maska za drenažni otvor	mask for drainage holes	2	
365.043	čep-umetak za FT-0237F	cap-insert for FT-0237F	L+D	
433.017	vijak 3.9x16 za Z40-657	screw 3.9x16 for Z40-657	6	

BRTVE



GASKET


			kom pcs	mjera measure
338.001	centralna brtva	central gasket		2L+3H
328.006	brtva u krilu	gasket in sash		2L+4H
328.004	brtva prema staklu	glazing gasket		2L+4H
311.004	brtva prema staklu	glazing gasket		2L+4H
345.001	kutni umetak	corner insert	4	
348.002	ispuna po opsegu stakla	fill around glass		2L+4H

STAKLO

GLASS

		kom pcs	mjera measure
26 mm		2	Lkr-112 x Hkr-112

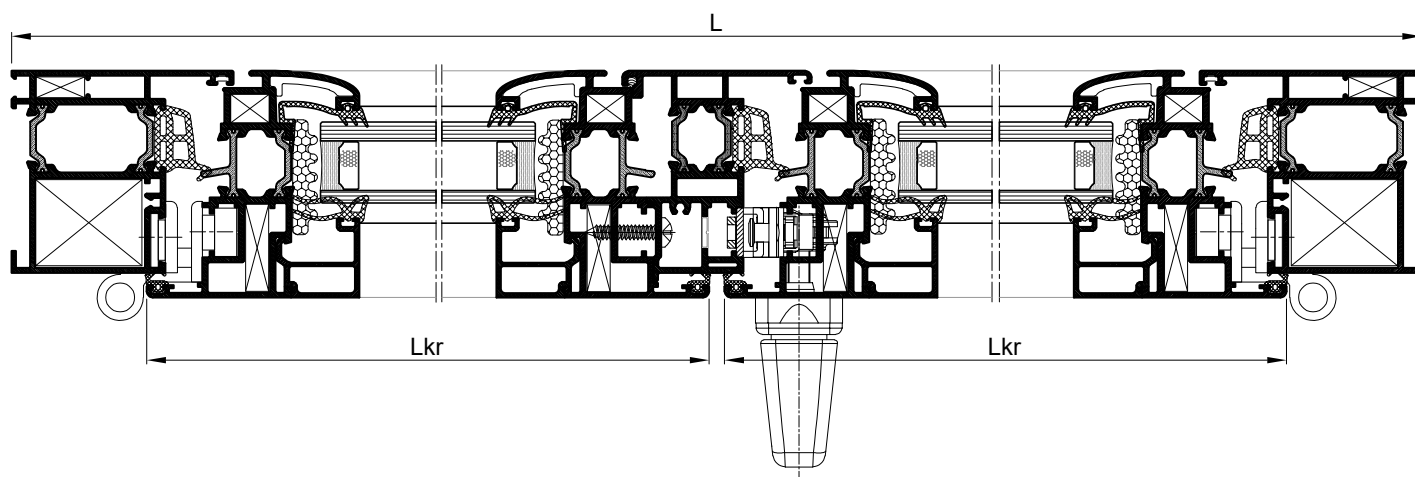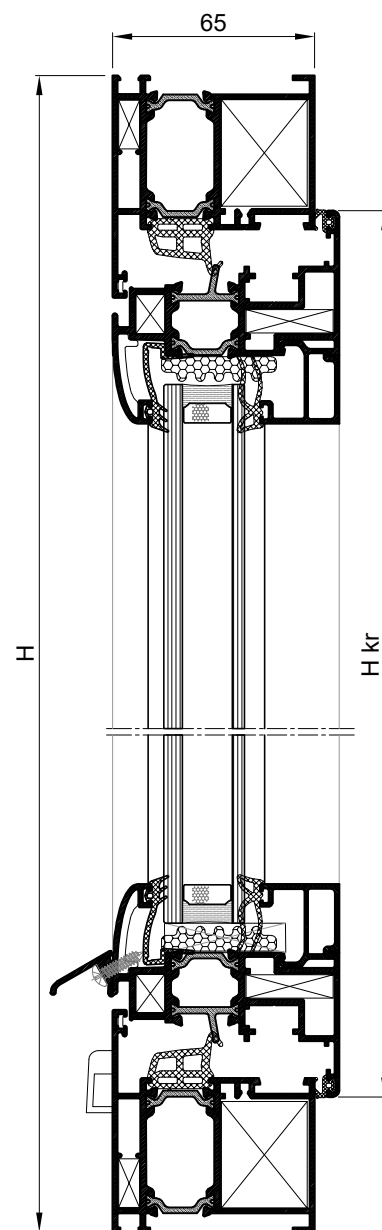

PROFILI
PROFILES

			kom pcs	mjera measure	pilanje cutting
FT-0201	horizontala okvira	horizontal frame profile	1	L	45-45
FT-0294	prag	threshold	1	Lkr-4	90-90
FT-0201	vertikala okvira	vertical frame profile	2	H	45-90
FT-0244	horizontala krila	horizontal sash profile	2	Lkr=L-87	45-45
FT-0244	vertikala krila	vertical sash profile	2	Hkr=H-58	45-45
Z40-667	horizontalna lajsna	horizontal bead	2	Lkr=146	90-90
Z40-667	vertikalna lajsna	vertical bead	2	Hkr=190	90-90
F-1567	okapnica	drip edge	1	Lkr-76	90-90
OKOVI HARDWARE			kom pcs		



710.072	kutna spojnica rama	frame corner bracket	2		
710.452	kutna spojnica rama	frame corner bracket	2		
730.002	kutna spojnica rama	frame corner bracket	2		
710.072	kutna spojnica krila	sash corner bracket	4		
710.453	kutna spojnica krila	sash corner bracket	4		
730.005	kutna spojnica krila	sash corner bracket	4		
730.001	kutna spojnica krila	sash corner bracket	4		
142.054	Otkl-zaokr.okov-UNI-JET C	TILT&TURN UNI-JET C	1		
433.017	vijak 3.9x16 za F-1567	screw 3.9x16 for 1567	4		
373.055	umetak za F-1567	insert for F-1567	L+D		


BRTVE
GASKETS

338.001	centralna brtva	central gasket		L+2H	
328.006	brtva u krilu	gasket in sash		2L+2H	
348.088	brtva prema pragu	gasket towards threshold		L	
344.058	brtva u pragu	gasket in threshold		L	
328.002	brtva prema staklu	glazing gasket		2L+2H	
311.004	brtva prema staklu	glazing gasket		2L+2H	
345.001	kutni umetak	corner insert	2		
340.013	ispuna po opsegu stakla	fill around glass		2L+2H	

STAKLO
GLASS

26 mm			kom pcs	mjera measure	
			1	Lkr-165 x Hkr-165	

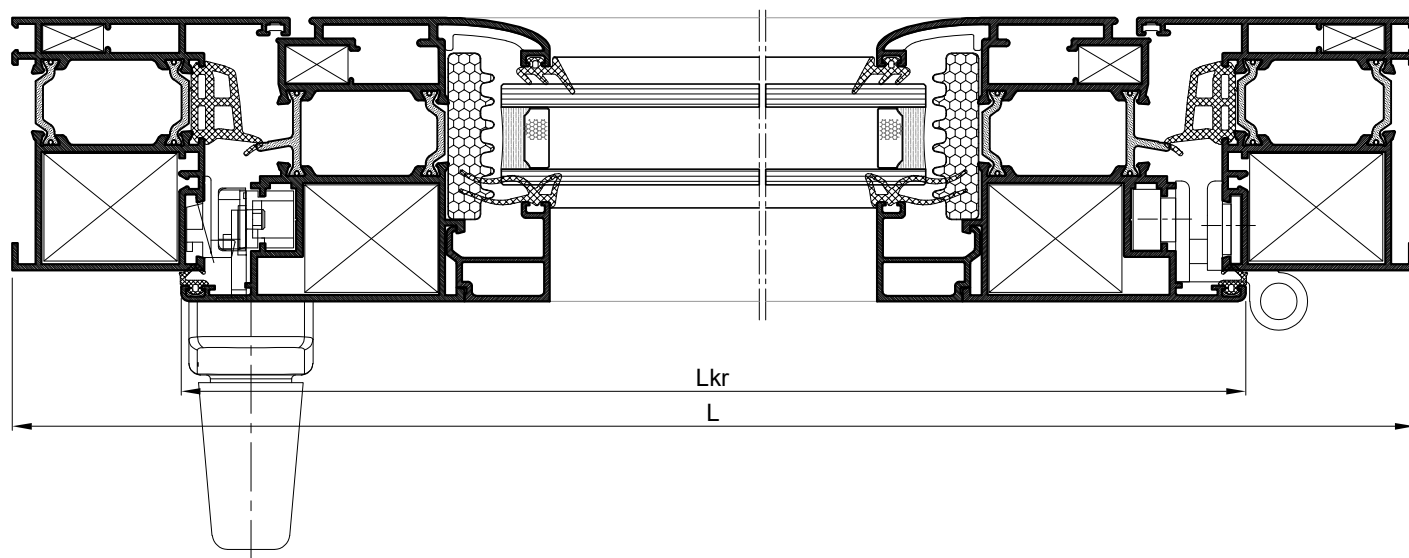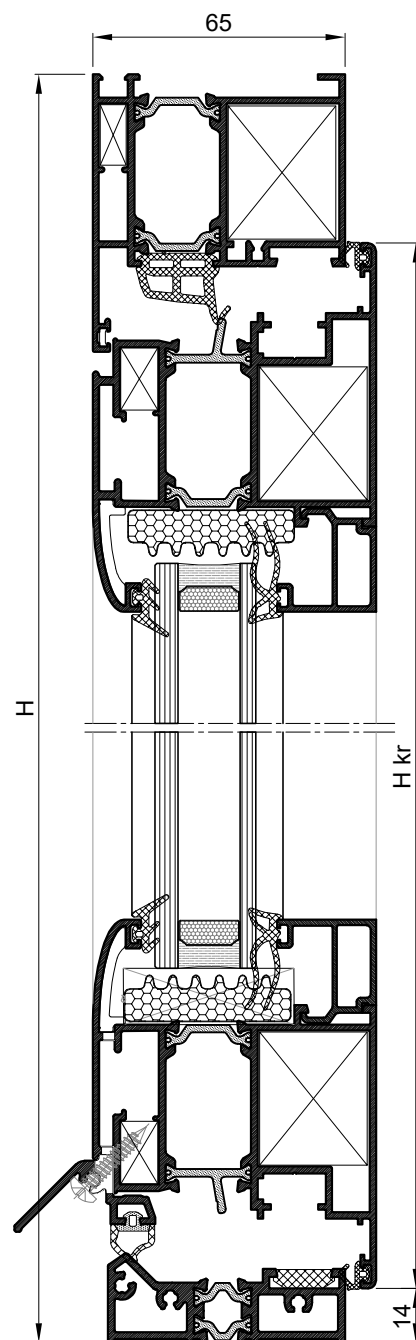


PROFILI
PROFILES

			kom pcs	mjera measure	pilanje cutting
FT-0201	horizontala okvira	horizontal frame profile	1	L	45-45
FT-0294	prag	threshold	1	L-91	90-90
FT-0201	vertikala okvira	vertical frame profile	2	H	45-90
FT-0244	horizontalna krila	horizontal sash profile	2	Lkr=L-87	45-45
FT-0244	vertikala krila	vertical sash profile	2	Hkr=H-58	45-45
FT-0237	profil kombatute	flying mullion profile	1	Hkr=68	90-90
Z40-667	horizontalna lajsna	horizontal bead	2	Lkr=146	90-90
Z40-667	vertikalna lajsna	vertical bead	2	Hkr=190	90-90
F-1567	okapnica	drip edge	2	Lkr=76	90-90

OKOVI
HARDWARE



			kom pcs
710.059	kutna spojnica rama	frame corner bracket	2
710.452	kutna spojnica rama	frame corner bracket	2
730.002	kutna spojnica rama	frame corner bracket	2
710.059	kutna spojnica krila	sash corner bracket	8
710.453	kutna spojnica krila	sash corner bracket	8
730.005	kutna spojnica krila	sash corner bracket	8
730.001	kutna spojnica krila	sash corner bracket	4
142.054	otkl-zaokr.okov-UNI-JET C	TILT&TURN UNI-JET C	1
142.055	UNI-JET C za pom.krilo	UNI-JET C for aux. sash	1
365.043	čep-umetak za FT-0237	cap-insert for FT-0237	L+D
373.055	umetak za F-1567	insert for for F-1567	2L+2D
433.017	vijak 3.9x16 za F-1567	screw 3.9x16 for F-1567	8

BRTVE
GASKETS

			kom pcs	mjera measure
338.001	centralna brtva	central gasket		L+2H
328.006	brtva u krilu	gasket in sash		3L+4H
348.088	brtva prema pragu	gasket towards threshold		L
344.058	brtva u pragu	gasket in threshold		L
321.002	brtva prema staklu	glazing gasket		2L+4H
311.003	brtva prema staklu	glazing gasket		2L+4H
345.001	kutni umetak	corner insert	2	
340.013	ispuna po opsegu stakla	fill around glass		2L+4H

STAKLO
GLASS

	kom pcs	mjera measure
26 mm	2	Lkr-165 x Hkr-165
	L	

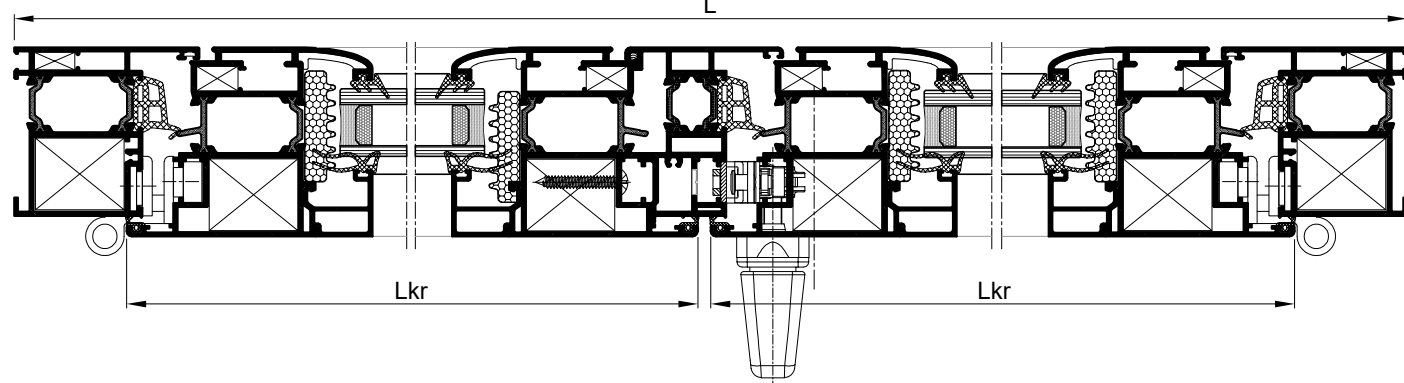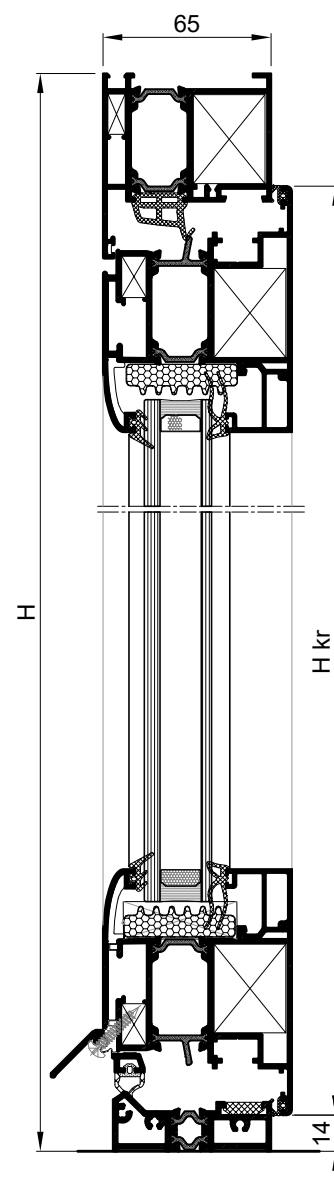

FEAL



Skenirajte QR kod i registrirajte
se na partner.feal.ba

*Scan the QR code and register
on partner.feal.ba*

TERMO 65

Knjiga B / *Book B*

Studen 2025. / *November 2025*

FEAL d.o.o.
Trnska cesta 146
88220 Široki Brijeg
Bosna i Hercegovina
Tel. +387 39 704-269; 705-807; 705-636
Fax. +387 39 704-358
info@feal.ba
www.feal.ba